

STANDARD PRODUCT CATALOG 3000



Table of Contents

Product Description	Page	Product Description	Page
Alphanumeric Index	67-76	Rigid (Continued)	
Aluminum Flexible Conduit and Connectors	55	Compression Connectors and Couplings	53
Beam Clamps	45-46	Conduit Bodies	50-51
Bucket Hooks	32	Conduit Couplings	41
Dock Lighting Products	66	Conduit Elbows	41
EMT		Conduit Nipples	42
Compression Connectors and Couplings	38	Conduit Straps	48
Conduit Bodies	39	Device Boxes and Covers	51
Conduit Elbows	41	Enlargers	52
EMT to Flex Coupling	40	Fixture Hangers	52
EMT to Rigid Coupling	40	Floor Flanges	52
Offset Connectors	40	Gaskets	50
Pipe Straps	40	Hangers with Bolt	46
Pull Elbows	40	Hole Seals	49
Set Screw Connectors and Couplings	39	Hubs	53
Explosion Proof Fittings		Locknuts	
Flexible Couplings	57	Aluminum	47
Reducing Bushings	56	Nylon	37
Unions	56	Sealing	47
Foot Switches	15-18	Steel	47
Fuse Blocks		Pull Elbows	52
CC	5	Reducing Bushings	
H&K	2	Standard	44
J	4	Explosion Proof	56
Midget	4-5	Reducing Washers	43
R	3	Sealing Rings	47
Semi Conducting	12	Service Entrance Caps	52
Grounding		Strain Relief Connectors	
Cable to Bar	30	Nylon	37
Cable to Rod or Pipe	31	Steel	36
Flexible Braid	32	Threaded Adapters	25
Heavy Duty	32	Three Piece Couplings	46
Lugs	12, 32	Stainless Steel Products	58-61
Service Posts	30	Strut Fittings	62-64
Heat Shrink Products	24-25	Switches/Push Buttons	14
Liquid-Tite Conduit/Connectors		Tapes	
CN Hose	55	Arc/Fire Proofing	21
Liquid-Tite Connectors	54	Dacron Glass	21
Liquid-Tite Flexible Conduit	55	Duct	20
Lugs/Sleeves		Friction	20
Aluminum	28	Glass Cloth	21
Copper	26-27	Grounding Braid	21
Grounding	12, 32	High Voltage	20-21
Mechanical	29	Insulating Mastic	20
Power Blocks		Liquid Electrical Tape	21
Power Distribution	6, 8-9	Rubber	20
Splicer	7, 9	Shielding Braid	21
Stud	7	Shielding Tape	21
Radiant Heating Products	65	Silicone Tape	21
Retractable Cords	33	Underground Warning Tape	21
Rigid		Vinyl	19
Bushed Conduit Nipples (Chase)	46	Terminal Blocks	
Bushings		Dead Front	12
Ground Insulated Bushings	49	Double Row	10
Metal Insulated Bushings	47	Heavy Duty	11
Plastic	47	Sectional	13
Clamp Backs	48	Termination Kits	22
		Wire Mesh Grips	33-35

Fuse Blocks

Marathon Special Products

Class H & K – 250 Volt

Catalog Number		Pole	Amp	Base Material	Load Termination	Wire Range
Standard	Reinforced					
F30A1S	RF30A1S	1	30	Thermoplastic	Wire Binding Screw	#10 - #22 AWG CU
F30A2S	RF30A2S	2				
F30A3S	RF30A3S	3				
F30A1SP	RF30A1SP	1	30	Thermoplastic	SEMS Pressure Screw	#10 - #14 AWG CU
F30A2SP	RF30A2SP	2				
F30A3SP	RF30A3SP	3				
F30A1B	RF30A1B	1	30	Thermoplastic	Box Connector	#6 - #14 AWG CU
F30A2B	RF30A2B	2				
F30A3B	RF30A3B	3				
F60A1SQ	RF60A1SQ	1	60	Thermoplastic	Male Quick Connect	#10 - #22 AWG CU
F60A2SQ	RF60A2SQ	2				
F60A3SQ	RF60A3SQ	3				
F60A1B	RF60A1B	1	60	Thermoplastic	Box Connector	#2 - #14 AWG CU / #2 - #12 AWG AL
F60A2B	RF60A2B	2				
F60A3B	RF60A3B	3				
-	RF100A1B	1	100	Phenolic	Box Connector	2/0 - #14 AWG CU / 2/0 - #12 AWG AL
-	RF100A2B	2				
-	RF100A3B	3				
-	F200A1BE	1	200	Polyester	Box Connector	250MCM - #6 AWG CU AL
-	F200A3BE	3				
-	RF400A1B	1	400	Phenolic	Box Connector	(2) 350MCM - #1/0 AWG CU AL
-	RF400A3B	3				
F600A1B	-	1	600	Phenolic	Box Connector	(2) 500MCM - 1/0 AWG CU AL
F600A3B	-	3				

Class H & K – 600 Volt

Catalog Number		Pole	Amp	Base Material	Load Termination	Wire Range
Standard	Reinforced					
6F30A1S	R6F30A1S	1	30	Thermoplastic	Wire Binding Screw	#10 - #22 AWG CU
6F30A2S	R6F30A2S	2				
6F30A3S	R6F30A3S	3				
6F30A1SP	R6F30A1SP	1	30	Thermoplastic	SEMS Pressure Screw	#10 - #14 AWG CU
6F30A2SP	R6F30A2SP	2				
6F30A3SP	R6F30A3SP	3				
6F30A1B	R6F30A1B	1	30	Thermoplastic	Box Connector	#6 - #14 AWG CU
6F30A2B	R6F30A2B	2				
6F30A3B	R6F30A3B	3				
6F60A1B	R6F60A1B	1	60	Thermoplastic	Box Connector	#2 - #14 AWG CU / #2 - #12 AWG AL
6F60A2B	R6F60A2B	2				
6F60A3B	R6F60A3B	3				
-	R6F100A1B	1	100	Phenolic	Box Connector	2/0 - #14 AWG CU / 2/0 - #12 AWG AL
-	R6F100A2B	2				
-	R6F100A3B	3				
-	6F200A1BE	1	200	Polyester	Box Connector	250MCM - #6 AWG CU AL
-	6F200A3BE	3				
-	R6F400A1B	1	400	Polyester	Box Connector	(2) 350MCM - #1/0 AWG CU AL
-	R6F400A3B	3				
6F600A1B	-	1	600	Polyester	Box Connector	(2) 500MCM - #1/0 AWG CU AL
6F600A3B	-	3				



F30A3SP



6F30A3B

Specifications:

- Approved for 10,000 Amp Withstand Rating and Short Circuit Current Ratings (SCCR)
- RoHS Compliant



30 & 60 Amp:

- Clip, Copper Alloy, Tin Plated
- Patented Cool-Clip Design

100 Amp:

- Clip, Copper Alloy, Tin Plated

200 Amp:

- Clip, One Piece Aluminum, Tin Plated

400 & 600 Amp:

- Clip, Copper Alloy, Tin Plated

Fuse Blocks

Marathon Special Products

Class R – 250 Volt

Catalog Number Standard	Reinforced	Pole	Amp	Base Material	Load Termination	Wire Range
-	R30A1S	1				
-	R30A2S	2	30	Thermoplastic	Wire Binding Screw	#10 - #22 AWG CU
-	R30A3S	3				
-	R30A1SP	1				
-	R30A2SP	2	30	Thermoplastic	SEMS Pressure Screw	#10 - #14 AWG CU
-	R30A3SP	3				
-	R30A1B	1				
-	R30A2B	2	30	Thermoplastic	Box Connector	#6 - #14 AWG CU
-	R30A3B	3				
-	R60A1SQ	1				
-	R60A2SQ	2	60	Thermoplastic	Wire Binding Screw	#10 - #22 AWG CU
-	R60A3SQ	3				
-	R60A1B	1				
-	R60A2B	2	60	Thermoplastic	Box Connector	#2 - #14 AWG CU / #2 - #12 AWG AL
-	R60A3B	3				
-	R100A1B	1				
-	R100A2B	2	100	Phenolic	Box Connector	2/0 - #14 AWG CU / 2/0 - #12 AWG AL
-	R100A3B	3				
-	R200A1BE	1	200	Polyester	Box Connector	250MCM - #6 AWG CU AL
-	R200A3BE	3				
-	R400A1B	1	400	Phenolic	Box Connector	(2) 350MCM - #1/0 AWG CU AL
-	R400A3B	3				
R600A1B	-	1	600	Phenolic	Box Connector	(2) 500MCM - #1/0 AWG CU AL
R600A3B	-	3				

Class R – 600 Volt

Catalog Number Standard	Reinforced	Pole	Amp	Base Material	Load Termination	Wire Range
-	6R30A1S	1				
-	6R30A2S	2	30	Phenolic	Wire Binding Screw	#10 - #22 AWG CU
-	6R30A3S	3				
-	6R30A1SP	1				
-	6R30A2SP	2	30	Phenolic	SEMS Pressure Screw	#10- #14 AWG CU
-	6R30A3SP	3				
-	6R30A1B	1				
-	6R30A2B	2	30	Phenolic	Box Connector	#6 - #14 AWG CU
-	6R30A3B	3				
-	6R60A1B	1				
-	6R60A2B	2	60	Phenolic	Box Connector	#2 - #14 AWG CU / #2 - #12 AWG AL
-	6R60A3B	3				
-	6R100A1B	1				
-	6R100A2B	2	100	Phenolic	Box Connector	2/0 - #14 AWG CU / 2/0 - #12 AWG AL
-	6R100A3B	3				
-	6R200A1BE	1	200	Polyester	Box Connector	#250 - #6 AWG CU AL
-	6R200A3BE	3				
-	6R400A1B	1	400	Phenolic	Box Connector	(2) 350MCM - #1/0 AWG CU AL
-	6R400A3B	3				
6R600A1B	-	1	600	Phenolic	Box Connector	(2) 500MCM - #1/0 AWG CU AL
6R600A3B	-	3				

Specifications:

- Tested and Approved for 200,000 Amp Withstand Rating and Short Circuit Current Ratings (SCCR)
- RoHS Compliant



30 & 60 Amp:

- Clip, Copper Alloy, Tin Plated, with Patented Reject Member
- Patented Cool-Clip Design

100 Amp:

- Clip, Copper Alloy, Tin Plated, with Reject Pin

200 Amp:

- Clip, One Piece Aluminum, Tin Plated with Reject Pin

400 & 600 Amp:

- Clip, Copper Alloy, Tin Plated, with Rejection Pin



R30A3S



6R30A3B

Fuse Blocks

Marathon Special Products

Class J – 600 Volt

Catalog Number		Pole	Amp	Base Material	Load Termination	Wire Range
Standard	Reinforced					
6J30A1S	R6J30A1S	1				
6J30A2S	R6J30A2S	2	30	Thermoplastic	Wire Binding Screw	#10 - #22 AWG CU
6J30A3S	R6J30A3S	3				
6J30A1SP	R6J30A1SP	1				
6J30A2SP	R6J30A2SP	2	30	Thermoplastic	SEMS Pressure Screw	#10 - #14 AWG CU
6J30A3SP	R6J30A3SP	3				
6J30A1B	R6J30A1B	1				
6J30A2B	R6J30A2B	2	30	Thermoplastic	Box Connector	#6 - #14 AWG CU
6J30A3B	R6J30A3B	3				
6J60A1B	R6J60A1B	1				
6J60A2B	R6J60A2B	2	60	Thermoplastic	Box Connector	#2 - #14 AWG CU AL
6J60A3B	R6J60A3B	3				
-	R6J100A1B	1	100	Phenolic	Box Connector	2/0 - #14 AWG CU / 2/0 - #12 AWG AL
-	R6J100A3B	3				
-	6J200A1BFBD	1	200	Phenolic	Box Connector	250MCM - #6 AWG CU AL
-	6J200A3BFBD	3				
-	6J400A1BFBD	1	400	Phenolic	Box Connector	(2) 350MCM - #6 AWG CU AL
-	6J400A3BFBD	3				
-	6J600A1BFBD	1	600	Phenolic	Box Connector	(2) 500MCM - #4 AWG CU AL
-	6J600A3BFBD	3				



6J60A3B

Specifications:

- Tested and Approved for 200,000 Amp Withstand Rating and Short Circuit Current Ratings (SCCR)
- RoHS Compliant



30 & 60 Amp:

- Clip, Copper Alloy, Tin Plated
- Patented Cool-Clip Design
- Integral DIN Rail Mount and Expander Block (Available only on 30 Amp)

100 Amp:

- Clip Copper Alloy, Tin Plated
- 1-Pole Molding Incorporates a Dovetail Feature for Ganging Multiple Poles

200 Amp:

- Connector, One Piece Aluminum, Tin Plated (Optional one piece copper, nickel plated add "CU")
- FDB, Fuse Bolt-Down Construction

400 & 600 Amp:

- Connector, One Piece Aluminum, Tin Plated (Optional one piece copper, nickel plated add "CU")
- FDB, Fuse Bolt-Down Construction

Class M – 600 Volt

Catalog Number	Pole	Amp	Base Material	Load Termination	Wire Range
6M30A1SQ	1				
6M30A2SQ	2	30	Thermoplastic	Wire Binding Screw	#10 - #22 AWG CU
6M30A3SQ	3				
6M30A1SPQ	1				
6M30A2SPQ	2	30	Thermoplastic	SEMS Pressure Screw	#10 - #14 AWG CU
6M30A3SPQ	3				
6M30A1B	1				
6M30A2B	2	30	Thermoplastic	Box Connector	#6 - #14 AWG CU
6M30A3B	3				



6M30A3SPQ

Specifications:

- Tested and Approved for 100,000 Amp Withstand Rating and Short Circuit Current Ratings (SCCR)
- Clip, Copper Alloy, Tin Plated
- Quick Connect Standard with Screw (S) or Sems Pressure (SP)
- RoHS Compliant



Fuse Blocks

Marathon Special Products

Class CC – 600 Volt

Catalog Number	Pole	Amp	Base Material	Load Termination	Wire Range
6CC30A1SQ	1	30	Thermoplastic	Wire Binding Screw	#10 - #22 AWG CU
6CC30A2SQ	2				
6CC30A3SQ	3				
6CC30A1SPQ	1	30	Thermoplastic	SEMS Pressure Screw	#10 - #14 AWG CU
6CC30A2SPQ	2				
6CC30A3SPQ	3				
6CC30A1B	1	30	Thermoplastic	Box Connector	#6 - #14 AWG CU
6CC30A2B	2				
6CC30A3B	3				

Specifications:

- Tested and Approved for 200,000 Amp Withstand Rating and Short Circuit Current Ratings (SCCR)
- Clip, Copper Alloy, Tin Plated with Patented Reject Member
- Quick Connect Standard with Screw (S) or Sems Pressure (SP)
- RoHS Compliant



6CC30A3SQ



Class CC Enclosed – 600 Volt

Catalog Number	Indicating	Pole	Amp	Base Material	Wire Range
6SC30A1-B	No	1	30	Thermoplastic	#6 - #14 AWG CU
6SC30A2-B		2			
6SC30A3-B		3			
6SC30A4-B	Yes	4	30	Thermoplastic	#6 - #14 AWG CU
6SC30A1I-B		1			
6SC30A2I-B		2			
6SC30A3I-B		3			
6SC30A4I-B		4			

Specifications:

- Tested and Approved for 200,000 RMS Symmetrical Amps Withstand Rating and Short Circuit Current Ratings (SCCR)
- Touchsafe Design IEC Type IP20
- DIN Rail Mount (35mm)
- Blown Fuse Indication Available
- Handle Allows Quick Easy Fuse Change
- Indication Light AC and DC – 80 volts minimum
- RoHS Compliant



6SC30A3-B



Midget Enclosed – 600 Volt

Catalog Number	Indicating	Pole	Amp	Base Material	Wire Range
6SM30A1-B	No	1	30	Thermoplastic	#6 - #14 AWG CU
6SM30A2-B		2			
6SM30A3-B		3			
6SM30A4-B	Yes	4	30	Thermoplastic	#6 - #14 AWG CU
6SM30A1I-B		1			
6SM30A2I-B		2			
6SM30A3I-B		3			
6SM30A4I-B		4			

Specifications:

- Tested and Approved for 100,000 RMS Symmetrical Amps Withstand Rating and Short Circuit Current Ratings (SCCR)
- Touchsafe Design IEC Type IP20
- DIN Rail Mount (35mm)
- Blown Fuse Indication Available
- Handle Allows Quick Easy Fuse Change
- AC and DC Rated
- Indication Light AC and DC – 80 volts minimum
- RoHS Compliant



6SM30A3I-B




Power Distribution Blocks

Marathon Special Products

Power Distribution Blocks - Phenolic

Catalog Number	Pole	Amp	Line Side			Load Side		
			Configuration	Wire Range	Openings Per Pole	Configuration	Wire Range	Openings Per Pole
1411400 1412400 1413400 1414400	1 2 3 4	115		#2 - #14Awg	1		#10 - #16Awg	4
1421570 1422570 1423570	1 2 3	175		2/0 - #14Awg	1		#4 - #14Awg**	4
1402402 1403402	2 3	175		2/0 - #14Awg	1		#4 - #14Awg**	4
1402401 1403401	2 3	175		2/0 - #14Awg	1		#4 - #14Awg**	6
1402404 1403404	2 3	310		350Mcm - #6Awg	1		#4 - #14Awg	6
1431552 1432552 1433552	1 2 3	335		400Mcm - #6Awg	1		#2 - #14Awg	4
1431553 1432553 1433553	1 2 3	335		400Mcm - #6Awg	1		#2 - #14Awg	6
1441560 1442560 1443560	1 2 3	335		400Mcm - #6Awg	1		#2 - #14Awg	8
1431555 1432555 1433555	1 2 3	350		2/0 - #14Awg	2		#4 - #14Awg**	6
1441551 1442551 1443551	1 2 3	380		500Mcm - #4Awg	1		#2 - #14Awg	6
1451552 1452552 1453552	1 2 3	380		500Mcm - #4Awg	1		#2 - #14Awg	12
1451592 1452592 1453592	1 2 3	760		500Mcm - #4Awg	2		#4 - #14Awg**	12
1451586 1452586 1453586	1 2 3	760		500Mcm - #4Awg	2		2/0 - #14Awg	8
1421970 1422970 1423970	1 2 3	175	 CU	2/0 - #14Awg	1	 CU	#4 - #14Awg**	4



Specifications:

- Connector, High Conductive Aluminum, Tin Plated
Rated for Copper and Aluminum Wire
- Amp Rating Based on NEC Table 310-16 Using 75° C Copper Wire
- ** Multiple Wire Rated
(2) #10 CU Str, (2 to 4) #12 CU Str, and (2 to 4) #14 CU Str.
- 600 Volts AC/DC
- RoHS Compliant



Clear Protective Covers are Available

Power Distribution Blocks

Marathon Special Products

Power Splicer Blocks - Phenolic

Catalog Number	Pole	Amp	Line Side			Load Side		
			Configuration	Wire Range	Openings Per Pole	Configuration	Wire Range	Openings Per Pole
1411300 1412300 1413300 1414300	1 2 3 4	115		#2 - #14Awg	1		#2 - #14Awg	1
1421552 1422552 1423552	1 2 3	115		#2 - #14Awg	1		#2 - #14Awg	1
1421572 1422572 1423572	1 2 3	175		2/0 - #14Awg	1		2/0 - #14Awg	1
1431123 1432123 1433123	1 2 3	255		250Mcm - #6Awg	1		250Mcm - #6Awg	1
1431126 1432126 1433126	3	310		350Mcm - #6Awg	1		350Mcm - #6Awg	1
1441557 1442557 1443557	3	420		600Mcm - #4Awg	1		600Mcm - #4Awg	1
1451129 1452129 1453129	3	620		350Mcm - #4Awg	2		350Mcm - #4Awg	2
1451301 1452301 1453301	3	760		500Mcm - #4Awg	2		500Mcm - #4Awg	2
1421121 1422121 1423121	3	150	 CU	1/0 - #18Awg	1	 CU	1/0 - #18Awg	1
1431124 1432124 1433124	3	255	 CU	250Mcm - #6Awg	1	 CU	250Mcm - #6Awg	1

Specifications:

- Connector, High Conductive Aluminum, Tin Plated, Rated for Copper and Aluminum Wire
- CU Connector, High Conductive Copper, Tin Plated, Rated for Copper Wire Only
- Amp Rating Based on NEC Table 310-16 Using 75°C Copper Wire
- 600 Volt
- RoHS Compliant



Clear Protective Covers Are Available



Power Stud Blocks - Phenolic

Catalog Number	Pole	Amp	Line Side			Load Side		
			Configuration	Stud Size	Studs Per Pole	Configuration	Stud Size	Studs Per Pole
1421122 1422122 1423122	1 2 3	200		1/4-20 x 9/16	1		1/4-20 x 9/16	1
1431563 1432563 1433563	1 2 3	230		3/8-16 x 1-3/16	1		3/8-16 x 1-3/16	1
1431561 1432561 1433561	1 2 3	230		3/8-16 x 1-3/16	1		1/4-20 x 1-3/16	1

Specifications:

- Connector, High Conductive Aluminum, Tin Plated
- Stud, Brass, Tin Plated, Metric (M) Studs, Steel
- Suitable for Compression Wire Lugs
- 600 Volts
- RoHS Compliant



Clear Protective Covers Are Available



Power Distribution Blocks

Marathon Special Products

Power Distribution Blocks - Thermoplastic

Catalog Number	Pole	Amp	Line Side			Load Side		
			Configuration	Wire Range	Openings Per Pole	Configuration	Wire Range	Openings Per Pole
1321570CH 1322570CH 1323570CH 1320570	1 2 3 Adder	175		2/0 - #14Awg	1		#4 - #14Awg**	4
1321580CH 1322580CH 1323580CH 1320580	1 2 3 Adder	175		2/0 - #14Awg	1		#4 - #14Awg**	6
1331554CH 1332554CH 1333554CH	1 2 3	310		350Mcm - #6Awg	1		2/0 - #14Awg	2
1331552CH 1332552CH 1333552CH	1 2 3	335		400Mcm - #6Awg	1		#2 - #14Awg*	4
1331555CH 1332555CH 1333555CH	1 2 3	350		2/0 - #14Awg	2		#4 - 14Awg**	6
1331587CH 1332587CH 1333587CH	1 2 3	380		500Mcm - #4Awg	1		#2 - #14Awg* 350Mcm - #6Awg	3 1
1331588CH 1332588CH 1333588CH	1 2 3	420		600Mcm - #2Awg	1		#2 - #14Awg* 1/0 - #14Awg	6 3
1331595CH 1332595CH 1333595CH	1 2 3	420		600Mcm - #2Awg	1		#4 - #14Awg**	12
1331585CH 1332585CH 1333585CH	1 2 3	420		600Mcm - #2Awg	1		#2 - #14Awg*	8
1331575CH 1332575CH 1333575CH	1 2 3	420		600Mcm - #2Awg	1		2/0 - #14Awg	4
1331565CH 1332565CH 1333565CH	1 2 3	420		600Mcm - #2Awg	1		250Mcm - 1/0Awg	2
1331596CH 1332596CH 1333596CH	1 2 3	510		250Mcm - 1/0Awg	2		#4 - #14Awg**	12
1331597CH 1332597CH 1333597CH	1 2 3	510		250Mcm - 1/0Awg	2		#2 - #14Awg*	8
1331598CH 1332598CH 1333598CH	1 2 3	510		250Mcm - 1/0Awg	2		2/0 - #14Awg	4



Specifications:

- Connector, High Conductive Aluminum, Tin Plated Rated for Copper and Aluminum Wire
- Amp Rating Based on NEC Table 310-16 Using 75° C Copper Wire
- * Multiple Wire Rated
(2) #8 CU Str, (2) #10 CU Str, and (2) #12 CU Str, and (2) #14 CU Str.
- ** Multiple Wire Rated
(2) #10 CU Str, (2 to 4) #12 CU Str, and (2 to 4) #14 CU Str.
- 600 Volts AC/DC
- RoHS Compliant



Supplied with removable hinged cover

Power Distribution Blocks

Marathon Special Products

Power Distribution Blocks - Thermoplastic

Catalog Number	Pole	Amp	Line Side				Load Side			
			Configuration		Wire Range	Openings Per Pole	Configuration		Wire Range	Openings Per Pole
1321970CH 1322970CH 1323970CH 1320970	1 2 3 Adder	175		CU	2/0 - #14Awg	1		CU	#4 - #14Awg**	4
1331955CH 1332955CH 1333955CH	1 2 3	350		CU	2/0 - #14Awg	2		CU	#4 - #14Awg**	6
1331953CH 1332953CH 1333953CH	1 2 3	380		CU	500Mcm - #4Awg	1		CU	#2 - #14Awg	6

Specifications:

- Connector, High Conductive Aluminum, Tin Plated
Rated for Copper and Aluminum Wire
- Amp Rating Based on NEC Table 310-16 Using 75° C Copper Wire
- ** Multiple Wire Rated
(2) #10 CU Str, (2 to 4) #12 CU Str, and (2 to 4) #14 CU Str.
- 600 Volts AC/DC
- RoHS Compliant



Supplied with removable hinged cover



Power Splicer Blocks - Thermoplastic

Catalog Number	Pole	Amp	Line Side			Load Side				
			Configuration		Wire Range	Openings Per Pole	Configuration		Wire Range	Openings Per Pole
1321572CH 1322572CH 1323572CH 1320572	1 2 3 Adder	175			2/0 - #14Awg	1			2/0 - #14Awg	1
1331126CH 1332126CH 1333126CH	1 2 3	310			350Mcm - #6Awg	1			350Mcm - #6Awg	1
1331305CH 1332305CH 1333305CH	1 2 3	350			2/0 - #14Awg	2			2/0 - #14Awg	2
1331360CH 1332360CH 1333360CH	1 2 3	420			600Mcm - #2Awg	1			600Mcm - #2Awg	1
1331320CH 1332320CH 1333320CH	1 2 3	510			250Mcm - 1/0Awg	2			250Mcm - 1/0Awg	2
1321972CH 1322972CH 1323972CH 1320972	1 2 3 Adder	175		CU	2/0 - #14Awg	1		CU	2/0 - #14Awg	1

Specifications:

- Connector, High Conductive Aluminum, Tin Plated,
Rated for Copper and Aluminum Wire
- CU Connector, High Conductive Copper, Tin Plated,
Rated for Copper Wire Only
- Amp Rating based on NEC Table 310-16 Using 75°C Copper Wire
- 600 Volts
- RoHS Compliant



Supplied with removable hinged cover



Double Row Terminal Blocks

Marathon Special Products

Phenolic 150 Volt or Thermoplastic 300 Volt - 3/8" Centers

Catalog Number		Pole	Catalog Number		Pole	Catalog Number		Pole
Phenolic	Thermoplastic		Phenolic	Thermoplastic		Phenolic	Thermoplastic	
101	670ARZ01	1	113	670ARZ13	13	125	670ARZ25	25
102	670ARZ02	2	114	670ARZ14	14	126	670ARZ26	26
103	670ARZ03	3	115	670ARZ15	15	127	670ARZ27	27
104	670ARZ04	4	116	670ARZ16	16	128	670ARZ28	28
105	670ARZ05	5	117	670ARZ17	17	129	670ARZ29	29
106	670ARZ06	6	118	670ARZ18	18	130	670ARZ30	30
107	670ARZ07	7	119	670ARZ19	19	131	-	31
108	670ARZ08	8	120	670ARZ20	20	132	-	32
109	670ARZ09	9	121	670ARZ21	21	133	-	33
110	670ARZ10	10	122	670ARZ22	22	134	-	34
111	670ARZ11	11	123	670ARZ23	23	135	-	35
112	670ARZ12	12	124	670ARZ24	24	136	-	36

300 Volt - 7/16" Centers

Catalog Number		Pole	Catalog Number		Pole	Catalog Number		Pole
Phenolic	Thermoplastic		Phenolic	Thermoplastic		Phenolic	Thermoplastic	
201	671RZ01	1	211	671RZ11	11	221	671RZ21	21
202	671RZ02	2	212	671RZ12	12	222	671RZ22	22
203	671RZ03	3	213	671RZ13	13	223	671RZ23	23
204	671RZ04	4	214	671RZ14	14	224	671RZ24	24
205	671RZ05	5	215	671RZ15	15	225	671RZ25	25
206	671RZ06	6	216	671RZ16	16	226	671RZ26	26
207	671RZ07	7	217	671RZ17	17	227	671RZ27	27
208	671RZ08	8	218	671RZ18	18	228	671RZ28	28
209	671RZ09	9	219	671RZ19	19	229	671RZ29	29
210	671RZ10	10	220	671RZ20	20	230	671RZ30	30

- 200 Series Phenolic Terminal Blocks are also Available in 600 Volt High Barrier Series - Add HB to end of Catalog Number

- 671RZ Series Thermoplastic Terminal Blocks are also Available in 600 Volt High Barrier Series - Change Series to 621RZ

600 Volt - 9/16" Centers

Catalog Number		Pole	Catalog Number		Pole	Catalog Number		Pole
Phenolic	Thermoplastic		Phenolic	Thermoplastic		Phenolic	Thermoplastic	
301	672RZ01	1	309	672RZ09	9	317	672RZ17	17
302	672RZ02	2	310	672RZ10	10	318	672RZ18	18
303	672RZ03	3	311	672RZ11	11	319	672RZ19	19
304	672RZ04	4	312	672RZ12	12	320	672RZ20	20
305	672RZ05	5	313	672RZ13	13	321	672RZ21	21
306	672RZ06	6	314	672RZ14	14	322	672RZ22	22
307	672RZ07	7	315	672RZ15	15	323	672RZ23	23
308	672RZ08	8	316	672RZ16	16	324	672RZ24	24



Phenolic Specifications:

- Base, General Purpose Phenolic 150° C
- Closed Back Design

100 and 200 Series:

- Screws, #6-32 Binder Head, Phil-Slot
- Wire Range #12 - #22 Awg - 20 Amps

300 Series:

- Screws, #8-32 Binder Head, Phil-Slot
- Wire Range #10 - #14 Awg - 30 Amps

Thermoplastic Specifications:

- Base, Thermoplastic, 125° C
- Closed Back Design

670 and 671 Series:

- Screws, #6-32 Binder Head, Phil-Slot
- Wire Range #12 - #22 Awg - 20 Amps

672 Series:

- Screws, #8-32 Binder Head, Phil-Slot
- Wire Range #10 - #14 Awg - 30 Amps

Full Range of Hardware Available, Please Call



Heavy Duty Terminal Blocks

Marathon Special Products

1500 Series

Catalog Number						Pole
STD	DJ	DJSV	ST	SC	H	
1504STD	1504DJ	1504DJSV	1504ST	1504SC	1504H	4
1506STD	1506DJ	1506DJSV	1506ST	1506SC	1506H	6
1508STD	1508DJ	1508DJSV	1508ST	1508SC	1508H	8
1512STD	1512DJ	1512DJSV	1512ST	1512SC	1512H	12

STD – Standard Connector with Serrations for Anti-Rotation

DJ – Removable Connector with Brass Insert

DJSV – Removable Connector with Brass Insert, Removable Cover


ST – 10-32 Stud, Removable Connector

SC – Short Circuit Bar with Brass Insert, 4 Shorting Pins per Block

H – Standard Connector with Hinged Cover

Specifications:

- Base, General Purpose Phenolic, 150° C
- Connector, Brass, Nickel Plated
- Phil-Slot Screws standard (slotted screws also available)
Brass, Nickel Plated, 10-32
- Current rated up to 30 Amps with unprepared wire, #10-22 AWG Copper
- Current rated up to 75 Amps when wired with crimp type ring,
spade or fork terminal
- 5/8" (.625") Line to Line Spacing
- 600 Volt
- RoHS Compliant

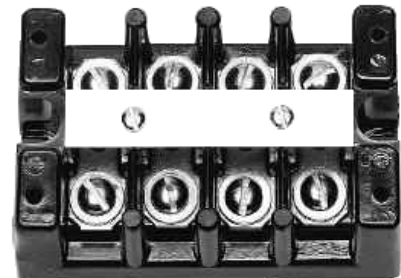

1504STD

1600 Series

Catalog Number						Pole
STD	DJ	DJSV	ST	SC	H	
1604STD	1604DJ	1604DJSV	1604ST	1604SC	1604H	4
1606STD	1606DJ	1606DJSV	1606ST	1606SC	1606H	6
1608STD	1608DJ	1608DJSV	1608ST	1608SC	1608H	8
1612STD	1612DJ	1612DJSV	1612ST	1612SC	1612H	12

STD – Standard Connector with Serrations for Anti-Rotation

DJ – Removable Connector with Brass Insert

DJSV – Removable Connector with Brass Insert, Removable Cover

ST – 10-32 Stud, Removable Connector

SC – Short Circuit Bar with Brass Insert, 4 Shorting Pins per Block

H – Standard Connector with Hinged Cover

Specifications:

- Base, General Purpose Phenolic, 150° C
- Connector, Brass, Nickel Plated
- Phil-Slot Screws standard (slotted screws also available)
Brass, Nickel Plated, 10-32
- Current rated up to 30 Amps with unprepared wire, #10-22 AWG Copper
- Current rated up to 75 Amps when wired with crimp type ring,
spade or fork terminal
- 21/32" (.65625") Line to Line Spacing
- 600 Volt
- RoHS Compliant



1604STD

Terminal Blocks / Fuse Holders

Marathon Special Products

Deadfront Terminal Blocks – 600 Volts



Catalog Number	Pole
985GP02	2
985GP03	3
985GP04	4
985GP05	5
985GP06	6
985GP07	7
985GP08	8
985GP09	9
985GP10	10
985GP11	11
985GP12	12

Specifications:

- Base, General Purpose Phenolic, 150° C
- Connector, Aluminum, Tin Plated
- Screws, Steel, Nickel Plated
- 5/8" Spacing
- Wire Range #4 - #18 Awg Copper Wire - 85 Amps



Multiple Wire Combinations for Solid or Stranded Wire are:

1 #6 Awg to 1 #4 Awg	2 to 6 #14 Awg
2 #8 Awg	2 to 6 # 16 Awg
2 to 4 #10 Awg	2 to 8 # 18 Awg
2 to 4 #12 Awg	

Grounding Lugs



Catalog Number	Wire Range
GL02	#2 - #14 Awg
GL20	2/0 - #14 Awg
GL35	350Mcm - #6 Awg

Specifications:

- Connector, High Conductive Aluminum, Tin plated
- Per Code – Screw is Green



Semi Conductor Fuse Holders



Catalog Number	Stud Size	Electrical Ratings
FSM25E	1/4-20	400A
FSM37E	3/8-16	800A
FSM50E	1/2-13	1200A






Stud Version - Specifications:

- Insulator Base, High Strength Thermoplastic
- Maximum Insulator Base Temperature Rating 125° C
- Stud, Nuts and Belleville washers plated steel
- Hardware Provided Unassembled
- Up to 1000V AC/DC

Sectional Terminal Blocks


Marathon Special Products

3/8" Sectional - 600 Volts, 32 Circuits per Foot


Catalog Number			Description	
DIN Mount	Flat Mount	Channel Mount		
6G38TS-DIN	6G38TSF	6G38TSC	Tubular Screw	
6G38TSKK-DIN	6G38TSKKF	6G38TSKKC	Kant Kut Connector	
---	6H38SF	6H38SC	Screw	
---	6H38SPF	6H38SPC	SEMS Pressure	
6G38E-DIN	6G38EF	6G38EC	End Section	
MSK35W	MC		Mounting Clamp	
J38			Jumper for TS + TSKK	
C38			Cover	
MN35-2 (2 Meter Length)	MPC3 (3 Foot Length) MPC6 (6 Foot Length)		Channel	
MS			Vinyl Marking Strip 1/2" x 2" White	

Specifications:

- Base, White Nylon 105° C
- Tubular Screw Connector (TS) Copper, Tin Plated; Screw #10-32 Steel, Nickel Plated
- Wire Range #8 - #18 Awg Copper, 40 Amps
- Multiple Wire Combinations for Stranded Copper Wire Are:
 - 1 #8 Awg or 1 # 10 Awg
 - 1 to 3 # 12 Awg
 - 1 to 4 #14 Awg or # 16 Awg
- Kant Kut Connector (TSKK) Copper, Tin Plated; Screw #10-32 Steel, Nickel Plated, Pad Steel
- Wire Range #10 - #22 Awg Copper, 40 Amps
- Multiple Wire Combinations for Stranded Copper Wire Are:
 - 1 #10 Awg
 - 1 to 2 #12 Awg
 - 1 to 3 #14 Awg
 - 1 to 4 # 16 Awg
 - 1 to 5 #18 Awg
 - 2 to 5 #22 Awg
- Strap (S) Brass, Tin Plated Connector, Screw #6-32 Brass, Nickel Plated, Wire Range #14 - #16 Awg, 20 Amps
- Sems (SP) Brass, Tin Plated Connector, Screw #6-32 Steel, Nickel Plated, Wire Range #12 - #22 Awg, 25 Amps

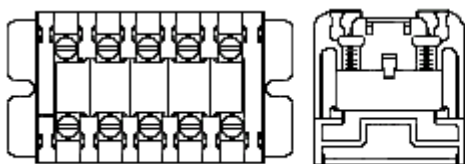

Flat Mount

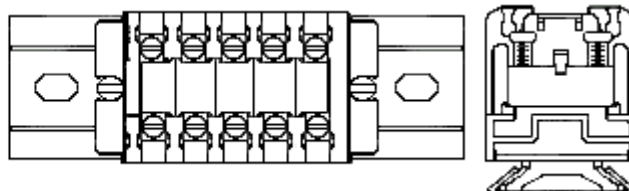

Channel Mount

Specialty Switches

Spemco

Toggle Switches

Screw Terminal	Catalog Number		Function	Circuit
	.250 Quick Connect	Solder Terminal		

3/4 HP, 10A @ 250VAC, 20A @ 125VAC

1185/20	1185-Q/20	1185-S/20	ON-OFF	SPST
1196/20	1196-Q/20	1196-S/20	(ON) - OFF	SPST
1186/20	1186-Q/20	1186-S/20	ON - ON	SPDT
1241/20	1241-Q/20	-	(ON) - ON	SPDT
1187/20	1187-Q/20	1187-S/20	ON - OFF - ON	SPDT
1195/20	1195-Q/20	1195-S/20	(ON) - OFF - (ON)	SPDT



1-1/2 HP, 10A @ 250VAC, 20A @ 125VAC

1188/20	1188-Q/20	1188-S/20	ON - OFF	DPST
1194/20	1194-Q/20	1194-S/20	ON - ON	DPDT
1242/20	1242-Q/20	1242-S/20	(ON) - ON	DPDT
1189/20	1189-Q/20	1189-S/20	ON - OFF - ON	DPDT
1244/20	1244-Q/20	-	(ON) - OFF - ON	DPDT
1193/20	1193-Q/20	-	(ON) - OFF - (ON)	DPDT

() momentary contact

Pushbutton Switches - SPST

Catalog Number	Function	AMP Rating		Button Style	Terminal	Sleeve Length (15/32" dia.)
		125V	250V			
1156-W	ON - OFF	6	3	Chrome	Wire Leads	9/16"
1157-A	OFF - (ON)	6	3	Red	Solder	9/16"
1157-B	(ON) - OFF	6	3	Black	Solder	9/16"
1157-C	ON - (OFF)	6	3	Red	Solder	9/16"
1157-D	ON - (OFF)	6	3	Black	Solder	9/16"



() momentary contact

Accessories

Catalog Number	Description
12-B	Rubber Boot for Toggle Switches - Specify Gray or Black
13-B	Rubber Boot for Pushbutton Switches - Gray
14-B	Rubber Boot for Toggle Switches - Toggle Protrudes - Gray
1132	On - Off Indicator Plate
1132-HL	Hi - Lo Indicator Plate
1213-SG	Switch Guard - Chrome



Foot Switches

Linemaster

Explosion Proof

Catalog Number	Description	Circuit
592-EX	Momentary	SPDT
594-EX	Momentary	DPDT
597-EX (two pedal)	Momentary	Each Pedal SPDT



- Class I, Division I, Group D
- Class II, Division I, Group F & G
- Class I, Zone I, Group IIA
- Nema type 2, 3, 4, 6, 6P, 13, 7D & 9F
- Driptight • Dusttight • Watertight • Oiltight
- 15A @ 125VAC / 10A @250VAC
- 3/4 HP @125VAC / 1 HP @250VAC
- 3A @ 28VDC
- Heavy Pilot Duty 250VAC Maximum

- Non-Sparking Cast Aluminum Housing
- Aluminum Full Guard with Integral Base Plate
- Painted Alert Orange
- 4.38" x 11" x 10.25" ▪ 7.75 Lbs.
- Two Pedal Model is Supplied with a Divider Bar Between Pedals Which Helps Prevent Accidental Operation of Both Pedals at One Time



Classic

Catalog Number	Description	Circuit	Electrical Rating
77SN1	Momentary	SPDT	15A @ 125-250VAC 1/2 H.P. @ 125-250VAC



- Cast aluminum body painted black
- Cast aluminum treadle and base plate with nonskid base pad

- 5-1/4" x 3-1/4" x 1-3/4" • 1-1/8 Lbs.

Optional Guard Available - See page 17



Dolphin

Catalog Number	Description	Circuit	Electrical Ratings
D41-SN028	Momentary	SPST Wired N.O.	5A Resistive 125VAC 28VDC 3A General Purpose 125VAC



- Actuation from any direction with moderate pressure
- Cover and base molded in a high impact polymeric compound
- Base includes mounting provisions

- NEMA Type 2, 4, 6 & 6P ▪ IP68
- 4.13" x 3.50" x 1" ▪ 9 oz



Classic IV

Catalog Number	Description	Type	Circuit
88SH1-05	Momentary	Single Pedal	SPDT
88SH2-05		Guarded	DPDT
TWIN88SH1-05	Momentary	Two Pedal	SPDT
TWIN88SH2-05		Guarded	DPDT



- One Piece Cast Aluminum Housing
- Non-Skid Feet to Minimize Movement
- Divider Bar on Twin Models aids in Reducing Accidental Operation of Multiple Pedals at Once
- Single Pedal 1/2" - 14 NPT Threaded Conduit Opening
- Twin Pedal 1/2" - 14 NPT Threaded Conduit Opening

- 16A @ 125-250VAC / 1/2 HP @ 125-250VAC
- 250 VAC Maximum
- Nema Type 1, 2, 4, 6, 6P & 13
- Driptight • Dusttight • Watertight • Oiltight
- Single – 4.5" x 6" x 7" Twin – 4.5" x 11" x 7"



Available Without Guard

Foot Switches

Linemaster

Hercules



No Guard

Catalog Number			Description	Stage	Circuit
Full Shield	"O" Shield	No Guard			

20 Amp @ 125-250VAC - 1 H.P. @ 125-250VAC

531-SWH	531-SWHO	531-SWN	Momentary	Single	SPDT
571-DWH	571-DWHO	571-DWN	Maintained		
532-SWH	532-SWHO	532-SWN	Momentary	Single	DPDT
572-DWH	572-DWHO	572-DWN	Maintained		
533-SWH	533-SWHO	533-SWN	Momentary	Single	TPDT
573-DWH	573-DWHO	573-DWN	Maintained		
534-SWH	534-SWHO	534-SWN	Momentary	Two	SPDT
574-DWH	574-DWHO	574-DWN	Maintained		
535-SWH	535-SWHO	535-SWN	Momentary	Three	SPDT
575-DWH	575-DWHO	575-DWN	Maintained		

15 Amp @ 125-250VAC - 1/2 H.P. @ 125VAC / 1 H.P. @ 250VAC

536-SWH	536-SWHO	536-SWN	Momentary	Single	SPDT DB*
576-DWH	576-DWHO	576-DWN	Maintained		
537-SWH	537-SWHO	537-SWN	Momentary	Single	DPDT DB*
577-DWH	577-DWHO	577-DWN	Maintained		
538-SWH	538-SWHO	538-SWN	Momentary	Two	SPDT DB*

Hercules Anti-Trip



Full Shield

Catalog Number			Stage	Circuit
Full Shield	"O" Shield	With Gate		

20 Amp @ 125-250VAC - 1 H.P. @ 125-250VAC

511-B	511-BO	511-BG	Single	SPDT
511-B2	511-B2O	511-B2G	Single	DPDT
511-B2A	511-B2OA	511-B2GA	Two	SPDT

15 Amp @ 125-250VAC - 1/2 H.P. @ 125VAC / 1 H.P. @ 250VAC

511-B3	511-B3O	511-B3G	Single	SPDT DB*
511-B4	511-B4O	511-B4G	Single	DPDT DB*
511-B4A	511-B4OA	511-B4GA	Two	SPDT DB*

Hercules and Hercules Anti-Trip Heavy Duty Foot Switches Feature:

- NEMA type 2,4 and 13
- Driptight • Dusttight • Watertight • Oiltight
- Heavy Pilot Duty
- 250VAC Maximum
- Painted Alert Orange
- 9" x 5-3/4" x 4-3/4" • 8 Lbs
- 3/4" - 14NPT Threaded Conduit Entry
- "O" - Denotes Oversize O-Shield Models Which Accept Oversize Safety Shoes and Metatarsal Foot Guards
- *DB Double Break Models Must be Wired to Equal Voltage Sources and the Same Polarity



Hercules Anti-Trip:

- Foot switch features an anti-trip treadle mechanism that helps prevent accidental actuation through unintentional stepping on foot treadle.
- Switch operation requires that the latch trip lever be released prior to depressing the foot treadle. An in-line foot pressure is applied to the latch trip lever located at the rear of the foot treadle.

Foot Switches

Linemaster

Treadlite II

Catalog Number	Description	Circuit	Electrical Rating
T91-S	Momentary	SPDT	15A @ 125-250VAC 1/2 H.P. 125-250 VAC
TWIN T91-S	Momentary	Each Side SPDT	15A @ 125-250VAC 1/2 H.P. 125-250 VAC
T91-D	Maintained	SPDT	15A @ 125-250VAC 1/2 H.P. 125-250 VAC
T91-SC36*	Momentary	SPDT Wired N.O.	10A @ 125-250VAC 1/2 H.P. @ 125-250VAC
T91-SC3**	Momentary	SPDT Wired N.O.	10A @ 125VAC 1/2 H.P. @ 125VAC



Single

- Steel Housing with Nonskid Base Pad
- Painted Black
- 3-1/2" x 2-5/8" x 1" • 7 oz
- TWIN T91-S 3-1/2" x 6-1/8" x 1" • 1 Lb
- Momentary Models - Press to Start - Release to Stop
- Maintained Models - Press to Start - Press to Stop

- TWIN T91-S consists of two single models on a single cast aluminum base with a divider bar between pedals which helps prevent accidental operation of both switches at one time.
- *Supplied with 6 ft. 18/3 Cord without Plug
- **Supplied with 6 ft. 18/3 Cord with 3 Prong Series Plug
- Green Lead Grounded

Optional Guards Available - See below



Compact

Catalog Number	Description	Circuit	Electrical Rating
491-S	Momentary	SPDT	10A @ 125-250VAC 1/2 H.P. @ 125-250VAC
491-DA**	Maintained	SPST	10A @ 125-250VAC 1/2 H.P. @ 125-250VAC
491-SC3*	Momentary	SPDT Wired N.O.	10A @ 125VAC 1/2 H.P. @ 125VAC
492-S**	Momentary	SPDT	20A @ 125-250VAC 1 H.P. @ 125.250VAC



- Steel Housing with Nonskid Base Pad
- Painted Black
- Compact Design and Light in Weight
- 2-7/8" x 2-1/2" x 1-1/8" • 7 oz

- Momentary Models - Press to Start - Release to Stop
- Maintained Models - Press to Start - Press to Stop
- *Supplied with 8 ft. 16/3 Cord with 3 Prong Series Plug

Optional Guards Available - See below



Optional Guards

Catalog Number	Description
522-B12	Twin Guard
522-B14	Single Guard



- Full Guards
- Painted Alert Orange

- Complete with Hardware Predrilled to Accept most Aqualine, Classic, Classic III, Clipper, Compact and Treadlite II Foot Switches

Foot Switches

Linemaster

Clipper



Single



TWIN

Catalog Number	Description	Circuit	Electrical Rating
632-S	Momentary	SPDT	20A @ 125-250VAC
642-S (wide treadle)			1 H.P. @ 125-250VAC
635-S**	Momentary	DPDT	15A @ 125VAC / 10A @ 250VAC
645-S** (wide treadle)			1/2 H.P. @ 125-250VAC
636-S**	Two Stage	Each Stage	15A @ 125VAC / 10A @ 250VAC
646-S** (wide treadle)	Momentary	SPDT	1/2 H.P. @ 125-250VAC
632-DA	Maintained	SPDT	20A @ 125-250VAC
642-D (wide treadle)			1 H.P. @ 125-250VAC
632-SC3*	Momentary	SPST Wired N.O.	15A @ 125VAC 1/2 H.P. @ 125VAC
634-DA**	Maintained	DPDT	10A @ 125VAC / 5A @ 250VAC
TWIN-632-S	Momentary	Each Side SPDT	20A @ 125-250VAC 1 H.P. @ 125-250VAC
TWIN-635-S**		Each Side DPDT	15A @ 125VAC / 10A @ 250VAC 1/2 H.P. @ 125-250VAC

- Cast Iron Housing with Nonskid Base Pad
- Painted Black
- 4-1/2" x 3-1/2" x 1-1/2" • 2-1/4 Lbs
- Wide Treadle 7" • 3-1/2 Lbs.
- Momentary Models - Press to Start - Release to Stop
- Maintained Models - Press to Start - Press to Stop
- * Supplied with 8 ft. 14/3 Cord and 3 Prong Series Plug
- Green Lead Grounded

- TWIN Models consist of two SPDT or two DPDT switches mounted on a heavy steel base plate with nonskid pad. Divider bar between pedals helps prevent accidental operation of both pedals at one time. A tube between the two switches conceals all internal wiring between them. A conduit opening with strain relief connector is provided on the right switch.
- TWIN Models 8-3/4" x 4-1/2" x 1-1/2" • 5 Lbs

Optional Guards Available - See page 17



Aqualine



Catalog Number	Colour	Description	Circuit	Electrical Rating
971S	Dark Gray	Momentary	SPDT	15A 125-250VAC 1/2 H.P. @ 125-250VAC
971SA	Light Gray			
971SB	Blue			
971SO	Orange			
971SY	Yellow	Momentary	DPDT	15A 125-250VAC 1/2 H.P. @ 125-250VAC
974S	Dark Gray			
974SA	Light Gray			

- Rustproof and corrosion proof polymeric material and formed steel base
- Non skid base pad
- Raised ribs on treadle for positive traction during operation
- 2 holes provided for rigid mounting to floor or equipment

- Integrated adjustable strain relief clamp accommodates cord sizes from .250 Dia. To .400 Dia.
- 3.44" x 4" x 1.16" • 3.6 oz.
- Momentary - Press to Start - Release to Stop
- IP20

Optional Guards Available - See page 17



Tapes and Insulating Products

Electrotape

General Purpose Vinyl Electrical Tape

Catalog Number	Dimensions (imperial)	Dimensions (metric)	Packaging
----------------	-----------------------	---------------------	-----------

General Purpose – 7.5 mil

70-B 3/4" x .0075" x 66' 19mm x 0,19mm x 20m Cello-Wrap

General Purpose - 7.5 mil Colour Coding

60-GREEN

60-YELLOW 3/4" x .0075" x 66' 19mm x 0,19mm x 20m Cello-Wrap

60-RED

60-BLUE

60-WHITE 3/4" x .0075" x 66' 19mm x 0,19mm x 20m Cello-Wrap

60-BROWN

60-ORANGE

60-GREY 3/4" x .0075" x 66' 19mm x 0,19mm x 20m Cello-Wrap

60-VIOLET



Plymouth

Professional Grade Vinyl Electrical Tape

Catalog Number	Dimensions (imperial)	Dimensions (metric)	Packaging
----------------	-----------------------	---------------------	-----------

Premium 111 - 7 mil Professional Grade Electrical Tape

4453 3/4" x .007" x 66' 19mm x 0,18mm x 20m Crystal Case

4452 3/4" x .007" x 66' 19mm x 0,18mm x 20m

4461 2" x .007" x 66' 51mm x 0,18mm x 20m Cello-Wrap

4417 1.5" x .007" x 44' 38mm x 0,18mm x 13m

- UL510, CSA 22.2 (Rated from -18°C to 105°C)
- Lead-free



Premium 85 - 8.5 mil Professional Grade Electrical Tape

4240 3/4" x .0085" x 66' 19mm x 0,21mm x 20m Crystal Case

4243 3/4" x .0085" x 66' 19mm x 0,21mm x 20m

4247 1" x .0085" x 66' 25mm x 0,21mm x 20m

4252 1-1/2" x .0085" x 66' 38mm x 0,21mm x 20m

4311 2" x .0085" x 66' 51mm x 0,21mm x 20m Cello-Wrap

4273 1-1/2" x .0085" x 108' 38mm x 0,21mm x 33m

4301 2" x .0085" x 108' 51mm x 0,21mm x 33m

- UL510, CSA 22.2 (Rated from -18°C to 105°C)
- Lead-free



Premium 37 - 7 mil Professional Grade Colour Coding Tape

3702* 3/4" x .007" x 66' 19mm x 0,18mm x 20m Crystal Case

3898* 3/4" x .007" x 66' 19mm x 0,18mm x 20m Cello-Wrap

*Specify Colour: Green, Yellow, Red, Blue, White, Brown, Orange, Gray or Violet

- UL510, CSA 22.2 (Rated from -18°C to 105°C)
- Lead-free



PLYWRAP® - Pipewrap

4611 2" x .010" x 100' 51mm x 0,25mm x 31m Cello-Wrap



Tapes and Insulating Products

Plymouth

Friction and Duct Tape



Catalog Number	Dimensions (imperial)	Dimensions (metric)	Packaging
----------------	-----------------------	---------------------	-----------

100 ASTM - Friction Tape

1002	3/4" x .015" x 60'	19mm x 0,38mm x 18m	Cello-Wrap
1039	2" x .015" x 60'	51mm x 0,38mm x 18m	

PLYDUCT® 48 - Commercial Grade Cloth Duct Tape

3150	2" x 180'	51mm x 55m	Cello-Wrap
------	-----------	------------	------------

Low Voltage Rubber Tape



Catalog Number	Dimensions (imperial)	Dimensions (metric)	Packaging
----------------	-----------------------	---------------------	-----------

122 Rubber Tape - Splicing Compound

2002	3/4" x .030" x 22'	19mm x 0,76mm x 6,7m	Cello-Wrap
------	--------------------	----------------------	------------

125 Electrical Filler Tape

2074	1-1/2" x .125" x 60"	38mm x 3,2mm x 1,5m	Cello-Wrap
------	----------------------	---------------------	------------

Insulating Mastic



Catalog Number	Dimensions (imperial)	Dimensions (metric)	Packaging
----------------	-----------------------	---------------------	-----------

4000 PLYSEAL®-V - Vinyl Reinforced Insulating Mastic

2620	4" x .133" x 10'	102mm x 3,4mm x 3m	Cello-Wrap
2621	4" x .133" x 4"	102mm x 3,4mm x 102mm	
2622	4" x .133" x 6-1/2"	102mm x 3,4mm x 165mm	

High Voltage Tape



Catalog Number	Dimensions (imperial)	Dimensions (metric)	Packaging
----------------	-----------------------	---------------------	-----------

L969 PLYVOLT™ - Linerless High Voltage Insulating Tape

2211	3/4" x .030" x 30'	19mm x 0,76mm x 9m	Cello-Wrap
2212	1" x .030" x 30'	25mm x 0,76mm x 9m	
2213	1-1/2" x .030" x 30'	38mm x 0,76mm x 9m	
2214	2" x .030" x 30'	51mm x 0,76mm x 9m	

W963 PLYSAFE® - High Voltage Insulating Tape with Liner

2117	3/4" x .030" x 30'	19mm x 0,76mm x 9m	Cello-Wrap
2132	1" x .030" x 30'	25mm x 0,76mm x 9m	
2134	1-1/2" x .030" x 30'	38mm x 0,76mm x 9m	
2145	2" x .030" x 30'	51mm x 0,76mm x 9m	

Tapes and Insulating Products

Plymouth

High Voltage Tape

Catalog Number	Dimensions (imperial)	Dimensions (metric)	Packaging
----------------	-----------------------	---------------------	-----------

17 PLYSHIELD® - EPR Shielding Tape

2104 3/4" x .030" x 15' 19mm x 0,76mm x 4,6m Cello-Wrap



15 PLYBRAID - Tinned Copper Shielding Braid

5415 1" x 15' 25mm x 4,6m
5416 1" x 100' 25mm x 30m Boxed



PLYSTRAP® - Tinned Copper Grounding Braid

2711 3/8" x 100' 9mm x 30m Boxed



Special Purpose Tapes

Catalog Number	Dimensions (imperial)	Dimensions (metric)	Packaging
----------------	-----------------------	---------------------	-----------

20 PLYSIL® - Silicone Rubber Tape

3455 1" x .020" x 30' 25mm x 0,51 x 9m Cello-Wrap




53 PLYARC® - Arc and Fire-Proofing Tape

3817 1-1/2" x .030" x 20' 38mm x 0,76mm x 6m
3819 3" x .030" x 20' 76mm x 0,76mm x 6m Cello-Wrap



77 PLYGLAS® - Pressure Sensitive Glass Cloth Tape

3451 1/2" x .007" x 66' 13mm x 0,18mm x 20m
3456 3/4" x .007" x 66' 19mm x 0,18mm x 20m Boxed
3459 1" x .007" x 108' 25mm x 0,18mm x 33m



61A Dacron-Glass with Adhesive

1121 3/4" x .008" x 60' 19mm x 0,202mm x 18m
1122 1" x .008" x 108' 25mm x 0,203mm x 33m Cello-Wrap
1123 1-1/2" x .008" x 108' 38mm x 0,203mm x 33m



Liquid Electrical Tape

Catalog Number	Description
----------------	-------------

LT4* 4 ounce can with brush applicator

LT32* 32 ounce can with brush applicator

*Specify Colour: Black, Red, White or Clear



Underground Warning Tape

Catalog Number	Colour	Size	Thickness
----------------	--------	------	-----------

AMT1006RE Red 6" x 1000' 3 Mil

CAUTION CAUTION
ELECTRIC LINE BURIED BELOW

High Voltage Termination Kits

Plymouth

High Voltage Termination Kits

Catalog Number	KV Range	Cable Insulation O.D. Range (imperial)	Cable Insulation O.D. Range (metric)	Packaging	Weight
----------------	----------	--	--------------------------------------	-----------	--------

Outdoor

2800	5 - 15KV	.637 - 1.12	1,62 - 2,84 cm	3 terminations per kit	3 Lbs.
2801	5 - 28KV	.840 - 1.38	2,13 - 3,51 cm	3 terminations per kit	3 Lbs.
2802	5 - 28KV	1.30 - 2.10	3,30 - 5,33 cm	3 terminations per kit	3 Lbs.
2806	5 - 35KV	.840 - 1.38	2,13 - 3,51 cm	3 terminations per kit	4 Lbs.
2807	5 - 35KV	1.30 - 2.10	3,30 - 5,33 cm	3 terminations per kit	4 Lbs.

Indoor

2803	5 - 15KV	.637 - 1.12	1,62 - 2,84 cm	3 terminations per kit	3 Lbs.
2804	5 - 15KV	.840 - 1.38	2,13 - 3,51 cm	3 terminations per kit	3 Lbs.
2805	5 - 15KV	1.30 - 2.10	3,30 - 5,33 cm	3 terminations per kit	3 Lbs.

Catalog Number	Cable Insulation O.D. Range	5KV 100%	5KV 133% 8KV 100%	15KV 100%	15KV 133%	25/28KV	35KV 100%	35KV 133%
Outdoor								
2800	.637 - 1.12	3/0 AWG to 600 kCMIL	1/0 AWG to 500 kCMIL	2 AWG to 350 kCMIL	4 AWG to 250 kCMIL	N/A	N/A	N/A
2801	.840 - 1.38	350 kCMIL to 1000 kCMIL	250 kCMIL to 750 kCMIL	3/0 AWG to 600 kCMIL	1/0 AWG to 500 kCMIL	2 AWG to 400 kCMIL	N/A	N/A
2802	1.30 - 2.10	Over 1000 kCMIL	750 kCMIL to 2000 kCMIL	600 kCMIL to 1500 kCMIL	500 kCMIL to 1500 kCMIL	400 kCMIL to 1250 kCMIL	N/A	N/A
2806	.840 - 1.38	350 kCMIL to 1000 kCMIL	250 kCMIL to 750 kCMIL	3/0 AWG to 600 kCMIL	1/0 AWG to 500 kCMIL	2 AWG to 400 kCMIL	1/0 AWG to 250 kCMIL	1/0 AWG to 2/0 AWG
2807	1.32 - 2.10	1000 kCMIL to 2500 kCMIL	750 kCMIL to 2000 kCMIL	600 kCMIL to 1500 kCMIL	500 kCMIL to 1500 kCMIL	400 kCMIL to 1250 kCMIL	250 kCMIL to 1000 kCMIL	2/0 AWG to 1000 kCMIL
Indoor								
2803	.637 - 1.12	3/0 AWG to 600 kCMIL	1/0 AWG to 500 kCMIL	2 AWG to 350 kCMIL	4 AWG to 250 kCMIL	N/A	N/A	N/A
2804	.840 - 1.38	350 kCMIL to 1000 kCMIL	250 kCMIL to 750 kCMIL	3/0 AWG to 600 kCMIL	1/0 AWG to 500 kCMIL	N/A	N/A	N/A
2805	1.30 - 2.10	Over 1000 kCMIL	750 kCMIL to 2000 kCMIL	600 kCMIL to 1500 kCMIL	500 kCMIL to 1500 kCMIL	N/A	N/A	N/A



Cable Types:

ColdTerm Termination Kits are designed for terminating solid extruded dielectric cables to include tape shield, wire shield, unshielded and jacketed concentric neutral (JCN) cables.

Ratings:

Coldterm Termination kits meet or exceed the Class I termination requirements of IEEE Standard 48.

Kit Components:

3 **Coldterm** Terminations
 1 Roll of 20 Plysil® Silicone Rubber Tape
 1 Roll of 17 Plyshield® Semi-Conducting Shielding Tape
 1 Roll of Premium 85CW Vinyl Electrical Tape
 3 Packs of 10 Plyseal® Mastic Strips
 3 Tubes of Silicone Grease
 3 Ground Assemblies
 3 Plyprep™ Solvent Packs
 Abrasive Cloths
 3 Pair of Gloves
 Instruction Sheet
 *Terminal Lugs not included

3M to Plymouth Cross Reference

3M Catalog Number	Plymouth Catalog Number	Description
(Super) 33+	4453	Premium Vinyl Tape (3/4" x .007" x 66')
(Super) 88	4240	Premium Vinyl Tape (3/4" x .0085" x 66')
Temflex 1700	70-B	Economy Grade Vinyl Tape (3/4" x .0075" x 66')
13	2104	EPR Shielding Tape (3/4" x 15')
23	2117	High Voltage Insulating Tape with Liner (3/4" x 30')
	2132	High Voltage Insulating Tape with Liner (1" x 30')
	2134	High Voltage Insulating Tape with Liner (1-1/2" x 30')
	2145	High Voltage Insulating Tape with Liner (2" x 30')
24	5415	Tinned Copper Shielding Braid (1" x 15')
	5416	Tinned Copper Shielding Braid (1" x 100')
25	2711	Tinned Copper Grounding Braid (3/8" x 100')
27	3451	Pressure Sensitive Glass Cloth Tape (1/2" x 66')
	3456	Pressure Sensitive Glass Cloth Tape (3/4" x 66')
	3459	Pressure Sensitive Glass Cloth Tape (1" x 108')
35	3167*	Premium Colour Coding Tape (1/2" x 20')
	3702*	Premium Colour Coding Tape (3/4" x 66') - Crystal Pack
	8751*	Premium Colour Coding Tape (3/4" x 66') - Cello Wrap
50	4611	Vinyl Pipewrap (2" x 100')
51	4631	Vinyl Pipewrap (2" x 100')
70	3455	Silicone Rubber Tape (1" x 30')
77	3817	Arc and Fire-Proofing Tape (1-1/2" x 20')
	3819	Arc and Fire-Proofing Tape (3" x 20')
130C	2211	Linerless High Voltage Insulating Tape (3/4" x 30')
	2212	Linerless High Voltage Insulating Tape (1" x 30')
	2213	Linerless High Voltage Insulating Tape (1-1/2" x 30')
	2214	Linerless High Voltage Insulating Tape (2" x 30')
1755	1002	Friction Tape (3/4" x 60')
	1039	Friction Tape (2" x 60')
2150	2002	Rubber Tape - Splicing Compound (3/4" x 22')
2200	2621	Vinyl Reinforced Insulating Mastic (4" x 4")
	2622	Vinyl Reinforced Insulating Mastic (4" x 6-1/2")
2210	2620	Vinyl Reinforced Insulating Mastic (4" x 10')
2520	1121**	Dacron-Glass Tape with Adhesive (3/4" x 60')
	1122**	Dacron-Glass Tape with Adhesive (1" x 108')
	1123**	Dacron-Glass Tape with Adhesive (1-1/2" x 108')
3939	3150	Commercial Grade Cloth Duct Tape (2" x 180')
SCOTCHFIL	2074	Electrical Filler Tape (1-1/2" x 60")

*Specify Colour: Green, Yellow, Red, Blue, White, Brown, Orange, Gray or Violet


**Not an Exact Equal. Dacron-Glass Tape is Replacing Varnish Cambric Tape.

This table should be used as a guide only. Please refer to individual specs.

Heat Shrink Products


Raychem

Breakout Boots



Catalog Number	Number of Legs	Body Range (inches)	Leg Range (inches)
CBR2-1A	2	0.35 - 1.00	0.15 - 0.55
CBR2-2A	2	1.25 - 1.70	0.30 - 0.75
CBR2-3A	2	1.65 - 3.00	0.65 - 1.40
CBR3-1A	3	0.50 - 1.35	0.20 - 0.55
CBR3-2A	3	0.85 - 2.20	0.35 - 0.90
CBR3-3A	3	1.10 - 2.90	0.50 - 1.25
CBR3-4A	3	2.35 - 5.65	1.20 - 2.10
CBR4-1A	4	0.70 - 1.25	0.15 - 0.45
CBR4-2A	4	1.00 - 2.10	0.35 - 0.90
CBR4-3A	4	1.20 - 3.50	0.55 - 1.40
CBR4-4A	4	2.35 - 6.05	0.90 - 1.50

Teck Cable Splice Kits



Catalog Number	Description	Wire Range (inches)
TS14-4-3	1KV, 3 Conductor	#14 - #4
TS2-3/0-3	1KV, 3 Conductor	#2 - 3/0
TS4/0-400-3	1KV, 3 Conductor	4/0 - 400Mcm
TS500-1000-3	1KV, 3 Conductor	500 - 1000Mcm
TS14-4-4	1KV, 4 Conductor	#14 - #4
TS2-3/0-4	1KV, 4 Conductor	#2 - 3/0
TS4/0-400-4	1KV, 4 Conductor	4/0 - 400Mcm
TS500-1000-4	1KV, 4 Conductor	500 - 1000Mcm
TS5-3-2/0-3	5KV, 3 Conductor	#3 - 2/0
TS5-3/0-400-3	5KV, 3 Conductor	3/0 - 400Mcm
TS5-500-1000-3	5KV, 3 Conductor	500 - 1000Mcm


- Compression Sleeves Not Included
- Suitable for Direct Burial

Heavy Wall Tubing with Sealant - 1Kv - 4 Foot Lengths



Catalog Number	Range (inches)	Cable Range
WCSM-9/3-1200S	.15 - .30	#14 - #8
WCSM-13/4-1200S	.20 - .45	#12 - #6
WCSM-20/6-1200S	.25 - .70	#8 - #2
WCSM-33/8-1200S	.35 - 1.20	#4 - 4/0
WCSM-43/12-1200S	.50 - 1.55	1/0 - 400Mcm
WCSM-51/16-1200S	.70 - 1.75	250 - 500Mcm
WCSM-70/21-1200S	.90 - 2.44	400 - 1000Mcm
WCSM-105/30-1200S	1.30 - 3.70	800 - 1250Mcm
WCSM-130/36-1200S	1.60 - 4.20	1500 - 2500Mcm

Wraparound Cable Support Sleeves - 10" Length



Catalog Number	Range (inches)
WCSS170/35	1.70 - 0.35
WCSS280/60	2.80 - 0.60
WCSS360/100	3.60 - 1.00
WCSS470/110	4.70 - 1.10

Heat Shrink Products / Threaded Adapters

Raychem

Wraparound Repair Jackets - 4 Foot Lengths


Catalog Number	Range (inches)
CRSM34/10	0.25 - 1.20
CRSM53/13	0.60 - 1.80
CRSM84/20	0.95 - 2.70
CRSM107/29	1.30 - 3.60
CRSM143/35	1.65 - 4.95

0-35Kv



End Caps

Catalog Number	Range (inches)	Cable Range
ESC1A	.15 - .30	#12 - #8
ESC2A	.30 - .70	#6 - 3/0
ESC3A	.65 - 1.25	4/0 - 750Mcm
ESC4A	1.05 - 1.95	750 - 1500Mcm
ESC5A	1.30 - 2.65	1500 - 2000Mcm
ESC6A	1.85 - 3.70	-
ESC7A	2.95 - 4.50	-



Kleinhuis

Threaded Adapters

Catalog Number	Size	
	Male	Female

PG to NPT

1234/1112	PG 11	1/2"
1234/1312	PG 13	1/2"
1234/1612	PG 16	1/2"
1234/2112	PG 21	1/2"
1234/2134	PG 21	3/4"
1234/2910	PG 29	1"

Metric to NPT

1234M1612	M16	1/2"
1234M2012	M20	1/2"
1234M2512	M25	1/2"
1234M2534	M25	3/4"
1234M3210	M32	1"

- Constructed of High Quality Nickel Plated Brass



Copper Compression Lugs

Short Barrel One-Hole Lugs

Catalog No.	Wire Size	Hole Size	Colour Code	Comparison Numbers	
SAL6CT14	6 Str.	1/4"	Blue	54105	YAL6CT14
SAL4CT14		1/4"		54106	YAL4CT14
SAL4CT516	4 Str.	5/16"	Grey	54139	YAL4CT516
SAL4CT38		3/8"		54140	YAL4CT38
SAL2CT14		1/4"		54170	YAL2CT14
SAL2CT516	2 Str.	5/16"	Brown	54142	YAL2CT516
SAL2CT38		3/8"		54143	YAL2CT38
SAL1CT14		1/4"		54108	YAL1CT14
SAL1CT516	1 Str.	5/16"	Green	54147	YAL1CT516
SAL1CT38		3/8"		54148	YAL1CT38
SAL25T516	1/0 Str.	5/16"	Pink	54153	YAL25T516
SAL25T38		3/8"		54109	YAL25T38
SAL26T38	2/0 Str.	3/8"	Black	54110	YAL26T38
SAL26T12		1/2"		54160	YAL26T12
SAL27T38	3/0 Str.	3/8"	Orange	54111	YAL27T38
SAL27T12		1/2"		54165	YAL27T12
SAL28T38	4/0 Str.	3/8"	Purple	54112	YAL28T38
SAL28T12		1/2"		54170	YAL28T12
SAL29T12	250 Mcm	1/2"	Yellow	54113	YAL29T12
SAL30T12	300 Mcm	1/2"	White	54114	YAL30T12
SAL31T12	350 Mcm	1/2"	Red	54115	YAL31T12
SAL32T58	400 Mcm	5/8"	Blue	54185	YAL32T58
SAL34T58	500 Mcm	5/8"	Brown	54187	YAL34T58
SAL36T58	600 Mcm	5/8"	Green	54120	YAL36T58
SAL39T58	750 Mcm	5/8"	Black	54123	YAL39T58
SAL44T58	1000 Mcm	5/8"	White	54128	YAL44T58



Short Barrel Two-Hole Lugs

Catalog No.	Wire Size	Hole Size	Colour Code	Comparison Numbers	
SAL26-2N	2/0 Str.	1/2"	Black	54260	YAL26-2N
SAL27-2N	3/0 Str.	1/2"	Orange	54265	YAL27-2N
SAL28-2N	4/0 Str.	1/2"	Purple	54270	YAL28-2N
SAL29-2N	250 Mcm	1/2"	Yellow	54275	YAL29-2N
SAL30-2N	300 Mcm	1/2"	White	54280	YAL30-2N
SAL31-2N	350 Mcm	1/2"	Red	54282	YAL31-2N
SAL32-2N	400 Mcm	1/2"	Blue	54216	YAL32-2N
SAL34-2N	500 Mcm	1/2"	Brown	54286	YAL34-2N
SAL36-2N	600 Mcm	1/2"	Green	54289	YAL36-2N
SAL39-2N	750 Mcm	1/2"	Black	54223	YAL39-2N
SAL44-2N	1000 Mcm	1/2"	White	54228	YAL44-2N



Long Barrel Two-Hole Lugs

Catalog No.	Wire Size	Hole Size	Colour Code	Comparison Numbers	
SA25-2N	1/0 Str.	1/2"	Pink	54860BE	YA25-2N
SA26-2N	2/0 Str.	1/2"	Black	54862BE	YA26-2N
SA27-2N	3/0 Str.	1/2"	Orange	54864BE	YA27-2N
SA28-2N	4/0 Str.	1/2"	Purple	54866BE	YA28-2N
SA29-2N	250 Mcm	1/2"	Yellow	54868BE	YA29-2N
SA30-2N	300 Mcm	1/2"	White	54870BE	YA30-2N
SA31-2N	350 Mcm	1/2"	Red	54872BE	YA31-2N
SA32-2N	400 Mcm	1/2"	Blue	54874BE	YA32-2N
SA34-2N	500 Mcm	1/2"	Brown	54876BE	YA34-2N
SA36-2N	600 Mcm	1/2"	Green	54878BE	YA36-2N
SA39-2N	750 Mcm	1/2"	Black	54880BE	YA39-2N
SA44-2N	1000 Mcm	1/2"	White	54882BE	YA44-2N
SA46-2N	1500 Mcm	1/2"	-	-	YA46-2N
SA48-2N	2000 Mcm	1/2"	-	-	YA48-2N



Copper Compression Lugs / Sleeves

Long Barrel One-Hole Lugs

Catalog No.	Wire Size	Hole Size	Colour Code	Comparison Numbers	
SA6C	6 Str.	1/4	Blue	54905BE	YA6C
SA4C	4 Str.	1/4	Grey	54906BE	YA4C
SA2C	2 Str.	5/16	Brown	54942BE	YA2C
SA1C	1 Str.	5/16	Green	54947BE	YA1C
SA25	1/0 Str.	5/16	Pink	54909BE	YA25
SA26	2/0 Str.	3/8	Black	54910BE	YA26
SA27	3/0 Str.	1/2	Orange	54965BE	YA27
SA28	4/0 Str.	1/2	Purple	54970BE	YA28
SA29	250 Mcm	1/2	Yellow	54913BE	YA29
SA30	300 Mcm	1/2	White	54914BE	YA30
SA31	350 Mcm	1/2	Red	54915BE	YA31
SA32	400 Mcm	1/2	Blue	54916BE	YA32
SA34	500 Mcm	1/2	Brown	54918BE	YA34
SA36	600 Mcm	1/2	Green	54920BE	YA36
SA39	750 Mcm	1/2	Black	54923BE	YA39
SA44	1000 Mcm	1/2	White	54928BE	YA44



Long Barrel Compression Sleeves

Catalog No.	Wire Size	Colour Code	Comparison Numbers	
SS6C	6 Str.	Blue	54805	YS6C
SS4C	4 Str.	Grey	54806	YS4C
SS2C	2 Str.	Brown	54807	YS2C
SS1C	1 Str.	Green	54808	YS1C
SS25	1/0 Str.	Pink	54809	YS25
SS26	2/0 Str.	Black	54810	YS26
SS27	3/0 Str.	Orange	54811	YS27
SS28	4/0 Str.	Purple	54812	YS28
SS29	250 Mcm	Yellow	54813	YS29
SS30	300 Mcm	White	54814	YS30
SS31	350 Mcm	Red	54815	YS31
SS32	400 Mcm	Blue	54816	YS32
SS34	500 Mcm	Brown	54818	YS34
SS36	600 Mcm	Green	54820	YS36
SS39	750 Mcm	Black	54823	YS39
SS44	1000 Mcm	White	54828	YS44



Short Barrel Compression Sleeves

Catalog No.	Wire Size	Colour Code	Comparison Numbers	
SSL6C	6 Str.	Blue	54505	YSL6C
SSL4C	4 Str.	Grey	54506	YSL4C
SSL2C	2 Str.	Brown	54507	YSL2C
SSL1C	1 Str.	Green	54508	YSL1C
SSL25	1/0 Str.	Pink	54509	YSL25
SSL26	2/0 Str.	Black	54510	YSL26
SSL27	3/0 Str.	Orange	51511	YSL27
SSL28	4/0 Str.	Purple	51512	YSL28
SSL29	250 Mcm	Yellow	54513	YSL29
SSL30	300 Mcm	White	54514	YSL30
SSL31	350 Mcm	Red	54515	YSL31
SSL32	400 Mcm	Blue	54516	YSL32
SSL34	500 Mcm	Brown	54518	YSL34
SSL36	600 Mcm	Green	54520	YSL36
SSL39	750 Mcm	Black	54523	YSL39
SSL44	1000 Mcm	White	54528	YSL44



Aluminum Compression Lugs

Adapters - Aluminum Cable to Mechanical Connector



Catalog Number	Wire Size	Colour Code	Comparison Numbers	
SYP6	6 Str.	None	61910	AYP6
SYP4	4 Str.	None	61915	AYP4
SYP2	2 Str.	None	61920	AYP2
SYP1	1 Str.	None	61925	AYP1
SYP1/0	1/0 Str.	Red	61930	AYP1/0
SYP2/0	2/0 Str.	Red	61935	AYP2/0
SYP3/0	3/0 Str.	Red	61940	AYP3/0
SYP4/0	4/0 Str.	Red	61945	AYP4/0
SYP250	250 Mcm	Brown	61950	AYP250
SYP300	300 Mcm	Brown	61955	AYP300
SYP350	350 Mcm	Brown	61960	AYP350
SYP400	400 Mcm	Pink	61963	AYP400
SYP500	500 Mcm	Pink	61965	AYP500
SYP600	600 Mcm	Yellow	61970	AYP600
SYP750	750 Mcm	Yellow	61975	AYP750

Long Barrel Two-Hole Lugs



Catalog Number	Wire Size	Colour Code	Comparison Numbers	
SA26A3	2/0 Str.	Olive	60238	YA26A3
SA27A5	3/0 Str.	Ruby	60244	YA27A5
SA28A5	4/0 Str.	White	60250	YA28A5
SA29A3	250 Mcm	Red	60256	YA29A3
SA30A3	300 Mcm	Blue	60262	YA30A3
SA31A3	350 Mcm	Brown	60267	YA31A3
SA32A3	400 Mcm	Green	60269	YA32A3
SA34A3	500 Mcm	Pink	60273	YA34A3
SA36A3	600 Mcm	Black	60275	YA36A3
SA39A5	750 Mcm	Yellow	60278	YA39A5
SA44A3	1000 Mcm	Brown	60284	YA44A3
SA46A3	1500 Mcm	Blue	-	YA46A3
SA48A3	2000 Mcm	Red	-	YA48A3

Compression Sleeves



Catalog Number	Wire Size	Colour Code	Comparison Numbers	
SS26A1	2/0 Str.	Olive	60536	YS26A1
SS27A1	3/0 Str.	Ruby	60542	YS27A1
SS28A1	4/0 Str.	White	60548	YS28A1
SS29A1	250 Mcm	Red	60554	YS29A1
SS30A1	300 Mcm	Blue	60560	YS30A1
SS31A1	350 Mcm	Brown	60565	YS31A1
SS32A1	400 Mcm	Green	60568	YS32A1
SS34A1	500 Mcm	Pink	60571	YS34A1
SS36A1	600 Mcm	Black	60574	YS36A1
SS39A1	750 Mcm	Yellow	60578	YS39A1
SS44A1	1000 Mcm	Brown	60584	YS44A1
SS46A1	1500 Mcm	Blue	-	YS46A1
SS48A1	2000 Mcm	Red	-	YS48A1

Mechanical Lugs

NSI

Catalog No.	Wire Range	Style Code	Comparison Numbers	
-------------	------------	------------	--------------------	--

One Cable

SA6S	#6 - #14 Awg	1	TA6S	KA6U
SA2	#2 - #14 Awg	1	TA2	KA2U
SA0	1/0 - #14 Awg	1	TA0	KA25U
SA2/0	2/0 - #14 Awg	1	TA2/0	KA26U
SA250	250 Mcm - #6 Awg	1	TA250	KA29U
SA300	300 Mcm - #6 Awg	1	TA300	KA30U
SA350	350 Mcm - #6 Awg	1	TA350	KA31U
SA500	500 Mcm - #4 Awg	1	TA500	KA34U
SA600	600 Mcm - #2 Awg	1	TA600	KA36U
SA800	800 - 300 Mcm	1	TA800	KA40U
SA1000	1000 - 500 Mcm	1	TA1000	KA44U
SA350-2NS	350 Mcm - #6 Awg	2	TA350-2NS	KA31U-2N
SA600-2NS	600 Mcm - #2 Awg	2	TA600-2NS	KA36U-2N
SA800-2N	800 - 300 Mcm	2	TA800-2N	KA40U-2N
SA1000-2N	1000 - 500 Mcm	2	TA1000-2N	KA44U-2N



Style 1.



Style 2.



Style 3.

Two Cables - Side by Side

SU0	1/0 - #14 Awg	3	AU0	K2A25U
SU2/0	2/0 - #14 Awg	3	AU2/0	K2A26U
SU250	250 Mcm - #6 Awg	3	AU250	K2A29U
SU350	350 Mcm - #6 Awg	3	AU350	K2A31U
SU600	600 Mcm - #2 Awg	3	AU600	K2A36U
SU800	800 - 300 Mcm	3	AU800	K2A40U
SU1000	1000 - 500 Mcm	3	AU1000	K2A44U
SU350-2N	350 Mcm - #6 Awg	4	AU350-2N	K2A31U-2N
SU600-2NS	600 Mcm - #2 Awg	4	AU600-2NS	K2A36U-2N
SU800-2NS	800 - 300 Mcm	4	AU800-2NS	K2A40U-2N
SU1000-2NS	1000 - 500 Mcm	4	AU1000-2NS	K2A44U-2N



Style 4.



Style 5.



Style 6.

Three Cables - Side by Side

S3A4-250N	250 Mcm - #6 Awg	5	T3A4-250N	K3A29U-4N
S3A4-350N	350 Mcm - #6 Awg	5	T3A4-350N	K3A31U-4N
S3A4-600N	600 Mcm - #2 Awg	5	T3A4-600N	K3A36U-4N
S3A4-800N	800 - 300 Mcm	5	T3A4-800N	K3A40U-4N
S3A4-1000N	1000 - 500 Mcm	5	T3A4-1000N	K3A44U-4N



Style 7.



Style 8.

Four Cables - Side by Side

S4A4-600N	600 Mcm - #2 Awg	6	T4A4-600N	K4A36U-4N
S4A4-1000N	1000 - 500 Mcm	6	T4A4-1000N	K4A44U-4N



Style 9.



Style 10.

Step Lugs - Two, Three and Four Cables

SB2-300	300 Mcm - #6 Awg	7	PB2-300	K11A30U
SB2-600	600 Mcm - #2 Awg	8	PB2-600	K11A36U-2
SB2-800	800 - 300 Mcm	8	PB2-800	-
SB3-600	600 Mcm - #2 Awg	9	PB3-600	K21A36U-2
SB4-600	600 Mcm - #2 Awg	10	PB4-600	K22A36U-2
SB4-800	800 - 300 Mcm	10	PB4-800	-

- Suitable for Use With Aluminum and Copper Conductors



Grounding

Dossert

Service Post Connectors

Catalog Number	Max. Conductor Size		Stud Diameter	Threads Per Inch	Comparison Number
	Solid	Stranded			

One Cable

DGN-1	8	8	1/4"	20	KC15
DGN-2	6	7	1/4"	20	KC17
DGN-3	4	5	5/16"	18	KC20
DGN-5	2	3	3/8"	16	KC22
DGN-6	1	2	3/8"	16	KC23
DGN-10	2/0	1/0	1/2"	13	KC25
DGN-13	3/0	2/0	1/2"	13	KC26
DGN-21	4/0	4/0	5/8"	11	KC28
DGN-35	-	350 Mcm	5/8"	11	KC31
DGN-50	-	500 Mcm	3/4"	10	KC34
DGN-75	-	750 Mcm	7/8"	9	KC39
DGN-100	-	1000 Mcm	1"	8	KC44



Two Cable

DGM-1	8	8	1/4"	20	K2C15
DGM-2	6	7	1/4"	20	K2C17
DGM-3	4	5	5/16"	18	K2C20
DGM-5	2	3	3/8"	16	K2C22
DGM-6	1	2	3/8"	16	K2C23
DGM-10	2/0	1/0	1/2"	13	K2C25
DGM-13	3/0	2/0	1/2"	13	K2C26
DGM-21	4/0	4/0	5/8"	11	K2C28
DGM-35	-	350 Mcm	5/8"	11	K2C31
DGM-50	-	500 Mcm	3/4"	10	K2C34
DGM-75	-	750 Mcm	7/8"	9	K2C39
DGM-100	-	1000 Mcm	1"	8	K2C44

Material:

- High Copper Alloy

Ground Clamps - Cable to Bar

Catalog Number	Conductor Range Either Side		Comparison Number
	Minimum	Maximum	

One Cable

GFM-4	8 Solid	4 Stranded	GBM4C
GFM-13	4 Solid	2/0 Stranded	GBM26
GFM-25	2/0 Solid	250 Mcm	GBM29
GFM-50	300 Mcm	500 Mcm	GBM34
GFM-75	550 Mcm	750 Mcm	-
GFM-100	800 Mcm	1000 Mcm	-

Two Cables

GAM-4	8 Solid	4 Stranded	GCM4C
GAM-13	4 Solid	2/0 Stranded	GCM26
GAM-25	2/0 Solid	250 Mcm	GCM29
GAM-50	300 Mcm	500 Mcm	GCM34
GAM-75	550 Mcm	750 Mcm	-
GAM-100	800 Mcm	1000 Mcm	-



Material:

- High Conductivity Cast Copper Alloy

Hardware:

- Everdur Bolts, Nuts and Lock Washers

Grounding

Dossert

Ground Clamp - Cable to Rod or Pipe

Catalog Number	Ground		Conductor Range		Comparison Number
	Rod	S.P.S.	Minimum	Maximum	
GPC25-4	1/2"	1/4"	8 Solid	4 Stranded	GAR114C
GPC25-13			4 Solid	2/0 Stranded	GAR1126
GPC25-25			2/0 Solid	250 Mcm	GAR1129
GPC38-4	5/8" or 3/4"	3/8"	8 Solid	4 Stranded	GAR644C
GPC38-13			4 Solid	2/0 Stranded	GAR6426
GPC38-25			2/0 Solid	250 Mcm	GAR6429
GPC38-50			300 Mcm	500 Mcm	GAR6434
GPC75-4	7/8" or 1"	1/2" or 3/4"	8 Solid	4 Stranded	GAR144C
GPC75-13			4 Solid	2/0 Stranded	GAR1426
GPC75-25			2/0 Solid	250 Mcm	GAR1429
GPC75-50			300 Mcm	500 Mcm	GAR1434
GPC75-75			500 Mcm	750 Mcm	GAR1439
GPC100-4		1"	8 Solid	4 Stranded	GAR154C
GPC100-13			4 Solid	2/0 Stranded	GAR1526
GPC100-25			2/0 Solid	250 Mcm	GAR1529
GPC100-50			300 Mcm	500 Mcm	GAR1534
GPC100-75			500 Mcm	750 Mcm	GAR1539
GPC125-4		1-1/4"	8 Solid	4 Stranded	GAR164C
GPC125-13			4 Solid	2/0 Stranded	GAR1626
GPC125-25			2/0 Solid	250 Mcm	GAR1629
GPC125-50			300 Mcm	500 Mcm	GAR1634
GPC125-75			500 Mcm	750 Mcm	GAR1639
GPC150-4		1-1/2"	8 Solid	4 Stranded	GAR174C
GPC150-13			4 Solid	2/0 Stranded	GAR1726
GPC150-25			2/0 Solid	250 Mcm	GAR1729
GPC150-50			300 Mcm	500 Mcm	GAR1734
GPC150-75			500 Mcm	750 Mcm	GAR1739
GPC200-4		2"	8 Solid	4 Stranded	GAR184C
GPC200-13			4 Solid	2/0 Stranded	GAR1826
GPC200-25			2/0 Solid	250 Mcm	GAR1829
GPC200-50			300 Mcm	500 Mcm	GAR1834
GPC200-75			500 Mcm	750 Mcm	GAR1839
GPC250-4		2-1/2"	8 Solid	4 Stranded	GAR194C
GPC250-13			4 Solid	2/0 Stranded	GAR1926
GPC250-25			2/0 Solid	250 Mcm	GAR1929
GPC250-50			300 Mcm	500 Mcm	GAR1934
GPC250-75			500 Mcm	750 Mcm	GAR1939
GPC300-4		3"	8 Solid	4 Stranded	GAR204C
GPC300-13			4 Solid	2/0 Stranded	GAR2026
GPC300-25			2/0 Solid	250 Mcm	GAR2029
GPC300-50			300 Mcm	500 Mcm	GAR2034
GPC300-75			500 Mcm	750 Mcm	GAR2039
GPC350-4		3-1/2"	8 Solid	4 Stranded	GAR214C
GPC350-13			4 Solid	2/0 Stranded	GAR2126
GPC350-25			2/0 Solid	250 Mcm	GAR2129
GPC350-50			300 Mcm	500 Mcm	GAR2134
GPC350-75			500 Mcm	750 Mcm	GAR2139
GPC400-4		4"	8 Solid	4 Stranded	GAR224C
GPC400-13			4 Solid	2/0 Stranded	GAR2226
GPC400-25			2/0 Solid	250 Mcm	GAR2229
GPC400-50			300 Mcm	500 Mcm	GAR2234
GPC400-75			500 Mcm	750 Mcm	GAR2239



Material:

- High Conductivity Cast Copper Alloy

Hardware:

- Everdur U-bolts, Nuts and Lock Washers

Grounding / Insulators / Bucket Hooks

Flexible Copper Braid



Catalog Number	Indoor Amp Rating	Overall Length
----------------	-------------------	----------------

CF771

190

12"

Material: High Copper Alloy

Other Amp Ratings Available

Heavy Duty Ground Clamps - Bronze



Catalog Number	Pipe Size	Ground Wire Size
----------------	-----------	------------------

G200B

1-1/4" – 2"

8 Sol - 2 Str.

G350B

2-1/2" – 3-1/2"

8 Sol - 2 Str.

G500B

4" – 5"

8 Sol - 2 Str.

G600B

6"

8 Sol - 2 Str.

G800B

8"

8 Sol - 2 Str.

G1000B

10"

8 Sol - 2 Str.

G1200B

12"

8 Sol - 2 Str.

GWD25B

Terminal Adapter #1 – 250mcm

- Standard Built-in Ground Wire Connector
- Cast Bronze
- Silicone Bronze Hardware



NSI

Lay-In Ground Lugs



Catalog Number	Wire Range
----------------	------------

GLA0

#8 - 1/0

GLA000

#6 - 3/0

GLA4

#14 - #4

GLA250

#6 - 250

- Copper or Aluminum Conductors
- Aluminum Alloy, Tin Plated
- 600 Volts



Glastic

Standoff Insulators



Catalog Number	Height	Thread Size	Suggested Indoor Voltage Rating
----------------	--------	-------------	---------------------------------

2165-1A

1"

1/4" x 20 x 5/16" Deep

600

2165-1B

1-1/4"

1/4" x 20 x 5/16" Deep

600

2015-3A

1-1/2"

3/8" x 16 x 3/8" Deep

1500

2015-3B

1-3/4"

3/8" x 16 x 3/8" Deep

2000

2015-3C

2"

3/8" x 16 x 9/16" Deep

2300

- Other Sizes Available

Estex

Bucket Hooks

Catalog number	Description
----------------	-------------

1831

Super Strong Nonconductive Plastic



Retractable Cords / Wire Mesh Grips

Autac

Retractable Cords

Catalog Number	Retracted Length (inches)	Number of Conductors	U.L. Type	Maximum Voltage	Conductor Amp Rating
----------------	---------------------------	----------------------	-----------	-----------------	----------------------

18 AWG

710182	12,24,36,48	10	SEOW/STOW	600	7
72180	12,24,36,48	2	SVEO/STEO	300	7
72181	12,24,36,48	2	SJEOOW/SJTOOW	300	7
73181	12,24,36,48	3	SJEOW/SJTOW	300	7
74181	12,24,36,48	4	SJEOW/SJTOW	300	7
75181	12,24,36,48	5	SJEOW/SJTOW	300	7
77182	12,24,36,48	7	SEOW/STOW	600	7

16 AWG

73161	12,24,36,48	3	SJEOW/SJTOW	300	10
74161	12,24,36,48	4	SJEOW/SJTOW	300	10
74162	12,24,36,48	4	SEOW/STOW	600	10
76162	12,24,36,48	6	SEOW/STOW	600	10
78162	12,24,36,48	8	SEOW/STOW	600	10

14 AWG

73142	12,24,36,48	3	SEOW/STOW	600	12
74142	12,24,36,48	4	SEOW/STOW	600	12

12 AWG

73122	12,24,36,48	3	SEOW/STOW	600	20
74122	12,24,36,48	4	SEOW/STOW	600	20

- Soft Bare Copper, TPE Insulated
- TPR – Black Jacket



Length Chart:

- 12" Retracted Extends to Maximum 5'
- 24" Retracted Extends to Maximum 10'
- 36" Retracted Extends to Maximum 15'
- 48" Retracted Extends to Maximum 20'

Other cords may be available, Please call for availability.



Liquid Tight Conduit Grips

Catalog Number	Size	Comparison Number
FC38	3/8"	074-09-3511
FC50	1/2"	074-09-3512
FC75	3/4"	074-09-3513
FC100	1"	074-09-3514
FC125	1-1/4"	074-09-3515
FC150	1-1/2"	074-09-3516
FC200	2"	074-09-3518
FC250	2-1/2"	074-09-3520
FC300	3"	074-09-3522
FC400	4"	074-09-3526

- Single Weave
- Stainless Steel Mesh



45° and 90° Available, Please Call



Wire Mesh Grips

Strain Relief Connectors



Catalog Number	Cable Range (inches)	Size	Comparison Number
BDSR24	.24 - .32	1/2"	073-03-1200
BDSR32	.32 - .43	1/2"	073-03-1201
BDSR43	.43 - .54	1/2"	073-03-1202
BDSR54	.54 - .73	3/4"	073-03-1203
BDSR73	.73 - .97	1"	073-03-1204
BDSR97	.97 - 1.25	1-1/4"	073-03-1205
BDSR125	1.25 - 1.50	1-1/2"	073-03-1212
BDSR150	1.50 - 1.70	2"	073-03-1213
BDSR170	1.70 - 2.00	2-1/2"	073-03-1214
BDSR200	2.00 - 2.45	2-1/2"	073-03-1215

- Single Weave
- Galvanized Steel Mesh
- Steel Fitting
- Dust-Proof Seal



Deluxe Cord Grip Connectors



Catalog Number	Cable Range (inches)	Size	Comparison Number
DC2538	.250 - .312		074-01-001
DC3138	.312 - .375	3/8"	074-01-002
DC3738	.375 - .437		074-01-003
DC1812	.187 - .250		074-01-004
DC2512	.250 - .375	1/2"	074-01-006
DC3712	.375 - .500		074-01-008
DC5012	.500 - .625		074-01-010
DC1834	.187 - .250		074-01-011
DC2534	.250 - .375		074-01-013
DC3734	.375 - .500	3/4"	074-01-015
DC5034	.500 - .625		074-01-017
DC6234	.625 - .750		074-01-018
DC501	.500 - .625		074-01-019
DC621	.625 - .750	1"	074-01-021
DC751	.750 - .875		074-01-023
DC871	.875 - 1.000		074-01-025
DC87114	.875 - 1.000		074-01-026
DC100114	1.000 - 1.125	1-1/4"	074-01-027
DC112114	1.125 - 1.250		074-01-028
DC125114	1.250 - 1.375		074-01-1178
DC87112	.875 - 1.000		074-01-029
DC100112	1.000 - 1.125	1-1/2"	074-01-030
DC112112	1.125 - 1.250		074-01-031
DC125112	1.250 - 1.375		074-01-032
DC1312	1.312 - 1.437		- -
DC1432	1.437 - 1.562		
DC1562	1.562 - 1.687	2"	074-01-033
DC1682	1.687 - 1.812		074-01-034
			074-01-035

- Double to Single Weave
- Stainless Steel Mesh
- Aluminum Fitting
- Liquid-Tight Seal



Wire Mesh Grips

Bus Drop Grips - Single Eye

Catalog Number	Cable Range (inches)	Strength / Lbs.	Comparison Number
BDS24U	.24 - .32	350	073-04-1276
BDS32U	.32 - .43	450	073-04-1277
BDS43U	.43 - .56	550	073-04-1278
BDS56U	.54 - .73	1000	073-04-1279
BDS73U	.73 - .85	1400	073-04-1280
BDS85U	.85 - 1.00	1400	073-04-1281
BDS100U	1.00 - 1.25	1500	073-04-1282

- Single Weave
- Galvanized Steel Mesh



Support Grips - Double Eye, Split Mesh, Rod Closing

Catalog Number		Cable Range (inches)	Strength / Lbs.		Comparison Number
Tinned Bronze	Stainless Steel		Tinned Bronze	Stainless Steel	
SPSR050DE	-	.50 - .62	530		022-03-001
SPSR062DE	SPSR062DES	.63 - .74	790	2050	022-03-002
SPSR075DE	SPSR075DES	.75 - .99	1020	2050	022-03-003
SPSR100DE	SPSR100DES	1.00 - 1.24	1610	2650	022-03-005
SPSR125DE	SPSR125DES	1.25 - 1.49	1610	4500	022-03-006
SPSR150DE	SPSR150DES	1.50 - 1.74	1610	3750	022-03-007
SPSR175DE	SPSR175DES	1.75 - 1.99	2150	5000	022-03-008
SPSR200DE	SPSR200DES	2.00 - 2.49	3260	-	022-03-009
SPSR250DE	SPSR250DES	2.50 - 2.99	3260	-	022-03-010
SPSR300DE	-	3.00 - 3.49	5750	-	022-03-011
SPSR350DE	-	3.50 - 3.99	5750	-	022-03-012

- Single Weave



Pulling Grips - Heavy Duty, Revolving Eye

Catalog Number	Cable Range (inches)	Strength / Lbs.	Comparison Number
PHS050	.50 - .61	5600	033-01-011
PHS062	.62 - .74	6800	033-01-012
PHS075	.75 - .99	9600	033-01-024
PHS100	1.00 - 1.49	16400	033-01-025
PHS150	1.50 - 1.99	16400	033-01-026
PHS200	2.00 - 2.49	27200	033-01-027
PHS250	2.50 - 2.99	33000	033-01-028
PHS300	3.00 - 3.49	41000	033-01-029
PHS350	3.50 - 3.99	48000	033-01-030

- Double Weave
- Galvanized Steel Mesh



Bus Drop Support Springs

Catalog Number	Strength / Lbs.	Diameter	Comparison Number
S40	500	3/4"	203-02-001
S80	850	1"	203-02-002

- Zinc Plated



Strain Relief Connectors

Steel Electric Products

Strain Relief Connectors - Steel

Straight	Catalog Number		Size	Colour Code	Cable Range (inches)	
	90°	45°			Minimum	Maximum
CG50-250	CG50-25090	CG50-25045	1/2"	Red	0.15	0.25
CG50-350	CG50-35090	CG50-35045		White	0.25	0.35
CG50-450	CG50-45090	CG50-45045		Blue	0.34	0.45
CG50-560	CG50-56090	CG50-56045		Green	0.45	0.56
CG50-650	CG50-65090	CG50-65045		Brown	0.55	0.65
CG75-250	CG75-25090	CG75-25045	3/4"	Red	0.15	0.25
CG75-350	CG75-35090	CG75-35045		White	0.25	0.35
CG75-450	CG75-45090	CG75-45045		Blue	0.35	0.45
CG75-560	CG75-56090	CG75-56045		Green	0.45	0.56
CG75-650	CG75-65090	CG75-65045		Brown	0.55	0.65
CG75-750	CG75-75090	CG75-75045	1"	Yellow	0.65	0.75
CG75-850	CG75-85090	CG75-85045		Purple	0.75	0.85
CG100-560	CG100-56090	CG100-56045		Green	0.45	0.56
CG100-650	CG100-65090	CG100-65045		Brown	0.55	0.65
CG100-750	CG100-75090	CG100-75045		Yellow	0.65	0.75
CG100-850	CG100-85090	CG100-85045		Purple	0.75	0.85
CG100-950	CG100-95090	CG100-95045	1-1/4"	Grey	0.85	0.95
CG100-1050	CG100-105090	CG100-105045		Black	0.95	1.05
CG125-850	CG125-85090	CG125-85045		Purple	0.75	0.85
CG125-950	CG125-95090	CG125-95045		Grey	0.85	0.95
CG125-1050	CG125-105090	CG125-105045		Black	0.95	1.05
CG125-1150	CG125-115090	CG125-115045	1-1/2"	Orange	1.05	1.15
CG125-1250	CG125-125090	CG125-125045		Red	1.15	1.25
CG125-1375	CG125-137590	CG125-137545		White	1.25	1.375
CG150-1050	CG150-105090	CG150-105045		Black	0.95	1.05
CG150-1150	CG150-115090	CG150-115045		Orange	1.05	1.15
CG150-1250	CG150-125090	CG150-125045		Red	1.15	1.25
CG150-1375	CG150-137590	CG150-137545		White	1.25	1.375

Materials/Finish:

- Body, Malleable Iron/Zinc Plated
- Gland Nut, Malleable Iron/Zinc Plated
- Steel Locknut/Zinc Plated

Features:

- Neoprene Grommet for a Moisture Proof Seal
- Simple Installation, Cord can be Installed Without Disassembly of the Fitting
- Liquidtight • Oiltight • Raintight
- Male Tapered NPT Thread
- Colour Coded Grommets Allow for Easy Identification
- Suitable for use in NEMA 4 Enclosures and Other Wet Locations

Suitable for use in Hazardous Locations:

- Class I, Div 2
- Class II, Div 1 & 2
- Class III, Div 1 & 2



Strain Relief Connectors

Kleinhuys

Strain Relief Connectors - Nylon

Catalog Number (Light Grey)	Thread Size	Cable Range (inches)	Thread Length (inches)	Knockout Diameter (inches)
--------------------------------	----------------	-------------------------	------------------------------	-------------------------------

PG Thread

1234P0701	PG 7	.118 - .256	0.315	0.492
1234P0901	PG 9	.157 - .315	0.315	0.598
1234P1101	PG 11	.197 - .394	0.315	0.732
1234P1301	PG 13	.236 - .472	0.353	0.803
1234P1601	PG 16	.354 - .551	0.394	0.886
1234P2101	PG 21	.472 - .709	0.433	1.114
1234P2901	PG 29	.669 - .984	0.433	1.457
1234P3601	PG 36	.787 - 1.260	0.512	1.850
1234P4201	PG 42	1.260 - 1.496	0.512	2.126
1234P4801	PG 48	1.456 - 1.732	0.551	2.335

Metric Thread

1234M1201	M12 x 1.5	.118 - .256	0.315	0.472
1234M1601	M16 x 1.5	.157 - .315	0.315	0.630
1234M2001	M20 x 1.5	.236 - .472	0.353	0.787
1234M2501	M25 x 1.5	.472 - .709	0.472	0.984
1234M3201	M32 x 1.5	.669 - .984	0.472	1.260
1234M4001	M40 x 1.5	.787 - 1.260	0.512	1.575
1234M5001	M50 x 1.5	1.260 - 1.496	0.512	1.969
1234M6301	M63 x 1.5	1.456 - 1.732	0.551	2.480

NPT Thread

1234N3801	NPT 3/8"	.157 - .315	0.591	0.673
1234N1201	NPT 1/2"	.236 - .472	0.591	0.839
1234N3401	NPT 3/4"	.472 - .709	0.591	1.051
1234N1001	NPT 1"	.669 - .984	0.748	1.315
1234N1141	NPT 1-1/4"	.866 - 1.260	0.748	1.661
1234N1121	NPT 1-1/2"	1.181 - 1.496	0.748	1.902
1234N2001	NPT 2"	1.457 - 1.732	0.748	2.374

*Also available in Black and Dark Grey



Locknuts - Nylon

Catalog No.	Size	Catalog No.	Size	Catalog No.	Size
1420/7	Pg7	1420M12	M12	1420/38	3/8" NPT
1420/9	Pg9	1420M16	M16	1420/12	1/2" NPT
1420/11	Pg11	1420M20	M20	1420/34	3/4" NPT
1420/13	Pg13	1420M25	M25	1420/10	1" NPT
1420/16	Pg16	1420M32	M32		
1420/21	Pg21	1420M40	M40		
1420/29	Pg29	1420M50	M50		
1420/36	Pg36	1420M63	M63		
1420/42	Pg42				
1420/48	Pg48				

*Also available in Black and Dark Grey



EMT Compression Connectors - Steel



Raintight



Concretetight

Catalog Number		Size
Raintight	Concretetight	
S1010RT	S1010	1/2"
S1011RT	S1011	3/4"
S1012RT	S1012	1"
S1013RT	S1013	1-1/4"
S1014RT	S1014	1-1/2"
S1015RT	S1015	2"
S1015DRT	S1015D	2-1/2"
S1015ERT	S1015E	3"
S1015E1RT	S1015E1	3-1/2"
S1015FRT	S1015F	4"

- Steel/Zinc Plated



EMT Compression Connectors - Steel - With Insulated Throat



Raintight



Concretetight

Catalog Number		Size
Raintight	Concretetight	
S4060RT	S4060	1/2"
S4061RT	S4061	3/4"
S4062RT	S4062	1"
S4063RT	S4063	1-1/4"
S4064RT	S4064	1-1/2"
S4065RT	S4065	2"
S4065DRT	S4065D	2-1/2"
S4065ERT	S4065E	3"
S4065E1RT	S4065E1	3-1/2"
S4065FRT	S4065F	4"

- Steel/Zinc Plated



EMT Compression Couplings - Steel



Raintight



Concretetight

Catalog Number		Size
Raintight	Concretetight	
S1016RT	S1016	1/2"
S1017RT	S1017	3/4"
S1018RT	S1018	1"
S1019RT	S1019	1-1/4"
S1020RT	S1020	1-1/2"
S1021RT	S1021	2"
S1021DRT	S1021D	2-1/2"
S1021ERT	S1021E	3"
S1021E1RT	S1021E1	3-1/2"
S1021FRT	S1021F	4"

- Steel/Zinc Plated



EMT Compression Connectors and Couplings - Zinc Die Cast



Catalog Number		Size
Connector	Coupling	
1015D	1021D	2-1/2"
1015E	1021E	3"
1015F	1021F	4"

- Concretetight



EMT Set Screw Connectors - Steel

Catalog Number		Size
Non Insulated	Insulated	
S1110	S4066	1/2"
S1111	S4067	3/4"
S1112	S4068	1"
S1112A	S4069	1-1/4"
S1112B	S4070	1-1/2"
S1112C	S4071	2"
S1112D	S4072	2-1/2"
S1112E	S4073	3"
S1112E1	S4074	3-1/2"
S1112F	S4075	4"

- Pre-Set/Pre-Staked Set Screws
- Three-Way Combination Screws
- Steel/Zinc Plated



EMT Set Screw Couplings - Steel

Catalog Number	Size
S1113	1/2"
S1114	3/4"
S1115	1"
S1115A	1-1/4"
S1115B	1-1/2"
S1115C	2"
S1115D	2-1/2"
S1115E	3"
S1115E1	3-1/2"
S1115F	4"

- Pre-Set/Pre-Staked Set Screws
- Three-Way Combination Screws
- Steel/Zinc Plated



Combination EMT/Rigid Conduit Bodies

Catalog Number					Size
LB	LL	LR	C	T	
LB1CA	LL1CA	LR1CA	C1CA	T1CA	1/2"
LB2CA	LL2CA	LR2CA	C2CA	T2CA	3/4"
LB3CA	LL3CA	LR3CA	C3CA	T3CA	1"
LB4CA	LL4CA	LR4CA	C4CA	T4CA	1-1/4"
LB5CA	LL5CA	LR5CA	C5CA	T5CA	1-1/2"
LB6CA	LL6CA	LR6CA	C6CA	T6CA	2"

Supplied with cover and Gasket

- Die-Cast Copper Free Aluminum/Aluminum Enamel



EMT Set Screw Conduit Bodies

Catalog Number				Size
LB	C	LL	LR	
LB7ATCG	C7ATCG	LL7ATCG	LR7ATCG	2-1/2"
LB8ATCG	C8ATCG	LL8ATCG	LR8ATCG	3"
LB10ATCG	C10ATCG	LL10ATCG	LR10ATCG	4"

- Sand-Cast Copper-Free Aluminum/Aluminum Enamel
- Supplied with Cover and Neoprene Gasket



EMT Pipe Straps



Catalog Number		Size
One Hole	Two Hole	
142S	2142S	1/2"
143S	2143S	3/4"
144S	2144S	1"
145S	2145S	1-1/4"
146S	2146S	1-1/2"
147S	2147S	2"
158S	2158S	2-1/2"
159S	2159S	3"
160S	2160S	3-1/2"
161S	2161S	4"

- Steel/Zinc Plated



EMT Pull Elbows



Catalog Number		Size
Female to Female	Male to Female	
1326	1332	1/2"
1327	1333	3/4"
1328	-	1"
1329	-	1-1/4"

- Zinc Die Cast
- Furnished with Neoprene Gasket and Aluminum Cover



EMT Offset Connectors



Catalog Number	Size
1250	1/2"
1251	3/4"

- Zinc Die Cast



EMT to Flex Coupling



Catalog Number	Size
171C	1/2" EMT to 1/2" Flex
172C	3/4" EMT to 3/4" Flex
173C	1" EMT to 1" Flex

- Zinc Die Cast



EMT Compression to Rigid Coupling



Catalog Number	Size
ERC22	1/2"
ERC23	3/4"
ERC24	1"

- Steel/Zinc Plated



EMT and Rigid Pipe Products

Picoma

EMT Conduit Elbows

Catalog Number		Standard Radius	Size
90 Degree	45 Degree		
SWEEP50EMT	SWEEP50-45EMT	4"	1/2"
SWEEP75EMT	SWEEP75-45EMT	4-1/2"	3/4"
SWEEP100EMT	SWEEP100-45EMT	5-3/4"	1"
SWEEP125EMT	SWEEP125-45EMT	7-1/4"	1-1/4"
SWEEP150EMT	SWEEP150-45EMT	8-1/4"	1-1/2"
SWEEP200EMT	SWEEP200-45EMT	9-1/2"	2"
SWEEP250EMT	SWEEP250-45EMT	10-1/2"	2-1/2"
SWEEP300EMT	SWEEP300-45EMT	13"	3"
SWEEP350EMT	SWEEP350-45EMT	15"	3-1/2"
SWEEP400EMT	SWEEP400-45EMT	16"	4"



Rigid Conduit Elbows

Catalog Number		Standard Radius	Size
90 Degree	45 Degree		
SWEEP50	SWEEP50-45	4"	1/2"
SWEEP75	SWEEP75-45	4-1/2"	3/4"
SWEEP100	SWEEP100-45	5-3/4"	1"
SWEEP125	SWEEP125-45	7-1/4"	1-1/4"
SWEEP150	SWEEP150-45	8-1/4"	1-1/2"
SWEEP200	SWEEP200-45	9-1/2"	2"
SWEEP250	SWEEP250-45	10-1/2"	2-1/2"
SWEEP300	SWEEP300-45	13"	3"
SWEEP350	SWEEP350-45	15"	3-1/2"
SWEEP400	SWEEP400-45	16"	4"
SWEEP500	SWEEP500-45	24"	5"
SWEEP600	SWEEP600-45	30"	6"



Special Radius Bends Available Upon Request

Rigid Couplings

Catalog Number	Size
COUP50	1/2"
COUP75	3/4"
COUP100	1"
COUP125	1-1/4"
COUP150	1-1/2"
COUP200	2"
COUP250	2-1/2"
COUP300	3"
COUP350	3-1/2"
COUP400	4"
COUP500	5"
COUP600	6"



Conduit Nipples

Picoma

Rigid Conduit Nipples

Catalog Number	Size Diameter x Length	Catalog Number	Size Diameter x Length
NP50XCL	1/2" x Close	NP150X350	1-1/2" x 3-1/2"
NP50X150	1/2" x 1-1/2"	NP150X400	1-1/2" x 4"
NP50X200	1/2" x 2"	NP150X500	1-1/2" x 5"
NP50X250	1/2" x 2-1/2"	NP150X600	1-1/2" x 6"
NP50X300	1/2" x 3"		
NP50X350	1/2" x 3-1/2"	NP200XCL	2" x Close
NP50X400	1/2" x 4"	NP200X250	2" x 2-1/2"
NP50X500	1/2" x 5"	NP200X300	2" x 3"
NP50X600	1/2" x 6"	NP200X350	2" x 3-1/2"
		NP200X400	2" x 4"
NP75XCL	3/4" x Close	NP200X500	2" x 5"
NP75X200	3/4" x 2"	NP200X600	2" x 6"
NP75X250	3/4" x 2-1/2"		
NP75X300	3/4" x 3"	NP250XCL	2-1/2" x Close
NP75X350	3/4" x 3-1/2"	NP250X300	2-1/2" x 3"
NP75X400	3/4" x 4"	NP250X350	2-1/2" x 3-1/2"
NP75X500	3/4" x 5"	NP250X400	2-1/2" x 4"
NP75X600	3/4" x 6"	NP250X500	2-1/2" x 5"
		NP250X600	2-1/2" x 6"
NP100XCL	1" x Close		
NP100X200	1" x 2"	NP300XCL	3" x Close
NP100X250	1" x 2-1/2"	NP300X300	3" x 3"
NP100X300	1" x 3"	NP300X350	3" x 3-1/2"
NP100X350	1" x 3-1/2"	NP300X400	3" x 4"
NP100X400	1" x 4"	NP300X500	3" x 5"
NP100X500	1" x 5"	NP300X600	3" x 6"
NP100X600	1" x 6"		
		NP350XCL	3-1/2" x Close
NP125XCL	1-1/4" x Close	NP350X600	3-1/2" x 6"
NP125X200	1-1/4" x 2"		
NP125X250	1-1/4" x 2-1/2"	NP400XCL	4" x Close
NP125X300	1-1/4" x 3"	NP400X400	4" x 4"
NP125X350	1-1/4" x 3-1/2"	NP400X500	4" x 5"
NP125X400	1-1/4" x 4"	NP400X600	4" x 6"
NP125X500	1-1/4" x 5"		
NP125X600	1-1/4" x 6"	NP500XCL	5" x Close
		NP500X600	5" x 6"
NP150XCL	1-1/2" x Close		
NP150X200	1-1/2" x 2"	NP600XCL	6" x Close
NP150X250	1-1/2" x 2-1/2"	NP600X600	6" x 6"
NP150X300	1-1/2" x 3"		



Other Lengths Available

Offset Nipples - Malleable Iron



Catalog Number	Size
OSN50	1/2"
OSN75	3/4"
OSN100	1"
OSN125	1-1/4"

- Malleable Iron/Zinc Plated




Reducing Washers

Steel Electric Products

Reducing Washers

Catalog Number	Size
CW19	1/2" x 1/4"
CW20	1/2" x 3/8"
CW21	3/4" x 1/2"
CW31	1" x 1/2"
CW32	1" x 3/4"
CW41	1-1/4" x 1/2"
CW42	1-1/4" x 3/4"
CW43	1-1/4" x 1"
CW51	1-1/2" x 1/2"
CW52	1-1/2" x 3/4"
CW53	1-1/2" x 1"
CW54	1-1/2" x 1-1/4"
CW61	2" x 1/2"
CW62	2" x 3/4"
CW63	2" x 1"
CW64	2" x 1-1/4"
CW65	2" x 1-1/2"
CW71	2-1/2" x 1/2"
CW72	2-1/2" x 3/4"
CW73	2-1/2" x 1"
CW74	2-1/2" x 1-1/4"
CW75	2-1/2" x 1-1/2"
CW76	2-1/2" x 2"
CW81	3" x 1/2"
CW82	3" x 3/4"
CW83	3" x 1"
CW84	3" x 1-1/4"
CW85	3" x 1-1/2"
CW86	3" x 2"
CW87	3" x 2-1/2"
CW91	3-1/2" x 1/2"
CW92	3-1/2" x 3/4"
CW93	3-1/2" x 1"
CW94	3-1/2" x 1-1/4"
CW95	3-1/2" x 1-1/2"
CW96	3-1/2" x 2"
CW97	3-1/2" x 2-1/2"
CW98	3-1/2" x 3"
CW101	4" x 1/2"
CW102	4" x 3/4"
CW103	4" x 1"
CW104	4" x 1-1/4"
CW105	4" x 1-1/2"
CW106	4" x 2"
CW107	4" x 2-1/2"
CW108	4" x 3"
CW109	4" x 3-1/2"

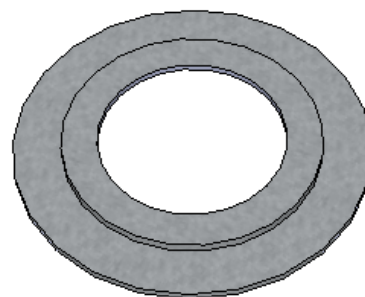

- Galvanized Steel



Reducing Bushings

Steel Electric Products

Reducing Bushings - Non Explosion Proof

Catalog Number	Size
RE21K	3/4" x 1/2"
RE31K	1" x 1/2"
RE32K	1" x 3/4"
RE41K	1-1/4" x 1/2"
RE42K	1-1/4" x 3/4"
RE43K	1-1/4" x 1"
RE51K	1-1/2" x 1/2"
RE52K	1-1/2" x 3/4"
RE53K	1-1/2" x 1"
RE54K	1-1/2" x 1-1/4"
RE61K	2" x 1/2"
RE62K	2" x 3/4"
RE63K	2" x 1"
RE64K	2" x 1-1/4"
RE65K	2" x 1-1/2"
RE71K	2-1/2" x 1/2"
RE72K	2-1/2" x 3/4"
RE73K	2-1/2" x 1"
RE74K	2-1/2" x 1-1/4"
RE75K	2-1/2" x 1-1/2"
RE76K	2-1/2" x 2"
RE81K	3" x 1/2"
RE82K	3" x 3/4"
RE83K	3" x 1"
RE84K	3" x 1-1/4"
RE85K	3" x 1-1/2"
RE86K	3" x 2"
RE87K	3" x 2-1/2"
RE91K	3-1/2" x 1/2"
RE92K	3-1/2" x 3/4"
RE93K	3-1/2" x 1"
RE94K	3-1/2" x 1-1/4"
RE95K	3-1/2" x 1-1/2"
RE96K	3-1/2" x 2"
RE97K	3-1/2" x 2-1/2"
RE98K	3-1/2" x 3"
RE101K	4" x 1/2"
RE102K	4" x 3/4"
RE103K	4" x 1"
RE104K	4" x 1-1/4"
RE105K	4" x 1-1/2"
RE106K	4" x 2"
RE107K	4" x 2-1/2"
RE108K	4" x 3"
RE109K	4" x 3-1/2"
RE01210K	5" x 4"
RE01412K	6" x 5"



- Steel 1/2" - 2"
- Malleable Iron 2-1/2" - 6"

Hex Head Reducers Available Upon Request



Explosion Proof Reducers Also Available, See Page 56

Beam Clamps

Steel Electric Products

Right Angle

Catalog Number	Size
RA50	1/2"
RA75	3/4"
RA100	1"
RA125	1-1/4"
RA150	1-1/2"
RA200	2"
RA250	2-1/2"
RA300	3"
RA350	3-1/2"
RA400	4"

- Malleable Iron with Steel Bolts and Nuts/Hot-Dip Galvanized



Parallel

Catalog Number	Size
PAR50	1/2"
PAR75	3/4"
PAR100	1"
PAR125	1-1/4"
PAR150	1-1/2"
PAR200	2"
PAR250	2-1/2"
PAR300	3"
PAR350	3-1/2"
PAR400	4"

- Malleable Iron with Steel Bolts and Nuts/Hot-Dip Galvanized



Edge Type

Catalog Number	Size
ET50	1/2"
ET75	3/4"
ET100	1"
ET125	1-1/4"
ET150	1-1/2"
ET200	2"
ET250	2-1/2"
ET300	3"

- Malleable Iron with Steel Bolts and Nuts/Hot-Dip Galvanized



J Type

Catalog Number	Size
JC50	1/2"
JC75	3/4"
JC100	1"
JC100-125	1" – 1-1/4"
JC150-200	1-1/2" – 2"
JC250-300	2-1/2" – 3"
JC350-400	3-1/2" – 4"

- Malleable Iron/Steel Bolt



Beam Clamps / Rigid

Steel Electric Products

Beam Clamps



Catalog Number	Base Size	Bolt Size
620	1"	1/4 - 20
625	2"	3/8 - 16
627	2-1/2"	1/2 - 13

- Malleable Iron/Zinc Plated

Three Piece Couplings



Catalog Number	Size
1022	1/2"
1023	3/4"
1024	1"
1025	1-1/4"
1026	1-1/2"
1027	2"
1028	2-1/2"
1029	3"
1030	3-1/2"
1031	4"
1005	5"
1006	6"

- Malleable Iron/Zinc Plated
- Heavy Duty Casting

Bushed Conduit Nipples (Chase)



Catalog Number		Size
Malleable Iron	Zinc Die Cast	
90	90Z	1/2"
91	91Z	3/4"
92	92Z	1"
93	93Z	1-1/4"
94	94Z	1-1/2"
95	95Z	2"
96	96Z	2-1/2"
97	97Z	3"
98	98Z	3-1/2"
99	99Z	4"
995	-	5"
996	-	6"

Conduit Hangers with Bolt



Catalog Number	Size
10CS	1/2"
11CS	3/4"
12CS	1"
13CS	1-1/4"
14CS	1-1/2"
15CS	2"
16CS	2-1/2"
17CS	3"
18CS	3-1/2"
19CS	4"

- Steel/Zinc Plated
- Supplied with Bolts and Nuts

Locknuts - Steel

Catalog Number	Size
LN50	1/2"
LN75	3/4"
LN100	1"
LN125	1-1/4"
LN150	1-1/2"
LN200	2"
LN250	2-1/2"
LN300	3"
LN350	3-1/2"
LN400	4"
LN500	5"
LN600	6"



- Steel/Zinc Plated

Locknuts - Aluminum

Catalog Number	Size
LN50AL	1/2"
LN75AL	3/4"
LN100AL	1"
LN125AL	1-1/4"
LN150AL	1-1/2"
LN200AL	2"
LN250AL	2-1/2"
LN300AL	3"
LN350AL	3-1/2"
LN400AL	4"
LN500AL	5"
LN600AL	6"



- Aluminum

Metal Insulated Bushings

Catalog Number	Size
1206	1/2"
1207	3/4"
1208	1"
1209	1-1/4"
1210	1-1/2"
1211	2"
1212	2-1/2"
1213	3"
1214	3-1/2"
1215	4"
1216	5"
1217	6"



- Malleable Iron Body/Zinc Plated
- Thermoplastic Insulator

Plastic Bushings

Catalog Number	Size
PB50	1/2"
PB75	3/4"
PB100	1"
PB125	1-1/4"
PB150	1-1/2"
PB200	2"
PB250	2-1/2"
PB300	3"
PB350	3-1/2"
PB400	4"
PB500	5"
PB600	6"



- Thermoplastic
- Rating 105 ° C

Sealing Locknuts

Catalog Number	Size
706P	1/2"
707P	3/4"
708P	1"
709P	1-1/4"
710P	1-1/2"
711P	2"
712P	2-1/2"
713P	3"
714P	3-1/2"
715P	4"
716P	5"
717P	6"



- Stamped Steel/Zinc Plated
- Neoprene Gasket

Sealing O-Rings

Catalog Number	Size
SR50	1/2"
SR75	3/4"
SR100	1"
SR125	1-1/4"
SR150	1-1/2"
SR200	2"
SR250	2-1/2"
SR300	3"
SR350	3-1/2"
SR400	4"



- Stamped Steel/Zinc Plated
- Neoprene Gasket

Conduit Straps - Malleable Iron



Catalog Number	Size
132	1/2"
133	3/4"
134	1"
135	1-1/4"
136	1-1/2"
137	2"
138	2-1/2"
139	3"
141	3-1/2"
148	4"
150	5"
152	6"

- Heavy Duty Casting
- Malleable Iron/Zinc Plated



Clamp Backs - Malleable Iron



Catalog Number	Size
900	1/2"
901	3/4"
902	1"
903	1-1/4"
904	1-1/2"
905	2"
906	2-1/2"
907	3"
908	3-1/2"
909	4"

- Heavy Duty Casting
- Malleable Iron/Hot Dipped Galvanized



Conduit Straps - Steel



Catalog Number		Size
One Hole	Two Hole	
132S	2132S	1/2"
133S	2133S	3/4"
134S	2134S	1"
135S	2135S	1-1/4"
136S	2136S	1-1/2"
137S	2137S	2"
138S	2138S	2-1/2"
139S	2139S	3"
141S	2141S	3-1/2"
148S	2148S	4"
-	2150S	5"
-	2152S	6"

- Steel/Zinc Plated



Insulated Ground Bushings c/w Aluminum Lazy-Lug

Catalog Number		Ground Lug Capacity	Size
Zinc Die Cast	Malleable Iron		
20BIZ4L	-	14-4	1/2"
21BIZ4L	-	14-4	3/4"
22BIZ4L	-	14-4	1"
23BIZ4L	-	14-4	1-1/4"
24BIZ4L	-	14-4	1-1/2"
25BIZ4L	-	14-4	2"
26BIZ0L	26BI0L	14-2/0	2-1/2"
27BIZ0L	27BI0L	14-2/0	3"
28BIZ0L	28BI0L	14-2/0	3-1/2"
29BIZ0L	29BI0L	14-2/0	4"
-	30BI40L	6-250	5"
-	31BI40L	6-250	6"

- Body Zinc Die Cast or Malleable Iron
- Lug - Aluminum/Tin Plated



Hole Seals

Catalog Number	Size
SS50	1/2"
SS52	3/4"
SS54	1"
SS56	1-1/4"
SS58	1-1/2"
SS60	2"
SS62*	2-1/2"
SS64*	3"
SS66*	3-1/2"
SS68*	4"

- Steel/Zinc Plated

* 2 piece design



Oil-Tight Hole Seals

Catalog Number		Description	Hole Diameter	
Steel	Stainless Steel		Inches	Millimeters
S050	S050SS	1/2" Conduit Holes	0.88	22
S075	S075SS	3/4" Conduit Holes	1.13	29
S100	S100SS	1" Conduit Holes	1.38	35
S125	S125SS	1-1/4" Conduit Holes	1.63	41
S150	S150SS	1-1/2" Conduit Holes	2.00	51
S200	S200SS	2" Conduit Holes	2.50	64
S250	-	2-1/2" Conduit Holes	3.00	76
S300	-	3" Conduit Holes	3.63	92
S350	-	3-1/2" Conduit Holes	4.13	105
S400	-	4" Conduit Holes	4.63	118
ASPB	ASPBSS	30mm Pushbutton Holes	1.20	30

Steel:

ANSI 61 Gray Polyester Finish

Stainless Steel:

Grained finish

- Oil resistant Gasket
- Quick Wing Nut



Rigid Conduit Bodies - Malleable Iron

Catalog Number			Size
LB	LL	LR	
LB1CG	LL1CG	LR1CG	1/2"
LB2CG	LL2CG	LR2CG	3/4"
LB3CG	LL3CG	LR3CG	1"
LB4CG	LL4CG	LR4CG	1-1/4"
LB5CG	LL5CG	LR5CG	1-1/2"
LB6CG	LL6CG	LR6CG	2"
LB7CG	LL7CG	LR7CG	2-1/2"
LB8CG	LL8CG	LR8CG	3"
LB9CG	LL9CG	LR9CG	3-1/2"
LB10CG	LL10CG	LR10CG	4"
C	T	TB	
C1CG	T1CG	TB1CG	1/2"
C2CG	T2CG	TB2CG	3/4"
C3CG	T3CG	TB3CG	1"
C4CG	T4CG	TB4CG	1-1/4"
C5CG	T5CG	TB5CG	1-1/2"
C6CG	T6CG	TB6CG	2"
C7CG	T7CG		2-1/2"
C8CG	T8CG		3"
C9CG	T9CG		3-1/2"
C10CG	T10CG		4"



LB



C



T

Supplied with steel cover and neoprene gasket

- Malleable Iron
- Zinc Plated/Aluminum Enamel



Neoprene Gaskets

Catalog Number	Size	Catalog Number	Size
9GK50N	1/2"	9GASK851N	1/2"
9GK75N	3/4"	9GASK852N	3/4"
9GK100N	1"	9GASK853N	1"
9GK125/150N	1-1/4" – 1-1/2"	9GASK854N	1-1/4"
9GK200N	2"	9GASK805N	1-1/2"
9GK250/300N	2-1/2" – 3"	9GASK806N	2"
9GK350/400N	3-1/2" – 4"	9GASK808N	2-1/2" – 3"
9GASK571	1/2"	9GASK809N	3-1/2" – 4"
9GASK572	3/4"	9GASK1941	1/2"
9GASK573	1"	9GASK1942	3/4"
9GASK574	1-1/4"	9GASK1943	1"
9GASK575	1-1/2"	9GASK1944	1-1/4"
9GASK576	2"	9GASK1945	1-1/2"
9GASK578	2-1/2" – 3"	9GASK1946	2"
9GASK579	3-1/2" – 4"		



- Neoprene Rubber

Combination EMT/Rigid Conduit Bodies

Catalog Number					Size
LB	LL	LR	C	T	
LB1CA	LL1CA	LR1CA	C1CA	T1CA	1/2"
LB2CA	LL2CA	LR2CA	C2CA	T2CA	3/4"
LB3CA	LL3CA	LR3CA	C3CA	T3CA	1"
LB4CA	LL4CA	LR4CA	C4CA	T4CA	1-1/4"
LB5CA	LL5CA	LR5CA	C5CA	T5CA	1-1/2"
LB6CA	LL6CA	LR6CA	C6CA	T6CA	2"


Supplied with cover and Gasket

Die-Cast Copper Free Aluminum/Aluminum Enamel



Device Boxes - Malleable Iron

Catalog No.	Type	Size	Catalog No.	Type	Size
Shallow			Deep		
FS50	Dead End	1/2"	FD50	Dead End	1/2"
FS75		3/4"	FD75		3/4"
FS100		1"	FD100		1"
FSC50	Pull Thru	1/2"	FDC50	Pull Thru	1/2"
FSC75		3/4"	FDC75		3/4"
FSC100		1"	FDC100		1"

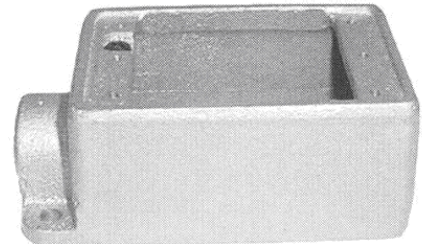

- Malleable Iron/Zinc Plated



Device Box Covers

Catalog Number		Type
Steel	Malleable Iron	
FSFDCS1	FSFDCM1	Blank
FSFDCS2	FSFDCM2	Toggle Switch
FSFDCS3	FSFDCM3	Duplex Receptacle
FSFDCS4	-	Ground Fault Interrupter (GFI)
FSFDCG		Gasket

Covers

- Steel or Malleable Iron/Zinc Plated

Gasket

- Neoprene Rubber



Service Entrance Caps - Threaded



Catalog Number	Size
400	1/2"
401	3/4"
402	1"
403	1-1/4"
404	1-1/2"
405	2"
406	2-1/2"
407	3"
408	3-1/2"
409	4"
410	5"
411	6"

- Aluminum
- Phenolic Insulator
- Weather Resistant

Pull Elbows - Female to Female



Catalog Number		Size
Malleable Iron	Zinc Die Cast	
PEF50	1313	1/2"
PEF75	1314	3/4"
PEF100	1315	1"
PEF125	1316	1-1/4"
PEF150	-	1-1/2"
PEF200	-	2"

- Furnished with Neoprene Gasket and Cover
- Raintight

Enlargers - Male to Female



Catalog Number	Size
E35	1/2" Male - 3/4" Female
E36	3/4" Male - 1" Female
E37	1" Male - 1-1/4" Female
E38	1-1/4" Male - 1-1/2" Female

- Malleable Iron

Floor Flanges



Catalog Number	Size	Base Dia. (inches)
1F	1/2"	3.000
2F	3/4"	3.380
3F	1"	3.380
4F	1-1/4"	4.000
5F	1-1/2"	4.380
6F	2"	4.880

- Malleable Iron/Zinc Plated
- Heavy Duty Casting

Swivel Fixture Hangers



Catalog Number	Size
SWV-4R	4-1/8" Round
SWV-4S	4-1/8" Square

- Furnished with 3/4" x 1/2" Steel Reducing Bushing
- Steel
- Malleable Iron/Zinc Plated



Watertight Hubs

Catalog Number		Size
Zinc Die Cast	Aluminum	
TWH10	TWHA10	1/2"
TWH20	TWHA20	3/4"
TWH30	TWHA30	1"
TWH40	TWHA40	1-1/4"
TWH50	TWHA50	1-1/2"
TWH60	TWHA60	2"
TWH70	TWHA70	2-1/2"
TWH80	TWHA80	3"
TWH90	TWHA90	3-1/2"
TWH100	TWHA100	4"



- Recessed O-Ring Assures Watertight and Dust Tight Connection



Rigid Compression Connectors

Catalog Number		Size
Standard	Insulated	
NTC50	NTC50T	1/2"
NTC75	NTC75T	3/4"
NTC100	NTC100T	1"
NTC125	NTC125T	1-1/4"
NTC150	NTC150T	1-1/2"
NTC200	NTC200T	2"
NTC250	NTC250T	2-1/2"
NTC300	NTC300T	3"
NTC350	NTC350T	3-1/2"
NTC400	NTC400T	4"



- Concrete tight
- Malleable Iron/Zinc Plated
- Steel Locknut



Rigid Compression Couplings

Catalog Number	Size
NTCC50	1/2"
NTCC75	3/4"
NTCC100	1"
NTCC125	1-1/4"
NTCC150	1-1/2"
NTCC200	2"
NTCC250	2-1/2"
NTCC300	3"
NTCC350	3-1/2"
NTCC400	4"



- Concrete tight
- Malleable Iron/Zinc Plated



Liquid-Tite Connectors

Steel Electric Products

Straight



Catalog Number		Size
Insulated	Insulated with Ground	
SLT47T	SLT47ALT	3/8"
SLT27T	SLT27ALT	1/2"
SLT28T	SLT28ALT	3/4"
SLT29T	SLT29ALT	1"
SLT30T	SLT30ALT	1-1/4"
SLT31T	SLT31ALT	1-1/2"
SLT32T	SLT32ALT	2"
SLT33T	SLT33ALT	2-1/2"
SLT34T	SLT34ALT	3"
SLT60T	SLT60ALT	3-1/2"
SLT61T	SLT61ALT	4"
SLT62T	SLT62ALT	5"
SLT63T	SLT63ALT	6"

45 Degree



Catalog Number		Size
Insulated	Insulated with Ground	
SLT25-45T	SLT25-45ALT	3/8"
SLT35-45T	SLT35-45ALT	1/2"
SLT36-45T	SLT36-45ALT	3/4"
SLT37-45T	SLT37-45ALT	1"
SLT38-45T	SLT38-45ALT	1-1/4"
SLT39-45T	SLT39-45ALT	1-1/2"
SLT40-45T	SLT40-45ALT	2"
SLT65-45T	SLT65-45ALT	2-1/2"
SLT66-45T	SLT66-45ALT	3"
SLT67-45T	SLT67-45ALT	3-1/2"
SLT68-45T	SLT68-45ALT	4"

90 Degree



Catalog Number		Size
Insulated	Insulated with Ground	
SLT25T	SLT25ALT	3/8"
SLT35T	SLT35ALT	1/2"
SLT36T	SLT36ALT	3/4"
SLT37T	SLT37ALT	1"
SLT38T	SLT38ALT	1-1/4"
SLT39T	SLT39ALT	1-1/2"
SLT40T	SLT40ALT	2"
SLT65T	SLT65ALT	2-1/2"
SLT66T	SLT66ALT	3"
SLT67T	SLT67ALT	3-1/2"
SLT68T	SLT68ALT	4"

- Tapered Threaded Male Hub (NPT)
- Compact, Slim Diameter with Small Turning Radius
- Furnished with Steel Locknut and Sealing Ring
- Long Ferrule Prevents Pullout and Tight Bend "pop-out"
- Liquidtight • Raintight • Oiltight

- Malleable Iron/Zinc Plated
- Steel Ferrule/Zinc Plated
- Aluminum Grounding Lug



Flexible Conduit

Liquid-tite Flexible Conduit

Catalog Number	Size	Standard Length
CSALT-3/8	3/8"	30 / 150 Meters
CSALT-1/2	1/2"	30 / 150 / 300 Meters
CSALT-3/4	3/4"	30 / 150 / 300 Meters
CSALT-1	1"	30 / 150 Meters
CSALT-1-1/4	1-1/4"	15 / 75 Meters
CSALT-1-1/2	1-1/2"	15 / 61 Meters
CSALT-2	2"	15 Meters
CSALT-2-1/2	2-1/2"	8 Meters **
CSALT-3	3"	8 Meters **
CSALT-4	4"	8 Meters **

**Cut Lengths Available



Aluminum Flexible Conduit

Catalog Number	Size	Standard Length
2-1/2-IN-ALUM-FLEX	2-1/2"	16 Meters
3-IN-ALUM-FLEX	3"	16 Meters
4-IN-ALUM-FLEX	4"	16 Meters

Cut Lengths Available



Flexible Conduit Connectors

Catalog Number		Size
Straight	90 Degree	
C32	C40	2"
C33	C65	2-1/2"
C34	C66	3"
C61	C68	4"

- Malleable Iron/Zinc Plated



CN Hose - Orange

Catalog Number	Size	Standard Length
CNP50	1/2"	100 Foot Carton / 500
CNP75	3/4"	100 Foot Carton / 400
CNP100	1"	100 Foot Carton / 300
CNP125	1-1/4"	50 Foot Carton
CNP150	1-1/2"	50 Foot Carton
CNP200	2"	50 Foot Carton

Cut Lengths Available



Explosion Proof

SparkSafe

Explosion Proof Reducing Bushings



Catalog Number		Size
Steel	Aluminum	
RB75-50S	RB75-50A	3/4" x 1/2"
RB100-50S	RB100-50A	1" x 1/2"
RB100-75S	RB100-75A	1" x 3/4"
RB125-50S	RB125-50A	1-1/4" x 1/2"
RB125-75S	RB125-75A	1-1/4" x 3/4"
RB125-100S	RB125-100A	1-1/4" x 1"
RB150-50S	RB150-50A	1-1/2" x 1/2"
RB150-75S	RB150-75A	1-1/2" x 3/4"
RB150-100S	RB150-100A	1-1/2" x 1"
RB150-125S	RB150-125A	1-1/2" x 1-1/4"
RB200-50S	RB200-50A	2" x 1/2"
RB200-75S	RB200-75A	2" x 3/4"
RB200-100S	RB200-100A	2" x 1"
RB200-125S	RB200-125A	2" x 1-1/4"
RB200-150S	RB200-150A	2" x 1-1/2"

- Class I, Division 1 & 2, Groups A, B, C & D
- Class I, Zone 1 & 2, Groups IIC, IIB & IIA
- Class II, Division 1 & 2, Groups E, F & G
- Class III, Division 1 & 2



Explosion Proof Conduit Unions



Catalog Number		Size
Steel	Aluminum	
Male		
UM50S	UM50A	1/2"
UM75S	UM75A	3/4"
UM100S	UM100A	1"
Female		
UF50S	UF50A	1/2"
UF75S	UF75A	3/4"
UF100S	UF100A	1"

- Class I, Division 1 & 2, Groups A, B, C & D
- Class I, Zone 1 & 2, Groups IIC, IIB & IIA
- Class II, Division 1 & 2, Groups E, F & G
- Class III, Division 1 & 2



Explosion Proof

Flexible Couplings

Catalog Number	Size	Length	Catalog Number	Size	Length
EXFC-14	1/2"	4"	EXFC-310	1"	10"
EXFC-16	1/2"	6"	EXFC-312	1"	12"
EXFC-18	1/2"	8"	EXFC-315	1"	15"
EXFC-110	1/2"	10"	EXFC-318	1"	18"
EXFC-112	1/2"	12"	EXFC-321	1"	21"
EXFC-115	1/2"	15"	EXFC-324	1"	24"
EXFC-118	1/2"	18"	EXFC-327	1"	27"
EXFC-121	1/2"	21"	EXFC-330	1"	30"
EXFC-124	1/2"	24"	EXFC-333	1"	33"
EXFC-127	1/2"	27"	EXFC-336	1"	36"
EXFC-130	1/2"	30"			
EXFC-133	1/2"	33"	EXFC-412	1-1/4"	12"
EXFC-136	1/2"	36"	EXFC-415	1-1/4"	15"
			EXFC-418	1-1/4"	18"
EXFC-24	3/4"	4"	EXFC-421	1-1/4"	21"
EXFC-26	3/4"	6"	EXFC-424	1-1/4"	24"
EXFC-28	3/4"	8"	EXFC-427	1-1/4"	27"
EXFC-210	3/4"	10"	EXFC-430	1-1/4"	30"
EXFC-212	3/4"	12"	EXFC-433	1-1/4"	33"
EXFC-215	3/4"	15"	EXFC-436	1-1/4"	36"
EXFC-218	3/4"	18"			
EXFC-221	3/4"	21"	EXFC-512	1-1/2"	12"
EXFC-224	3/4"	24"	EXFC-515	1-1/2"	15"
EXFC-227	3/4"	27"	EXFC-518	1-1/2"	18"
EXFC-230	3/4"	30"	EXFC-521	1-1/2"	21"
EXFC-233	3/4"	33"	EXFC-524	1-1/2"	24"
EXFC-236	3/4"	36"	EXFC-527	1-1/2"	27"
			EXFC-530	1-1/2"	30"
EXFC-36	1"	6"	EXFC-533	1-1/2"	33"
EXFC-38	1"	8"	EXFC-536	1-1/2"	36"



- Larger Sizes May Be Available, please call

EXFC couplings are for use in hazardous atmospheres where a flexible connection is required for motor and equipment installation where movement and vibration are present. Also for difficult bends and connections.

- Class I, Groups A,B,C,D;
- Class II, Groups E,F,G;
- Nema 7 & 9
- Brass and Bronze End Fittings
- Bronze Wire Flexible Braid over Flexible Bronze Core with Insulating Liner



Stainless Steel Products

Gibson

Conduit Bodies

Catalog Number	Conduit Size	Material
----------------	--------------	----------

LB Fitting

7050LB	1/2"	CF8M(316)
7075LB	3/4"	
7100LB	1"	
7125LB	1-1/4"	
7150LB	1-1/2"	
7200LB	2"	
7300LB	3"	
7400LB	4"	



7075LB

LL Fitting

7075LL	3/4"	CF8M(316)
7100LL	1"	

LR Fitting

7075LR	3/4"	CF8M(316)
7100LR	1"	

C Fitting

7050C	1/2"	CF8M(316)
7075C	3/4"	
7100C	1"	

T Fitting

7050T	1/2"	CF8M(316)
7075T	3/4"	
7100T	1"	
7125T	1-1/4"	
7150T	1-1/2"	
7200T	2"	



7075T

TB Fitting

7075TB	3/4"	CF8M(316)
7100TB	1"	
7125TB	1-1/4"	
7150TB	1-1/2"	
7200TB	2"	



- Polished Finish Standard
- Supplied with 316SS Stamped Cover, Neoprene Gasket and 316SS Screws.

Device Boxes and Covers

Catalog Number	Conduit Size	Style	Material
FDC75	3/4"	2 Opening Pull Thru	CF8M(316)
FDS75	3/4"	2 Opening Dead End	



Catalog Number	Description	Material
7000BC	Blank Cover – Cast	CF8M(316)
7000BF	Blank Cover – Stamped	
7000SF	Switch Cover – Stamped	316SS
7000RF	Receptacle Cover - Stamped	

- Polished Finish Standard
- Supplied with Gasket and 316SS Screws

Conduit

Catalog Number		Size
Type 304SS	Type 316SS	
CND50-304SS	CND50-316SS	1/2"
CND75-304SS	CND75-316SS	3/4"
CND100-304SS	CND100-316SS	1"
CND125-304SS	CND125-316SS	1-1/4"
CND150-304SS	CND150-316SS	1-1/2"
CND200-304SS	CND200-316SS	2"
CND250-304SS	CND250-316SS	2-1/2"
CND300-304SS	CND300-316SS	3"
CND400-304SS	CND400-316SS	4"

- Polished Finish Standard
- One Conduit Coupling Supplied With Each 10 Foot Length



Conduit Elbows

Catalog Number		Size
Type 304SS	Type 316SS	
ELB50-304SS	ELB50-316SS	1/2"
ELB75-304SS	ELB75-316SS	3/4"
ELB100-304SS	ELB100-316SS	1"
ELB125-304SS	ELB125-316SS	1-1/4"
ELB150-304SS	ELB150-316SS	1-1/2"
ELB200-304SS	ELB200-316SS	2"

- Polished Finish Standard



Conduit Couplings

Catalog Number		Size
Type 304SS	Type 316SS	
CPL50-304SS	CPL50-316SS	1/2"
CPL75-304SS	CPL75-316SS	3/4"
CPL100-304SS	CPL100-316SS	1"
CPL125-304SS	CPL125-316SS	1-1/4"
CPL150-304SS	CPL150-316SS	1-1/2"
CPL200-304SS	CPL200-316SS	2"
CPL250-304SS	CPL250-316SS	2-1/2"
CPL300-304SS	CPL300-316SS	3"
CPL400-304SS	CPL400-316SS	4"

- Polished Finish Standard



Conduit Nipples

Catalog Number		Size
Type 304SS	Type 316SS	
NIP50X*-304SS	NIP50X*-316SS	1/2"
NIP75X*-304SS	NIP75X*-316SS	3/4"
NIP100X*-304SS	NIP100X*-316SS	1"
NIP125X*-304SS	NIP125X*-316SS	1-1/4"
NIP150X*-304SS	NIP150X*-316SS	1-1/2"
NIP200X*-304SS	NIP200X*-316SS	2"

- Polished Finish Standard

Catalog Number is Incomplete. Substitute * for Length Required



Stainless Steel Products

Gibson

Conduit Hangers



Catalog Number	Size	Material
6050	1/2"	316SS
6075	3/4"	
6100	1"	
6125	1-1/4"	
6150	1-1/2"	
6200	2"	

- Polished Finish Standard
- Supplied with 316SS Nut and Screw

Rigid Conduit Straps



Catalog Number		Size	Material
One Hole	Two Hole		
3050	3050-2	1/2"	316SS
3075	3075-2	3/4"	
3100	3100-2	1"	
3125	3125-2	1-1/4"	
3150	3150-2	1-1/2"	
3200	3200-2	2"	
3250	3250-2	2-1/2"	
3300	3300-2	3"	
3350	3350-2	3-1/2"	
3400	3400-2	4"	

- Polished Finish Standard

2000 Series Beam Clamp



Catalog Number	Load Rating*	Material
2001	150	316SS
2003	750	
2004	1100	

- Polished Finish Standard
- *Based on Upright Installation from bottom hole

Right Angle Beam Clamp



Catalog Number	Size	Catalog Number	Size	Material
1050	1/2"	1200	2"	CF8M/316SS
1075	3/4"	1250	2-1/2"	
1100	1"	1300	3"	
1125	1-1/4"	1350	3-1/2"	
1150	1-1/2"	1400	4"	

- Polished Finish Standard

Parallel Beam Clamp



Catalog Number	Size	Material
4075	3/4"	CF8M/316SS
4100	1"	

- Polished Finish Standard

Conduit Hubs

Catalog Number		Conduit Size	Material
Hub	Grounding Hub		
7050-HUB	7050-G-HUB	1/2"	CF8M/316SS
7075-HUB	7075-G-HUB	3/4"	
7100-HUB	7100-G-HUB	1"	
7125-HUB	7125-G-HUB	1-1/4"	
7150-HUB	7150-G-HUB	1-1/2"	
7200-HUB	7200-G-HUB	2"	

- Polished Finish Standard



Three Piece Couplings

Catalog Number	Size	Material
TPC75	3/4"	316SS
TPC100	1"	

- Polished Finish Standard



Locknuts

Catalog Number		Conduit Size	Material
Locknut	Grounding Locknut		
8050	8050-G	1/2"	316SS
8075	8075-G	3/4"	
8100	8100-G	1"	
8125	8125-G	1-1/4"	
8150	8150-G	1-1/2"	
8200	8200-G	2"	

- Polished Finish Standard



Reducing Bushings

Catalog Number	Size	Catalog Number	Size	Material
7500RB - 1/2 X 3/8	1/2 X 3/8	7500RB - 1-1/2 X 3/4	1-1/2 X 3/4	316SS
7500RB - 3/4 X 1/2	3/4 X 1/2	7500RB - 1-1/2 X 1	1-1/2 X 1	
7500RB - 1 X 1/2	1 X 1/2	7500RB - 1-1/2 X 1-1/4	1-1/2 X 1-1/4	
7500RB - 1 X 3/4	1 X 3/4	7500RB - 2 X 1/2	2 X 1/2	
7500RB - 1-1/4 X 1/2	1-1/4 X 1/2	7500RB - 2 X 3/4	2 X 3/4	
7500RB - 1-1/4 X 3/4	1-1/4 X 3/4	7500RB - 2 X 1	2 X 1	
7500RB - 1-1/4 X 1	1-1/4 X 1	7500RB - 2 X 1-1/4	2 X 1-1/4	
7500RB - 1-1/2 X 1/2	1-1/2 X 1/2	7500RB - 2 X 1-1/2	2 X 1-1/2	

- Polished Finish Standard



Threaded Plugs

Catalog Number	Size	Catalog Number	Size	Material
7050P	1/2"	7200P	2"	316SS
7075P	3/4"	7250P	2-1/2"	
7100P	1"	7300P	3"	
7125P	1-1/4"	7400P	4"	
7150P	1-1/2"			

- Polished Finish Standard



Strut Fittings

R.S. Dale

Clamping Nuts with Regular Spring



Catalog Number		Size
Steel	Stainless Steel	
C6-0832RS	-	8-32
C6-1024RS	-	10-24
C6-1420RS	5911	1/4-20
C7RS	5912	5/16-18
C8RS	5913	3/8-16
C10RS	5914	1/2-13
C12RS	5915	5/8-11
C13RS	5916	3/4-10

2 Piece Straps for EMT Conduit



Catalog Number	Size	Catalog Number	Size
C1025	3/8"	C1029	1-1/4"
C1026	1/2"	C1030	1-1/2"
C1027	3/4"	C1031	2"
C1028	1"		

2 Piece Straps for Rigid Conduit



Catalog Number			Size
Steel	Aluminum	Stainless Steel	
C1125	C1125AL	-	3/8"
C1126	C1126AL	5050	1/2"
C1127	C1127AL	5075	3/4"
C1128	C1128AL	5100	1"
C1129	C1129AL	5125	1-1/4"
C1130	C1130AL	5150	1-1/2"
C1131	C1131AL	5200	2"
C1132	C1132AL	5250	2-1/2"
C1133	C1133AL	5300	3"
C1134	C1134AL	5350	3-1/2"
C1135	C1135AL	5400	4"
C1137	-	5500	5"
C1138	-	5600	6"
C1140	-	5800	8"


"P" Clamps




Catalog Number		Diameter Range (inches)
Steel	Aluminum	
C55	C55AL	.05 - .55
C81	C81AL	.25 - .84
C110	C110AL	.81 - 1.10
C125	C125AL	.75 - 1.25
C135	C135AL	.85 - 1.35
C175	C175AL	1.25 - 1.75
C205	C205AL	1.55 - 2.05
C225	C225AL	1.75 - 2.25
C250	C250AL	2.00 - 2.50
C275	C275AL	2.25 - 2.75
C300	C300AL	2.50 - 3.00
C325	C325AL	2.75 - 3.25
C375	C375AL	3.25 - 3.75
C425	C425AL	3.75 - 4.25
C475	C475AL	4.25 - 4.75

Strut Fittings

R.S. Dale




C601
Two Hole Splice Plate




C602
Three Hole Splice Plate




C619-1/4 **C619-3/8**
C619-1/2 **C619-5/8**
C619-3/4
Square Washer
* Available in Stainless Steel




C712
Cross Plate
* Available in Stainless Steel




C714
Tee Plate
* Available in Stainless Steel



C718
3 Hole Flat Angle Plate
* Available in Stainless Steel




C719
4 Hole Flat Angle Plate
* Available in Stainless Steel




C723
Four Hole Splice Plate
* Available in Stainless Steel




C603
Two Hole End Angle
* Available in Stainless Steel




C605
Three Hole Corner Angle
* Available in Stainless Steel




C607
Four Hole Corner Angle
* Available in Stainless Steel



C624-45 **C630-1-60**
Two Hole Closed Angle Connector




C634-75 **C640-30**
C636-60 **C642-15**
Two Hole Open Angle Connector




C613
"U" Support




C616
Four Hole Splice Clevis



C721
Double "U" Support




C611
"Z" Support



C756
"Z" Support Double Channel



FJ103
Two Wheel Trolley




FJ108
Four Wheel Trolley

Strut Fittings

R.S. Dale




C684S
"I" Beam Clamp




C685S
Beam Clamp



C686
Beam Clamp




C855S
Angular "I" Beam Clamp




C858S - 3/8
C859S - 1/2
C860S - 5/8
Heavy Duty Beam Clamp




C907S
"I" Beam Clamp




C2622
Beam Clamp




C872-6 **C872-8**
C872-10 **C872-12**
C872-16
Safety Anchor Strap



C2651
Double Channel
Beam Clamp
* Available in Stainless Steel



C2652
Single Channel Beam Clamp
* Available in Stainless Steel




C2654
Column Support




C4502 - 3/8
C4503 - 1/2
C4504 - 5/8
"C" Clamp




C608
Four Hole Shelf Bracket
Right Hand




C609
Four Hole Shelf Bracket
Left Hand



C3033
Post Base - Offset
C3033SQ
Post Base - Square



C3064
Double Post Base - Offset
C3064SQ
Double Post Base - Square

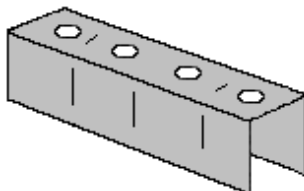


C649A
Joiner - Stamped Steel



C655
Raceway End Cap



C2631
Swing Gate Fixture Hanger



C2625
Wiring Stud Nut

Cozy Legs

NCL150

Shipping Weight: 8 Lbs.
Dimensions: 22-1/2"L x 16"W x 1"D
Electrical: 115VAC, 150 Watts, 1.25 Amps



*Supplied with Portable Stand and Hi-Low Switch



Cozy Toes

NCT

Shipping Weight: 5 Lbs.
Dimensions: 18"L x 19"W x .5"D
Electrical: 115VAC, 75 Watts, 0.6 Amps



Cozy Foot Rest

NCFR

Shipping Weight: 6 Lbs.
Dimensions: 20"L x 14"W x 1"D
Electrical: 115VAC, 50 Watts, 0.4 Amps



Warehouse Foot Warmer – Regular

NFWR

Shipping Weight: 5 Lbs.
Dimensions: 20.5"L x 13.75"W x .25"D
Electrical: 115VAC, 90 Watts, 0.7 Amps



Warehouse Foot Warmer - Large

NFWL

Shipping Weight: 9 Lbs.
Dimensions: 36"L x 16"W x .25"D
Electrical: 115VAC, 135 Watts, 1.2 Amps



Optional Hi-Low Switch

160731T

*Not for use with Warehouse Foot Warmer

Lighting Products

Tri-Lite

Dock Lights



DL Model



Catalog number	Lamp Type	Description
SDL40P	Incandescent	40" Adjustable Swing Arm
SDL60P		60" Adjustable Swing Arm
SDL40P-LED	LED	40" Adjustable Swing Arm
SDL60P-LED		60" Adjustable Swing Arm
DL24P	Incandescent	24" Double Strut Arm
DL40P		40" Double Strut Arm
DL60P		60" Double Strut Arm
DL90P		90" Double Strut Arm
DL114P		114" Double Strut Arm
DL24P-LED	LED	24" Double Strut Arm
DL40P-LED		40" Double Strut Arm
DL60P-LED		60" Double Strut Arm
DL90P-LED		90" Double Strut Arm

- 1-1/2", 14 Gauge Square Steel Tubing
- Painted Safety Yellow
- Polycarbonate Lamp Head
- Adjustable Swing Arm Allows for both Vertical and Horizontal Adjustment
- Double Strut Mounting Arm Provides Greater Strength

High Pressure Sodium Dock Lights are also Available

Stop and Go Lights



Catalog number	Lamp Type	Description
SG10-12RG*	Incandescent	Outdoor - 12VDC
SG10-24RG*		Outdoor - 24VDC
SG10-115RG*		Outdoor - 115VAC
SG10-12RG-LED	LED	Outdoor - 12VDC
SG10-24RG-LED		Outdoor - 24VDC
SG10-115RG-LED		Outdoor - 115VAC
SG20-12RG	Incandescent	Indoor - 12VDC
SG20-24RG		Indoor - 24VDC
SG20-115RG		Indoor - 115VAC
SG20-12RG-LED	LED	Indoor - 12VDC
SG20-24RG-LED		Indoor - 24VDC
SG20-115RG-LED		Indoor - 115VAC
SG30-12RG	Incandescent	Indoor/Outdoor Set - 12VDC
SG30-24RG		Indoor/Outdoor Set - 24VDC
SG30-115RG		Indoor/Outdoor Set - 115VAC
SG30-12RG-LED	LED	Indoor/Outdoor Set - 12VDC
SG30-24RG-LED		Indoor/Outdoor Set - 24VDC
SG30-115RG-LED		Indoor/Outdoor Set - 115VAC

- Safety Yellow Polypropylene
- Red and Green Lens
- 11-3/8"H x 6-3/8"W x 3-1/4" D
- 2 Lbs.
- Indoor Units Come Complete with a Solid State Flasher and On-Off-On Toggle Switch.

* It is strongly recommended that the outdoor incandescent units be used in conjunction with the indoor units or wired to a flasher. Incandescent units are not intended for continuous burn.

Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
1002	20	1185-S/20	14	1234N...	37	133 (Sepco)	48
1005	46	1185/20	14	1234P...	37	1331126CH	9
1006	46	1186-Q/20	14	124	10	1331305CH	9
101	10	1186-S/20	14	1241-Q/20	14	1331320CH	9
1015D	38	1186/20	14	1241/20	14	1331360CH	9
1015E	38	1187-Q/20	14	1242-Q/20	14	1331552CH	8
1015F	38	1187-S/20	14	1242-S/20	14	1331554CH	8
102	10	1187/20	14	1242/20	14	1331555CH	8
1021D	38	1188-Q/20	14	1244-Q/20	14	1331565CH	8
1021E	38	1188-S/20	14	1244/20	14	1331575CH	8
1021F	38	1188/20	14	125	10	1331585CH	8
1022	46	1189-Q/20	14	1250	40	1331587CH	8
1023	46	1189-S/20	14	1250	60	1331588CH	8
1024	46	1189/20	14	1251	40	1331595CH	8
1025	46	119	10	126	10	1331596CH	8
1026	46	1193-Q/20	14	127	10	1331597CH	8
1027	46	1193/20	14	128	10	1331598CH	8
1028	46	1194-Q/20	14	129	10	1331953CH	9
1029	46	1194-S/20	14	12CS	46	1331955CH	9
103	10	1194/20	14	13-B	14	1332	40
1030	46	1195-Q/20	14	130	10	1332126CH	9
1031	46	1195-S/20	14	1300	60	1332305CH	9
1039	20	1195/20	14	131	10	1332320CH	9
104	10	1196-Q/20	14	1313	52	1332360CH	9
105	10	1196-S/20	14	1314	52	1332552CH	8
1050	60	1196/20	14	1315	52	1332554CH	8
106	10	11CS	46	1316	52	1332555CH	8
107	10	12-B	14	132 (Marathon)	10	1332565CH	8
1075	60	120	10	132 (Sepco)	48	1332575CH	8
108	10	1200	60	1320570	8	1332585CH	8
109	10	1206	47	1320572	9	1332587CH	8
10CS	46	1207	47	1320580	8	1332588CH	8
110	10	1208	47	1320970	9	1332595CH	8
1100	60	1209	47	1320972	9	1332596CH	8
111	10	121	10	1321570CH	8	1332597CH	8
112	10	1210	47	1321572CH	9	1332598CH	8
1121	21	1211	47	1321580CH	8	1332953CH	9
1122	21	1212	47	1321970CH	9	1332955CH	9
1123	21	1213-SG	14	1321972CH	9	1333	40
1125	60	1213	47	1322570CH	8	1333126CH	9
113	10	1214	47	1322572CH	9	1333305CH	9
1132-HL	14	1215	47	1322580CH	8	1333320CH	9
1132	14	1216	47	1322970CH	9	1333360CH	9
114	10	1217	47	1322972CH	9	1333552CH	8
115	10	122	10	1323570CH	8	1333554CH	8
1150	60	123	10	1323572CH	9	1333555CH	8
1156-W	14	1234/1112	25	1323580CH	8	1333565CH	8
1157-A	14	1234/1138	25	1323970CH	9	1333575CH	8
1157-B	14	1234/1312	25	1323972CH	9	1333585CH	8
1157-C	14	1234/1612	25	1326	40	1333587CH	8
1157-D	14	1234/2134	25	1327	40	1333588CH	8
116	10	1234/2910	25	1328	40	1333595CH	8
117	10	1234/36125	25	1329	40	1333596CH	8
118	10	1234/42150	25	132S	48	1333597CH	8
1185-Q/20	14	1234M...	37	133 (Marathon)	10	1333598CH	8

Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
1333953CH	9	1420M25	37	1443551	6	1604DJSV	11
1333955CH	9	1420M32	37	1443557	7	1604H	11
133S	48	1420M40	37	1443560	6	1604SC	11
134 (Marathon)	10	1420M50	37	144S	40	1604ST	11
134 (Sepco)	48	1420M63	37	1451129	7	1604STD	11
134S	48	1421121	7	1451301	7	1606DJ	11
135 (Marathon)	10	1421122	7	1451552	6	1606DJSV	11
135 (Sepco)	48	1421552	7	1451586	6	1606H	11
1350	60	1421570	6	1451592	6	1606SC	11
135S	48	1421572	7	1452129	7	1606ST	11
136 (Marathon)	10	1421970	6	1452301	7	1606STD	11
136 (Sepco)	48	1422121	7	1452552	6	160731T	65
136S	48	1422122	7	1452586	6	1608DJ	11
137	48	1422552	7	1452592	6	1608DJSV	11
137S	48	1422570	6	1453129	7	1608H	11
138	48	1422572	7	1453301	7	1608SC	11
138S	48	1422970	6	1453552	6	1608ST	11
139	48	1423121	7	1453586	6	1608STD	11
139S	48	1423122	7	1453592	6	160S	40
13CS	46	1423552	7	145S	40	1612DJ	11
14-B	14	1423570	6	146S	40	1612DJSV	11
1400	60	1423572	7	147S	40	1612H	11
1402401	6	1423970	6	148	48	1612SC	11
1402402	6	142S	40	148S	48	1612ST	11
1402404	6	1431123	7	14CS	46	1612STD	11
1403401	6	1431124	7	150	48	161S	40
1403402	6	1431126	7	1504DJ	11	16CS	46
1403404	6	1431552	6	1504DJSV	11	171C	40
141	48	1431553	6	1504H	11	172C	40
1411300	7	1431555	6	1504SC	11	173C	40
1411400	6	1431561	7	1504ST	11	17CS	46
1412300	7	1431563	7	1504STD	11	1831	32
1412400	6	1432123	7	1506DJ	11	18CS	46
1413300	7	1432124	7	1506DJSV	11	19CS	46
1413400	6	1432126	7	1506H	11	1F	52
1414300	7	1432552	6	1506SC	11	2-1/2IN ALUM-FLEX	55
1414400	6	1432553	6	1506ST	11	2001	60
141S	48	1432555	6	1506STD	11	2002	20
1420/10	37	1432561	7	1508DJ	11	2003	60
1420/11	37	1432563	7	1508DJSV	11	2004	60
1420/12	37	1433123	7	1508H	11	201	10
1420/13	37	1433124	7	1508SC	11	2015-3A	32
1420/16	37	1433126	7	1508ST	11	2015-3B	32
1420/21	37	1433552	6	1508STD	11	2015-3C	32
1420/29	37	1433553	6	1512DJ	11	202	10
1420/34	37	1433555	6	1512DJSV	11	203	10
1420/36	37	1433561	7	1512H	11	204	10
1420/38	37	1433563	7	1512SC	11	205	10
1420/42	37	143S	40	1512ST	11	206	10
1420/48	37	1441551	6	1512STD	11	207	10
1420/7	37	1441557	7	152	48	2074	20
1420/9	37	1441560	6	158S	40	208	10
1420M12	37	1442551	6	159S	40	209	10
1420M16	37	1442557	7	15CS	46	20BIZ4L	49
1420M20	37	1442560	6	1604DJ	11	210	10

Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
2104	21	23BIZ4L	49	318	10	5075	62
211	10	24BIZ4L	49	319	10	5100	62
2117	20	25BIZ4L	49	31BI40L	49	511-B	16
212	10	2620	20	320	10	511-B2	16
213	10	2621	20	3200-2	60	511-B2A	16
2132	20	2622	20	3200	60	511-B2G	16
2132S	48	26BI0L	49	321	10	511-B2GA	16
2133S	48	26BIZ0L	49	322	10	511-B2O	16
2134	20	2711	21	323	10	511-B2OA	16
2134S	48	27BI0L	49	324	10	511-B3	16
2135S	48	27BIZ0L	49	3250-2	60	511-B3G	16
2136S	48	2800	22	3250	60	511-B3O	16
2137S	48	2801	22	3300-2	60	511-B4	16
2138S	48	2802	22	3300	60	511-B4A	16
2139S	48	2803	22	3350-2	60	511-B4G	16
214	10	2804	22	3350	60	511-B4GA	16
2141S	48	2805	22	3400-2	60	511-B4O	16
2142S	40	2806	22	3400	60	511-B4OA	16
2143S	40	2807	22	3451	21	511-BG	16
2144S	40	28BI0L	49	3455	21	511-BO	16
2145	20	28BIZ0L	49	3456	21	5125	62
2145S	40	29BI0L	49	3459	21	5150	62
2146S	40	29BIZ0L	49	3702*	19	5200	62
2147S	40	2F	52	3817	21	522-B12	17
2148S	48	3-IN-ALUM-FLEX	55	3819	21	522-B14	17
215	10	301	10	3F	52	5250	62
2150S	48	302	10	4-IN-ALUM-FLEX	55	5300	62
2152S	48	303	10	400	52	531-SWH	16
2158S	40	304	10	401	52	531-SWHO	16
2159S	40	305	10	402	52	531-SWN	16
216	10	3050-2	60	403	52	532-SWH	16
2160S	40	3050	60	404	52	532-SWHO	16
2161S	40	306	10	405	52	532-SWN	16
2165-1A	32	307	10	406	52	533-SWH	16
2165-1B	32	3075-2	60	407	52	533-SWHO	16
217	10	3075	60	4075	60	533-SWN	16
218	10	308	10	408	52	534-SWH	16
219	10	309	10	409	52	534-SWHO	16
21BIZ4L	49	30BI40L	49	410	52	534-SWN	16
220	10	310	10	4100	60	535-SWH	16
221	10	3100-2	60	411	52	535-SWHO	16
2211	20	3100	60	4240	19	535-SWN	16
2212	20	311	10	4243	19	5350	62
2213	20	312	10	4252	19	536-SWH	16
2214	20	3125-2	60	4273	19	536-SWHO	16
222	10	3125	60	4311	19	536-SWN	16
223	10	313	10	4453	19	537-SWH	16
224	10	314	10	4611	19	537-SWHO	16
225	10	315	10	4631	19	537-SWN	16
226	10	3150-2	60	491-DA	17	538-SWH	16
227	10	3150	20	491-S	17	538-SWHO	16
228	10	3150	60	491-SC3	17	538-SWN	16
229	10	316	10	492-S	17	5400	62
22BIZ4L	49	3167*	19	4F	52	5415	21
230	10	317	10	5050	62	5416	21

Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
5500	62	671RZ...	10	6J600A3BFBD	4	7050-G-HUB	61
5600	62	672RZ...	10	6J60A1B	4	7050-HUB	61
571-DWH	16	6CC30A1B	5	6J60A2B	4	7050C	58
571-DWHO	16	6CC30A1SPQ	5	6J60A3B	4	7050LB	58
571-DWN	16	6CC30A1SQ	5	6M30A1B	4	7050P	61
572-DWH	16	6CC30A2B	5	6M30A1SPQ	4	7050T	58
572-DWHO	16	6CC30A2SPQ	5	6M30A1SQ	4	706P	47
572-DWN	16	6CC30A2SQ	5	6M30A2B	4	7075-G-HUB	61
573-DWH	16	6CC30A3B	5	6M30A2SPQ	4	7075-HUB	61
573-DWHO	16	6CC30A3SPQ	5	6M30A2SQ	4	7075C	58
573-DWN	16	6CC30A3SQ	5	6M30A3B	4	7075LB	58
574-DWH	16	6F	52	6M30A3SPQ	4	7075LL	58
574-DWHO	16	6F200A1BE	2	6M30A3SQ	4	7075LR	58
574-DWN	16	6F200A3BE	2	6R100A1B	3	7075P	61
575-DWH	16	6F30A1B	2	6R100A2B	3	7075T	58
575-DWHO	16	6F30A1S	2	6R100A3B	3	7075TB	58
575-DWN	16	6F30A1SP	2	6R200A1BE	3	707P	47
576-DWH	16	6F30A2B	2	6R200A3BE	3	708P	47
576-DWHO	16	6F30A2S	2	6R30A1B	3	709P	47
576-DWN	16	6F30A2SP	2	6R30A1S	3	7100-G-HUB	61
577-DWH	16	6F30A3B	2	6R30A1SP	3	7100-HUB	61
577-DWHO	16	6F30A3S	2	6R30A2B	3	7100C	58
577-DWN	16	6F30A3SP	2	6R30A2S	3	7100LB	58
5800	62	6F600A1B	2	6R30A2SP	3	7100LL	58
5911	62	6F600A3B	2	6R30A3B	3	7100LR	58
5912	62	6F60A1B	2	6R30A3S	3	7100P	61
5913	62	6F60A2B	2	6R30A3SP	3	7100T	58
5914	62	6F60A3B	2	6R400A1B	3	7100TB	58
5915	62	6G38E-DIN	13	6R400A3B	3	710182	33
5916	62	6G38EC	13	6R600A1B	3	710P	47
592-EX	15	6G38EF	13	6R600A3B	3	711P	47
594-EX	15	6G38TS-DIN	13	6R60A1B	3	7125-G-HUB	61
597-EX	15	6G38TSC	13	6R60A2B	3	7125-HUB	61
5F	52	6G38TSF	13	6R60A3B	3	7125LB	58
60-*	19	6G38TSKK-DIN	13	6SC30A1-B	5	7125P	61
6050	60	6G38TSKKC	13	6SC30A1I-B	5	7125T	58
6075	60	6G38TSKKF	13	6SC30A2-B	5	7125TB	58
6100	60	6H38SC	13	6SC30A2I-B	5	712P	47
6125	60	6H38SF	13	6SC30A3-B	5	713P	47
6150	60	6H38SPC	13	6SC30A3I-B	5	714P	47
620	46	6H38SPF	13	6SC30A4-B	5	7150-G-HUB	61
6200	60	6J200A1BFBD	4	6SC30A4I-B	5	7150-HUB	61
625	46	6J200A3BFBD	4	6SM30A1-B	5	7150LB	58
627	46	6J30A1B	4	6SM30A1I-B	5	7150P	61
632-DA	18	6J30A1S	4	6SM30A2-B	5	7150T	58
632-S	18	6J30A1SP	4	6SM30A2I-B	5	7150TB	58
632-SC3	18	6J30A2B	4	6SM30A3-B	5	715P	47
634-DA	18	6J30A2S	4	6SM30A3I-B	5	716P	47
635-S	18	6J30A2SP	4	6SM30A4-B	5	717P	47
636-S	18	6J30A3B	4	6SM30A4I-B	5	7200-G-HUB	61
642-D	18	6J30A3S	4	70-B	19	7200-HUB	61
642-S	18	6J30A3SP	4	7000BC	58	7200LB	58
645-S	18	6J400A1BFBD	4	7000BF	58	7200P	61
646-S	18	6J400A3BFBD	4	7000RF	58	7200T	58
670ARZ...	10	6J600A1BFBD	4	7000SF	58	7200TB	58

Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
72180	33	94	46	C1132	62	C40	55
72181	33	94Z	46	C1132AL	62	C425	62
7250P	61	95	46	C1133	62	C425AL	62
7300LB	58	95Z	46	C1133AL	62	C4502 - 3/8	64
7300P	61	96	46	C1134	62	C4503 - 1/2	64
73122	33	96Z	46	C1134AL	62	C4504 - 5/8	64
73142	33	97	46	C1135	62	C475	62
73161	33	971S	18	C1135AL	62	C475AL	62
73181	33	971SA	18	C1137	62	C4CA	39
7400LB	58	971SB	18	C1138	62	C4CA	51
7400P	61	971SO	18	C1140	62	C4CG	50
74122	33	971SY	18	C125	62	C55	62
74142	33	974S	18	C125AL	62	C55AL	62
74161	33	974SA	18	C12RS	62	C5CA	39
74162	33	97Z	46	C135	62	C5CA	51
74181	33	98	46	C135AL	62	C5CG	50
7500RB...	61	985GP...	12	C13RS	62	C6-0832RS	62
75181	33	98Z	46	C175	62	C6-1024RS	62
76162	33	99	46	C175AL	62	C6-1420RS	62
77182	33	995	46	C1CA	39	C601	63
77SN1	15	996	46	C1CA	51	C602	63
78162	33	99Z	46	C1CG	50	C603	63
8050-G	61	9GASK...	50	C205	62	C605	63
8050	61	9GK...	50	C205AL	62	C607	63
8075-G	61	AMT1006RE	21	C225	62	C608	64
8075	61	ASPB	49	C225AL	62	C609	64
8100-G	61	ASPBSS	49	C250	62	C61	55
8100	61	BDS...	35	C250AL	62	C611	63
8125-G	61	BDSR...	34	C2622	64	C613	63
8125	61	C1025	62	C2625	64	C616	63
8150-G	61	C1026	62	C2631	64	C619-1/2	63
8150	61	C1027	62	C2651	64	C619-1/4	63
8200-G	61	C1028	62	C2652	64	C619-3/4	63
8200	61	C1029	62	C2654	64	C619-3/8	63
8751*	19	C1030	62	C275	62	C619-5/8	63
88SH1-05	15	C1031	62	C275AL	62	C624-45	63
88SH2-05	15	C10ATCG	39	C2CA	39	C630-1-60	63
90	46	C10CG	50	C2CA	51	C634-75	63
900	48	C10RS	62	C2CG	50	C636-60	63
901	48	C110	62	C300	62	C640-30	63
902	48	C110AL	62	C300AL	62	C642-15	63
903	48	C1125	62	C3033	64	C649A	64
904	48	C1125AL	62	C3064	64	C65	55
905	48	C1126	62	C3064SQ	64	C655	64
906	48	C1126AL	62	C32	55	C66	55
907	48	C1127	62	C325	62	C68	55
908	48	C1127AL	62	C325AL	62	C684S	64
909	48	C1128	62	C33	55	C685S	64
90Z	46	C1128AL	62	C34	55	C686	64
91	46	C1129	62	C375	62	C6CA	39
91Z	46	C1129AL	62	C375AL	62	C6CA	51
92	46	C1130	62	C38	13	C6CG	50
92Z	46	C1130AL	62	C3CA	39	C712	63
93	46	C1131	62	C3CA	51	C714	63
93Z	46	C1131AL	62	C3CG	50	C718	63

Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
C719	63	COUP125	41	E36	52	FC150	33
C721	63	COUP150	41	E37	52	FC200	33
C723	63	COUP200	41	E38	52	FC250	33
C756	63	COUP250	41	ELB100-304SS	59	FC300	33
C7ATCG	39	COUP300	41	ELB100-316SS	59	FC38	33
C7CG	50	COUP350	41	ELB125-304SS	59	FC400	33
C7RS	62	COUP400	41	ELB125-316SS	59	FC50	33
C81	62	COUP50	41	ELB150-304SS	59	FC75	33
C81AL	62	COUP500	41	ELB150-316SS	59	FD100	51
C855S	64	COUP600	41	ELB200-304SS	59	FD50	51
C858S - 3/8	64	COUP75	41	ELB200-316SS	59	FD75	51
C859S - 1/2	64	CPL100-304SS	59	ELB50-304SS	59	FDC100	51
C860S - 5/8	64	CPL100-316SS	59	ELB50-316SS	59	FDC50	51
C872-10	64	CPL125-304SS	59	ELB75-304SS	59	FDC75	51
C872-12	64	CPL125-316SS	59	ELB75-316SS	59	FDC75	58
C872-16	64	CPL150-304SS	59	ERC22	40	FDS75	58
C872-6	64	CPL150-316SS	59	ERC23	40	FJ103	63
C872-8	64	CPL200-304SS	59	ERC24	40	FJ108	63
C8ATCG	39	CPL200-316SS	59	ESC1A	25	FS100	51
C8CG	50	CPL250-304SS	59	ESC2A	25	FS50	51
C8RS	62	CPL250-316SS	59	ESC3A	25	FS75	51
C907S	64	CPL300-304SS	59	ESC4A	25	FSC100	51
C9CG	50	CPL300-316SS	59	ESC5A	25	FSC50	51
CBR...	24	CPL400-304SS	59	ESC6A	25	FSC75	51
CF771	32	CPL400-316SS	59	ESC7A	25	FSFDCM1	51
CG100-...	36	CPL50-304SS	59	ET100	45	FSFDCM2	51
CG125-...	36	CPL50-316SS	59	ET125	45	FSFDCM3	51
CG150-...	36	CPL75-304SS	59	ET150	45	FSFDCS1	51
CG50-...	36	CPL75-316SS	59	ET200	45	FSFDCS2	51
CG75-...	36	CRSM...	25	ET250	45	FSFDCS3	51
CND100-304SS	59	CSALT-1-1/2	55	ET300	45	FSFDCS4	51
CND100-316SS	59	CSALT-1-1/4	55	ET50	45	FSM25E	12
CND125-304SS	59	CSALT-1	55	ET75	45	FSM37E	12
CND125-316SS	59	CSALT-1/2	55	EXFC-...	57	FSM50E	12
CND150-304SS	59	CSALT-2-1/2	55	F200A1BE	2	G1000B	32
CND150-316SS	59	CSALT-2	55	F200A3BE	2	G1200B	32
CND200-304SS	59	CSALT-3	55	F30A1B	2	G200B	32
CND200-316SS	59	CSALT-3/4	55	F30A1S	2	G350B	32
CND250-304SS	59	CSALT-3/8	55	F30A1SP	2	G500B	32
CND250-316SS	59	CSALT-4	55	F30A2B	2	G600B	32
CND300-304SS	59	CW...	43	F30A2S	2	G800B	32
CND300-316SS	59	D41-SN028	15	F30A2SP	2	GAM-...	30
CND400-304SS	59	DC...	34	F30A3B	2	GFM-...	30
CND400-316SS	59	DGM-...	30	F30A3S	2	GL02	12
CND50-304SS	59	DGN-...	30	F30A3SP	2	GL20	12
CND50-316SS	59	DL114P	66	F600A1B	2	GL35	12
CND75-304SS	59	DL24P-LED	66	F600A3B	2	GLA0	32
CND75-316SS	59	DL24P	66	F60A1B	2	GLA000	32
CNP100	55	DL40P-LED	66	F60A1SQ	2	GLA250	32
CNP125	55	DL40P	66	F60A2B	2	GLA4	32
CNP150	55	DL60P-LED	66	F60A2SQ	2	GPC100-...	31
CNP200	55	DL60P	66	F60A3B	2	GPC125-...	31
CNP50	55	DL90P-LED	66	F60A3SQ	2	GPC150-...	31
CNP75	55	DL90P	66	FC100	33	GPC200-...	31
COUP100	41	E35	52	FC125	33	GPC25-...	31

Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
GPC250-...	31	LL5CA	51	LR7CG	50	NP200X350	42
GPC300-...	31	LL5CG	50	LR8ATCG	39	NP200X400	42
GPC350-...	31	LL6CA	39	LR8CG	50	NP200X500	42
GPC38-...	31	LL6CA	51	LR9CG	50	NP200X600	42
GPC400-...	31	LL6CG	50	LT32	21	NP200XCL	42
GPC75-...	31	LL7ATCG	39	LT4	21	NP250X300	42
GWD25B	32	LL7CG	50	MC	13	NP250X350	42
J38	13	LL8ATCG	39	MN35-2	13	NP250X400	42
JC100-125	45	LL8CG	50	MPC3	13	NP250X500	42
JC100	45	LL9CG	50	MPC6	13	NP250X600	42
JC150-200	45	LN100	47	MS	13	NP250XCL	42
JC250-300	45	LN100AL	47	MSK35W	13	NP300X300	42
JC350-400	45	LN125	47	NCFR	65	NP300X350	42
JC50	45	LN125AL	47	NCL150	65	NP300X400	42
JC75	45	LN150	47	NCT	65	NP300X500	42
LB10ATCG	39	LN150AL	47	NFWL	65	NP300X600	42
LB10CG	50	LN200	47	NFWR	65	NP300XCL	42
LB1CA	39	LN200AL	47	NIP100X*-304SS	59	NP350X600	42
LB1CA	51	LN250	47	NIP100X*-316SS	59	NP350XCL	42
LB1CG	50	LN250AL	47	NIP125X*-304SS	59	NP400X400	42
LB2CA	39	LN300	47	NIP125X*-316SS	59	NP400X500	42
LB2CA	51	LN300AL	47	NIP150X*-304SS	59	NP400X600	42
LB2CG	50	LN350	47	NIP150X*-316SS	59	NP400XCL	42
LB3CA	39	LN350AL	47	NIP200X*-304SS	59	NP500X600	42
LB3CA	51	LN400	47	NIP200X*-316SS	59	NP500XCL	42
LB3CG	50	LN400AL	47	NIP50X*-304SS	59	NP50X150	42
LB4CA	39	LN50	47	NIP50X*-316SS	59	NP50X200	42
LB4CA	51	LN500	47	NIP75X*-304SS	59	NP50X250	42
LB4CG	50	LN500AL	47	NIP75X*-316SS	59	NP50X300	42
LB5CA	39	LN50AL	47	NP100X200	42	NP50X350	42
LB5CA	51	LN600	47	NP100X250	42	NP50X400	42
LB5CG	50	LN600AL	47	NP100X300	42	NP50X500	42
LB6CA	39	LN75	47	NP100X350	42	NP50X600	42
LB6CA	51	LN75AL	47	NP100X400	42	NP50XCL	42
LB6CG	50	LR10ATCG	39	NP100X500	42	NP600X600	42
LB7ATCG	39	LR10CG	50	NP100X600	42	NP600XCL	42
LB7CG	50	LR1CA	39	NP100XCL	42	NP75X200	42
LB8ATCG	39	LR1CA	51	NP125X200	42	NP75X250	42
LB8CG	50	LR1CG	50	NP125X250	42	NP75X300	42
LB9CG	50	LR2CA	39	NP125X300	42	NP75X350	42
LL10ATCG	39	LR2CA	51	NP125X350	42	NP75X400	42
LL10CG	50	LR2CG	50	NP125X400	42	NP75X500	42
LL1CA	39	LR3CA	39	NP125X500	42	NP75X600	42
LL1CA	51	LR3CA	51	NP125X600	42	NP75XCL	42
LL1CG	50	LR3CG	50	NP125XCL	42	NTC100	53
LL2CA	39	LR4CA	39	NP150X200	42	NTC100T	53
LL2CA	51	LR4CA	51	NP150X250	42	NTC125	53
LL2CG	50	LR4CG	50	NP150X300	42	NTC125T	53
LL3CA	39	LR5CA	39	NP150X350	42	NTC150	53
LL3CA	51	LR5CA	51	NP150X400	42	NTC150T	53
LL3CG	50	LR5CG	50	NP150X500	42	NTC200	53
LL4CA	39	LR6CA	39	NP150X600	42	NTC200T	53
LL4CA	51	LR6CA	51	NP150XCL	42	NTC250	53
LL4CG	50	LR6CG	50	NP200X250	42	NTC250T	53
LL5CA	39	LR7ATCG	39	NP200X300	42	NTC300	53

Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
NTC300T	53	PHS150	35	R6J30A3S	4	RF30A3B	2
NTC350	53	PHS200	35	R6J30A3SP	4	RF30A3S	2
NTC350T	53	PHS250	35	R6J60A1B	4	RF30A3SP	2
NTC400	53	PHS300	35	R6J60A2B	4	RF400A1B	2
NTC400T	53	PHS350	35	R6J60A3B	4	RF400A3B	2
NTC50	53	R100A1B	3	RA100	45	RF60A1B	2
NTC50T	53	R100A2B	3	RA125	45	RF60A1SQ	2
NTC75	53	R100A3B	3	RA150	45	RF60A2B	2
NTC75T	53	R200A1BE	3	RA200	45	RF60A2SQ	2
NTCC100	53	R200A3BE	3	RA250	45	RF60A3B	2
NTCC125	53	R30A1B	3	RA300	45	RF60A3SQ	2
NTCC150	53	R30A1S	3	RA350	45	S050	49
NTCC200	53	R30A1SP	3	RA400	45	S050SS	49
NTCC250	53	R30A2B	3	RA50	45	S075	49
NTCC300	53	R30A2S	3	RA75	45	S075SS	49
NTCC350	53	R30A2SP	3	RB100-50A	56	S100	49
NTCC400	53	R30A3B	3	RB100-50S	56	S100SS	49
NTCC50	53	R30A3S	3	RB100-75A	56	S1010	38
NTCC75	53	R30A3SP	3	RB100-75S	56	S1010RT	38
OSN100	42	R400A1B	3	RB125-100A	56	S1011	38
OSN125	42	R400A3B	3	RB125-100S	56	S1011RT	38
OSN50	42	R600A1B	3	RB125-50A	56	S1012	38
OSN75	42	R600A3B	3	RB125-50S	56	S1012RT	38
PAR100	45	R60A1B	3	RB125-75A	56	S1013	38
PAR125	45	R60A1SQ	3	RB125-75S	56	S1013RT	38
PAR150	45	R60A2B	3	RB150-100A	56	S1014	38
PAR200	45	R60A2SQ	3	RB150-100S	56	S1014RT	38
PAR250	45	R60A3B	3	RB150-125A	56	S1015	38
PAR300	45	R60A3SQ	3	RB150-125S	56	S1015D	38
PAR350	45	R6F100A1B	2	RB150-50A	56	S1015DRT	38
PAR400	45	R6F100A2B	2	RB150-50S	56	S1015E	38
PAR50	45	R6F100A3B	2	RB150-75A	56	S1015E1	38
PAR75	45	R6F30A1B	2	RB150-75S	56	S1015E1RT	38
PB100	47	R6F30A1S	2	RB200-100A	56	S1015ERT	38
PB125	47	R6F30A1SP	2	RB200-100S	56	S1015F	38
PB150	47	R6F30A2B	2	RB200-125A	56	S1015FRT	38
PB200	47	R6F30A2S	2	RB200-125S	56	S1015RT	38
PB250	47	R6F30A2SP	2	RB200-150A	56	S1016	38
PB300	47	R6F30A3B	2	RB200-150S	56	S1016RT	38
PB350	47	R6F30A3S	2	RB200-50A	56	S1017	38
PB400	47	R6F30A3SP	2	RB200-50S	56	S1017RT	38
PB50	47	R6F400A1B	2	RB200-75A	56	S1018	38
PB500	47	R6F400A3B	2	RB200-75S	56	S1018RT	38
PB600	47	R6F60A1B	2	RB75-50A	56	S1019	38
PB75	47	R6F60A2B	2	RB75-50S	56	S1019RT	38
PEF100	52	R6F60A3B	2	RE...	44	S1020	38
PEF125	52	R6J100A1B	4	RF100A1B	2	S1020RT	38
PEF150	52	R6J100A3B	4	RF100A2B	2	S1021	38
PEF200	52	R6J30A1B	4	RF100A3B	2	S1021D	38
PEF50	52	R6J30A1S	4	RF30A1B	2	S1021DRT	38
PEF75	52	R6J30A1SP	4	RF30A1S	2	S1021E	38
PHS050	35	R6J30A2B	4	RF30A1SP	2	S1021E1	38
PHS062	35	R6J30A2S	4	RF30A2B	2	S1021E1RT	38
PHS075	35	R6J30A2SP	4	RF30A2S	2	S1021ERT	38
PHS100	35	R6J30A3B	4	RF30A2SP	2	S1021F	38

Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
S1021FRT	38	S4065F	38	SA36A3	28	SAL6CT14	26
S1021RT	38	S4065FRT	38	SA39-2N	26	SB2-300	29
S1110	39	S4065RT	38	SA39	27	SB2-600	29
S1111	39	S4066	39	SA39A5	28	SB2-800	29
S1112	39	S4067	39	SA44-2N	26	SB3-600	29
S1112A	39	S4068	39	SA44	27	SB4-600	29
S1112B	39	S4069	39	SA44A3	28	SB4-800	29
S1112C	39	S4070	39	SA46-2N	26	SDL40P-LED	66
S1112D	39	S4071	39	SA46A3	28	SDL40P	66
S1112E	39	S4072	39	SA48-2N	26	SDL60P-LED	66
S1112E1	39	S4073	39	SA48A3	28	SDL60P	66
S1112F	39	S4074	39	SA4C	27	SG10-115RG-LED	66
S1113	39	S4075	39	SA500	29	SG10-115RG	66
S1114	39	S4A4-1000N	29	SA600-2NS	29	SG10-12RG-LED	66
S1115	39	S4A4-600N	29	SA600	29	SG10-12RG	66
S1115A	39	S80	35	SA6C	27	SG10-24RG-LED	66
S1115B	39	SA0	29	SA6S	29	SG10-24RG	66
S1115C	39	SA1000-2N	29	SA800-2N	29	SG20-115RG-LED	66
S1115D	39	SA1000	29	SA800	29	SG20-115RG	66
S1115E	39	SA1C	27	SAL1CT14	26	SG20-12RG-LED	66
S1115E1	39	SA2	29	SAL1CT38	26	SG20-12RG	66
S1115F	39	SA2/0	29	SAL1CT516	26	SG20-24RG-LED	66
S125	49	SA25-2N	26	SAL25T38	26	SG20-24RG	66
S125SS	49	SA25	27	SAL25T516	26	SG30-115RG-LED	66
S150	49	SA250	29	SAL26-2N	26	SG30-115RG	66
S150SS	49	SA26-2N	26	SAL26T12	26	SG30-12RG-LED	66
S200	49	SA26	27	SAL26T38	26	SG30-12RG	66
S200SS	49	SA26A3	28	SAL27-2N	26	SG30-24RG-LED	66
S250	49	SA27-2N	26	SAL27T12	26	SG30-24RG	66
S300	49	SA27	27	SAL27T38	26	SLT25-45ALT	54
S350	49	SA27A5	28	SAL28-2N	26	SLT25-45T	54
S3A4-1000N	29	SA28-2N	26	SAL28T12	26	SLT25ALT	54
S3A4-250N	29	SA28	27	SAL28T38	26	SLT25T	54
S3A4-350N	29	SA28A5	28	SAL29-2N	26	SLT27ALT	54
S3A4-600N	29	SA29-2N	26	SAL29T12	26	SLT27T	54
S3A4-800N	29	SA29	27	SAL2CT14	26	SLT28ALT	54
S40	35	SA29A3	28	SAL2CT38	26	SLT28T	54
S400	49	SA2C	27	SAL2CT516	26	SLT29ALT	54
S4060	38	SA30-2N	26	SAL30-2N	26	SLT29T	54
S4060RT	38	SA30	27	SAL30T12	26	SLT30ALT	54
S4061	38	SA300	29	SAL31-2N	26	SLT30T	54
S4061RT	38	SA30A3	28	SAL31T12	26	SLT31ALT	54
S4062	38	SA31-2N	26	SAL32-2N	26	SLT31T	54
S4062RT	38	SA31	27	SAL32T58	26	SLT32ALT	54
S4063	38	SA31A3	28	SAL34-2N	26	SLT32T	54
S4063RT	38	SA32-2N	26	SAL34T58	26	SLT33ALT	54
S4064	38	SA32	27	SAL36-2N	26	SLT33T	54
S4064RT	38	SA32A3	28	SAL36T58	26	SLT34ALT	54
S4065	38	SA34-2N	26	SAL39-2N	26	SLT34T	54
S4065D	38	SA34	27	SAL39T58	26	SLT35-45ALT	54
S4065DRT	38	SA34A3	28	SAL44-2N	26	SLT35-45T	54
S4065E	38	SA350-2NS	29	SAL44T58	26	SLT35ALT	54
S4065E1	38	SA350	29	SAL4CT14	26	SLT35T	54
S4065E1RT	38	SA36-2N	26	SAL4CT38	26	SLT36-45ALT	54
S4065ERT	38	SA36	27	SAL4CT516	26	SLT36-45T	54

Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
SLT36ALT	54	SS1C	27	SWEEP125-45	41	T4CG	50
SLT36T	54	SS25	27	SWEEP125-45EMT	41	T5CA	39
SLT37-45ALT	54	SS26	27	SWEEP125	41	T5CA	51
SLT37-45T	54	SS26A1	28	SWEEP125EMT	41	T5CG	50
SLT37ALT	54	SS27	27	SWEEP150-45	41	T6CA	39
SLT37T	54	SS27A1	28	SWEEP150-45EMT	41	T6CA	51
SLT38-45ALT	54	SS28	27	SWEEP150	41	T6CG	50
SLT38-45T	54	SS28A1	28	SWEEP150EMT	41	T7CG	50
SLT38ALT	54	SS29	27	SWEEP200-45	41	T8CG	50
SLT38T	54	SS29A1	28	SWEEP200-45EMT	41	T91-D	17
SLT39-45ALT	54	SS2C	27	SWEEP200	41	T91-S	17
SLT39-45T	54	SS30	27	SWEEP200EMT	41	T91-SC3	17
SLT39ALT	54	SS30A1	28	SWEEP250-45	41	T91-SC36	17
SLT39T	54	SS31	27	SWEEP250-45EMT	41	T9CG	50
SLT40-45ALT	54	SS31A1	28	SWEEP250	41	TB1CG	50
SLT40-45T	54	SS32	27	SWEEP250EMT	41	TB2CG	50
SLT40ALT	54	SS32A1	28	SWEEP300-45	41	TB3CG	50
SLT40T	54	SS34	27	SWEEP300-45EMT	41	TB4CG	50
SLT47ALT	54	SS34A1	28	SWEEP300	41	TB5CG	50
SLT47T	54	SS36	27	SWEEP300EMT	41	TB6CG	50
SLT60ALT	54	SS36A1	28	SWEEP350-45	41	TPC100	61
SLT60T	54	SS39	27	SWEEP350-45EMT	41	TPC75	61
SLT61ALT	54	SS39A1	28	SWEEP350	41	TS14-4-3	24
SLT61T	54	SS44	27	SWEEP350EMT	41	TS14-4-4	24
SLT62ALT	54	SS44A1	28	SWEEP400-45	41	TS2-3/0-3	24
SLT62T	54	SS46A1	28	SWEEP400-45EMT	41	TS2-3/0-4	24
SLT63ALT	54	SS48A1	28	SWEEP400	41	TS4/0-400-3	24
SLT63T	54	SS4C	27	SWEEP400EMT	41	TS4/0-400-4	24
SLT65-45ALT	54	SS50	49	SWEEP50-45	41	TS5-3-2/0-3	24
SLT65-45T	54	SS52	49	SWEEP50-45EMT	41	TS5-3/0-400-3	24
SLT65ALT	54	SS54	49	SWEEP50	41	TS5-500-1000-3	24
SLT65T	54	SS56	49	SWEEP500-45	41	TS500-1000-3	24
SLT66-45ALT	54	SS58	49	SWEEP500	41	TS500-1000-4	24
SLT66-45T	54	SS60	49	SWEEP50EMT	41	TWH...	53
SLT66ALT	54	SS62	49	SWEEP600-45	41	TWHA...	53
SLT66T	54	SS64	49	SWEEP600	41	TWIN-632-S	18
SLT67-45ALT	54	SS66	49	SWEEP75-45	41	TWIN-635-S	18
SLT67-45T	54	SS68	49	SWEEP75-45EMT	41	TWIN T91-S	17
SLT67ALT	54	SS6C	27	SWEEP75	41	TWIN88SH1-05	15
SLT67T	54	SSL...	27	SWEEP75EMT	41	TWIN88SH2-05	15
SLT68-45ALT	54	SU0	29	SWV-4R	52	UF100A	56
SLT68-45T	54	SU1000-2NS	29	SWV-4S	52	UF100S	56
SLT68ALT	54	SU1000	29	SYP...	28	UF50A	56
SLT68T	54	SU2/0	29	T10CG	50	UF50S	56
SPSR...	35	SU250	29	T1CA	39	UF75A	56
SR100	47	SU350-2N	29	T1CA	51	UF75S	56
SR125	47	SU350	29	T1CG	50	UM100A	56
SR150	47	SU600-2NS	29	T2CA	39	UM100S	56
SR200	47	SU600	29	T2CA	51	UM50A	56
SR250	47	SU800-2NS	29	T2CG	50	UM50S	56
SR300	47	SU800	29	T3CA	39	UM75A	56
SR350	47	SWEEP100-45	41	T3CA	51	UM75S	56
SR400	47	SWEEP100-45EMT	41	T3CG	50	WCSM...	24
SR50	47	SWEEP100	41	T4CA	39	WCSS...	24
SR75	47	SWEEP100EMT	41	T4CA	51		

WWW.SUMMIT-ELECTRIC.COM



3333 Devon Drive, Windsor ON N8X 4L5
Toll Free: 1-800-265-4822
Tel: 519-250-8820 . Fax: 519-250-8389
sales@summit-electric.com
www.summit-electric.com