

HUNTERSVILLE, NORTH CAROLINA USA



— EFFECTIVE JUNE 1, 2004 —

Miniterms

SWITCHES & DATACOM

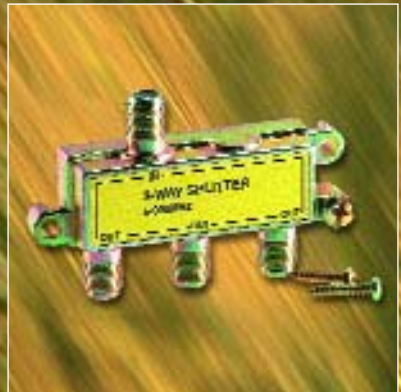
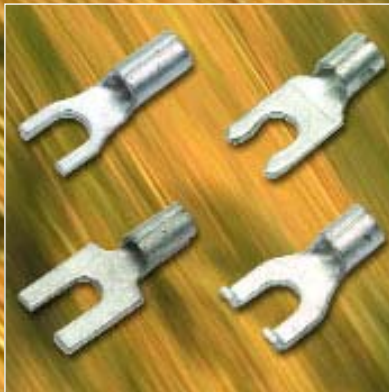


Table of Contents

MINITERMS

Uninsulated Ring Terminals	1
Butt Connectors & Specialty Parts	1
Uninsulated Spade Terminals & Disconnects	2
Vinyl-Insulated Terminals	3
Nylon-Insulated Ring Terminals	3
Vinyl-Insulated & Nylon-Insulated Spade Terminals	4
Insulated Disconnects	5
Insulated Butt Connectors & Specialty Parts	6
High Temperature Ring Terminals	7
High Temperature Specialty Parts	7
Terminal Kits	7
Merchandising Display Packs (Small Packs)	8
Merchandising Display Packs (Standard Packs)	9
Miniterm Kits	10
Alligator Test Clips	10

SWITCHES

Pushbuttons & Pull Chains	11
Toggle Switches – Maintained Contact & Single Pole	12
Toggle Switches – Maintained & Momentary Contact	13
Rocker, Rotary & Miscellaneous Switches	14

INDICATOR LIGHTS

Snap-In Rectangular Indicator Lights	15
Round Indicator Lights	16
Pilot Light & Emergency Stop Button	17

COAX ACCESSORIES

“F” connectors & Splitters	18
Coax & Telephone Accessories	
“F” Type & Combination Wall Plates	19

TELEPHONE ACCESSORIES

Telephone Accessories	19
Telephone Wall Plates	20

THE FINE PRINT

Alphanumeric Index	17
How to Reach Us	17
Terms and Conditions	17



UNINSULATED RING TERMINALS



Other sizes and styles available. Please contact NSi for price and delivery on your requirements. Rated 600 volts, 175°C.

CAT. NO.	NAED NO.	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.	NET PER 100	
							1 TO 9 CTN.	10+ CTN.
R22-6	07200	22-18	6	.614	.315	100	15.60	12.05
R22-8	07201	22-18	8	.614	.315	100	15.60	12.05
R22-10	07202	22-18	10	.614	.315	100	15.60	12.05
R22-14	07203	22-18	1/4	.795	.472	100	19.60	15.20
R22-56	07204	22-18	5/16	.795	.472	100	19.60	15.20
R22-38	07205	22-18	3/8	.984	.650	100	31.35	24.15
R16-6	07206	16-14	6	.500	.256	100	17.50	13.40
R16-8	07207	16-14	8	.630	.315	100	17.50	13.40
R16-10	07208	16-14	10	.630	.315	100	17.50	13.40
R16-14	07209	16-14	1/4	.846	.472	100	24.25	18.60
R16-56	07210	16-14	5/16	.846	.472	100	24.25	18.60
R16-38	07211	16-14	3/8	.965	.590	50	28.50	22.00
R16-50	07212	16-14	1/2	1.122	.748	50	35.70	27.80
R12-6	07213	12-10	6	.768	.374	50	28.50	22.00
R12-8	07214	12-10	8	.768	.374	50	28.50	22.00

CAT. NO.	NAED NO.	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.	NET PER 100	
							1 TO 9 CTN.	10+ CTN.
R12-10	07215	12-10	10	.768	.374	50	28.50	22.00
R12-14	07216	12-10	1/4	.906	.472	50	31.35	24.15
R12-56	07217	12-10	5/16	1.102	.591	40	39.50	30.50
R12-38	07218	12-10	3/8	1.102	.591	40	39.50	30.50
R12-50	07219	12-10	1/2	1.280	.756	40	44.90	34.95
R8-10	07220	8	10	.925	.472	25	52.45	40.25
R8-14	07221	8	1/4	.925	.472	25	52.45	40.25
R8-56	07222	8	5/16	1.161	.591	25	63.25	48.40
R8-38	07223	8	3/8	1.161	.591	25	63.25	48.40
R6-14	07224	6	1/4	1.083	.472	15	130.90	112.70
R6-56	07225	6	5/16	1.280	.630	15	157.00	120.60
R6-38	07226	6	3/8	1.280	.630	15	157.00	120.60
R6-50	07227	6	1/2	1.626	.866	15	174.60	134.30
R4-14	07228	4	1/4	1.311	.649	15	224.50	172.70
R4-56	07229	4	5/16	1.311	.649	15	224.50	172.70
R4-38	07230	4	3/8	1.429	.689	15	224.50	172.70
R4-50	07231	4	1/2	1.665	.866	15	224.50	172.70
R2-14	07232	2	1/4	1.535	.602	10	261.85	201.45
R2-56	07233	2	5/16	1.535	.602	10	261.85	201.45
R2-38	07234	2	3/8	1.535	.602	10	261.85	201.45
R2-50	07235	2	1/2	1.665	.866	10	313.75	241.40




UNINSULATED BUTT CONNECTORS



CAT. NO.	NAED NO.	WIRE SIZE	TAB SIZE	CTN. QTY.	NET PER 100	
					1 TO 9 CTN.	10+ CTN.
B22	07950	22-18	.591	100	15.60	12.10
B16	07951	16-14	.591	50	19.60	15.20
B12	07952	12-10	.591	50	22.45	17.25
B8	07953	8	.827	25	78.50	60.30

SPECIALTY PARTS See page 7 for high temperature specialty parts.

CAT. NO.	NAED NO.	DESCRIPTION	QTY.	NET PER 100	
				1 TO 9 CTN.	10+ CTN.
	250-3MFM 08050	.250 x .032 male/female adapter	100	24.15	18.65
	250-3-Z 08052	.250 x .032 male/female adapter	100	31.30	24.15
	FCT12-250-3 07919	.250 x .032 12-8 AWG compresor terminal	50	29.40	23.90

CAT. NO.	NAED NO.	DESCRIPTION	QTY.	NET PER 100	
				1 TO 9 CTN.	10+ CTN.
	DMT-250-3 08053	.250 x .032 male/female adapter	100	25.10	20.35
	SF16-187-2 08100	.187 x .020 16 AWG female flag	100	19.60	15.20
	SF16-250-3 08101	.250 x .032 16 AWG female flag	100	19.60	15.20
	SF12-250-3 08102	.250 x .032 12 AWG female flag	100	34.20	27.25

UNINSULATED SPADE TERMINALS



Locking Spade
Suffix "L"



Block Spade
Suffix "B"



Flange Spade
Suffix "F"

CAT. NO.	NAED NO.	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.	NET PER 100	
							1-9 CTN.	10+ CTN.
S22-4	07400	22-18	4	.630	.228	100	15.60	12.05
S22-6	07401	22-18	6	.630	.224	100	15.60	12.05
S22-6-L	07451	22-18	6	.551	.252	100	15.60	12.05
S22-6-B	07501	22-18	6	.630	.244	100	15.60	12.05
S22-6-F	07551	22-18	6	.531	.303	100	15.60	12.05
S22-8	07402	22-18	8	.646	.276	100	15.60	12.05
S22-8-L	07452	22-18	8	.630	.280	100	15.60	12.05
S22-8-B	07502	22-18	8	.551	.303	100	15.60	12.05
S22-8-F	07552	22-18	8	.551	.303	100	15.60	12.05
S22-10	07403	22-18	10	.689	.378	100	17.50	13.40
S22-10-L	07453	22-18	10	.669	.331	100	17.50	13.40
S22-10-B	07503	22-18	10	.551	.303	100	17.50	13.40
S22-10-F	07553	22-18	10	.551	.303	100	17.50	13.40
S22-14	07404	22-18	1/4	.787	.433	100	19.60	15.20
S16-6	07405	16-14	6	.622	.252	100	18.50	14.20
S16-6-L	07455	16-14	6	.551	.252	100	18.50	14.20
S16-6-B	07505	16-14	6	.551	.303	100	18.50	14.20
S16-6-F	07555	16-14	6	.551	.303	100	18.50	14.20
S16-8	07406	16-14	8	.630	.315	100	18.50	14.20
S16-8-L	07456	16-14	8	.630	.280	100	18.50	14.20
S16-8-B	07506	16-14	8	.551	.303	100	18.50	14.20
S16-8-F	07556	16-14	8	.551	.303	100	18.50	14.20
S16-10	07407	16-14	10	.630	.315	100	19.60	15.20
S16-10-L	07457	16-14	10	.669	.331	100	19.60	15.20
S16-10-B	07507	16-14	10	.551	.303	100	19.60	15.20
S16-10-F	07557	16-14	10	.551	.303	100	19.60	15.20
S16-14	07408	16-14	1/4	.787	.472	100	24.20	18.60
S12-6	07409	12-10	6	.717	.354	50	31.35	24.15
S12-6-L	07459	12-10	6	.717	.311	50	31.35	24.15
S12-8	07410	12-10	8	.717	.354	50	31.35	24.15
S12-8-L	07460	12-10	8	.717	.311	50	31.35	24.15
S12-10	07411	12-10	10	.717	.354	50	31.35	24.15
S12-10-L	07461	12-10	10	.717	.311	50	31.35	24.15
S12-14	07412	12-10	1/4	.992	.354	50	39.50	30.50
S8-10	07830	8	10	.945	.472	25	62.50	48.25
S8-14	07831	8	1/4	.945	.472	25	62.50	48.25

Rated 600 volts, 175°C. Other sizes and styles available.
Please contact NSi for price and delivery on your requirements.

UNINSULATED FEMALE DISCONNECTS



CATALOG NO.	NAED NO.	WIRE SIZE	TAB SIZE	CTN. QTY.	NET PER 100	
					1-9 CTN.	10+ CTN.
F22-110-2	06900	22-18	.110 x .020	100	15.60	12.05
F22-110-3	06901	22-18	.110 x .032	100	15.60	12.05
F22-187-2	06902	22-18	.187 x .020	100	15.60	12.05
F22-187-3	06903	22-18	.187 x .032	100	15.60	12.05
F22-250-3	06904	22-18	.250 x .032	100	15.60	12.05
F16-110-2	06905	16-14	.110 x .020	100	15.60	12.05
F16-110-3	06906	16-14	.110 x .032	100	15.60	12.05
F16-187-2	06907	16-14	.187 x .020	100	15.60	12.05
F16-187-3	06908	16-14	.187 x .032	100	15.60	12.05
F16-250-3	06909	16-14	.250 x .032	100	15.60	12.05
F12-250-3	06910	12-10	.250 x .032	50	19.60	15.20

UNINSULATED MALE DISCONNECTS

CAT. NO.	NAED NO.	WIRE SIZE	TAB SIZE	CTN. QTY.	NET PER 100	
					1-9 CTN.	10+ CTN.
M22-250-3	06911	22-18	.250 x .032	100	15.60	12.05
M16-187-2	06912	16-14	.187 x .020	100	15.60	12.05
M16-250-3	06913	16-14	.250 x .032	100	15.60	12.05
M12-250-3	06914	12-10	.250 x .032	50	17.50	13.40



FEMALE PLUGS .157 DIA.

CAT. NO.	NAED NO.	WIRE SIZE	LENGTH	CTN. QTY.	NET PER 100	
					1-9 CTN.	10+ CTN.
PF22-157	08000	22-18	.630	100	15.60	12.05
PF16-157	08001	16-14	.630	100	15.60	12.05
PF16-197	08002	16-14	.630	100	19.60	15.20



MALE PLUGS .157 DIA.

CAT. NO.	NAED NO.	WIRE SIZE	LENGTH	CTN. QTY.	NET PER 100	
					1-9 CTN.	10+ CTN.
PM22-157	08030	22-18	0.689	100	15.60	12.05
PM16-157	08031	16-14	0.689	100	15.60	12.05
PM16-197	08032	16-14	0.689	100	19.60	15.20



PIGGYBACKS

CAT. NO.	NAED NO.	WIRE SIZE	LENGTH	CTN. QTY.	NET PER 100	
					1-9 CTN.	10+ CTN.
P22-250-3	07930	22-18	.650	50	22.45	17.25
P16-250-3	07931	16-14	.650	50	22.45	17.25



VINYL-INSULATED RING TERMINALS



CATALOG NO.	NAED NO.	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.	NET PER 100	
							1-9 CTN.	10+ CTN.
R22-6V	06000	22-18	6	.831	.315	100	25.30	19.35
R22-8V	06001	22-18	8	.827	.315	100	25.30	19.35
R22-10V	06002	22-18	10	.827	.315	100	25.30	19.35
R22-14V	06003	22-18	1/4	1.008	.472	100	31.60	24.30
R22-56V	06004	22-18	5/16	1.028	.472	100	31.60	24.30
R22-38V	06005	22-18	3/8	1.217	.650	100	42.10	32.40
R16-6V	06006	16-14	6	.717	.256	100	28.05	21.55
R16-8V	06007	16-14	8	.846	.315	100	28.05	21.55
R16-10V	06008	16-14	10	.846	.315	100	28.05	21.55
R16-14V	06009	16-14	1/4	1.059	.472	100	33.65	25.90
R16-56V	06010	16-14	5/16	1.059	.472	100	33.65	25.90
R16-38V	06011	16-14	3/8	1.161	.590	50	42.10	32.40
R16-50V	06012	16-14	1/2	1.335	.748	50	50.50	38.90
R12-6V	06013	12-10	6	1.063	.374	50	42.10	32.40
R12-8V	06014	12-10	8	1.063	.374	50	42.10	32.40
R12-10V	06015	12-10	10	1.063	.374	50	42.10	32.40
R12-14V	06016	12-10	1/4	1.201	.472	50	50.50	38.90
R12-56V	06017	12-10	5/16	1.396	.591	40	50.50	38.90
R12-38V	06018	12-10	3/8	1.396	.591	40	56.20	43.20
R12-50V	06019	12-10	1/2	1.575	.756	40	63.15	48.60

NYLON-INSULATED RING TERMINALS



CATALOG NO.	NAED NO.	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.	NET PER 100	
							1-9 CTN.	10+ CTN.
R22-6N	07300	22-18	6	.831	.315	100	39.60	30.50
R22-8N	07301	22-18	8	.827	.315	100	39.60	30.50
R22-10N	07302	22-18	10	.827	.315	100	39.60	30.50
R22-14N	07303	22-18	1/4	1.008	.472	100	49.55	38.10
R22-56N	07304	22-18	5/16	1.025	.472	100	49.55	38.10
R22-38N	07305	22-18	3/8	1.217	.650	100	60.90	46.90
R16-6N	07306	16-14	6	.717	.256	100	60.90	46.90
R16-8N	07307	16-14	8	.846	.315	100	46.55	35.90
R16-10N	07308	16-14	10	.846	.315	100	46.55	35.90
R16-14N	07309	16-14	1/4	1.059	.472	100	52.25	40.65
R16-56N	07310	16-14	5/16	1.059	.472	100	52.25	40.65
R16-38N	07311	16-14	3/8	1.161	.590	50	60.90	46.90
R16-50N	07312	16-14	1/2	1.335	.748	50	60.90	46.90
R12-6N	07313	12-10	6	1.063	.374	50	71.95	55.35
R12-8N	07314	12-10	8	1.063	.374	50	71.95	55.35
R12-10N	07315	12-10	10	1.063	.374	50	71.95	55.35
R12-14N	07316	12-10	1/4	1.201	.472	50	71.95	55.35
R12-56N	07317	12-10	5/16	1.398	.591	40	79.15	60.85
R12-38N	07318	12-10	3/8	1.398	.591	40	79.15	60.85
R12-50N	07319	12-10	1/2	1.575	.756	40	88.00	67.65
R8-10N	07320	8	10	1.244	.472	25	113.15	87.10
R8-14N	07321	8	1/4	1.244	.472	25	113.15	87.10
R8-56N	07322	8	5/16	1.480	.591	25	131.90	101.50
R8-38N	07323	8	3/8	1.480	.591	25	131.90	101.50
R6-14N	07324	6	1/4	1.535	.472	15	219.85	169.10
R6-56N	07325	6	5/16	1.732	.630	15	219.85	169.10
R6-38N	07326	6	3/8	1.732	.630	15	219.85	169.10
R6-50N	07327	6	1/2	2.028	.866	15	219.85	169.10
R4-14N	07328	4	1/4	1.803	.649	15	300.55	231.20
R4-56N	07329	4	5/16	1.803	.649	15	300.55	231.20
R4-38N	07330	4	3/8	1.921	.689	15	300.55	231.20
R4-50N	07331	4	1/2	2.157	.866	15	300.55	231.20
R2-14N	07332	2	1/4	2.086	.602	10	329.90	253.70
R2-56N	07333	2	5/16	2.086	.602	10	329.90	253.70
R2-38N	07334	2	3/8	2.086	.602	10	329.90	253.70
R2-50N	07335	2	1/2	2.216	.866	10	380.70	304.50

Rated 600 volts, -40°C to 105°C.

VINYL-INSULATED SPADE TERMINALS



Locking Spade
Suffix "L"



Block Spade
Suffix "B"



Flange Spade
Suffix "F"

CATALOG NO.	NAED NO.	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.	NET PER 100	
							1-9 CTN.	10+ CTN.
S22-4V	06200	22-18	4	.846	.228	100	25.30	19.35
S22-6V	06201	22-18	6	.896	.224	100	25.30	19.35
S22-6V-L	06301	22-18	6	.768	.252	100	25.30	19.35
S22-6V-B	06601	22-18	6	.846	.244	100	25.30	19.35
S22-6V-F	06451	22-18	6	.768	.303	100	25.30	19.35
S22-8V	06202	22-18	8	.862	.276	100	25.30	19.35
S22-8V-L	06302	22-18	8	.847	.280	100	25.30	19.35
S22-8V-B	06602	22-18	8	.768	.303	100	25.30	19.35
S22-8V-F	06452	22-18	8	.768	.303	100	25.30	19.35
S22-10V	06203	22-18	10	.906	.378	100	25.30	19.35
S22-10V-L	06303	22-18	10	.885	.331	100	25.30	19.35
S22-10V-B	06603	22-18	10	.768	.303	100	25.30	19.35
S22-10V-F	06453	22-18	10	.768	.303	100	25.30	19.35
S22-14V	06204	22-18	1/4	1.004	.433	100	29.65	22.85
S16-6V	06205	16-14	6	.839	.252	100	29.65	22.85
S16-6V-L	06305	16-14	6	.768	.252	100	29.65	22.85
S16-6V-B	06605	16-14	6	.768	.303	100	29.65	22.85
S16-6V-F	06455	16-14	6	.768	.303	100	29.65	22.85
S16-8V	06206	16-14	8	.846	.315	100	29.65	22.85
S16-8V-L	06306	16-14	8	.846	.280	100	29.65	22.85
S16-8V-B	06606	16-14	8	.768	.303	100	29.65	22.85
S16-8V-F	06456	16-14	8	.768	.303	100	29.65	22.85
S16-10V	06207	16-14	10	.846	.315	100	29.65	22.85
S16-10V-L	06307	16-14	10	.855	.331	100	29.65	22.85
S16-10V-B	06607	16-14	10	.768	.303	100	29.65	22.85
S16-10V-F	06457	16-14	10	.768	.303	100	31.65	24.30
S16-14V	06208	16-14	1/4	1.004	.472	100	42.15	32.40
S12-6V	06209	12-10	6	1.012	.354	50	42.15	32.40
S12-6V-L	06309	12-10	6	1.012	.311	50	42.15	32.40
S12-8V	06210	12-10	8	1.012	.354	50	42.15	32.40
S12-8V-L	06310	12-10	8	1.012	.311	50	42.15	32.40
S12-10V	06211	12-10	10	1.012	.354	50	42.15	32.40
S12-10V-L	06311	12-10	10	1.012	.311	50	42.15	32.40
S12-14V	06212	12-10	1/4	1.287	.354	50	49.85	38.80

NYLON-INSULATED SPADE TERMINALS




Rated 600 volts, -40°C to 105°C. Other sizes and styles available. Please contact NSi for price and delivery on your requirements.

CATALOG NO.	NAED NO.	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.	NET PER 100	
							1-9 CTN.	10+ CTN.
S22-4N	07600	22-18	4	.846	.228	100	43.95	33.80
S22-6N	07601	22-18	6	.896	.224	100	43.95	33.80
S22-6N-L	07651	22-18	6	.768	.252	100	43.95	33.80
S22-6N-B	07771	22-18	6	.846	.244	100	43.95	33.80
S22-6N-F	07801	22-18	6	.768	.303	100	43.95	33.80
S22-8N	07602	22-18	8	.862	.276	100	43.95	33.80
S22-8N-L	07652	22-18	8	.847	.280	100	43.95	33.80
S22-8N-B	07772	22-18	8	.768	.303	100	43.95	33.80
S22-8N-F	07802	22-18	8	.768	.303	100	43.95	33.80
S22-10N	07603	22-18	10	.906	.378	100	46.55	35.90
S22-10N-L	07653	22-18	10	.885	.331	100	46.55	35.90
S22-10N-B	07773	22-18	10	.768	.303	100	46.55	35.90
S22-10N-F	07803	22-18	10	.768	.303	100	46.55	35.90
S22-14N	07604	22-18	1/4	1.004	.433	100	49.55	38.10
S16-6N	07605	16-14	6	.839	.252	100	49.55	38.10
S16-6N-L	07655	16-14	6	.768	.252	100	49.55	38.10
S16-6N-B	07775	16-14	6	.768	.303	100	49.55	38.10
S16-6N-F	07805	16-14	6	.768	.303	100	49.55	38.10
S16-8N	07606	16-14	8	.846	.315	100	49.55	38.10
S16-8N-L	07656	16-14	8	.846	.280	100	49.55	38.10
S16-8N-B	07776	16-14	8	.768	.303	100	49.55	38.10
S16-8N-F	07806	16-14	8	.768	.303	100	49.55	38.10
S16-10N	07607	16-14	10	.846	.315	100	49.55	38.10
S16-10N-L	07657	16-14	10	.855	.331	100	49.55	38.10
S16-10N-B	07777	16-14	10	.768	.303	100	49.55	38.10
S16-10N-F	07807	16-14	10	.768	.303	100	49.55	38.10
S16-14N	07608	16-14	1/4	1.004	.472	100	52.70	40.65
S12-6N	07609	12-10	6	1.012	.354	50	71.95	55.30
S12-6N-L	07659	12-10	6	1.012	.311	50	71.95	55.30
S12-8N	07610	12-10	8	1.012	.354	50	71.95	55.30
S12-8N-L	07660	12-10	8	1.012	.311	50	71.95	55.30
S12-10N	07611	12-10	10	1.012	.354	50	71.95	55.30
S12-10N-L	07661	12-10	10	1.012	.311	50	71.95	55.30
S12-14N	07612	12-10	1/4	1.287	.354	50	79.10	60.90
S8-10N	07832	8	10	1.264	.472	25	133.00	102.40
S8-14N	07833	8	1/4	1.264	.472	25	133.00	102.40


VINYL-INSULATED FEMALE

CAT. NO.	NAED NO.	WIRE SIZE	TAB SIZE	NET PER 100		
				CTN. QTY.	1-9 CTN.	10+ CTN.
 F22-110-2V	06950	22-18	.110 x .020	100	25.30	19.35
F22-110-3V	06951	22-18	.110 x .032	100	25.30	19.35
F22-187-2V	06952	22-18	.187 x .020	100	25.30	19.35
F22-187-3V	06953	22-18	.187 x .032	100	25.30	19.35
F22-250-3V	06954	22-18	.250 x .032	100	25.30	19.35
F16-110-2V	06955	16-14	.110 x .020	100	25.30	19.35
F16-110-3V	06956	16-14	.110 x .032	100	25.30	19.35
F16-187-2V	06957	16-14	.187 x .020	100	25.30	19.35
F16-187-3V	06958	16-14	.187 x .032	100	25.30	19.35
F16-250-3V	06959	16-14	.250 x .032	100	25.30	19.35
F12-250-3V	06960	12-10	.250 x .032	50	36.10	27.80


VINYL-INSULATED MALE

CAT. NO.	NAED NO.	WIRE SIZE	TAB SIZE	NET PER 100		
				CTN. QTY.	1-9 CTN.	10+ CTN.
 M22-250-3V	06961	22-18	.250 x .032	100	25.30	19.35
M16-187-2V	06962	16-14	.187 x .020	100	25.30	19.35
M16-250-3V	06963	16-14	.250 x .032	100	25.30	19.35
M12-250-3V	06964	12-10	.250 x .032	50	36.10	27.80


FULLY NYLON-INSULATED FEMALE

CAT. NO.	NAED NO.	WIRE SIZE	TAB SIZE	NET PER 100		
				CTN. QTY.	1-9 CTN.	10+ CTN.
 IF22-110-2N	07900	22-18	.110 x .020	50	29.70	22.90
IF22-110-3N	07901	22-18	.110 x .032	50	29.70	22.90
IF22-187-2N	07902	22-18	.187 x .020	50	29.70	22.90
IF22-187-3N	07903	22-18	.187 x .032	50	29.70	22.90
IF22-250-3N	07904	22-18	.250 x .032	50	29.70	22.90
IF16-187-2N	07905	16-14	.187 x .020	50	29.70	22.90
IF16-187-3N	07906	16-14	.187 x .032	50	29.70	22.90
IF16-250-3N	07907	16-14	.250 x .032	50	29.70	22.90

FULLY NYLON-INSULATED MALE

CAT. NO.	NAED NO.	WIRE SIZE	TAB SIZE	NET PER 100		
				CTN. QTY.	1-9 CTN.	10+ CTN.
 IM22-250-3N	07908	22-18	.250 x .032	50	31.30	24.15
IM16-250-3N	07909	16-14	.250 x .032	50	31.30	24.15
IM12-250-3N	07910	12-10	.250 x .032	50	52.95	42.40


NYLON-INSULATED FLAG TERMINAL

CAT. NO.	NAED NO.	WIRE SIZE	TAB SIZE	NET PER 100		
				CTN. QTY.	1-9 CTN.	10+ CTN.
 IFL12-250-3N	07912	12-10	.250 x .032	50	48.15	36.50


NYLON-INSULATED FEMALE

CAT. NO.	NAED NO.	WIRE SIZE	TAB SIZE	NET PER 100		
				CTN. QTY.	1-9 CTN.	10+ CTN.
 F22-110-2N	07100	22-18	.110 x .020	100	39.60	30.50
F22-110-3N	07101	22-18	.110 x .032	100	39.60	30.50
F22-187-2N	07102	22-18	.187 x .020	100	39.60	30.50
F22-187-3N	07103	22-18	.187 x .032	100	39.60	30.50
F22-250-3N	07104	22-18	.250 x .032	100	39.60	30.50
F16-110-2N	07105	16-14	.110 x .020	100	39.60	30.50
F16-110-3N	07106	16-14	.110 x .032	100	39.60	30.50
F16-187-2N	07107	16-14	.187 x .020	100	39.60	30.50
F16-187-3N	07108	16-14	.187 x .032	100	39.60	30.50
F16-250-3N	70109	16-14	.250 x .032	100	39.60	30.50
F12-250-3N	07110	12-10	.250 x .032	50	56.50	43.50


NYLON-INSULATED MALE

CAT. NO.	NAED NO.	WIRE SIZE	TAB SIZE	NET PER 100		
				CTN. QTY.	1-9 CTN.	10+ CTN.
 M22-250-3N	07111	22-18	.250 x .032	100	39.60	30.50
M16-187-2N	07112	16-14	.187 x .020	100	39.60	30.50
M16-250-3N	07113	16-14	.250 x .032	100	39.60	30.50
M12-250-3N	07114	12-10	.250 x .032	50	56.50	43.50


FULLY NYLON-INS. FEMALE - SLEEVED BARREL

CAT. NO.	NAED NO.	WIRE SIZE	TAB SIZE	NET PER 100		
				CTN. QTY.	1-9 CTN.	10+ CTN.
 IFS22-110-2N	07920	22-18	.110 x .020	50	52.45	40.25
IFS22-110-3N	07921	22-18	.110 x .032	50	52.45	40.25
IFS22-250-3N	07922	22-18	.250 x .032	50	52.45	40.25
IFS16-250-3N	07923	16-14	.250 x .032	50	52.45	40.25
IFS12-250-3N	07924	12-10	.250 x .032	50	62.90	48.20

VINYL-INSULATED PIGGYBACK

CAT. NO.	NAED NO.	WIRE SIZE	TAB SIZE	NET PER 100		
				CTN. QTY.	1-9 CTN.	10+ CTN.
 P22-250-3V	07935	22-18	.250 x .032	50	36.80	28.30
P16-250-3V	07936	16-14	.250 x .032	50	36.80	28.30

NYLON-INSULATED PIGGYBACK

CAT. NO.	NAED NO.	WIRE SIZE	TAB SIZE	NET PER 100		
				CTN. QTY.	1-9 CTN.	10+ CTN.
 P22-250-3N	07940	22-18	.250 x .032	50	52.70	40.60
P16-250-3N	07941	16-14	.250 x .032	50	52.70	40.60

Rated 600 volts, -40°C to 105°C. Other sizes and styles available. Please contact NSi for price and delivery on your requirements.

VINYL BUTT CONNECTORS

CAT. NO.	NAED NO.	WIRE SIZE	LENGTH	CTN. QTY.	NET PER 100	
					1-9 CTN.	10+ CTN.
B22-V	06750	22-18	1.004	100	19.55	15.05
B16-V	06751	16-14	1.004	50	22.50	17.40
B12-V	06752	12-10	1.063	50	33.05	25.45
B8-V	06753	8	1.450	25	120.60	92.75



NYLON BUTT CONNECTORS

CAT. NO.	NAED NO.	WIRE SIZE	LENGTH	CTN. QTY.	NET PER 100	
					1-9 CTN.	10+ CTN.
B22-N	07960	22-18	1.004	100	30.15	23.20
B16-N	07961	16-14	1.004	50	34.45	26.50
B12-N	07962	12-10	1.063	50	48.20	37.10



NYLON FEMALE PLUG DISCONNECTS

CAT. NO.	NAED NO.	WIRE SIZE	LENGTH	CTN. QTY.	NET PER 100	
					1-9 CTN.	10+ CTN.
PF22-157N	08010	22-18	1.154	50	37.55	28.75
PF16-157N	08011	16-14	1.154	50	37.55	28.75



SHRINK-TUBE BUTT CONNECTORS

CAT. NO.	NAED NO.	WIRE SIZE	LENGTH	CTN. QTY.	NET PER 100	
					1-9 CTN.	10+ CTN.
SB22	07980	22-18	.591	25	188.00	145.40
SB16	07981	16-14	.591	25	188.00	145.40
SB12	07982	12-10	.591	25	251.00	193.80



NYLON MALE PLUG DISCONNECTS

CAT. NO.	NAED NO.	WIRE SIZE	LENGTH	CTN. QTY.	NET PER 100	
					1-9 CTN.	10+ CTN.
PM22-157N	08040	22-18	.906	100	42.90	32.95
PM16-157N	08041	16-14	.906	100	42.90	32.95
PM16-197N	08042	16-14	.906	100	49.95	38.45



NYLON-SLEEVED FEMALE PLUG DISCONNECTS

CAT. NO.	NAED NO.	WIRE SIZE	LENGTH	CTN. QTY.	NET PER 100	
					1-9 CTN.	10+ CTN.
PFS22-157N	08020	22-18	1.154	50	49.95	38.45
PFS16-157N	08021	16-14	1.154	50	49.95	38.45
PFS16-197N	08022	16-14	1.154	50	59.90	46.15



2-WAY RECEPTACLE FOR .157 MALE

CAT. NO.	NAED NO.	CTN. QTY.	NET PER 100	
			1-9 CTN.	10+ CTN.
DFR-157N	08043	25	37.65	28.95



PLIER TAP CONNECTORS

CAT. NO.	NAED NO.	WIRE SIZE	CTN. QTY.	NET PER 100	
				1-9 CTN.	10+ CTN.
PTC22-18	07990	22-18	25	59.90	46.15
PTC16-14	07991	16-14	25	59.90	46.15
PTC12-10	07992	12-10	25	59.90	46.15



VINYL-INSULATED PIN TERMINALS

CAT. NO.	NAED NO.	WIRE SIZE	CTN. QTY.	NET PER 100	
				1-9 CTN.	10+ CTN.
PT-22V	07985	22-18	100	32.10	25.90
PT-16V	07986	16-14	100	38.60	31.10
PT-12V	07987	12-10	50	55.40	45.05



HIGH TEMPERATURE RING TERMINALS



These nickel-plated steel alloy ring terminals are designed to perform in ambient operating temperature ranges of up to 900°F (483°C).

CATALOG NO.	NAED NO.	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.	NET PER 100	
							1-9 CTN.	10+ CTN.
HTR22-6	08500	22-18	6	.660	.264	100	21.00	16.95
HTR22-8	08501	22-18	8	.660	.264	100	21.00	16.95
HTR22-10	08502	22-18	10	.670	.283	100	21.00	16.95
HTR16-6	08510	16-14	6	.730	.322	100	23.35	18.90
HTR16-8	08511	16-14	8	.730	.322	100	23.35	18.90

CATALOG NO.	NAED NO.	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.	NET PER 100	
							1-9 CTN.	10+ CTN.
HTR16-10	08512	16-14	10	.730	.322	100	23.35	18.90
HTR12-8	08520	12-10	8	.785	.385	50	38.15	30.75
HTR12-10	08521	12-10	10	.785	.385	50	38.15	30.75
HTR12-14	08522	12-10	1/4	.952	.540	50	38.15	30.75

HIGH TEMPERATURE SPECIALTY PARTS



CAT. NO.	NAED NO.	DESCRIPTION	NET PER 100	
			CTN. 1 TO 9	10+ CTN.
HTSF12-250-3	07914	.250 x .032 12-10 AWG female flag disconnect	50	35.65 29.70

Nickle-plated steel alloy performs well in ambient operating temperature ranges of up to 900°F (483°C).



CAT. NO.	NAED NO.	DESCRIPTION	NET PER 100	
			CTN. 1 TO 9	10+ CTN.
HTF12-250-3	07915	.250 x .032 12-10 AWG female disconnect	50	23.55 18.25

Nickle-plated steel alloy performs well in ambient operating temperature ranges of up to 900°F (483°C).



CAT. NO.	NAED NO.	DESCRIPTION	NET PER 100	
			CTN. 1 TO 9	10+ CTN.
HTM16-187-2	07916	.187 x .020 16-14 AWG male disconnect	100	20.75 16.45

Nickle-plated steel alloy performs well in ambient operating temperature ranges of up to 900°F (483°C).



CAT. NO.	NAED NO.	DESCRIPTION	NET PER 100	
			CTN. 1 TO 9	10+ CTN.
HTP16-250-3	07918	.250 x .032 16-14 AWG combination male/female disconnect	50	28.95 22.70

Nickle-plated steel alloy performs well in ambient operating temperature ranges of up to 900°F (483°C).

COMPRESSOR TERMINAL KIT - WITH WIRE



This NSi Compressor Terminal Kit includes three color coded #10 AWG type AWM extra flexible lead wires (10" lengths). One end has a .250" by .032" female tab 12-10 quick disconnect, and the other is stripped at 5/16". Also included are three 12-10 AWG shrink tube butt connectors.

CATALOG NO.	NAED NO.	KIT CONTAINS	CARTON QTY.	SHPG. WT. LBS./100	NET PRICE EACH	
					1 TO 9 CTN.	10 OR MORE CTN.
NSi 33-12	06049	three color coded #10 AWG type AWM extra flexible lead wires and three 12-10 AWG shrink tube butt connectors	25	8	11.75	9.75

PUSH-ON TERMINAL KIT



This kit converts screw type terminals to push-on type. The Push-on Terminal Kit includes four push-on terminal adapters and the four screws.

CATALOG NO.	NAED NO.	KIT CONTAINS	CARTON QTY.	SHPG. WT. LBS./100	NET PRICE EACH	
					1 TO 9 CTN.	10 OR MORE CTN.
CTK-1	07927	four push-on terminal adapters, four screws	100	4	5.40	4.50



Increase your impulse sales and profits with NSI Merchandising Product Displays. All items are priced the same and sold on a "per package" basis for ease of handling at the counter. Display boards are provided free of charge with minimal opening order. Wall display is 23 1/2" high and 20" wide.

Net price per pack: \$6.75 each.

RING TERMINALS - VINYL INSULATED

CATALOG NO.	NAED NO.	WIRE SIZE	STUD SIZE	L	W	QTY. PER PACK
R22-6V-S*	06050	22-18	#6	0.831	0.315	25
R22-8V-S*	06051	22-18	#8	0.827	0.315	25
R22-10V-S*	06052	22-18	#10	0.827	0.315	25
R22-14V-S	06053	22-18	1/4	1.008	0.472	20
R22-56V-S	06054	22-18	5/16	1.028	0.472	20
R22-38V-S	06055	22-18	3/8	1.217	0.650	15
R16-6V-S*	06056	16-14	#6	0.717	0.256	25
R16-8V-S*	06057	16-14	#8	0.846	0.315	25
R16-10V-S*	06058	16-14	#10	0.846	0.315	25
R16-14V-S	06059	16-14	1/4	1.059	0.472	20
R16-56V-S	06060	16-14	5/16	1.059	0.472	20
R16-38V-S	06061	16-14	3/8	1.161	0.590	15
R16-50V-S	06062	16-14	1/2	1.335	0.748	15
R12-6V-S	06063	12-10	#6	1.063	0.374	15
R12-8V-S*	06064	12-10	#8	1.063	0.374	15
R12-10V-S*	06065	12-10	#10	1.063	0.374	15
R12-14V-S*	06066	12-10	1/4	1.201	0.472	15
R12-56V-S	06067	12-10	5/16	1.398	0.591	10
R12-38V-S	06068	12-10	3/8	1.398	0.591	10
R12-50V-S	06069	12-10	1/2	1.575	0.755	10



SPADE TERMINALS - VINYL INSULATED

CATALOG NO.	NAED NO.	WIRE SIZE	STUD SIZE	L	W	QTY. PER PACK
S22-6V-S*	06221	22-18	#6	0.896	0.224	25
S22-8V-S*	06222	22-18	#8	0.862	0.276	25
S22-10V-S*	06223	22-18	#10	0.906	0.378	25
S22-14V-S	06224	22-18	1/4	1.004	0.433	20
S16-6V-S*	06225	16-14	#6	0.839	0.252	20
S16-8V-S*	06226	16-14	#8	0.846	0.315	20
S16-10V-S*	06227	16-14	#10	0.846	0.315	20
S16-14V-S*	06228	16-14	1/4	1.004	0.472	20
S12-6V-S	06229	12-10	#6	1.012	0.354	15
S12-8V-S*	06230	12-10	#8	1.012	0.354	15
S12-10V-S*	06231	12-10	#10	1.012	0.354	15
S12-14V-S*	06232	12-10	1/4	1.287	0.354	12



Locking Spade
Suffix "L"



Block Spade
Suffix "B"



Flange Spade
Suffix "F"

DISCONNECTS - VINYL INSULATED

CATALOG NO.	NAED NO.	WIRE SIZE	TYPE	TAB SIZE	QTY. PER PACK
F22-110-2V-S	07000	22-18	female	.110 x .020	25
F22-110-3V-S	07001	22-18	female	.110 x .032	25
F22-187-2V-S	07002	22-18	female	.187 x .020	25
F22-187-3V-S	07003	22-18	female	.187 x .032	25
F22-250-3V-S*	07004	22-18	female	.250 x .032	25
M22-250-3V-S*	07011	22-18	male	.250 x .032	25
F16-110-2V-S	07005	16-14	female	.110 x .020	25
F16-110-3V-S	07006	16-14	female	.110 x .032	25
F16-187-2V-S	07007	16-14	female	.187 x .020	25
F16-187-3V-S	07008	16-14	female	.187 x .032	25
F16-250-3V-S*	07009	16-14	female	.250 x .032	25
M16-187-2V-S	07012	16-14	male	.187 x .020	25
M16-250-3V-S*	07013	16-14	male	.250 x .032	25
F12-250-3V-S*	07010	12-10	female	.250 x .032	15
M12-250-3V-S*	07014	12-10	male	.250 x .032	15



BUTT CONNECTORS - VINYL INSULATED

CATALOG NO.	NAED NO.	WIRE SIZE	L	COLOR	QTY. PER PACK
B22-V-S*	06760	22-18	1.004	red	25
B16-V-S*	06761	16-14	1.004	blue	20
B12-V-S*	06762	12-10	1.083	yellow	15
B8-V-S	06763	8	1.450	red	5



CLOSED END CONNECTORS

CATALOG NO.	NAED NO.	WIRE SIZE	L	H	QTY. PER PACK
C22-N-S*	06810	22-18	.228	.244	25
C16-N-S*	06811	16-14	.256	.272	25
C12-N-S*	06812	12-10	.293	.282	15
C8-N-S	06813	8	.453	.323	10



* Recommended display board items



Increase your impulse sales and profits with NSI Merchandising Product Displays. All items are priced the same and sold on a "per package" basis for ease of handling at the counter. Display boards are provided free of charge with minimal opening order. Wall display is 23 1/2" high and 20" wide.

Net price per pack: \$16.25 each.


RING TERMINALS - VINYL INSULATED

CATALOG NO.	NAED NO.	WIRE SIZE	STUD SIZE	L	W	QTY. PER PACK
R22-6V-D*	06050	22-18	#6	0.831	0.315	100
R22-8V-D*	06051	22-18	#8	0.827	0.315	100
R22-10V-D*	06052	22-18	#10	0.827	0.315	100
R22-14V-D	06053	22-18	1/4	1.008	0.472	80
R22-56V-D	06054	22-18	5/16	1.028	0.472	80
R22-38V-D	06055	22-18	3/8	1.217	0.650	60
R16-6V-D*	06056	16-14	#6	0.717	0.256	90
R16-8V-D*	06057	16-14	#8	0.846	0.315	90
R16-10V-D*	06058	16-14	#10	0.846	0.315	90
R16-14V-D	06059	16-14	1/4	1.059	0.472	75
R16-56V-D	06060	16-14	5/16	1.059	0.472	75
R16-38V-D	06061	16-14	3/8	1.161	0.590	60
R16-50V-D	06062	16-14	1/2	1.335	0.748	50
R12-6V-D	06063	12-10	#6	1.063	0.374	60
R12-8V-D*	06064	12-10	#8	1.063	0.374	60
R12-10V-D*	06065	12-10	#10	1.063	0.374	60
R12-14V-D*	06066	12-10	1/4	1.201	0.472	50
R12-56V-D	06067	12-10	5/16	1.398	0.591	45
R12-38V-D	06068	12-10	3/8	1.398	0.591	45
R12-50V-D	06069	12-10	1/2	1.575	0.755	40



SPADE TERMINALS - VINYL INSULATED

CATALOG NO.	NAED NO.	WIRE SIZE	STUD SIZE	L	W	QTY. PER PACK
S22-6V-D*	06221	22-18	#6	0.896	0.224	100
S22-8V-D*	06222	22-18	#8	0.862	0.276	100
S22-10V-D*	06223	22-18	#10	0.906	0.378	100
S22-14V-D	06224	22-18	1/4	1.004	0.433	85
S16-6V-D*	06225	16-14	#6	0.839	0.252	85
S16-8V-D*	06226	16-14	#8	0.846	0.315	85
S16-10V-D*	06227	16-14	#10	0.846	0.315	85
S16-14V-D*	06228	16-14	1/4	1.004	0.472	80
S12-6V-D	06229	12-10	#6	1.012	0.354	60
S12-8V-D*	06230	12-10	#8	1.012	0.354	60
S12-10V-D*	06231	12-10	#10	1.012	0.354	60
S12-14V-D*	06232	12-10	1/4	1.287	0.354	50



Locking Spade
Suffix "L"



Block Spade
Suffix "B"



Flange Spade
Suffix "F"

DISCONNECTS - VINYL INSULATED

CATALOG NO.	NAED NO.	WIRE SIZE	TYPE	TAB SIZE	QTY. PER PACK
F22-110-2V-D	07000	22-18	female	.110 x .020	100
F22-110-3V-D	07001	22-18	female	.110 x .032	100
F22-187-2V-D	07002	22-18	female	.187 x .020	100
F22-187-3V-D	07003	22-18	female	.187 x .032	100
F22-250-3V-D*	07004	22-18	female	.250 x .032	100
M22-250-3V-D*	07011	22-18	male	.250 x .032	100
F16-110-2V-D	07005	16-14	female	.110 x .020	100
F16-110-3V-D	07006	16-14	female	.110 x .032	100
F16-187-2V-D	07007	16-14	female	.187 x .020	100
F16-187-3V-D	07008	16-14	female	.187 x .032	100
F16-250-3V-D*	07009	16-14	female	.250 x .032	100
M16-187-2V-D	07012	16-14	male	.187 x .020	100
M16-250-3V-D*	07013	16-14	male	.250 x .032	100
F12-250-3V-D*	07010	12-10	female	.250 x .032	70
M12-250-3V-D*	07014	12-10	male	.250 x .032	70



BUTT CONNECTORS - VINYL INSULATED

CATALOG NO.	NAED NO.	WIRE SIZE	L	COLOR	QTY. PER PACK
B22-V-D*	06760	22-18	1.004	red	100
B16-V-D*	06761	16-14	1.004	blue	80
B12-V-D*	06762	12-10	1.083	yellow	50
B8-V-D	06763	8	1.450	red	20




CLOSED END CONNECTORS

CATALOG NO.	NAED NO.	WIRE SIZE	L	H	QTY. PER PACK
C22-N-D*	06810	22-18	.228	.244	100
C16-N-D*	06811	16-14	.256	.272	100
C12-N-D*	06812	12-10	.293	.282	65
C8-N-D	06813	8	.453	.323	40



* Recommended display board items

MINITERM DELUXE KIT IN HEAVY DUTY CASE/175 PIECE ECONOMY KIT WITH TOOL



These kits have been carefully designed to include the most popular NSi miniterm terminals. The cases are made of extremely durable polypropylene. They provide the ultimate in organization and convenience. Clearly labeled on the inside lid for easy recognition. Convenient size for easy carrying and easy storing. Reusable.

CATALOG NO.	NAED NO.	KIT CONTAINS				CARTON QTY.	SHPG. WT. LBS./100	NET PRICE EACH	
								1 TO 9 CTN.	10 OR MORE CTN.
MTK	08600	40	R22-6V	40	F22-250-3V	40	S22-6V	114.00	99.00
		40	R22-10V	35	F16-250-3V	40	S22-10V		
		30	R16-6V	20	F12-250-3V	25	S16-6V		
		30	R16-10V	35	B22-V	25	S16-10V		
		20	R12-8V	25	B16-V	15	S12-8V		
		20	R12-14V	15	B12-V	12	S12-14V		
MTK-2	08601	10	R22-6V	10	S22-8V	10	B22-V	59.00	49.00
		10	R22-8V	10	S22-10V	10	B16-V		
		10	R22-10V	10	S16-8V	10	B12-V		
		10	R16-6V	10	S16-10V	10	F22-250-3V		
		10	R16-8V	5	S12-10V	10	F16-250-3V		
		10	R16-10V	10	M22-250-3V	1	tool		
		5	R12-10V	10	M16-250-3V				

ALLIGATOR TEST CLIPS



CATALOG NO.	NAED NO.	FIG. NO.	DESCRIPTION	PACKAGING		SHPG. WT. LBS./100	NET PRICE PER 100	
				BAG	CARTON		LESS CTN.	CTN. OR MORE
ATC-1R	92101	1	2 inch alligator clip with vinyl boot – red	10	100	2	79.00	69.00
ATC-1B	92102	1	2 inch alligator clip with vinyl boot – black	10	100	2	79.00	69.00
ATC-2R	92103	2	2 inch screw type alligator clip with molded handle – red	10	100	2	69.00	59.00
ATC-2B	92104	2	2 inch screw type alligator clip with molded handle – black	10	100	2	69.00	59.00
ATC-3R	92105	3	10 amp. battery clip with molded vinyl boot – red	10	100	3	129.00	109.00
ATC-3B	92106	3	10 amp. battery clip with molded vinyl boot – black	10	100	3	129.00	109.00








PUSHBUTTONS & PULL CHAINS

CATALOG NO.	NAED NO.	CIRCUIT		RATINGS			ACTUA-TOR STYLE	ACTUA-TOR MATERIAL	CONTACT	CONNEC-TION TYPE	CTN. QTY.	NET PRICE EACH			
		FUNC-TIONS	POLES & THROWS	AMPS 125 VAC	AMPS 250 VAC	H.P. 125-250 VAC						LESS CTN.	CTN. OR MORE		
	76050PS	76050	push on push off	SPST	6*	3*	—	pushbutton	brass/ nickel	maintained	screws	5	8.90	7.55	
	76040PW	76040	push on push off	SPST	6	3	1/3 @125	pushbutton	brass/ nickel	maintained	wire leads	5	8.90	7.55	
DIMENSIONS IN INCHES		A: .437	B: .562	C: .542	D: 1.183										
	76101PW	76101	push on push off	SPST	10	5	1/4 @125	pushbutton	nylon	maintained	wire leads	5	7.15	6.05	
DIMENSIONS IN INCHES		A: 1.003	B: .612	C: .550	D: .993										
	76060PS	76060	push on push off	SPST	15	10	—	pushbutton	brass/ nickel	maintained	screws	5	7.95	6.75	
DIMENSIONS IN INCHES		A: .283	B: .562	C: .982	D: 1.125										
	76090PW	76090	on off	SPST	6	3	—	push canopy	brass	maintained	wire leads	5	6.25	5.30	
	76100PW	76100	on off	SPST	6	3	—	push canopy	nickel	maintained	wire leads	5	6.60	5.60	
DIMENSIONS IN INCHES		A: .968	B: .313	C:	D: .858										
	76020PS	76020	off (on)	SPST N.O.	3/4	1/4	—	pushbutton	nylon	momentary	screws	5	4.75	4.05	
	76030PS	76030	on (off)	SPST N.C.	3/4	1/4	—	pushbutton	nylon	momentary	screws	5	5.20	4.35	
DIMENSIONS IN INCHES		A: .460	B: 1.070	C: .650	D: 1.950										
	76065PS	76065	off (on)	SPST N.O.	3	—	—	pushbutton	plastic	momentary	screws	5	6.05	5.10	
DIMENSIONS IN INCHES		A: .689	B: 1.406	C: .563	D: .875	E:									
	76070PS	76070	off (on)	SPST N.O.	15	10	—	pushbutton	brass/nickel	momentary	screws	5	7.05	5.95	
	76080PS	76080	on (off)	SPST N.C.	15	10	—	pushbutton	brass/nickel	momentary	screws	5	7.75	6.60	
DIMENSIONS IN INCHES		A: .576	B: .562	C: 1.382											
	75101CW	75101	on off	SPST	6	3	—	chain w/cord	brass	—	wire leads	5	2.60	2.20	
	75102CW	75102	on off	SPST	6	3	—	chain w/cord	nickel	—	wire leads	5	2.70	2.30	
DIMENSIONS IN INCHES		A: 1.250	B: .781	C: .594											
	75110CW	75110	3 way/2 circuit	SP3T	6	3	—	chain w/cord	brass	—	wire leads	5	3.60	3.05	
	75111CQ	75111	off on on on	SP3T	6	3	—	chain w/cord	brass	—	push in	5	3.95	3.30	
DIMENSIONS IN INCHES		A: 1.250	B: 1.125	C: .742											

* Amperage and voltage are also valid for D.C. Rating
() Indicates momentary position.

TOGGLE SWITCHES – MAINTAINED CONTACT & SINGLE POLE



CATALOG NO.	NAED NO.	CIRCUIT		RATINGS			ACTUA-TOR	ACTUA-TOR	CONNEC-TION	CARTON QTY.	NET PRICE EACH		
		FUNC-TIONS	POLES & THROWS	AMPS 125 VAC	AMPS 250 VAC	H.P. 125-250 VAC	STYLE	MATERIAL	TYPE		LESS CTN.	CTN. OR MORE	
	78110TS	78110	on off	SPST	6	3	–	bat	brass/nickel	screws	5	3.90	3.30
	78210TS	78210	on off	SPST	20	10	3/4	bat	brass/nickel	screws	5	3.90	3.30
	78120TQ	78120	on off	SPST	20	10	3/4	bat	brass/nickel	.250 quikconnect	5	3.70	3.15
	78200TS	78200	on on	SPDT	20	10	3/4	bat	brass/nickel	screws	5	5.30	4.50
	78160TS	78160	on off on	SPDT	20	10	3/4	bat	brass/nickel	screws	5	5.30	4.50
	78060TQ	78060	on on	SPDT	20	10	3/4	bat	brass/nickel	.250 quikconnect	5	6.20	5.25
	78070TQ	78070	on off on	SPDT	20	10	3/4	bat	brass/nickel	.250 quikconnect	5	6.20	5.25
DIMENSIONS IN INCHES A: .687 B: .465 C: .670 D: .348 E: 1.134 F: .634 THREAD: 15/32-32UNS-2A KEYWAY: .072 X .038 DP													
	78140TS	78140	on off	SPST	6*	3*	–	bat	brass/nickel	screws	5	5.70	4.80
DIMENSIONS IN INCHES A: .687 B: .465 C: .560 D: .348 E: .890 F: .524 THREAD: 15/32-32UNS-2A KEYWAY: .072 X .038 DP													
	78150TW	78150	on off	SPST	10*	4*	–	bat	brass/nickel	wire leads	5	6.95	5.95
DIMENSIONS IN INCHES A: .500 B: .469 C: .685 D: 1.093 E: 1.856 THREAD: 15/32-32 STANDARD 6" WIRE LEADS													
	78020TQ	78020	on off	SPST	15*	10*	3/4	flat	poly. (amber)**	.250 quikconnect	5	6.70	5.70
	78030TQ	78030	on off	SPST	15*	10*	3/4	flat	poly. (green)**	.250 quikconnect	5	6.70	5.70
	78040TQ	78040	on off	SPST	15*	10*	3/4	flat	poly. (red)**	.250 quikconnect	5	6.70	5.70
DIMENSIONS IN INCHES A: .715 B: .379 C: .865 D: .750 E: .422 THREAD: 15/32-32UNS-2A KEYWAY: .072 X .038 DP													
	78280TS	78280	on off	SPST	16*	8*	1	bat	brass/nickel	screws	5	8.90	7.55
	78010TQ	78010	on off	SPST	20	10	1 1/2	flat	nylon	.250 quikconnect	5	3.80	3.25
	78015TS	78015	on off	SPST	20	10	–	flat	nylon	screws	5	5.00	4.25
DIMENSIONS IN INCHES A: .687 B: .280 C: .687 D: .375 E: 1.000 F: .588 KEYWAY: .072 X .038													
	78050TQ	78050	on off	SPST	20	10	3/4	bat	brass/nickel	.250 quikconnect	5	5.30	4.50
DIMENSIONS IN INCHES A: .687 B: .465 C: .585 D: .522 E: .312 THREAD: 15/32-32UNS-2A KEYWAY: .072 X .038													
	78350TS	78350	circuits 1&2 on off circuits 1 on	2 circuits	15	10	3/4@250	bat	brass/nickel	screws	5	9.00	7.65
DIMENSIONS IN INCHES A: .687 B: .465 C: .778 D: .750 E: 1.308 F: .422 KEYWAY: .072 X .038													









* Amperage and voltage are also valid for D.C. Rating

** Lighted toggle.

Poly. = Polycarbonate

TOGGLE SWITCHES – MAINTAINED & MOMENTARY CONTACT – MULTIPLE POLE



CATALOG NO.	NAED NO.	CIRCUIT FUNC-TIONS	POLES & THROWS	RATINGS			ACTUATOR STYLE	ACTUATOR MATERIAL	CONNECTION TYPE	CTN. QTY.	NET PRICE EACH		
				AMPS 125 VAC	AMPS 250 VAC	H.P. 125-250 VAC					LESS CTN.	CTN. OR MORE	
	78080TQ	78080	on off	DPST	15	10	–	bat	brass/nickel	.250 quikconnect	5	6.95	5.90
	78220TS	78220	on off	DPST	20	10	3/4	bat	brass/nickel	screws	5	8.05	6.85
	78130TQ	78130	on off	DPST	20	10	3/4	bat	brass/nickel	.250 quikconnect	5	7.55	6.40
	78090TQ	78090	on on	DPDT	15	10	–	bat	brass/nickel	.250 quikconnect	5	8.30	7.00
	78100TQ	78100	on off on	DPDT	15	10	1 1/2	bat	brass/nickel	.250 quikconnect	5	8.30	7.00
	78230TS	78230	on off on	DPDT	20	10	3/4	bat	brass/nickel	screws	5	7.60	6.45
	78270TS	78270	on on	DPDT	20	10	1 1/2@125.2@250	bat	brass/nickel	screws	5	9.90	8.45
	78240TS	78240	off (on)	DPST	15	10	3/4	bat	brass/nickel	screws	5	10.50	8.90
	78250TS	78250	on off (on)	DPDT	15	10	3/4	bat	brass/nickel	screws	5	15.25	12.90
	78260TS	78260	(on) off (on)	DPDT	15	10	3/4	bat	brass/nickel	screws	5	9.70	8.20
DIMENSIONS IN INCHES A: .687 B: .465 C: .778 D: .750 E: 1.308 F: .422 THREAD: 15/32-323UNS-2A KEYWAY: .072 X .038													
	78290TS	78290	on off	DPST	16*	8*	1	bat	brass/nickel	screws	5	8.85	7.50
DIMENSIONS IN INCHES A: .687 B: .465 C: .765 D: .836 E: 1.750 F: 1.764 THREAD: 15/32-323UNS-2A KEYWAY: .072 X .038													
	78300TS	78300	on off	DPST	20*	10*	1 1/2	bat	brass/nickel	screws	5	12.25	10.40
DIMENSIONS IN INCHES A: .687 B: .465 C: .895 D: 1.000 E: 2.093													
	78325TS	78325	on off	DPST	16	8	1	bat	nylon**	screws	5	8.60	7.30
DIMENSIONS IN INCHES A: .674 B: .468 C: .780 D: .810 E: 1.870													
	78310TS	78310	on off	3PST	15	10	3/4@250	bat	brass/nickel	screws	5	16.20	13.65
	78315TS	78315	on off on	3PDT	15	10	3/4@250	bat	brass/nickel	screws	5	21.25	18.05
DIMENSIONS IN INCHES A: .688 B: .469 C: .965 D: .300 THREAD: 15/32													
	78330TS	78330	on off	4PST	15	10	3/4@250	bat	brass/nickel	screws	5	19.25	16.30
	78320TS	78320	on on	4PDT	15	10	3/4@250	bat	brass/nickel	screws	5	24.65	20.90
	78340TS	78340	on off on	4PDT	15	10	3/4@250	bat	brass/nickel	screws	5	23.35	19.80
DIMENSIONS IN INCHES A: .687 B: .465 C: 1.436 D: .803 E: .422 F: 1.308 THREAD: 15/32-323UNS-2A KEYWAY: .072 X .038													
	78170TS	78170	off (on)	SPST	15	10	3/4	bat	brass/nickel	screws	5	7.25	6.15
	78180TS	78180	on off (on)	SPDT	15	10	3/4	bat	brass/nickel	screws	5	5.70	4.85
	78190TS	78190	(on) off (on)	SPDT	15	10	3/4	bat	brass/nickel	screws	5	5.70	4.85
DIMENSIONS IN INCHES A: .687 B: .465 C: .670 D: .348													
	79300MS	79300	rubber cover for toggles								5	2.05	1.75
DIMENSIONS IN INCHES A: .950 B: .812													

*Amperage and voltage are also valid for D.C. Rating () Indicates momentary position **Double-insulated for shock proof requirements






ROCKER, ROTARY & MISCELLANEOUS SWITCHES



CAT. NO.	NAED NO.	CIRCUIT FUNCTIONS	POLES & THROWS	RATINGS			LAMP VOLTAGE	ACTUATOR COLOR	CONTACT	CONNECTION TYPE	NET PRICE EACH				
				AMPS 125 VAC	AMPS 250 VAC	H.P. 125-250 VAC					CTN. LESS QTY.	CTN. OR +	CTN.		
	77010RQ	77010	on off	DPST	20	10	1 1/2@125, 2@250	non-lighted	black	maintained	.250 quikconnect	5	7.35	6.25	
	77040RQ	77040	on on	DPDT	20	10	1 1/2@125, 2@250	non-lighted	black	maintained	.250 quikconnect	5	8.45	7.15	
	77060RQ	77060	on off on	DPDT	20	10	1 1/2@125, 2@250	non-lighted	black	maintained	.250 quikconnect	5	8.45	7.15	
	77090RQ	77090	(on) off	DPST	15	10	3/4	non-lighted	black	momentary	.250 quikconnect	5	8.75	7.35	
	77100RQ	77100	(off) on	DPST	15	10	3/4	non-lighted	black	momentary	.250 quikconnect	5	8.75	7.35	
	77110RQ	77110	(on) on	DPDT	15	10	3/4	non-lighted	black	momentary	.250 quikconnect	5	9.85	8.30	
	77120RQ	77120	(on) off on	DPDT	15	10	3/4	non-lighted	black	momentary	.250 quikconnect	5	9.85	8.30	
	77130RQ	77130	(on) off (on)	DPDT	15	10	3/4	non-lighted	black	momentary	.250 quikconnect	5	9.85	8.30	
DIMENSIONS IN INCHES				A: 1.348	B: .750	C: .762	D: .422								
	77140RQ	77140	on off	SPST	15	10	—	non-lighted	black	maintained	.250 quikconnect	5	2.30	1.95	
DIMENSIONS IN INCHES				A: 1.250	B: .625	C: .828	D: .406								
	77150RQ	77150	on off	SPST	15	7.5	—	—	red	maintained	.250 quikconnect	5	3.10	2.65	
DIMENSIONS IN INCHES				A: 1.250	B: .625	C: .828	D: .406								
	77030RQ	77030	on off	DPST	15	10	3/4@250	12V incand.	red	—	maintained	.250 quikconnect	5	8.60	7.25
	77020RQ	77020	on off	DPST	15	10	3/4@250	125V neon	amber	—	maintained	.250 quikconnect	5	8.60	7.25
	77050RQ	77050	on on	DPDT	15	10	3/4@250	125V incand.	red	amber	maintained	.250 quikconnect	5	12.70	10.75
	77070RQ	77070	on off on	DPDT	15	10	3/4@250	125V neon	amber	amber	maintained	.250 quikconnect	5	11.95	10.10
	77080RQ	77080	on off on	DPDT	15	10	3/4@250	125V neon	red	red	maintained	.250 quikconnect	5	11.95	10.10
DIMENSIONS IN INCHES				A: .426	B: 1.088	C: .709	D: .345	E: 1.302							
	77300RW	77300	on off	SPST	3	1	non-lighted	rotary canopy		maintained	wire leads	5	3.15	2.70	
DIMENSIONS IN INCHES				A: .718	B: .600	C: .265									
	77340RW	77340	on off	SPST	6	3	non-lighted	rotary canopy		maintained	wire leads	5	3.70	3.10	
	77320RW	77320	off on on on	SPST	3	1	non-lighted	rotary canopy		maintained	wire leads	5	4.15	3.50	
DIMENSIONS IN INCHES				A: 1.000	B: .844										
	79100MS	79100	on off	SPST	6	3	—			feed through switch	screws	5	1.50	1.25	
DIMENSIONS IN INCHES				A: .844	B: .594	C: 1.375									
	79200MS	79200	N.C. & N.O.	SPDT	5	—	—			magnetic feed switch	screws	5	10.45	8.85	
DIMENSIONS IN INCHES				A: 2.500	B: .531										

() Indicates momentary position All rocker switches are black phenolic bases with a black snap-in bezel and nylon actuator.

SNAP-IN RECTANGULAR INDICATOR LIGHTS

CATALOG NO.	NAED NO.	PANEL CUTOUT	PANEL THICKNESS	LENS COLOR	LENS TYPE	BEZEL COLOR	CONNECTION TYPE	CTN. QTY.	NET PRICE EACH LESS CTN.	CTN. OR MORE	
	79500LQ	79500	.375 x 1.28	.03 - .10	green	diamond	stainless	.250 quikconnect	5	3.80	3.20
	79505LQ	79505	.375 x 1.28	.03 - .10	red	diamond	stainless	.250 quikconnect	5	3.00	2.55
	79510LQ	79510	.375 x 1.28	.03 - .10	amber	diamond	stainless	.250 quikconnect	5	3.00	2.55
	79515LQ	79515	.375 x 1.28	.03 - .10	green	diamond	white	.250 quikconnect	5	3.50	2.95
	79520LQ	79520	.375 x 1.28	.03 - .10	red	diamond	white	.250 quikconnect	5	2.65	2.25
	79525LQ	79525	.375 x 1.28	.03 - .10	amber	diamond	white	.250 quikconnect	5	2.65	2.25
DIMENSIONS IN INCHES		A: 1.080	B: .290	C: 1.380	D: .460	E: .500	F: .370	G: .120			
	79530LQ	79530	.550 x 1.125	.020 - .250	green	diamond	black	.250 quikconnect	5	3.60	3.10
	79535LQ	79535	.550 x 1.125	.020 - .250	red	diamond	black	.250 quikconnect	5	2.90	2.45
	79540LQ	79540	.550 x 1.125	.020 - .250	amber	diamond	black	.250 quikconnect	5	2.90	2.45
DIMENSIONS IN INCHES		A: .810	B: .420	C: 1.240	D: .670	E: .820					
	79545LQ	79545	1.00 x 1.125	.020 - .250	green	diamond	black	.250 quikconnect	5	4.10	3.45
	79550LQ	79550	1.00 x 1.125	.020 - .250	red	diamond	black	.250 quikconnect	5	3.30	2.80
	79555LQ	79555	1.00 x 1.125	.020 - .250	amber	diamond	black	.250 quikconnect	5	3.30	2.80
DIMENSIONS IN INCHES		A: .860	B: .810	C: 1.240	D: 1.150	E: 1.240					
	79560LQ	79560	.830 x 1.450	.030 - .240	green	diamond	black	.250 quikconnect	5	6.15	5.20
	79565LQ	79565	.830 x 1.450	.030 - .240	red	diamond	black	.250 quikconnect	5	5.45	4.60
	79570LQ	79570	.830 x 1.450	.030 - .240	amber	diamond	black	.250 quikconnect	5	5.45	4.60
DIMENSIONS IN INCHES		A: 1.240	B: .670	C: 1.700	D: .960	E: 1.230	F: .940	G: .820			
	79575LQ	79575	.550 x 1.125	.025 - .187	green	Frost	white	.250 quikconnect	5	4.00	3.35
	79580LQ	79580	.550 x 1.125	.025 - .187	red	Frost	white	.250 quikconnect	5	3.25	2.75
	79585LQ	79585	.550 x 1.125	.025 - .187	amber	Frost	white	.250 quikconnect	5	3.25	2.75
DIMENSIONS IN INCHES		A: 1.240	B: .680	C: .730	D: 1.07						

High quality indicator lights made of nylon with polycarbonate lens material and neon lamps. 125-Volt Rated. Available in many other styles and finishes. Also available with incandescent lamps. Contact NSI for price and delivery.

ROUND INDICATOR LIGHTS (WITH NON-REPLACEABLE LAMPS)



CAT. NO.	NAED NO.	PANEL CUTOUT	PANEL THICKNESS	LENS STYLE	LENS COLOR	LENS TYPE	BEZEL COLOR	TYPE OF FIT	MTNG. HOLE DIA.	CTN. QTY.	NET PRICE EACH LESS CTN.	CTN. OR +
79700LW	79700	.312	.030 Min.	flush	white	translucent	white	press	.312	5	2.65	2.25
79705LW	79705	.312	.030 Min.	flush	blue	diamond	white	press	.312	5	3.90	3.25
79710LW	79710	.312	.030 Min.	flush	green	diamond	white	press	.312	5	3.45	2.95
79715LW	79715	.312	.030 Min.	flush	clear	diamond	white	press	.312	5	2.70	2.25
79720LW	79720	.312	.030 Min.	flush	red	diamond	white	press	.312	5	2.70	2.25
79725LW	79725	.312	.030 Min.	flush	amber	diamond	white	press	.312	5	2.70	2.25



DIMENSIONS IN INCHES A: .130 B: 1.430 MOUNTING HOLE: .312 PANEL THICKNESS: .030 MIN.

79730LW	79730	.500	.030 - .093	.09 Cyl	white	translucent	stainless	press	.500	5	2.70	2.25
79735LW	79735	.500	.030 - .093	.09 Cyl	blue	diamond	stainless	press	.500	5	3.95	3.30
79740LW	79740	.500	.030 - .093	.09 Cyl	green	diamond	stainless	press	.500	5	3.60	3.00
79745LW	79745	.500	.030 - .093	.09 Cyl	clear	diamond	stainless	press	.500	5	2.80	2.35
79750LW	79750	.500	.030 - .093	.09 Cyl	red	diamond	chrome	press	.500	5	2.80	2.35
79755LW	79755	.500	.030 - .093	.09 Cyl	amber	diamond	stainless	press	.500	5	2.80	2.35



DIMENSIONS IN INCHES A: .210 B: .100 C: .910 MOUNTING HOLE: .500 PANEL THICKNESS: .030 TO .093

79760LW	79760	.500	.030 - .093	.25 Cyl	white	translucent	stainless	press	.500	5	4.20	3.60
79765LW	79765	.500	.030 - .093	.25 Cyl	blue	diamond	stainless	press	.500	5	4.95	4.30
79770LW	79770	.500	.030 - .093	.25 Cyl	green	diamond	stainless	press	.500	5	5.20	4.60
79775LW	79775	.500	.030 - .093	.25 Cyl	clear	diamond	stainless	press	.500	5	4.20	3.60
79780LW	79780	.500	.030 - .093	.25 Cyl	red	diamond	stainless	press	.500	5	4.20	3.60
79785LW	79785	.500	.030 - .093	.25 Cyl	amber	diamond	stainless	press	.500	5	4.20	3.60




DIMENSIONS IN INCHES A: .210 B: .100 C: .910 MOUNTING HOLE: .500 PANEL THICKNESS: .030 TO .093

79790LW	79790	.500	.030 - .093	shield	clear	diamond	none	press	.500	5	3.25	2.75
---------	-------	------	-------------	--------	-------	---------	------	-------	------	---	------	------



DIMENSIONS IN INCHES A: .210 B: .100 C: .910 MOUNTING HOLE: .500 PANEL THICKNESS: .030 TO .093

79795LW	79795	.500	.040 - .110	semi-dome	green	rings	none	snap in	.500	5	3.60	3.00
79800LW	79800	.500	.040 - .110	semi-dome	red	rings	none	snap in	.500	5	2.80	2.35
79805LW	79805	.500	.040 - .110	semi-dome	amber	rings	none	snap in	.500	5	2.80	2.35
79810LW	79810	.500	.040 - .110	semi-dome w/bezel	green	rings	chrome	snap in	.500	5	3.60	3.00
79815LW	79815	.500	.040 - .110	semi-dome w/bezel	red	rings	chrome	snap in	.500	5	2.80	2.35
79820LW	79820	.500	.040 - .110	semi-dome w/bezel	amber	rings	chrome	snap in	.500	5	2.80	2.35



DIMENSIONS IN INCHES A: 1.130 MOUNTING HOLE: .500 PANEL THICKNESS: .040 TO .110

High quality indicator lights made of nylon with polycarbonate lens material and neon lamps. 125-volt rated. Connection with 6 inch wire leads. Available in many other styles and finishes. Also available with incandescent lamps. Contact NSi for price and delivery.

20-240 V MULTI-VOLTAGE PILOT LIGHT



This state of the art indicating light unit features Super-Bright LEDs and printed circuit boards, which allow it to handle any voltage from 20 to 250 V – either AC or DC – without losing any light intensity. Provided with polyester clamp ring. Thin and compact design is NEMA 4X rated. Available with flashing bulb – please contact NSi.

CATALOG NO.	NAED NO.	VOLTAGE	LENS COLOR	CARTON QTY.	NET PRICE EACH	
					LESS CTN.	CTN. OR MORE
MVPL240A	92120	20-240V	amber	3	149.00	119.00
MVPL240B	92121	20-240V	blue	3	149.00	119.00
MVPL240C	92122	20-240V	clear	3	149.00	119.00
MVPL240G	92123	20-240V	green	3	149.00	119.00
MVPL240R	92124	20-240V	red	3	149.00	119.00
MVPL240W	92125	20-240V	white	3	149.00	119.00

EMERGENCY STOP BUTTON - TWO POSITION PUSH-PULL MAINTAINED






This unit features a solid brass detent mechanism that provides durability and reliability as well as an outstanding feel. The rugged design ensures 100% reliability and a longer life. It is maintained in both the push and pull positions. Primary application is 'push' to stop and 'pull' to start. U-cup seal is infused with 15% teflon to eliminate cracking when exposed to heat, dryness and sunlight. This seal forms a permanent watertight seal that meets and exceeds Type

4/4X testing. Supplied with polyester clamp ring and mushroom cap. Optional aluminum clamp ring is available. NEMA 4X rated and UL Listed. 10 amp, 600 volt.

MAINTAINED IN/ MAINTAINED OUT	CATALOG NO.	NAED NO.	LENS COLOR	CARTON QTY.	NET PRICE EACH	
					LESS CTN.	CTN. OR MORE
1 Circuit (1 NC) 	ESB2-INC-B	32130	black	6	79.00	69.00
	ESB2-INC-G	32131	green	6	79.00	69.00
	ESB2-INC-R	32132	red	6	79.00	69.00
	ESB2-INC-Y	32133	yellow	6	79.00	69.00
2 Circuit (1 NC/1 NO) 	ESB2-INOINC-B	32134	black	6	89.00	79.00
	ESB2-INOINC-G	32135	green	6	89.00	79.00
	ESB2-INOINC-R	32136	red	6	89.00	79.00
	ESB2-INOINC-Y	32137	yellow	6	89.00	79.00
2 Circuit (2 NC) 	ESB2-2NC-B	32138	black	6	89.00	79.00
	ESB2-2NC-G	32139	green	6	89.00	79.00
	ESB2-2NC-R	32140	red	6	89.00	79.00
	ESB2-2NC-Y	32141	yellow	6	89.00	79.00

"F" CONNECTORS




CATALOG NO.	NAED NO.	DESCRIPTION	CARTON	NET PRICE PER 100	
			QTY.	1 TO 9 CTN.	10 OR MORE CTN.
	FC59C 09200	"F" connector for RG59/U cable. Conductor of cable becomes male pin of connector supplied with 1/4 inch crimping ring.	25	63.80	53.40
	FC59T 09202	"F" connector for RG59/U cable twist-on style	25	68.80	57.40
	FC6C 09201	crimp-on "F" connector for standard shield RG6/U cable	25	55.60	46.10
	FC6C-Q 09226	foil shield crimp-on "F" connector for quad shield RG6/U cable	25	78.20	65.20
	FC6T 09203	twist on "F" connector for standard shield RG6/U cable	25	55.60	46.10
	FC6T-Q 09228	twist on "F" connector for quad shield RG6/U cable	25	78.20	65.20
	FCF 09204	female adapter supplied complete with locknut and washer	25	61.20	50.90

SPLITTERS








CATALOG NO.	NAED NO.	DESCRIPTION	CARTON	NET PRICE PER 100	
			QTY.	1 TO 9 CTN.	10 OR MORE CTN.
CS-2	09220	two-way splitter – includes mounting hardware. (5-900 MHz)	10	279.00	229.00
CS-3	09221	three-way splitter – includes mounting hardware. (5-900 MHz)	10	359.00	299.00
CS-4	09222	four-way splitter – includes mounting hardware. (5-900 MHz)	10	419.00	339.00
CS-8	09224	eight-way splitter – includes mounting hardware. (5-900 MHz)	5	1,459.00	1,199.00
CS-2HF	09230	two-way high frequency satellite splitter (1000-2050 MHz)	10	779.00	649.00
CS-3HF	09231	three-way high frequency satellite splitter (1000-2050 MHz)	10	959.00	799.00
CS-4HF	09232	four-way high frequency satellite splitter (1000-2050 MHz)	10	1,049.00	879.00








"F" TYPE & COMBINATION WALL PLATES

	CATALOG NO.	NAED NO.	DESCRIPTION	CARTON QTY.	NET PRICE PER 100	
					1 TO 4 CTN.	5 OR MORE CTN.
 <p>"F" Type TV/FM Wall Plates Designed for 75 ohm antenna and/or cable systems. These wall plates may be used flush or without box. A female adapter is mounted in the plate. Supplied complete with mounting screws.</p>	FCF-WP	09205	ivory	25	319.00	269.00
	FCF-WP-1	09206	white	25	319.00	269.00
 <p>Dual "F" Type TV/FM Wall Plates Designed for 75 ohm antenna and/or cable systems. These wall plates may be used flush or without box. Two female adapters are mounted in the plate. Supplied complete with mounting screws.</p>	FCF2-WP	82130	ivory	25	509.00	425.00
	FCF2-WP-1	82131	white	25	509.00	425.00
 <p>Combination Telephone/"F" Type Wall Plates Contains one 4 wire modular phone jack to accept a modular telephone plug and a female "F" type adapter for attaching 75 ohm antenna and/or cable systems. Supplied with mounting screws.</p>	FCFT-WP	82132	ivory	25	915.00	765.00
	FCFT-WP-1	82133	white	25	915.00	765.00

TELEPHONE ACCESSORIES

	CATALOG NO.	NAED NO.	DESCRIPTION	CARTON QTY.	NET PRICE PER 100	
					1 TO 4 CTN.	5 OR MORE CTN.
 <p>Single Mount Wall Jacks Converts a 4, 6 or 8 wire location to a modular telephone outlet. The mounting block is wire to the modular jack. Screw mount the block and attach existing color-coded wire to the screw terminals. Snap on cover.</p>	SMWJ-4	82135	4 conductor - ivory	25	405.00	342.00
	SMWJ-41	82136	4 conductor - white	25	405.00	342.00
	SMWJ-6	82137	6 conductor - ivory	25	789.00	659.00
	SMWJ-61	82138	6 conductor - white	25	789.00	659.00
	SMWJ-8	82139	8 conductor - ivory	25	999.00	839.00
 <p>Modular Extension Couplers Modular cord extension couplers have female adapter jacks at either end and allow two separate modular cords to be connected.</p>	MEC-4	82140	4 conductor - ivory	25	467.00	391.00
	MEC-41	82141	4 conductor - white	25	467.00	391.00
	MEC-6	82142	6 conductor - ivory	25	602.00	505.00
	MEC-61	82143	6 conductor - white	25	602.00	505.00
	MEC-8	82144	8 conductor - ivory	25	862.00	722.00
 <p>Telephone Line Junction Box A convenient method of interfacing modular telephones to the system in the home, without going through complicated wiring. Attachments are made at one to four color coded connecting points. A modular plug and 24" cable connects to a standard interface jack.</p>	TLJB	82145	ivory	25	1,689.00	1,413.00
	TLJB-1	82146	white	25	1,689.00	1,413.00
 <p>5 Way Modular Outlet Box Connects up to 5 telephones or related equipment to an existing single modular jack. 4 contacts. Self-adhesive backing for easy installation.</p>	MOB	82147	—	25	3,295.00	2,799.00
 <p>Telephone Extension Cable Telephone extension cable for 4 conductor systems.</p>	TEC-25	82148	ivory	10	903.00	758.00
	TEC-25-1	82149	white	10	903.00	758.00

TELEPHONE WALL PLATES

	CAT. NO.	NAED NO.	DESCRIPTION	CARTON QTY.	NET PRICE PER 100	
					1 TO 4 CTN.	5 OR MORE CTN.
 <p>Modular Telephone Wall Plates For standard electrical boxes, supplied with matching screws. Smooth plate finish. Color-coded wires connect jack to connecting block.</p>	MWP-4	82101	4 conductor - ivory	25	446.00	373.00
	MWP-41	82102	4 conductor - white	25	446.00	373.00
	MWP-6	82103	6 conductor - ivory	25	768.00	643.00
	MWP-61	82104	6 conductor - white	25	768.00	643.00
	MWP-8	82105	8 conductor - ivory	25	1,089.00	914.00
	MWP-81	82106	8 conductor - white	25	1,089.00	914.00
 <p>Dual Modular Telephone Wall Plates For standard electrical boxes, supplied with matching screws. Smooth plate finish. Color-coded wires connect jack to connecting block.</p>	DMWP-4	82107	4 conductor - ivory	25	819.00	685.00
	DMWP-41	82108	4 conductor - white	25	819.00	685.00
	DMWP-6	82109	6 conductor - ivory	25	1,235.00	1,035.00
	DMWP-61	82110	6 conductor - white	25	1,235.00	1,035.00
	DMWP-8	82111	8 conductor - ivory	25	1,359.00	1,139.00
	DMWP-81	82112	8 conductor - white	25	1,359.00	1,139.00
 <p>Wall Phone Modular Jack Designed to mount on a standard junction box or flat on a wall surface. Sturdy supports for mounting the wall phone are molded in. All have screw terminals for wire connection.</p>	WPMJ-P	82113	all plastic - ivory	25	659.00	549.00
	WPMJ-P1	82114	all plastic - white	25	659.00	549.00
	WPMJ-SS	82115	stainless steel	25	1,865.00	1,555.00
 <p>Mid Size Flush Mount Telephone Wall Plate Over-size flush mount plastic telephone wall plate.</p>	MSWP-4	82116	4 conductor - ivory	25	709.00	599.00
	MSWP-41	82117	4 conductor - white	25	709.00	599.00
 <p>Flush Mount Outdoor Modular Telephone Jack Flush mount weather-proof RJ11/RJ14. Mounts in any standard electrical box. Mounting hardware provided.</p>	OMJ-4	82118	4 conductor	25	3,709.00	3,095.00
 <p>Wall Mount Jack with Dual Side Jack Wall mount phone jack that provides dual side jacks that can be used to hook up answering machines, modems, faxes, extension phones, etc.</p>	WMDS-4	82119	4 conductor - ivory	25	2,579.00	2,149.00
	WMDS-41	82120	4 conductor - white	25	2,579.00	2,149.00
 <p>Blank Wall Plate Gang blank wall plate</p>	BWP	82121	ivory	25	171.00	145.00
	BWP-1	82122	white	25	171.00	145.00



Alphanumeric Index

CATALOG NUMBER	PAGE
250-3	1
751, 760, 761	11
770, 771, 773	14
780, 781, 782, 783, 793	12, 13
791, 792	14
795	15
797, 798	16
ATC	10
B	1, 6, 8, 9
BWP	20
C	8, 9
CS	18
CTK	7
DFR	6
DMT	1
DMWP	20
ESB	17
F	2, 5, 8, 9
FC	18
FCF	18, 19
FCFT	19
FCT	1
HTF	7
HTM	7
HTP	7
HTR	7
HTSF	7
IF	5
IPL	5
IFS	5
IM	5
M	2, 5
MEC	19
MOB	19
MSWP	20
MTK	10
MVPL	17
MWP	20
NSi	7
OMJ	20
P	2, 5
PF	2, 6
PFS	6
PM	2, 6
PT	6
PTC	6
R	1, 3, 8, 9
S	2, 4, 6, 8, 9
SB	6
SF	1
SMWJ	19
TEC	19
TLJB	19
WMDS	20
WPMJ	20

NSi Industries LLC



9730 Northcross Center Ct.
 Huntersville
 North Carolina, USA
 28078



Phone Toll Free:
 800.321.5847



Fax Toll Free:
 800.841.5566



Email:
nsi@nsiindustries.com



Website:
www.nsiindustries.com

Terms of Sale

Vendor Number: 662381

1. Prices are F.O.B. our plant.
2. Prices do not include any sales tax.
3. Freight charges will be prepaid on all orders \$250.00 and over shipping within continental USA using standard shipping methods and service.
4. Minimum order – \$100.00.
5. Claims for shortage, erroneous charges or price corrections shall be deemed waived unless made in writing, delivered to NSi within 30 days of invoice.
6. Terms of payment – 2% 10th prox. net 25th following.
7. Warranties – NSi guarantees all products to be free of defects in material and workmanship for a period of 90 days from date of sale. Any claims for defective material must be agreed to in writing by NSi. Defective material will be replaced on an F.O.B. – our factory basis. NSi disclaims the implied warranty of fitness for a particular application.

Other Products Available

NSi can provide many other products for special applications which are not listed in this catalog. If you require an item which you do not find listed, please contact us. We would be pleased to provide a quotation upon receipt of a drawing or a sample.

Guarantee

It is our goal to provide extraordinary products and service on a daily basis. If our products or service do not meet with your satisfaction, please let us know immediately and we promise to make every reasonable effort to remedy the situation.