

Date: 2017/07/28

User Manual
Model Name: DHUR-AN32

Delivery Specifications

Product Description	STAMP module 802.11 abgn & BT
WNC Part Number	81DHUR31.G01
WNC Model Name	DHUR-AN32
Issue Version :	V1.1
Manufacturer	Wistron NeWeb Corporation (WNC) Address: 20 Park Avenue II Road, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. (ZIP Code: 308) Tel: +886-3-666-7799
Production Factory	Wistron NeWeb (Kunshan) Corporation Address: 789 Yujinxiang Road, Comprehensive Free Trade Zone, Kunshan City, Jiangsu Province, P.R.C (ZIP Code: 215300) Tel: 0086-512-5772-2688

Production Country	People's Republic of China
PO Reception & Invoice Release Company	ANC holding Corporation P.O. Box 3152, Road Town, Tortola, British Virgin Islands

Revision History

Version	Change history	Date
1.0	Draft version	2017/07/06
1.1	1. Update Power-on Sequence Specifications in page 9 2. Module board thickness tolerance in page 21 3. Add EEPROM information in page 16	2017/07/13
1.2	4. Add Module Photo in page 4 5. Add Clamshell Embossed Carrier information in page 29	2018/07/19

Contents

1. Production Introduction	4
2. Photo Photograph	5
3. Functional Block Diagram	6
4. I/O Pin Definition	7
5. Product Specification	8
5.1 WiFi portion	8
5.2 BT portion.....	15
5.3 EEPROM Information	16

1. Product Introduction



DHUR-AN32 is a 802.11 a/b/g/n WLAN/Bluetooth Combo Module which compliant with IEEE802.11n standard supports 2x2 a/b/g/n MIMO technology with data rate from MCS 0-15 in 20MHz/40MHz Channels, and BT4.2 LE specifications.

Features

- Operation at 2.4~2.5GHz and 5.15~5.825GHz frequency band to meet worldwide regulations
- Bluetooth v4.2 Low Energy(LE);
- Bluetooth specification v2.1+EDR;
- Support wireless data encryption with 64/128-bit WEP for security
- Drivers support Windows 2000,XP,Vista
- ROHS compliant


Interfaces and Power supply

- WLAN / Bluetooth RF interface
- USB interface
- Chip power down control
- 3.3V supply voltage

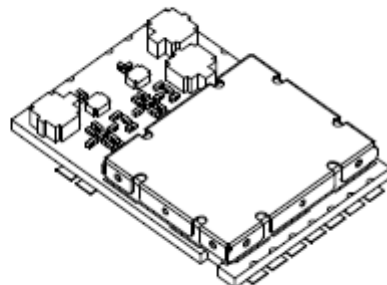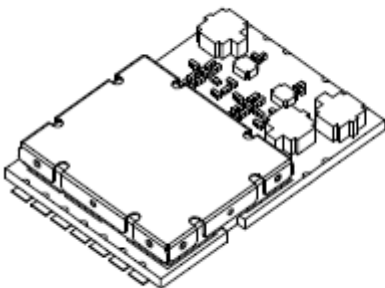

2. Product Photograph

Top side

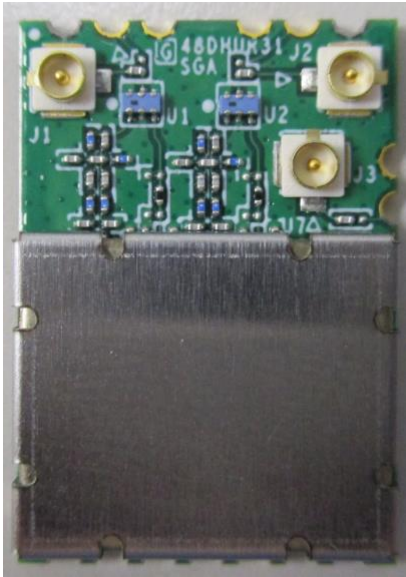

Bottom side



4. I/O Pin Definition

Pin list

Pin	Name	Pin	Name	Pin	Name
1	GND	6	GND	11	USBDM
2	ANT0	7	GND	12	3.3V
3	GND	8	BT_ANT	13	BT_WOL
4	GND	9	GND	14	WOL
5	ANT1	10	USBDP	15	RST

5. Product Specification

5.1 WiFi portion

Item	Key specifications					
Main chipset	MTK MT7632TU					
TX/RX	2T2R					
Frequency range	2.400 ~ 2.497GHz, 5.15GHz ~ 5.85GHz					
Modulation technique	<ul style="list-style-type: none"> ➤ 802.11 a/b/g DSSS (DBPSK, DQPSK, CCK) OFDM (BPSK, QPSK, 16-QAM, 64-QAM) DSSS (Direct Sequence Spread Spectrum) with DBPSK (Differential Binary Phase Shift Keying 1Mbps), DQPSK (Differential Quaternary Phase Shift Keying 2Mbps), and CCK (Complementary Code Keying 5.5&11Mbps), and OFDM (Orthogonal Frequency Division Multiplexing with BPSK for 6,9Mbps、QPSK for 12,18Mbps、16QAM for 24,36Mbps、64QAM for 48,54Mbps) ➤ 802.11n a/g OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 					
Host interface	➤ USB 2.0					
Operation voltage	➤ 3.3V DC +/-9% (including voltage ripple)					
Power consumption @25 °C	Mode		Average		Peak	
			2.4G	5G	2.4G	5G
	WiFi Tx		430mA	620mA	580mA	780mA
	WiFi Rx		165mA	160mA	240mA	230mA
	Driver disable		20mA		55mA	
	Standby WiFi+BT		15mA		50mA	
*WiFi Tx and Rx is for continuous Tx and Rx						
**Power consumption measured on PC platform.						

Output power (for each chain; tolerance +1.5/-1.5 dB)	➤ 802.11a	Test Frequencies	6-12_Target	18_Target	24_Target	36_Target	48_Target	54_Target	
	5180	14	14	14	14	14	14	14	
	5320	14	14	14	14	14	14	14	
	5500	14	14	14	14	14	14	14	
	5600	14	14	14	14	14	14	14	
	5700	14	14	14	14	14	14	14	
	5825	14	14	14	14	14	14	14	
	➤ 802.11b	Test Frequencies	1/2_Target	5.5_Target	11_Target				
	2412	15	15	15					
	2472	15	15	15					
	2484	15	15	15					
	➤ 802.11g	Test Frequencies	6-12_Target	18_Target	24_Target	36_Target	48_Target	54_Target	
	2412	14	14	14	14	14	14	14	
	2442	14	14	14	14	14	14	14	
	2472	14	14	14	14	14	14	14	
	➤ 802.11n	Freq. Range: HT20							
	Test Freq	MCS 0/8	MCS 1/9	MCS 2/10	MCS 3/11	MCS 4/12	MCS 5/13	MCS 6/14	MCS 7/15
	5180	12	12	12	12	12	12	12	12
	5240	12	12	12	12	12	12	12	12
	5320	12	12	12	12	12	12	12	12
	5500	12	12	12	12	12	12	12	12
	5700	12	12	12	12	12	12	12	12
	5745	12	12	12	12	12	12	12	12
	5825	12	12	12	12	12	12	12	12
	Freq. Range: HT40								
	Test Freq	MCS 0/8	MCS 1/9	MCS 2/10	MCS 3/11	MCS 4/12	MCS 5/13	MCS 6/14	MCS 7/15
	5190	12	12	12	12	12	12	12	12
	5230	12	12	12	12	12	12	12	12
5270	12	12	12	12	12	12	12	12	
5510	12	12	12	12	12	12	12	12	
5670	12	12	12	12	12	12	12	12	
5755	12	12	12	12	12	12	12	12	
5795	12	12	12	12	12	12	12	12	
Freq. Range: HT20									
Test Freq	MCS 0/8	MCS 1/9	MCS 2/10	MCS 3/11	MCS 4/12	MCS 5/13	MCS 6/14	MCS 7/15	
2412	14	14	14	14	14	14	14	14	
2437	14	14	14	14	14	14	14	14	
2472	14	14	14	14	14	14	14	14	
Freq. Range: HT40									
Test Freq	MCS 0/8	MCS 1/9	MCS 2/10	MCS 3/11	MCS 4/12	MCS 5/13	MCS 6/14	MCS 7/15	
2412	14	14	14	14	14	14	14	14	
2437	14	14	14	14	14	14	14	14	
2472	14	14	14	14	14	14	14	14	
EVM	The transmit modulation accuracy is measured using error vector magnitude (EVM). EVM is the magnitude of the phase difference as a function of time between an ideal reference signal and the measured transmitted signal.								
➤ 802.11a	Modulation	Code Rate	Relative constellation error (dB)			Relative constellation error (dB)			
			IEEE Spec (1Tx dB)			Typical (1Tx dB)			
	BPSK	1/2	-5			-20			
	BPSK	3/4	-8			-20			
	QPSK	1/2	-10			-22			

	QPSK	3/4	-13	-22
	16-QAM	1/2	-16	-30
	16-QAM	3/4	-19	-32
	64-QAM	2/3	-22	-32
	64-QAM	3/4	-25	-33
➤	802.11b			
	Modulation	Code Rate	Relative constellation error (dB) IEEE Spec (1Tx dB)	Relative constellation error (dB) Typical (1Tx dB)
	DBPSK		-10	-15
	DQPSK		-10	-15
	CCK		-10	-15
➤	802.11g			
	Modulation	Code Rate	Relative constellation error (dB) IEEE Spec (1Tx dB)	Relative constellation error (dB) Typical (1Tx dB)
	BPSK	1/2	-5	-20
	BPSK	3/4	-8	-20
	QPSK	1/2	-10	-20
	QPSK	3/4	-13	-20
	16-QAM	1/2	-16	-30
	16-QAM	3/4	-19	-30
	64-QAM	2/3	-22	-32
	64-QAM	3/4	-25	-33
➤	802.11ng (HT20)			
	Modulation	Code Rate	Relative constellation error (dB) IEEE Spec (1Tx dB)	Relative constellation error (dB) Typical (1Tx dB)
	(MCS0) BPSK	1/2	-5	-20
	(MCS1) QPSK	1/2	-10	-20
	(MCS2) QPSK	3/4	-13	-20
	(MCS3) 16-QAM	1/2	-16	-28
	(MCS4) 16-QAM	3/4	-19	-30
	(MCS5) 64-QAM	2/3	-22	-32
	(MCS6) 64-QAM	3/4	-25	-32
	(MCS7) 64-QAM	5/6	-27	-33
	(MCS8) BPSK	1/2	-5	-20
	(MCS9) QPSK	1/2	-10	-20
	(MCS10) QPSK	3/4	-13	-20
	(MCS11) 16-QAM	1/2	-16	-28
	(MCS12) 16-QAM	3/4	-19	-30
	(MCS13) 64-QAM	2/3	-22	-32
	(MCS14) 64-QAM	3/4	-25	-32
	(MCS15) 64-QAM	5/6	-27	-33
	(HT40)			
	Modulation	Code Rate	Relative constellation error (dB) IEEE Spec (1Tx dB)	Relative constellation error (dB) Typical (1Tx dB)
	(MCS0) BPSK	1/2	-5	-20
	(MCS1) QPSK	1/2	-10	-20
	(MCS2) QPSK	3/4	-13	-20
	(MCS3) 16-QAM	1/2	-16	-28
	(MCS4) 16-QAM	3/4	-19	-30
	(MCS5) 64-QAM	2/3	-22	-32
	(MCS6) 64-QAM	3/4	-25	-32
	(MCS7) 64-QAM	5/6	-27	-33
	(MCS8) BPSK	1/2	-5	-20
	(MCS9) QPSK	1/2	-10	-20
	(MCS10) QPSK	3/4	-13	-20
	(MCS11) 16-QAM	1/2	-16	-28
	(MCS12) 16-QAM	3/4	-19	-30
	(MCS13) 64-QAM	2/3	-22	-32

	(MCS14) 64-QAM	3/4	-25	-32
	(MCS15) 64-QAM	5/6	-27	-33
	➤ 802.11na (HT20)			
	Modulation	Code Rate	Relative constellation error (dB) IEEE Spec (1Tx dB)	Relative constellation error (dB) Typical (1Tx dB)
	(MCS0) BPSK	1/2	-5	-20
	(MCS1) QPSK	1/2	-10	-20
	(MCS2) QPSK	3/4	-13	-20
	(MCS3) 16-QAM	1/2	-16	-28
	(MCS4) 16-QAM	3/4	-19	-30
	(MCS5) 64-QAM	2/3	-22	-32
	(MCS6) 64-QAM	3/4	-25	-32
	(MCS7) 64-QAM	5/6	-27	-33
	(MCS8) BPSK	1/2	-5	-20
	(MCS9) QPSK	1/2	-10	-20
	(MCS10) QPSK	3/4	-13	-20
	(MCS11) 16-QAM	1/2	-16	-28
	(MCS12) 16-QAM	3/4	-19	-30
	(MCS13) 64-QAM	2/3	-22	-32
	(MCS14) 64-QAM	3/4	-25	-32
	(MCS15) 64-QAM	5/6	-27	-33
	(HT40)			
	Modulation	Code Rate	Relative constellation error (dB) IEEE Spec (1Tx dB)	Relative constellation error (dB) Typical (1Tx dB)
	(MCS0) BPSK	1/2	-5	-20
	(MCS1) QPSK	1/2	-10	-20
	(MCS2) QPSK	3/4	-13	-20
	(MCS3) 16-QAM	1/2	-16	-28
	(MCS4) 16-QAM	3/4	-19	-30
	(MCS5) 64-QAM	2/3	-22	-32
	(MCS6) 64-QAM	3/4	-25	-32
	(MCS7) 64-QAM	5/6	-27	-33
	(MCS8) BPSK	1/2	-5	-20
	(MCS9) QPSK	1/2	-10	-20
	(MCS10) QPSK	3/4	-13	-20
	(MCS11) 16-QAM	1/2	-16	-28
	(MCS12) 16-QAM	3/4	-19	-30
	(MCS13) 64-QAM	2/3	-22	-32
	(MCS14) 64-QAM	3/4	-25	-32
	(MCS15) 64-QAM	5/6	-27	-33
Sensitivity	➤ 802.11a			
	Modulation	Code Rate	IEEE Spec (1Rx dBm)	Typical (1Rx dBm)
	BPSK	1/2	-82	-88
	BPSK	3/4	-81	-86
	QPSK	1/2	-79	-84
	QPSK	3/4	-77	-82
	16-QAM	1/2	-74	-78
	16-QAM	3/4	-70	-76
	64-QAM	2/3	-66	-72
	64-QAM	3/4	-65	-70
	➤ 802.11b			
	Modulation	Code Rate	IEEE Spec (1Rx dBm)	Typical (1Rx dBm)
	DBPSK		not specified	-92
	DQPSK		not specified	-90
	CCK		not specified	-86
	➤ 802.11g			
	Modulation	Code Rate	IEEE Spec (1Rx dBm)	Typical (1Rx dBm)
	BPSK	1/2	-82	-90
	BPSK	3/4	-81	-88

	QPSK	1/2	-79	-86
	QPSK	3/4	-77	-84
	16-QAM	1/2	-74	-82
	16-QAM	3/4	-70	-78
	64-QAM	2/3	-66	-74
	64-QAM	3/4	-65	-72
	➤ 802.11ng (HT20)			
	Modulation	Code Rate	IEEE Spec (1Rx dBm)	Typical (1Rx dBm)
	(MCS0) BPSK	1/2	-82	-88
	(MCS1) QPSK	1/2	-79	-86
	(MCS2) QPSK	3/4	-77	-82
	(MCS3) 16-QAM	1/2	-74	-80
	(MCS4) 16-QAM	3/4	-70	-76
	(MCS5) 64-QAM	2/3	-66	-73
	(MCS6) 64-QAM	3/4	-65	-71
	(MCS7) 64-QAM	5/6	-64	-69
	(HT40)			
	Modulation	Code Rate	IEEE Spec (1Rx dBm)	Typical (1Rx dBm)
	(MCS0) BPSK	1/2	-79	-86
	(MCS1) QPSK	1/2	-76	-82
	(MCS2) QPSK	3/4	-74	-80
	(MCS3) 16-QAM	1/2	-71	-77
	(MCS4) 16-QAM	3/4	-67	-74
	(MCS5) 64-QAM	2/3	-63	-69
	(MCS6) 64-QAM	3/4	-62	-68
	(MCS7) 64-QAM	5/6	-61	-66
	➤ 802.11na (HT20)			
	Modulation	Code Rate	IEEE Spec (1Rx dBm)	Typical (1Rx dBm)
	(MCS0) BPSK	1/2	-82	-86
	(MCS1) QPSK	1/2	-79	-84
	(MCS2) QPSK	3/4	-77	-82
	(MCS3) 16-QAM	1/2	-74	-80
	(MCS4) 16-QAM	3/4	-70	-77
	(MCS5) 64-QAM	2/3	-66	-71
	(MCS6) 64-QAM	3/4	-65	-70
	(MCS7) 64-QAM	5/6	-64	-69
	(HT40)			
	Modulation	Code Rate	IEEE Spec (1Rx dBm)	Typical (1Rx dBm)
	(MCS0) BPSK	1/2	-79	-84
	(MCS1) QPSK	1/2	-76	-80
	(MCS2) QPSK	3/4	-74	-78
	(MCS3) 16-QAM	1/2	-71	-75
	(MCS4) 16-QAM	3/4	-67	-71
	(MCS5) 64-QAM	2/3	-63	-67
	(MCS6) 64-QAM	3/4	-62	-66
	(MCS7) 64-QAM	5/6	-61	-64
Transmit spectrum mask	For transmitted spectral mask for 11b shall be less than -50dBr for 22MHz<f<fc+22MHz. For transmitted spectral mask for 11g shall be less than -40dBr for fc-30MHz<f<fc+30MHz. For transmitted spectral mask for 11n 20MHz shall be less than -45dBr for fc-30MHz<f<fc+30MHz. For transmitted spectral mask for 11n 40MHz shall be less than -45dBr for fc-60MHz<f<fc+60MHz.			
Transmit spectrum flatness	For 802.11g the average energy of the constellations in each of spectral lines -16..-1 and +1..+16 will deviate no more than +/- 2dB from their average energy. For 802.11n 40MHz mode, the average energy of the constellations in each of spectral lines -42..-2 and +2..+42 will deviate no more than +/- 2dB from their average energy. The transmitted spectral flatness should be with in +2/- 4dB.			
Transmit	The transmitted center frequency tolerance shall be ±20 ppm maximum.			

center frequency tolerance	
Carrier suppression	<p>802.11a: The leakage of the center frequency component shall not exceed -15 dB relative to overall transmitted power or, equivalently, +2 dB relative to the average energy of the rest of the sub-carriers.</p> <p>802.11b: The RF carrier suppression, measured at the channel center frequency, shall be at least 15 dB below the peak SIN(x)/x power spectrum.</p> <p>802.11g: The leakage of the center frequency component shall not exceed -15 dB relative to overall transmitted power or, equivalently, +2 dB relative to the average energy of the rest of the sub-carriers.</p> <p>802.11n: For all 20 MHz modes of transmission The leakage of the center frequency component shall not exceed -15 dB relative to overall transmitted power or, equivalently, +2 dB relative to the average energy of the rest of the sub-carriers. For all 40 MHz modes of transmission The center frequency leakage shall not exceed -18 dB relative to overall transmitted power, or, equivalently, +2 dB relative to the average energy of the rest of the sub-carriers.</p>
Transmit power on ramp and power down ramp time	<ul style="list-style-type: none"> ➤ The transmitting power-on ramp for 10% to 90% of maximum power shall be no greater than 2 μs. ➤ The transmitting power-down ramp for 90% to 10% of maximum power shall be no greater than 2 μs.
Receiver maximum input level	<ul style="list-style-type: none"> ➤ 802.11a Modulation Code Rate IEEE Spec (1Rx dBm) >-30 ➤ 802.11b Modulation IEEE Spec (1Rx dBm) <ul style="list-style-type: none"> DBPSK >-10 DQPSK >-10 CCK >-10 ➤ 802.11g Modulation Code Rate IEEE Spec (1Rx dBm) >-20 ➤ 802.11na Modulation Code Rate IEEE Spec (1Rx dBm) >-30 ➤ 802.11ng Modulation Code Rate IEEE Spec (1Rx dBm) >-20
PCB dimension	<ul style="list-style-type: none"> ➤ 16+/-0.1mm x 23.00+/-0.1mm x 1.0+/-0.1mm 4L FR4
Transfer data rate	<ul style="list-style-type: none"> ➤ 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps ➤ 802.11b: 1, 2, 5.5, 11Mbps ➤ 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps ➤ 802.11n: @800GI(400GI) <ul style="list-style-type: none"> ● 20MHz BW <ul style="list-style-type: none"> ▪ 1 Nss: 65(72.2) Mbps maximal ▪ 2 Nss: 130(144.444) Mbps maximal ● 40MHz BW <ul style="list-style-type: none"> ▪ 1 Nss: 135(150) Mbps maximal ▪ 2 Nss: 270(300) Mbps maximal ▪ 1 Nss: 390(433.3) Mbps maximal ▪ 2 Nss: 780(866.7) Mbps maximal

Security	WEP, WPA ,WPA2 ,AES, TKIP
Operation temperature	-10° ~ 70° C
Storage temperature	- 35° ~ 70° C ,R.H:90%
Antenna	2 I-PEX connector on module
PID/VID	PID: 76A1, VID: 0E8D

5.2 BT portion

Item	Key specifications		
Main chipset	➤ MTK MT7632TU		
Compliance	➤ Bluetooth v4.2 LE		
Frequency range	➤ 2400 ~ 2483.5MHz		
Initial carrier frequency tolerance	➤ +/- 40kHz (typical)		
Modulation technique	➤ Frequency hopping, 1600 hops/sec		
Channel spacing	➤ 1MHz		
Channels support	➤ 79 channels		
Operation voltage	➤ 5V +/-9% (including voltage ripple)		
Power consumption @25° C		Avg (mA)	Max (mA)
	Continuous DH5 TX	38	79
	Continuous 2DH5 TX	36.5	72
	Continuous 3DH5 TX	36.5	72
	Continuous BLE TX	33.5	65
Note : *BT Tx is for continuous Tx **Power consumption measured on PC platform..			
Output power (dBm)	➤ Class 1, BT output power is adjusted by FW .		
Sensitivity	➤ -85 dBm (typ.) for pi/4-DQPSK, 0.1%BER		
Operation temperature	➤ -10° ~ 70° C		
Storage temperature	➤ -35° ~ 70° C , R.H. : 90%		
Antenna	➤ 1 I-PEX connector on module		
PID/VID	➤ PID: 76A1, VID: 0E8D		

5.3 EEPROM Information

5.3.1 WiFi Information

- WiFi MAC Address
- PA parameter
- Vendor ID
- Product ID

5.3.2 BT Information

- BT MAC Address
- Vendor ID
- Product ID

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device is restricted for indoor use.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

IMPORTANT NOTE:

This module is intended for OEM integrator. The OEM integrator is responsible for the compliance to all the rules that apply to the product into which this certified RF module is integrated.

Additional testing and certification may be necessary when multiple modules are used.

USERS MANUAL OF THE END PRODUCT:

In the users manual of the end product, the end user has to be informed to keep at least 20cm separation with the antenna while this end product is installed and operated. The end user has to be informed that the FCC radio-frequency exposure guidelines for an uncontrolled environment can be satisfied.

The end user has to also be informed that any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

If the labelling area is small than the palm of the hand, then additional FCC part 15.19 statement is required to be available in the users manual: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following " Contains TX FCC ID: NKR-DHURAN32 ".

If the labelling area is larger than the palm of the hand, then the following FCC part 15.19 statement has to also be available on the label: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.
Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This radio transmitter DHUR-AN32 has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio DHUR-AN32 a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

Bluetooth

Ant. No.	Type	Gain (dBi)	Connector	Remark
1	PIFA	3.61	UFL	---

WIFI 2.4G

Ant. No.	Model	Type	Gain (dBi)	Connector	Remark
1	RFMTA340740IMLB701	PIFA	2.3	UFL	---
2	RFMTA340765IMLB702_A	PIFA	2.3	UFL	---

WIFI 5G

Ant. No.	Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)			
				5150-5250	5250-5350	5470-5725	5725-5850
1	RFMTA340740IMLB701	PIFA	UFL	4.36			
2	RFMTA340765IMLB702_A	PIFA	UFL	4.36			

Dynamic Frequency Selection (DFS) for devices operating in the bands 5250- 5350 MHz, 5470-5600 MHz and 5650-5725 MHz.

Sélection dynamique de fréquences (DFS) pour les dispositifs fonctionnant dans les bandes 5250-5350 MHz, 5470-5600 MHz et 5650-5725 MHz.

The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

The maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit.

le gain maximal d'antenne permis pour les dispositifs utilisant les bandes 5250-5350 MHz et 5470-5725 MHz doit se conformer à la limite de p.i.r.e.

The maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate.

le gain maximal d'antenne permis (pour les dispositifs utilisant la bande 5725-5850 MHz)

doit se conformer à la limite de p.i.r.e. spécifiée pour l'exploitation point à point et non point à point, selon le cas.

Users should also be advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

De plus, les utilisateurs devraient aussi être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5250-5350 MHz et 5650-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

For indoor use only.

Pour une utilisation en intérieur uniquement.

IMPORTANT NOTE:**IC Radiation Exposure Statement:**

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un

environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20

cm de distance entre la source de rayonnement et votre corps.

IMPORTANT NOTE:

This module is intended for OEM integrator. The OEM integrator is responsible for the compliance to all the rules that apply to the product into which this certified RF module is integrated.

Additional testing and certification may be necessary when multiple modules are used.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

USERS MANUAL OF THE END PRODUCT:

In the users manual of the end product, the end user has to be informed to keep at least 20cm separation with the antenna while this end product is installed and operated. The end user has to be informed that the IC radio-frequency exposure guidelines for an uncontrolled environment can be satisfied.

The end user has to also be informed that any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following " Contains IC: 4441A-DHURAN32 ".

The Host Model Number (HMN) must be indicated at any location on the exterior of the end product or product packaging or product literature which shall be available with the end product or online.