


High Resolution
TFT LCD Monitor

HLM151X

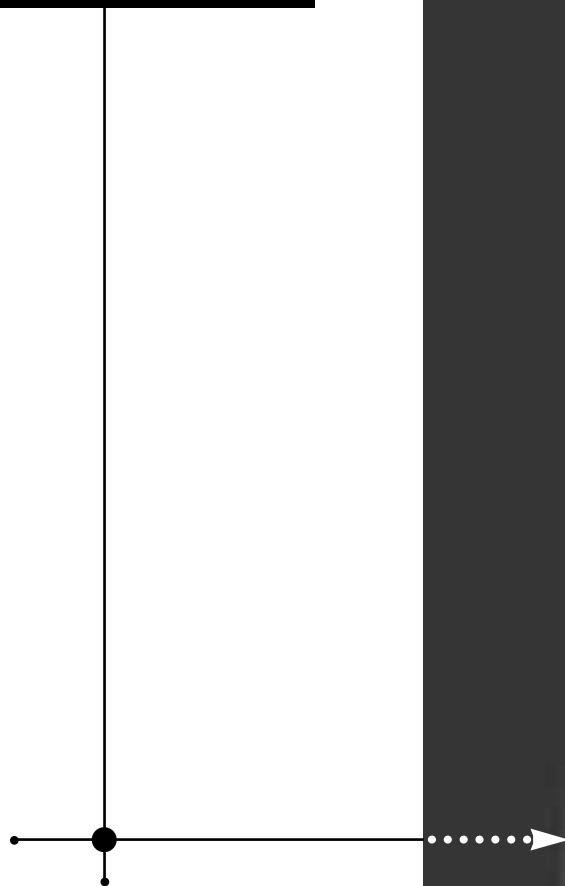

Information to the user

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Information in this manual is subject to change without notice.

© 2001 HANGIL TELECOM CO.,LTD. All rights reserved.

Reproduction in any manner whatsoever without the written permission of HANGIL TELECOM CO.,LTD. Is strictly forbidden.

HANGIL TELECOM CO.,LTD. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

HLM170M is registered trademarks of HANGIL TELECOM CO.,LTD.;

Microsoft, Windows® and Windows®NT are registered trademarks of

Microsoft Corporation; VESA, DPMS and DDC are registered trademarks of Video Electronics Standard Association; All other product names mentioned herein may be the trademarks or registered trademarks of their respective owners.

Contents



Before Setting up	5
Brief Specification of LCD Monitor	5
Precautions	6
Items	8
Setting up the LCD monitor	9
Where is a good place to position the monitor?	9
Please control Tilting Degree.	9
Check before connecting the power cord and the signal cable !!	9
How to connect the power cord and the signal cable to the LCD monitor.	10
Connecting Your LCD Monitor	10
Plug & Play	10
Warm-up Time	10
Adjusting The Monitor	11
The Function Control Buttons	11
How to use function control button	11
How to use the Hot Key.	12
Main OSD Menu	13
AUTO CONFIG	13
POSITION	14



BRIGHTNESS/CONTRAST	15
CLOCK/PHASE	15
COLOR	16
USER COLOR	17
OSD POSITION	17
INFORMATION	18
Appendix	19
Appendix A. Specifications	19
Appendix B. Display Modes	20
Appendix C. 15-pin D-Sub Connector	20
Appendix D. DPMS Power Saving Mode	21
Troubleshooting	22

1 Before Setting up



This is 15.1 inch TFT-LCD monitor. Before Setting up the LCD Monitor, Please this manual read help your understanding ok.

Brief Specification of LCD Monitor

- Resolution : 15.1 inch XGA (1024 X 768 @60Hz)
- Color display : 262,144 colors
- DPMS (Display Power Management Signaling)
- Viewing angle : L/R 75°/75°, U/D 55°/55°
- Brightness : 200cd/m²
- OSD (On Screen Display)
- Auto Configuration : Hot key
- DDC1/2B/2Bi : Plug & Play


Notice

According to PC system, DDC 1/2B may not be supported. If you meet Display Error message, check your video card which compatibility with DDC. If you want to know more information, please contact our service center.




HLM151X


Precautions




Check the voltage corresponds to the local electrical supply before connecting the AC power cord.




Do not use Ketone type material (ex. Acetone), Ethyl Alcohol, Toluene, Ethyl Acid or Methyl chloride, to clear the panel. It might permanently damage the panel.

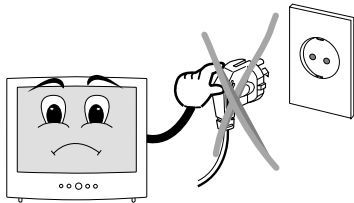


Never use the damaged AC power cord.




Keep it away from stoves, heaters, fireplaces and other sources of heat and magnets.




Don't put your LCD monitor in a location with high humidity and dust.
Temperature : 0~40 °C
Humidity : 90% less




Place the LCD monitor on a solid surface. If dropped, the screen can be damaged easily.



Don't touch the screen with a acute nail and pin




The LCD monitor consists of electrical devices.
If the LCD monitor is damaged, contact immediately
our service center.



The LCD monitor can be damaged easily by shock.




If you don't use the LCD monitor for a long time,
unplug the LCD monitor.

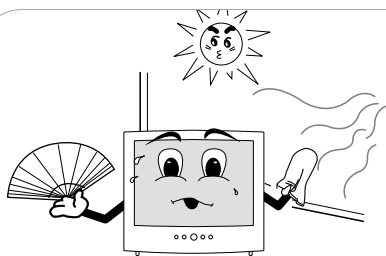

Don't use your LCD monitor in under direct sunlight.


2 Items




User Manual



LCD Monitor



AC Power Cord



15-pin D-Sub Signal Cable

Notice


Please make sure the following items are included with your monitor.
If any items are missing, contact your dealer.

3 Setting up the LCD monitor



Where is a good place to position the monitor? _____

Place the LCD monitor on a solid and flat surface. If dropped, the screen can be damaged easily.

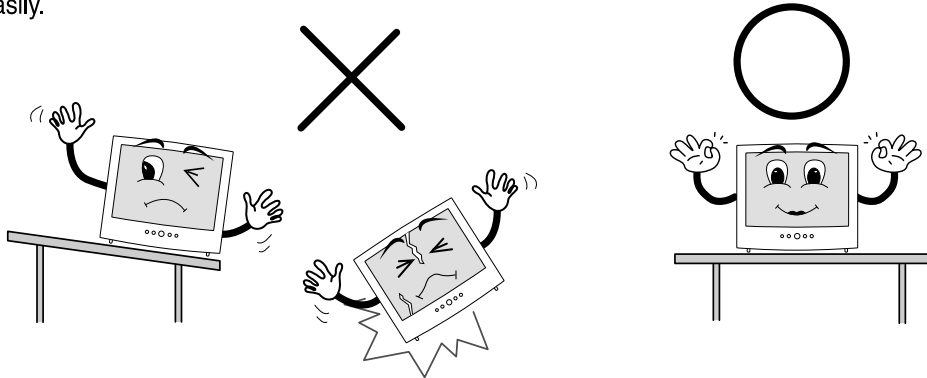


Please control Tilting Degree. _____

You can see a supporting prop on the backside of the LCD monitor.

Tilt the screen until you feel comfortable for working

Tilting Degree (Up/Down) : +10/+30 Degree

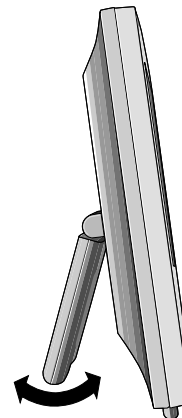


Check before connecting the power cord and the signal cable !! _____

Turn off the PC power before connecting power cord and signal cable to the LCD monitor.



HLM151X

How to connect the power cord and the signal cable to the LCD monitor.

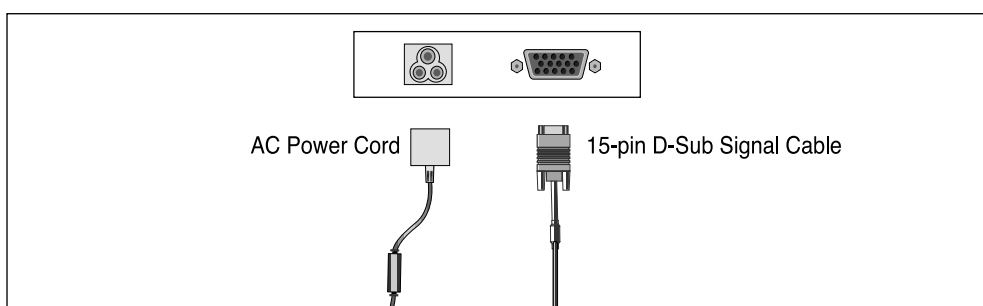

Connecting Your LCD Monitor

1. First, you can connect the power cord to the LCD monitor and AC outlet.
2. You can connect the signal cable to the LCD monitor and the PC system.

Plug & Play

The adoption of the new VESA(Plug and Play solution eliminates complicated and time consuming setup. It allows you to install your monitor in a Plug and Play compatible system without the usual hassles and confusion. Your PC system can easily identify and configure itself for use with your display. This monitor automatically tells the PC system its Extended Display Identification Data (EDID) using Display Data Channel (DDC) protocols so the PC system can automatically configure itself to use the flat panel display.

Warm-up Time

All LCD monitors need time to become thermally stable whenever you turn on the monitor. Therefore, to achieve more accurate adjustments for parameters, allow the LCD monitor to be warmed up for at least 20 minutes before making any screen adjustments.