


SwivelLok®  
Multi-Position  
Liquidtight Connector

# HUBBELL

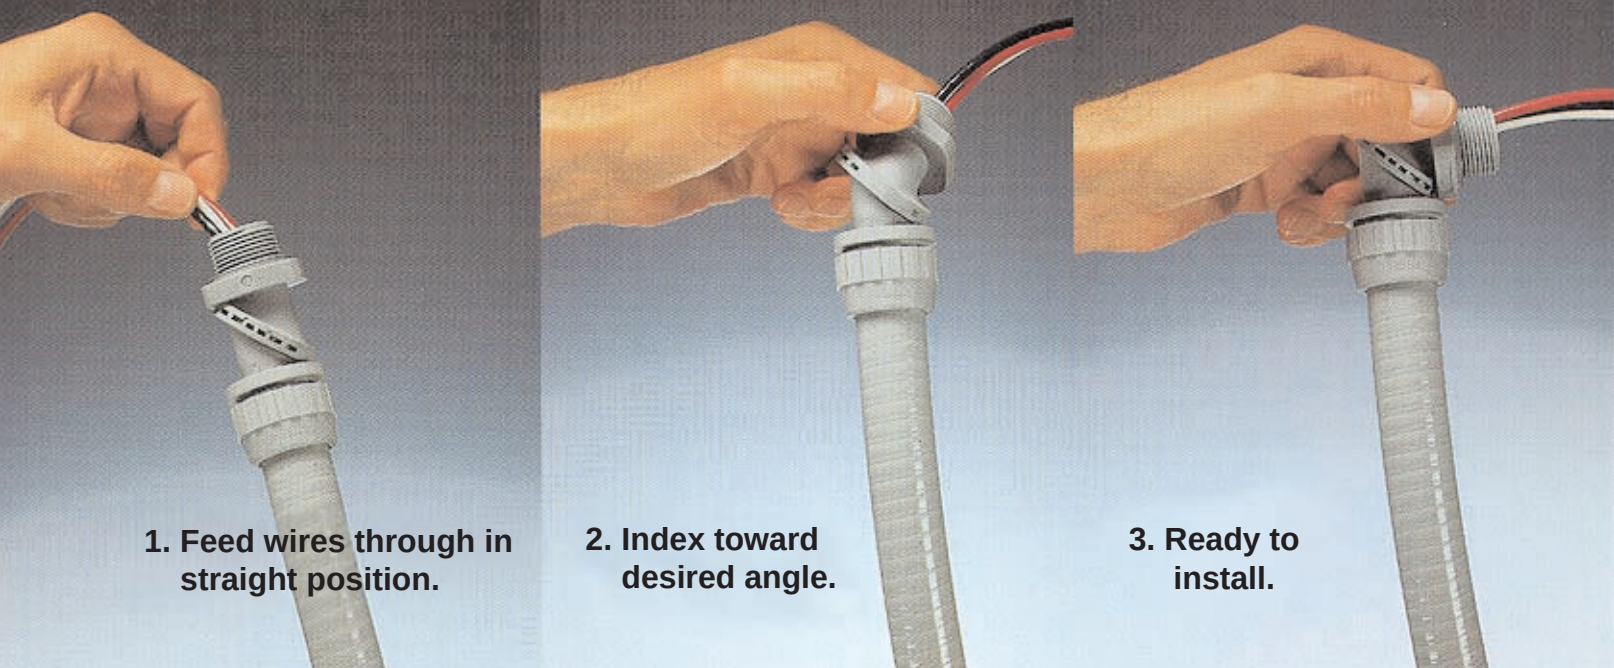

1. Feed wires through in straight position.

2. Index toward desired angle.

3. Ready to install.

With the introduction of a 3/8" version, enhanced SwivelLok® multi-position liquidtight connectors are now available in 3/8", 1/2", 3/4" and 1" sizes in both gray and black nylon. When teamed with PolyTuff® I flexible liquidtight nonmetallic conduit or PolyTuff® II flexible liquidtight nonmetallic tubing, it becomes the *SwivelLok® system*. Now there's **one** connector that can handle any angle from 0° to 90°. Easily feed the conductors through

the SwivelLok® connector in the straight position and then simply swivel it to the desired angle. No need to spend time forcing wires through 45° and 90° connectors, one SwivelLok® connector can handle all your liquidtight applications. SwivelLok® connectors—innovation, quality and performance in one liquidtight connector system engineered to save time and installed cost.

## Features


- Swivels into any position between straight and 90 degrees.
- Indexes every 15 degrees when twisted.
- Smooth ferrule.
- Multiple position capability.
- Meets same UL and CSA performance standards as all Hubbell liquidtight fittings.

## Benefits

- Saves time by feeding wires through straight, then twisting to desired position. No more fishing wires through 90 degree connectors. Same fitting may be used in any desired position.
- Easy position selection.
- Eliminates threading on at installation. Saves time. Provides superior conduit pull-out retention.
- Less inventory and broader application capacity.
- High reliability.

| Ordering Information |      |       | Dimensional Chart |            |       |      |       |       |       |             |
|----------------------|------|-------|-------------------|------------|-------|------|-------|-------|-------|-------------|
| Catalog Number       | Size | Color | Catalog Number    | Trade Size | A     | B    | C     | D     | E     | F           |
| PS0389NGY            | 3/8" | GRAY  | PS0389NGY         |            |       |      | A/C*  | A/F*  |       |             |
| PS0509NGY            | 1/2" | GRAY  | PS0389NBK         | 3/8"       | 3.268 | .569 | 1.406 | 1.298 | 1.300 | 1.426 1.998 |
| PS0759NGY            | 3/4" | GRAY  | PS0509NGY         |            |       |      |       |       |       |             |
| PS1009NGY            | 1"   | GRAY  | PS0509NBK         | 1/2"       | 3.268 | .569 | 1.406 | 1.298 | 1.300 | 1.426 1.998 |
| PS0389NBK            | 3/8" | BLACK | PS0759NGY         |            |       |      |       |       |       |             |
| PS0509NBK            | 1/2" | BLACK | PS0759NBK         | 3/4"       | 3.659 | .581 | 1.650 | 1.525 | 1.525 | 1.593 2.229 |
| PS0759NBK            | 3/4" | BLACK | PS1000NGY         |            |       |      |       |       |       |             |
| PS1009NBK            | 1"   | BLACK | PS1009NBK         | 1"         | 3.996 | .718 | 1.937 | 1.798 | 1.798 | 1.838 2.296 |

\*A/C = Across corners, A/F\* = Across flats

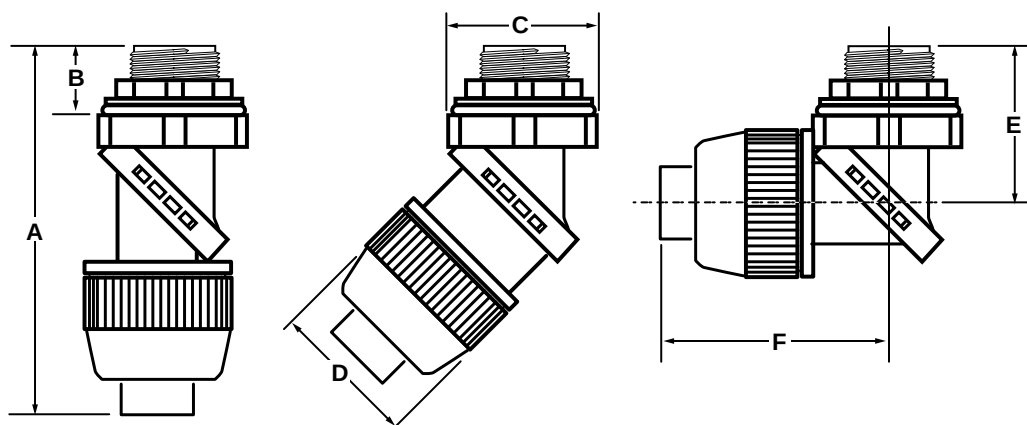

## SwivelLok Connectors...Make it a System

When teamed with PolyTuff I flexible liquidtight nonmetallic conduit or PolyTuff II flexible liquidtight nonmetallic tubing, it becomes the *SwivelLok System*. Add straight, 90 degree or SwivelLok connectors where applicable to make PolyTuff nonmetallic conduit or tubing the choice for any job. PolyTuff liquidtight systems: the system you want to connect with.

### Systems Ordering Information

| Trade Size | Polytuff I Gray Conduit | Straight Gray Connectors | 90° Gray Connectors | PolyTuff II Black Tubing | Straight Black Connectors | 90° Black Connectors |
|------------|-------------------------|--------------------------|---------------------|--------------------------|---------------------------|----------------------|
| 1/4"       | -                       | -                        | -                   | B2025                    | F2025                     | F20259               |
| 3/8"       | G1038                   | P038NGYA                 | PS0389NGY*          | B2038                    | P038NBKA                  | PS0389NBK*           |
| 1/2"       | G1050                   | P050NGYA                 | PS0509NGY*          | B2050                    | P050NBKA                  | PS0509NBK*           |
| 3/4"       | G1075                   | P075NGYA                 | PS0759NGY*          | B2075                    | P075NBKA                  | PS0759NBK*           |
| 1"         | G1100                   | P100NGYA                 | PS1009NGY*          | B2100                    | P100NBKA                  | PS1009NBK*           |
| 1 1/4"     | G1125                   | P125NGY                  | P1259NGY            | B2125                    | P125NBK                   | P1259NBK             |
| 1 1/2"     | G1150                   | P150NGY                  | -                   | B150NBK                  | B150NBK                   | -                    |
| 2"         | G1200                   | P200NGY                  | -                   | B2200                    | P200NBK                   | -                    |

\*SwivelLok Connector



## Wiring Device - Kellems

Hubbell Incorporated (Delaware) • 185 Plains Road • Milford, CT 06460-2420 • (203) 882-4800 • FAX (800) 255-1031  
World Wide Web URL: <http://www.hubbell-wiring.com>

### Worldwide Locations

Hubbell Canada (905) 839-1138, Fax (905) 839-9108  
Hubbell Ltd. England (441) 234-855444, Fax (441) 234-854008  
Hubbell-Taian Co., Ltd., (886) 2 567-5995, Fax (886) 2 567-4853  
Hubbell Int'l. Inc., Korea Branch (82) 2 607-1362, Fax (82) 2 603-7386

Hubbell de Mexico, S.A. de C.V. (52) 5 575-2022, Fax (52) 5 559-8626  
Caribe Sales Agencies, Puerto Rico (809) 720-7185, Fax (809) 789-2796  
Hubbell S.E. Asia Pte., Ltd., (65) 382-1600, Fax (65) 382-3727  
Hubbell Inc. Middle East (971) 4 369-763, Fax (971) 4 360-541

Printed In U.S.A. Specifications subject to change without notice. ® Registered trademark of Hubbell Incorporated

H4539