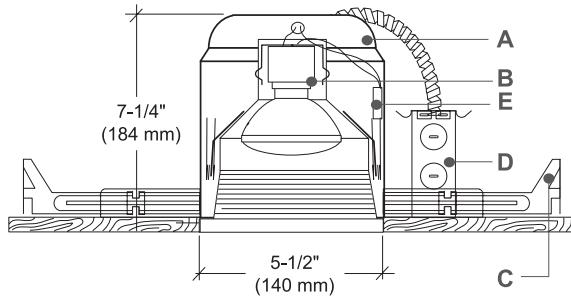
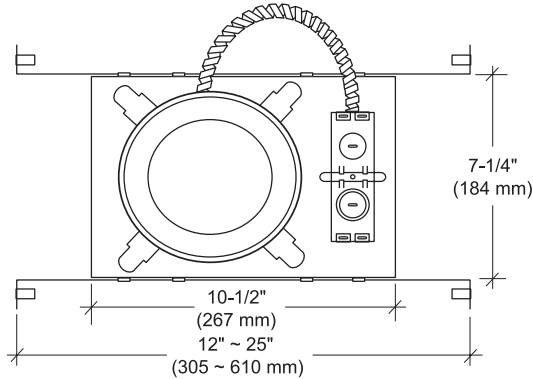


B5**5" UNIVERSAL HOUSING****B
A
F
F
L
E
T
R
I
M**
5"**I
N
C
A
N
D
E
S
C
E
N
T****DESCRIPTION**

New construction, thermally protected, non-IC rated specification grade recessed housing. Accommodates up to 75W PAR 30, R30 and A19 lamps. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four 1/2" KOs, one 3/4" KO and four Romex knockouts with strain relief

LAMP WATTAGE: (1) Maximum 75W PAR30, R30 and A19

**SPECIFICATION**

A. HOUSING - Die-formed all aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

B. SOCKET - Medium base screw shell porcelain socket snaps into trim to allow usage of different lamp types, as well as proper and consistent lamp positioning.

C. BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span. They can be used on either long or short axis of housing and can be shortened for 12" joists. They are designed to be hammered directly without using nails or screws and could be fit onto T-Bar spline for easy installation and quick alignment.

D. JUNCTION BOX - is UL and ETL listed for through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

E. THERMAL PROTECTION - Standard thermal protection device guards against improper installation, overlampping and misuse of insulation material.

UL and C-UL listed for Damp location.
UL listed for Feed Through wiring.

ETL and C-ETL listed for Damp location.
ETL listed for Feed Through wiring.

**ORDERING INFORMATION, PLEASE SPECIFY:**


TYPE	OPTION	TRIM TYPE	COLOR COMBINATION
B5	<input type="checkbox"/> AT-AIR SHUT	<input type="checkbox"/> B530 - Stepped Baffle	<input type="checkbox"/> CP - CP
			<input type="checkbox"/> SN - SN
			<input type="checkbox"/> W - WH
			<input type="checkbox"/> P - WH
			<input type="checkbox"/> P - BK

Specified:
B5 - - - -
 TYPE OPTION TRIM TYPE COLOR TRIM RING

(Sample of Catalog Number: B5-AT- B530 -W-WH)

SPECIFIED BY:**TYPE:****JOB NAME:**

Tel: 323-888-1973 • 877-375-5555 / Fax: 323-888-1977 • 877-375-3333
 www.iuseelite.com • E-mail: sales@iuseelite.com

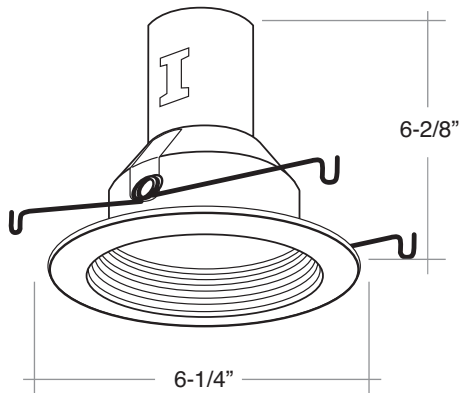**B530****STEPPED BAFFLE****MAX. LAMP WATTAGE:**

75W R/PAR30, 50W R/PAR20, 40W A19

AVAILABLE COLOR COMBINATIONS:

CP - CP, SN - SN, W - WH, P - WH, P - BK

DESCRIPTIONS:

- Built w/ deep baffle technology for glare free illumination.
- Relamps from the front.
- Unitized optics guarantee proper alignment of lamp.
- Both trim and trim ring are U.V. coated to prevent rust and discoloration caused by heat and sun light.
- Internal gasket prevents 100% of all light leakage.

RING/TRIM FINISHES: WH=White BK=Black SN=Satin Nickel CP=Copper CH=Chrome PB=Polished Brass

BAFFLE FINISHES: W=White P=Black SN=Satin Nickel CP=Copper

REFLECTOR FINISHES: CL=Chrome RG=Gold W=White MB=Black CP=Copper SN=Satin Nickel