

Shown actual size: Wireless wall-mount temperature sensor in Snow (LRF2-TWRB-SW)

Features and capacities

- Detects temperature and transmits information to HVAC controller (required)
- Simple installation with no wiring
- Use up to four wireless temperature sensors per HVAC controller (temperatures are averaged)
- Battery included; 5-year battery life
- Available in Snow (SW) or Midnight (MN)

Dimensions and mounting

- Width: 1.63 in (41 mm)
Profile: 0.75 in (17 mm)
- Temporary attachment method: 3M® command strip
- Permanent attachment: wall anchor and screw
- Surface mount to wall in space to be conditioned

Communication and wiring

- Communicates via Lutron reliable Clear Connect® Radio Frequency (RF) technology to other Lutron wireless devices
- Wireless temperature sensor must be located within 30 ft (9 m) of a hybrid repeater
- Operates at 434 MHz
- Up to four wireless temperature sensors can be used with a single HVAC controller and up to five temperature sensors per QS link
- HomeWorks QS system can have up to 99 devices per RF link

Related components



seeTemp® wall control
(available separately,
see pg. 415)




HVAC controller
(available separately,
see pg. 506)

[Download specification submittal](#)

[Download high resolution product image](#)

Explanation of features

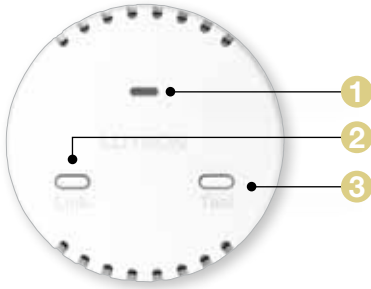

Wireless wall-mount temperature sensor

.7 in
(17 mm)



Features

<p>1 Status LED</p>	<ul style="list-style-type: none"> Amber LED provides feedback during association and commissioning
<p>2 Link button</p>	<ul style="list-style-type: none"> Assigns sensor with HVAC controller
<p>3 Test button</p>	<ul style="list-style-type: none"> Press to test system functionality

Available finishes

Satin finishes



SW
Snow



MN
Midnight

Model numbers

Temperature sensor

Wall-mount

Wireless, 434 MHz

LRF2-TWRB-**XX**¹

Compatible with the HomeWorks® QS system.

XX¹: Available in Snow (SW) and Midnight (MN)