


Hubbell Wiring Systems Delivery Systems Product Guide

HUBBELL

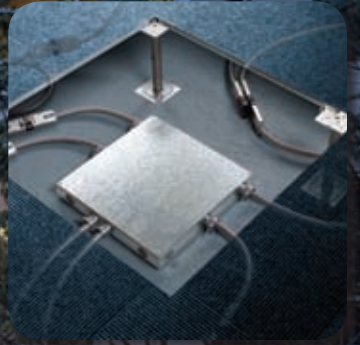

WIRING SYSTEMS
Wiring Device-Kellems
Premise Wiring

Table Of Contents



Raceway Systems Page 1

Hubbell's innovative Raceway Systems include a choice of steel, aluminum and non-metallic, single or multi-channel raceways in addition to a quality line of color-matching power and datacom devices. Hubbell's Metal Raceway features innovative technologies like the Hubbell Handi-Screw for easy box mounting and more data capacity with the HBL750 and HBL4750 series raceways.




Floor Boxes Page 83

Hubbell has expanded its offering of traditional flush and recessed floor boxes to include SystemOne, a unique modular in-floor system that accommodates the industry's broadest range of power, data, audio/video and voice applications. The sub-plate and universal cover design provides consistent aesthetics regardless of the application.



Raised Access Systems Page 99

Hubbell's Raised Access offering includes traditional, unloaded floor boxes and the pre-wired CONNEXION Zone Distribution System. CONNEXION is a factory assembled, modular, plug-and-play wiring system that delivers power and data in raised floor applications. This flexible wiring system provides the ability to reconfigure the workspace as requirements change with minimal downtime.



Fire-Rated Poke-Throughs Page 105

Hubbell's offering of flush, pedestal and furniture feed fire-rated poke-throughs has been expanded to include the unique capabilities of Hubbell SystemOne. This unique modular in-floor system accommodates the industry's broadest range of power, data, audio/video and voice applications. The sub-plate and universal cover design provides consistent aesthetics regardless of the application.



Multi-Connect Recessed Wall Boxes Page 117

Multi-Connect Recessed Wall Boxes provide a versatile "in the wall" solution for single and multi-service applications. The product offering includes one, two, three, four and six-gang boxes, barriers for separation of power and low voltage services and a wide variety of modular face plates and wall flanges to match office décor. The Multi-Connect system provides superior aesthetics and allows for future expansion capability.



Service Poles Page 121

Hubbell's Service Pole offering includes a complete line of gray, ivory and satin finish extruded aluminum service poles. These attractive and durable poles effectively distribute power, data, audio/video and voice wiring from above the ceiling to workstations below. They are offered in heights of 10'2", 12'2" and 15'2" and accommodate a wide variety of Hubbell power and datacom device products.



Power, Data, Audio and Voice Accessories Page 125

A comprehensive offering of quality, color-matching wiring devices and premise wiring products provide the perfect compliment to Hubbell Delivery Systems. From traditional commercial wiring devices to the unique AUTOGUARD® Self-Test ground fault receptacle, Hubbell offers the highest quality wiring devices in the industry. Hubbell's datacom products, including the modular iSTATION™ product line, provide the industry's widest array of color-matched voice, data and audio/video solutions for the most demanding applications.



Hubbell's NEW Product Introductions


Pre-Wired Raceway Page ii

Hubbell's Metal and Non-Metallic Raceways are now available factory pre-wired with the high quality wiring devices you've come to expect from Hubbell. Saving significant time and labor, Hubbell Pre-Wired Raceway will keep your fast track projects on schedule and help you complete the job on time. Each project is custom built to your specifications, then factory tested and inspected to ensure safety, reliability and quality. Our team of professionals will provide project support, documentation and delivery logistics throughout the construction cycle. Let your next raceway project be wired by the leader in the wiring device industry.



Convention Center Utility Box Page v

Hubbell's UL Listed Convention Center Utility Box incorporates the diverse range of utility services required for public assembly facilities such as convention centers, stadiums, arenas, performing art venues and university complexes. The dual non-metallic box design provides two separate concrete-tight and corrosion resistant enclosures to completely isolate the power and data services from the water and air services. The heavy-duty cast aluminum covers are designed to withstand loads up to 32,000 pounds with a safety factor of 2. These boxes are custom built to meet your unique application needs.

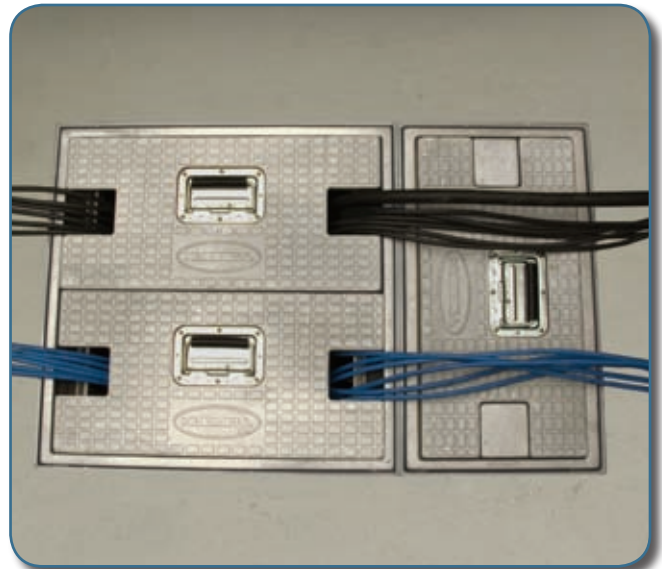

Furniture Connectivity Boxes . . . Page vii



Hubbell's Furniture Connectivity Boxes provide convenient access to power, voice, data and multimedia services at the desktop level. The modular face plates accommodate a broad range of power, data, audio, video and voice services for configuration flexibility. Available in surface, recessed and flush mount to meet any application requirements. Granite and brushed stainless steel finishes are available to compliment any décor.




Hubbell's NEW Product Introduction

Pre-Wired Raceway

Save significant time and labor by using Hubbell Pre-Wired Raceway Systems on your next project. Pre-wired raceways are custom built to your specifications. Hubbell Pre-Wired Raceway will keep your fast track projects on schedule and help complete the job on time! Hubbell's team of professionals will provide project support and documentation throughout the construction cycle. The dedicated project team coordinates the construction and delivery schedule of Hubbell's Pre-Wired Raceway Systems.

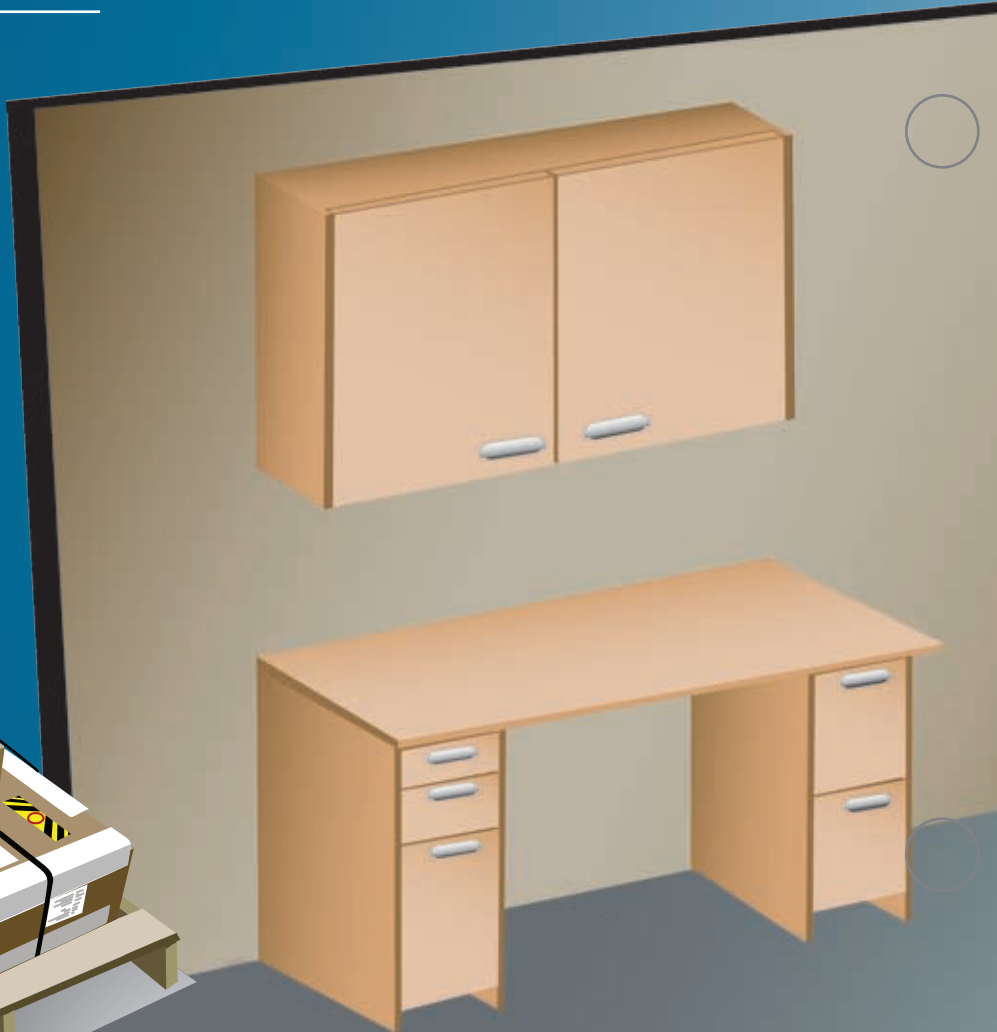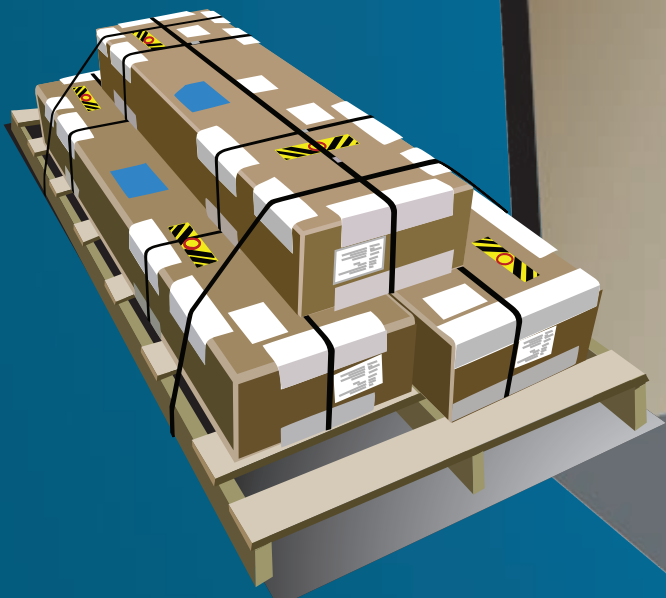

Pre-Wired Packaging...

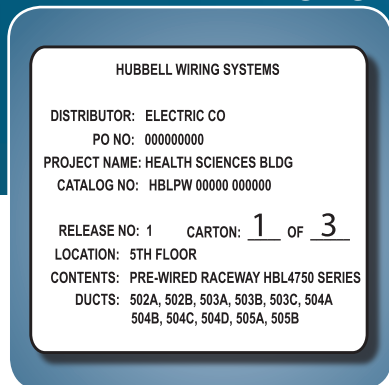

Packaging and Delivery

Raceway is delivered according to your schedule on the job site. Secure packaging is designed to protect material while in transit. Product can be delivered complete or in multiple releases.




Packing List

Each skid is complete with a packing list that identifies the raceway and its location. Raceway can be packaged to customer requirements, including shipments by floor, work area or room.



Setting the Standard

Since 1888, Hubbell has set the standard for wiring devices through innovations such as Twist-Lock®, Hospital Grade and AUTOGUARD™ Self-Test GFCI receptacles. Now, these products are provided as part of Hubbell's Pre-Wired Raceway offering.

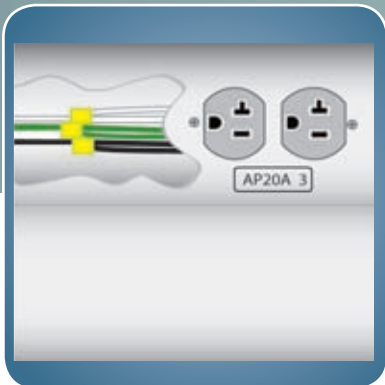

Quality by Design

All Hubbell Pre-Wired Raceways are UL Listed and CSA Certified. Each raceway receives a 100% quality inspection and testing prior to shipment. Pre-wired raceway is now available with the high quality and workmanship you have come to expect from Hubbell.



Labeling and Engraving

Optional labeling is available to identify branch panels and circuits at receptacle locations. Choose from adhesive labels or engraved aluminum plates.




Wire Identification

Wire leads are clearly labeled with corresponding circuit numbers. This aids the installer when terminating to building wiring or connecting from duct to duct. Ample wire is provided at feed locations.

HBLALU3800 Series Aluminum Raceway

Description

Aluminum Raceway, Single Channel,
Satin Anodized Finish.




A: 2.25" (57.15)
B: 3.00" (76.20)

HBLALU4800 Series Aluminum Raceway

Description

Aluminum Raceway, Two Channel,
Satin Anodized Finish.




A: 2.25" (57.15)
B: 6.00" (152.40)

HBL3000 Series Metal Raceway

Description

Steel Raceway, Single Channel,
Ivory or Gray Finish.




A: 1.53" (38.86)
B: 2.75" (69.85)

HBL4750 Series Metal Raceway

Description

Steel Raceway, Single or Two Channel (with Divider),
Ivory or Gray Finish.




A: 1.75" (44.45)
B: 4.75" (120.65)

HBL6750 Series Metal Raceway

Description

Steel Raceway, Single, Two Channel (with One Divider)
or Three Channel (with Two Dividers),
Ivory or Gray Finish.




A: 2.22" (56.39)
B: 6.75" (171.45)

PB2 BaseTrak® Series Non-Metallic Raceway

Description

Non-Metallic Raceway, Two Channel,
Office White Color.




A: 1.63" (41.40)
B: 4.50" (114.30)

PS3 Super BaseTrak® Series Non-Metallic Raceway

Description

Non-Metallic Raceway, Three Channel,
Office White Color.



A: 1.97" (50.00)
B: 6.70" (170.20)



Project Support:

- Dedicated Project Team Provides Support Throughout the Construction Cycle.
- Comprehensive Submittal Packages.
- Knowledgeable Field Sales Organization for Local and Job Site Support.
- Contact Your Local Hubbell Representative for Capabilities and Ordering Information.

Applications:

- Schools and Universities
- Research and Medical Labs
- Commercial Offices
- Testing Facilities
- Pharmaceutical
- Work Bench Solutions



Hubbell's NEW Product Introduction


Convention Center Utility Box

Public assembly facilities such as convention centers, exhibit halls and stadiums often require a diverse range of utility services including power, data, audio, video, voice, compressed air and water in the middle of the floor. Hubbell's new UL Listed and CSA Certified box provides all of these requirements. The internal components are custom manufactured to the end user's needs. The unique polyurethane box provides a concrete-tight and corrosion resistant enclosure. Hubbell provides a separate yet connected enclosure to safely divide the power and data from the air and water services if required.



Convention Center Utility Box

Hubbell's non-metallic box is constructed of a high-strength polyurethane material. It is concrete-tight and corrosion resistant. The dual box design provides two separate enclosures to completely isolate the power and data services from the water and air services.

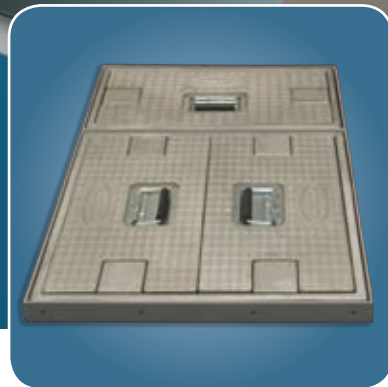

Cover

The heavy-duty dual cast aluminum covers have a working load capacity of 32,000 pounds with a safety factor of 2 (64,000 pounds).* They are skid resistant and meet the UL514 scrub water requirements. Cover is fully removable for easy access to services. Each cover has two drop down cable access doors for wire management.



Power and Data Panels


The power panel is custom configured to your specifications. Capabilities include Hubbell Pin & Sleeve, Twist-Lock® and Straight Blade Receptacles with optional circuit breaker protection. In addition, three-gangs are provided to accommodate your data, audio, video and voice needs.

* Footprint of 1" (25.4) x 16" (406.4).

Hubbell Convention Center Utility Box

UL  SF  UL Listed, CSA Certified

A galvanized steel concrete cover is provided with each box to protect the cast aluminum cover during the concrete pour.

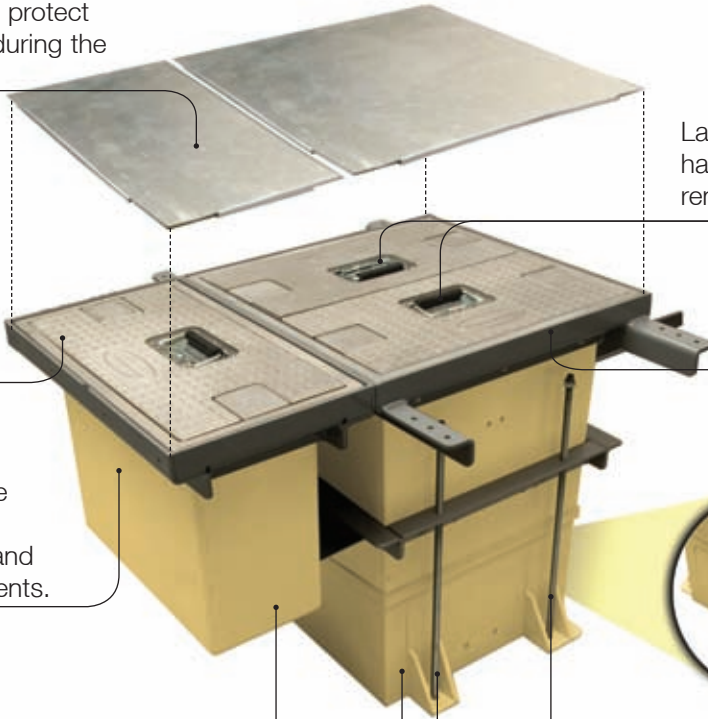

Large, heavy-duty, spring loaded handles allow covers to be easily removed.

Cast aluminum covers are skid resistant and have a working load capacity of 32,000 pounds.

A steel frame provides structural support and is zinc-coated for corrosion resistance.

The box is constructed of polyurethane for resistance to rust and corrosion. The material meets UL94 V-0 and 5VA flammability requirements.

Conduit feeds can be easily field cut to the specified conduit size.



The box can be easily leveled prior to the pour by simply adjusting the extra long threaded rods.

Power/datacom and water/compressed air services are contained in separate enclosures to provide maximum safety.

Convention Center Utility Box

Description

Hubbell Convention Center Utility Box with Covers for Power and Data/Communications Box.

Catalog Number


HBLCCUBPD*

Hubbell Convention Center Utility Box with Covers for Power, Data/Communications and Air/Water Boxes.

HBLCCUBPDW*

* Consult Your Local Hubbell Representative for Information on Power Panel Configurations.

Dimensions inches (mm)

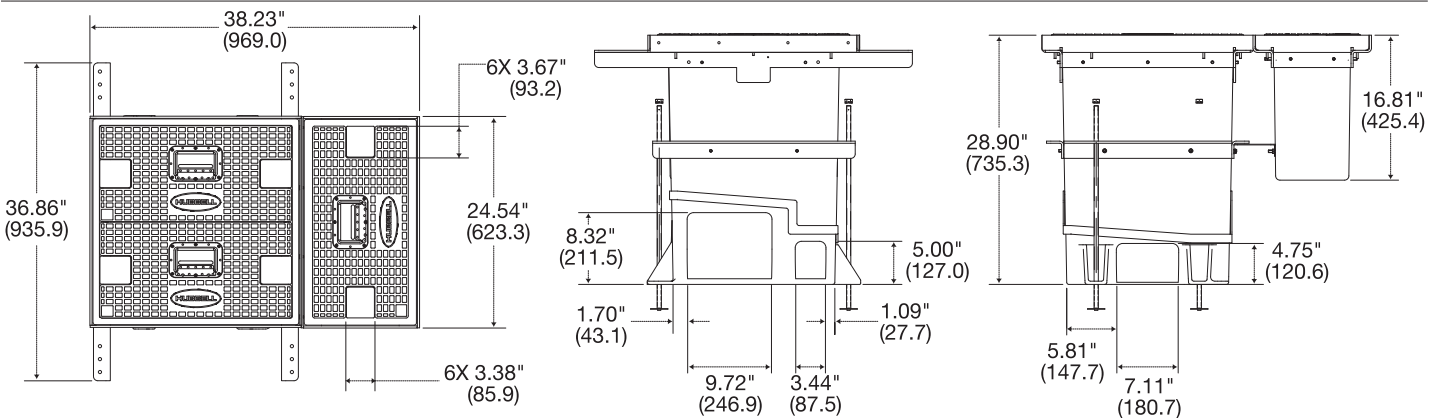

Hubbell's NEW Product Introduction

Furniture Connectivity Boxes

This family of furniture connectivity boxes installs into conference tables and individual workstations to bring power, voice, data, and multimedia directly to the point of use. In addition, they offer an aesthetic design with improved cable management. Now, users can plug in laptop computers for both power and data at the desktop level - no more crawling under the table or moving obstacles to get to the electrical outlet and network connectivity.



Flush Mount Boxes

Hubbell offers square and rectangular flush mount boxes in 2 and 4-gang configurations. These boxes are available with either stainless steel or granite finish covers that conveniently flip-down to store inside the box when in use. Boxes feature adjustable restraints to simplify the installation. The low voltage divider is field configurable for maximum flexibility.



Surface Mount Boxes

For applications where surface mount installation is desired, Hubbell offers low profile 2 and 3-gang designs. The angled profile compliments desktop environments. The powder coated 16 gauge steel enclosure with granite finish provides durability without sacrificing aesthetics.



Recessed Mount Boxes

Hubbell offers 4 and 8-gang boxes for recessed table-top installations. The convenient 90-degree design provides improved cable management for power and data cords. Boxes feature screw down design for secure installation. The granite finish compliments any décor.

Square Flush Mount Boxes

Description

2-Gang Square Flush Mount Box w/ Cover, Crinkle Black Finish.
2-Gang Square Flush Mount Box w/ Cover, Stainless Steel.

Catalog Number

HBLSHA2
HBLSHA2BSS



HBLSHA2*

Rectangular Flush Mount Boxes

Description

2-Gang Rectangular Flush Mount w/ Cover, Crinkle Black Finish.
4-Gang Rectangular Flush Mount w/ Cover, Crinkle Black Finish.
2-Gang Rectangular Flush Mount w/ Cover, Stainless Steel.
4-Gang Rectangular Flush Mount w/ Cover, Stainless Steel.

Catalog Number

HBLPHA2
HBLPHA4
HBLPHA2BSS
HBLPHA4BSS



HBLPHA2*

Surface Mount Boxes

Description

2-Gang Surface Mount Box, Crinkle Black Finish.
3-Gang Surface Mount Box, Crinkle Black Finish.

Catalog Number

HBLCON2
HBLCON3



HBLCON2*

Recessed Mount Boxes

Description

4-Gang Recessed Mount w/ Cover, Crinkle Black Finish.
8-Gang Recessed Mount w/ Cover, Crinkle Black Finish.

Catalog Number

HBLMIR2
HBLMIR4



HBLMIR4*

Under Desk Mount Boxes

Description

2-Gang, Under Desk Mount, Crinkle Black Finish.
3-Gang, Under Desk Mount, Crinkle Black Finish.

Catalog Number


HBLMAR2
HBLMAR3



HBLMAR2*


Hubbell - Screw Type Face Plates

Description	Color	Catalog Number
Hubbell 6-Port.	Gray	HBL317SGY
	Black	HBL317SBK**
Single Receptacle Opening (1.39" Diameter).	Gray	HBLTL318SGY
	Black	HBLTL318SBK**
Single Receptacle Opening (1.56" Diameter).	Gray	HBLTL319SGY
	Black	HBLTL319SBK**
Hubbell iSTATION™ Module.	Gray	HBLIMFSGY
	Black	HBLIMFSBK**
Duplex Opening.	Gray	HBLST302SGY
	Black	HBLST302SBK**
Toggle.	Gray	HBLTO310SGY
	Black	HBLTO310SBK**
Style Line® Rectangular.	Gray	HBLDE301SGY
	Black	HBLDE301SBK**
Blank.	Gray	HBLBL300SGY
	Black	HBLBL300SBK**



HBL317SGY

HBLTL318SGY



HBLTL319SGY

HBLIMFSGY



HBLST302SGY

HBLTO310SGY



HBLDE301SGY

HBLBL300SGY

* Devices shown must be ordered separately. See pages 125-135 for power and datacom accessories.

** Also available in White and Ivory. To order replace "BK" with "WA" for White, "I" for Ivory.

For open systems plate options, see page 103.

Hubbell Raceway Systems
More Innovation. More Capacity. More Flexibility.


HUBBELL

Metal Raceway

	Page
HBL500, HBL750 Series. . .	2
HBL2000 Series	14
Metal PlugTrak®	17
HBL3000 Series	18
HBL4750 Series	26
HBL6750 Series	36
HBLALU3800	46
HBLALU4800	46
Technical Info	53
Plates & Outlets	54
Cross Reference	56

Non-Metallic Raceway

	Page
Non-Metallic Series	60
PT1 Series	64
PP1 Series	66
PL1 Series	68
PW1 Series	70
PW2 Series	72
PB2 Series	74
PB3 Series	76
PS3 Series	78
PlugTrak®	80
Portable PlugTrak®	80
Plates and Outlets	81
Technical Info	82

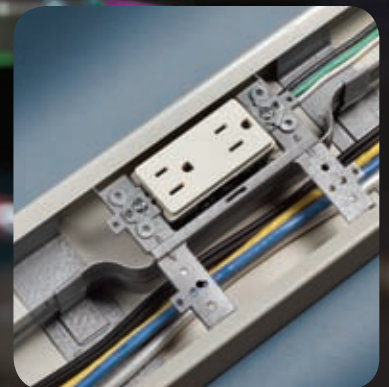


Hubbell Metal Raceway

HBL500, HBL750, HBL2000

and PlugTrak® Series


Product Applications

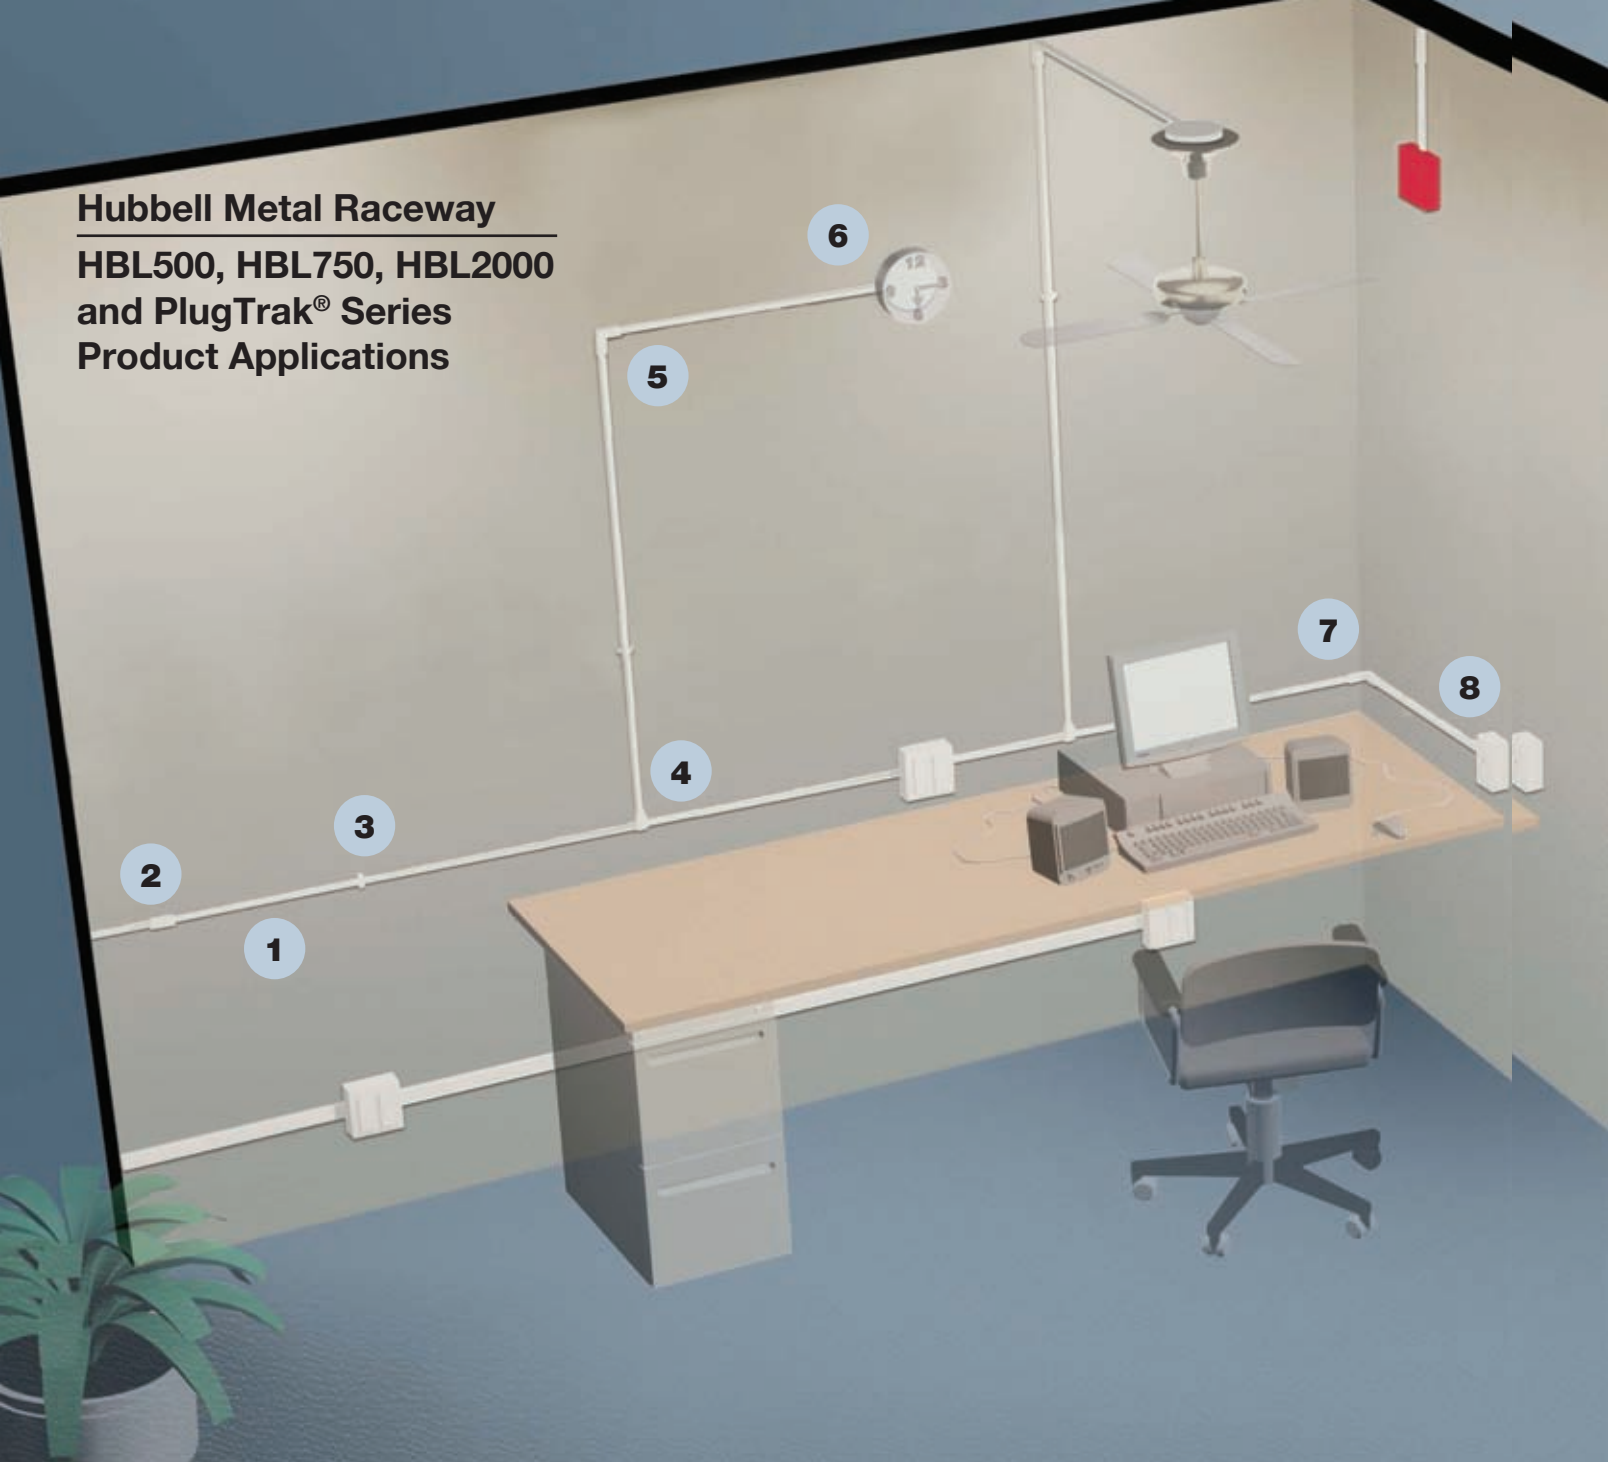

Catalog Number	Description
1 HBL50010IV	HBL500 Series 10 ft. Base and Cover
2 HBL500TFIV	Transition Fitting Wiremold® V500 Raceway to Hubbell HBL500 Series Raceway
3 HBL504IV	Mounting Strap
4 HBL5715IV	Tee

Catalog Number	Description
5 HBL511IV	90° Flat Elbow
6 HBL5738IV	Round Fixture Box with Solid Base
7 HBL517IV	Internal Elbow
8 HBL5748IV	One-Gang Device Box

Wiremold® is a registered trademark of The Wiremold Company.

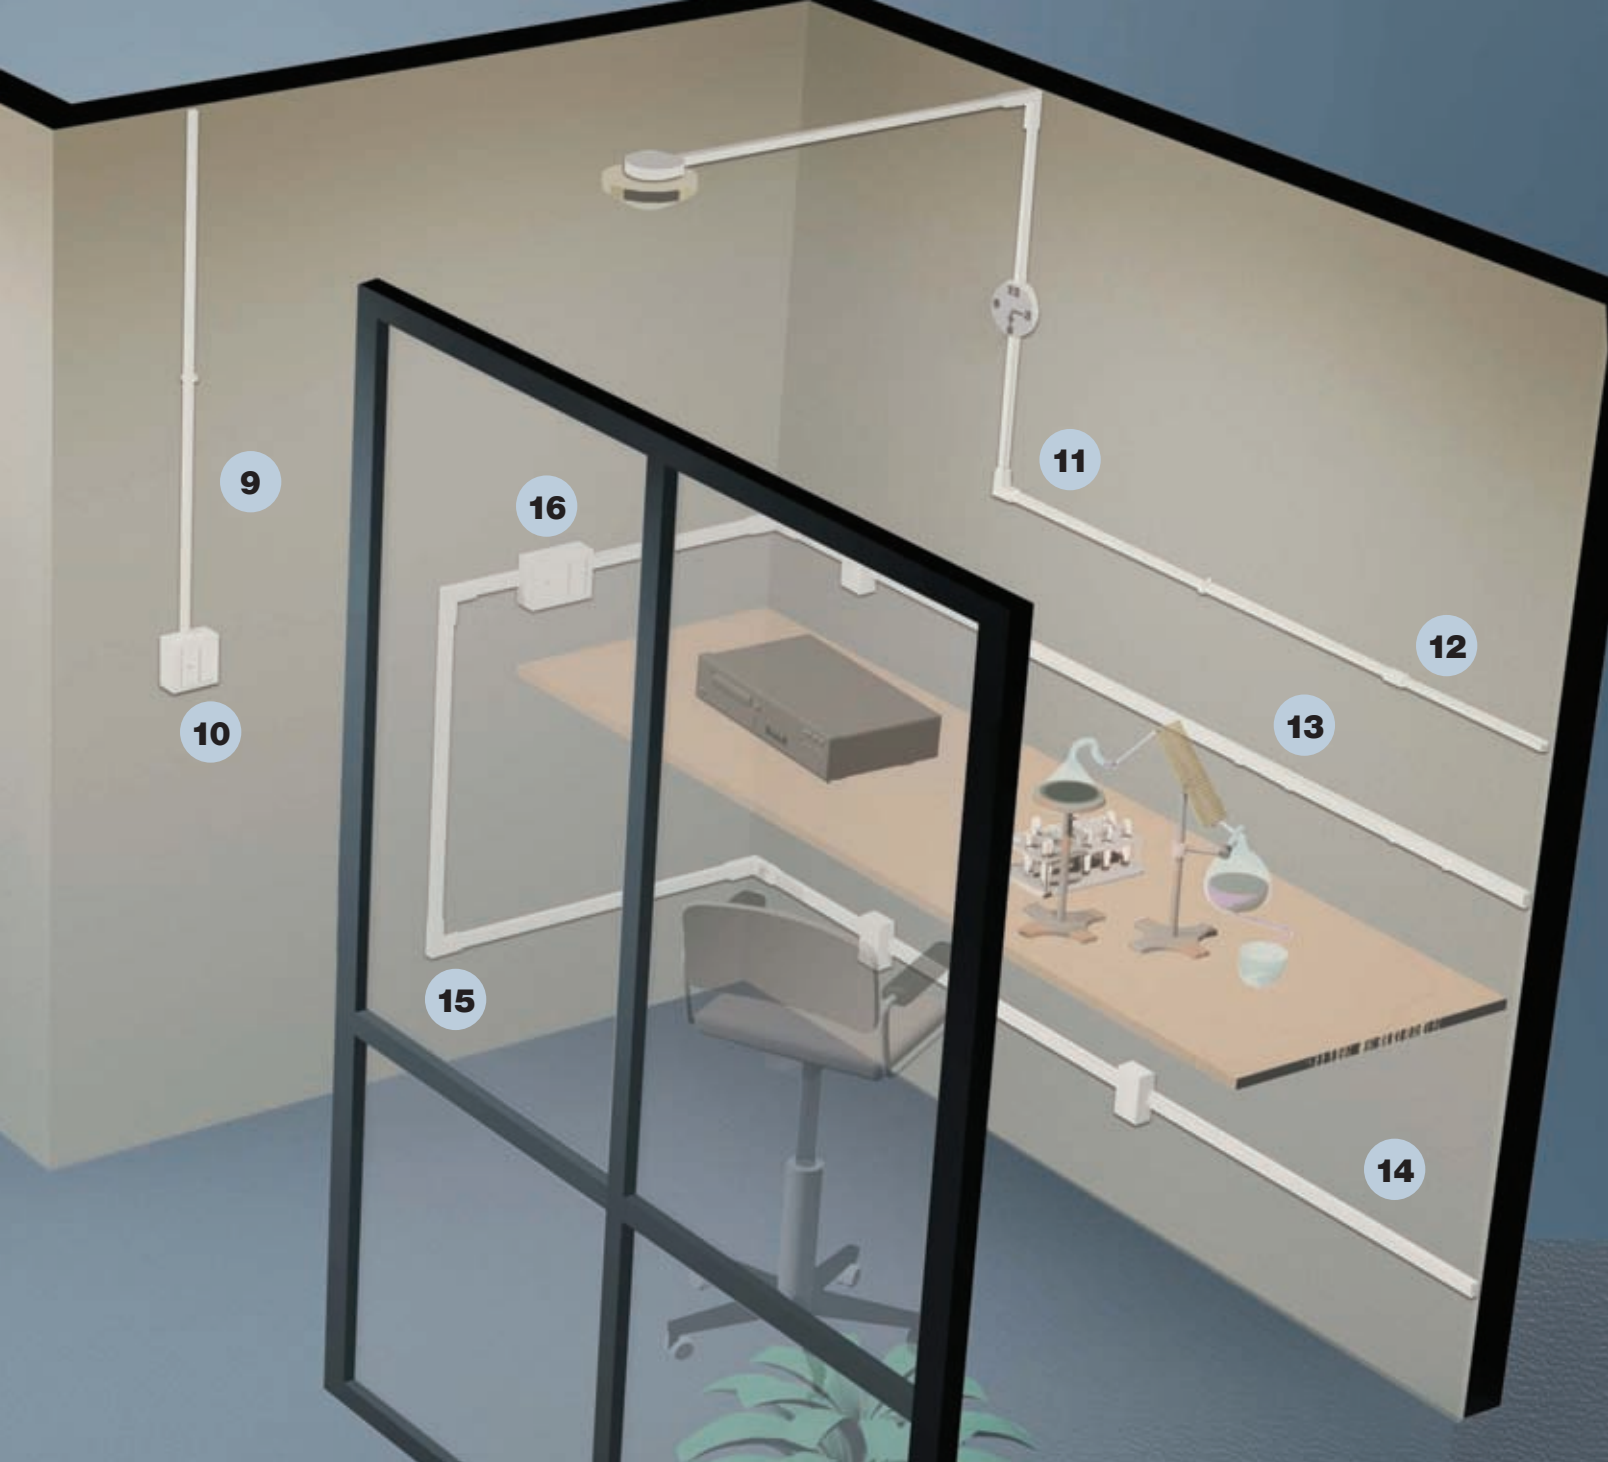

Catalog Number	Description
9 HBL75010IV	HBL750 Series 10 ft. Base and Cover
10 HBL5744S2IV	Two-Gang Deep Device Box
11 HBL711IV	90° Flat Elbow
12 HBL750TFIV	Transition Fitting Wiremold® V700 Raceway to Hubbell HBL750 Series Raceway

Catalog Number	Description
13 HBL20GB606IV	Metal PlugTrak® 6 ft. Base and Cover with 10 Receptacles on 6 in. Center
14 HBL2000BCIV	HBL2000 Series Base and Cover
15 HBL2011IV	90° Flat Elbow
16 HBL20482IV	Two-Gang Device Box

Wiremold® is a registered trademark of The Wiremold Company.

HBL500, HBL750, HBL2000 and PlugTrak® Metal Raceway



Innovative Box Design

- Hubbell Handi-Screw eliminates difficult to install long screws for easier installation.
- Rounded corners eliminate sharp edges.
- One seam construction provides “clean” look.
- Box design allows standard wall plates to be mounted flush with virtually no perimeter profile exposed.

Advantage HUBBELL



Enhanced Datacom Capabilities

- Allows up to five Category 5e, three Category 6, or two Category 6a cables.
- Available with 1.5 in. Category 6 and 6a bend radius fittings.
- Largest single channel low profile raceway available in its class.
- Ideal for datacom and oversized neutral applications.
- HBL750 Series exclusive to Hubbell.

Advantage HUBBELL

Transition Fitting

- UL Classified to transition from Wiremold® Metal Surface Raceway to Hubbell Metal Raceway.
- Complete line of transition fittings for HBL500, HBL750 and HBL2000 Series Metal Raceway.




Wiremold® V700 to Hubbell HBL750 Series utilizing Hubbell transition fitting.



Metal PlugTrak® Featuring Exclusive Receptacle Design

- Gray or ivory scratch resistant finish.
- Multiple spacing configurations.
- Hubbell designed and manufactured single receptacle.
- Insulation displacement wiring provides superior wire retention.
- Mates with HBL2000 Series Metal Raceway.
- Available in 3 ft., 5 ft. and 6 ft. lengths.

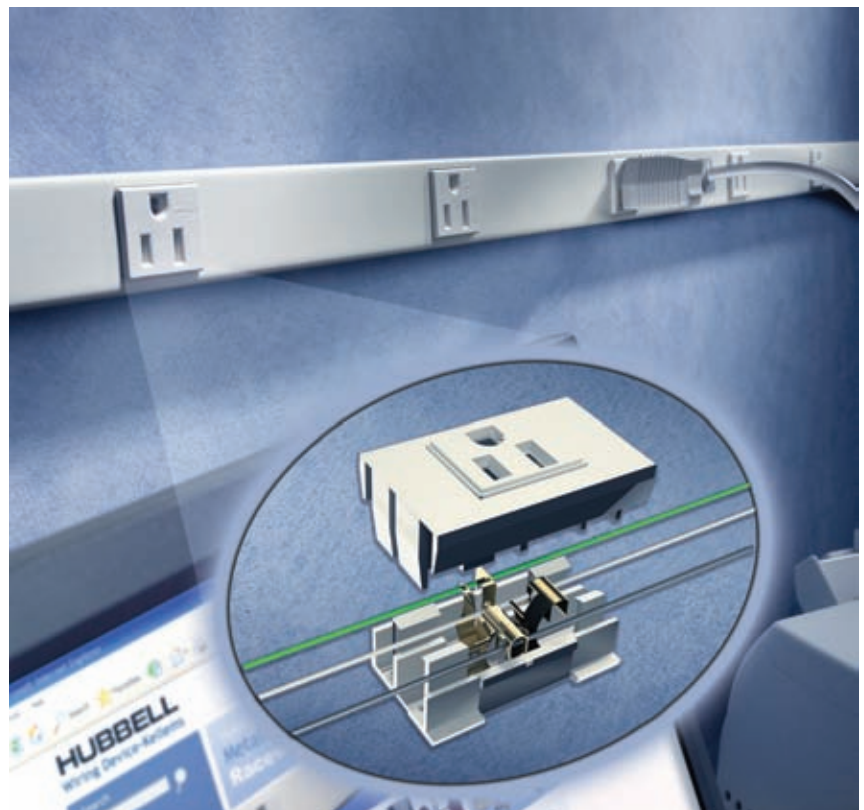

Wiremold® is a registered trademark of The Wiremold Company.




HBL500 and HBL750 Single Channel Metal Raceway

HBL500 Series Metal Raceway

Base and Cover

Available in 5 ft. (1.5m) lengths, packed 50 ft. (15m) per carton and 10 ft. (3m) lengths, packed 100 ft. (30m) per carton. **HBL5701C** coupling furnished with each length.

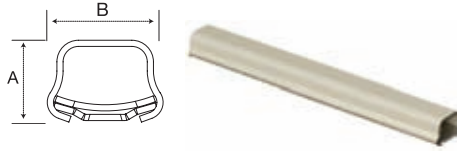


Catalog Number	Length	Color
HBL5005IV	5 ft.	Ivory
HBL50010IV	10 ft.	Ivory
A: .53" (13.46)		
B: .76" (19.30)		

HBL750 Series Metal Raceway

Base and Cover

Available in 5 ft. (1.5m) lengths, packed 50 ft. (15m) per carton and 10 ft. (3m) lengths, packed 100 ft. (30m) per carton. **HBL5701C** coupling furnished with each length.

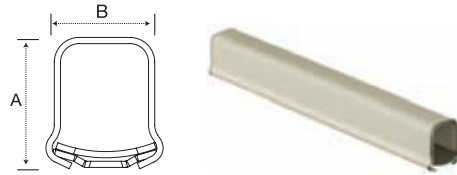


Catalog Number	Length	Color
HBL7505IV	5 ft.	Ivory
HBL75010IV	10 ft.	Ivory
A: .85" (21.59)		
B: .76" (19.30)		

Switch and Receptacle Boxes*


Switch and Receptacle Box

For standard switches and receptacles. Single gang box base has two ½ in. trade size KOs. Two gang box base has a rectangular KO and concentric ½ in. and ¾ in. trade size KOs. Three through six gang box bases have one ½ in. trade size KO per gang. Use catalog number **HBL5791** for connecting ½ in. EMT to all HBL5700 Series rectangular boxes.




One-Gang

HBL5748IV
A: 4.54" (115.32)
B: 2.82" (71.63)
C: 1.75" (44.45)




Two-Gang

HBL57482IV
A: 4.54" (115.32)
B: 4.64" (117.86)
C: 1.75" (44.45)




Three-Gang

HBL57483IV
A: 4.54" (115.32)
B: 6.45" (163.88)
C: 1.75" (44.45)




Four-Gang

HBL57484IV
A: 4.54" (115.32)
B: 8.26" (209.91)
C: 1.75" (44.45)



Five-Gang

HBL57485IV
A: 4.54" (115.32)
B: 10.01" (255.93)
C: 1.75" (44.45)

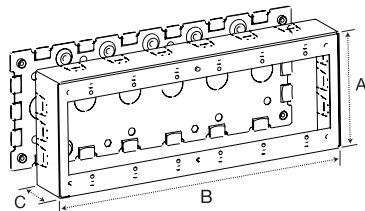


Six-Gang


HBL57486IV
A: 4.54" (115.32)
B: 11.89" (301.96)
C: 1.75" (44.45)

Switch and Receptacle Boxes*


Shallow Switch and Receptacle Box
 For shallow switches and receptacles. Single gang box base has two 1/2 in. trade size KOs. Two gang box base has a rectangular KO and concentric 1/2 in. and 3/4 in. trade size KOs. Three gang box base has three 1/2 in. trade size KOs.



One-Gang
HBL57471V
 A: 4.54" (115.32)
 B: 2.82" (71.63)
 C: 1.375" (35.00)




Two-Gang
HBL57472IV
 A: 4.54" (115.32)
 B: 4.64" (117.86)
 C: 1.375" (35.00)




Three-Gang
HBL57473IV
 A: 4.54" (115.32)
 B: 6.45" (163.88)
 C: 1.375" (35.00)


Deep Switch and Receptacle Box
 For deep devices or applications where additional room is beneficial. Single gang box base has two 1/2 in. trade size KOs. Two gang box base has a rectangular KO and concentric 1/2 in. and 3/4 in. trade size KOs. Three gang box base has three 1/2 in. trade size KOs.



One-Gang
HBL5744SIV
 A: 4.54" (115.32)
 B: 2.82" (71.63)
 C: 2.25" (57.00)




Two-Gang
HBL5744S2IV
 A: 4.54" (115.32)
 B: 4.64" (117.86)
 C: 2.25" (57.00)




Three-Gang
HBL5744S3IV
 A: 4.54" (115.32)
 B: 6.45" (163.88)
 C: 2.25" (57.00)


Extra Deep Switch and Receptacle Box
 For deep devices (such as momentary contact switches) or applications where additional room is beneficial. Single gang box base has two 1/2 in. trade size KOs. Two gang box base has a rectangular KO and concentric 1/2 in. and 3/4 in. trade size KOs. Three gang box base has three 1/2 in. trade size KOs.



One-Gang
HBL5744IV
 A: 4.54" (115.32)
 B: 2.82" (71.63)
 C: 2.75" (70.00)











Two-Gang
HBL57442IV
 A: 4.54" (115.32)
 B: 4.64" (117.86)
 C: 2.75" (70.00)













Three-Gang
HBL57443IV
 A: 4.54" (115.32)
 B: 6.45" (163.88)
 C: 2.75" (70.00)

*Notes: For datacom applications, box selection is dependent on depth of connectors (jacks). See pages 54-55 for datacom product selection. Use catalog number **HBL5791** for connecting 1/2 in. EMT to all HBL5700 Series rectangular boxes.

HBL500 and HBL750 Single Channel Metal Raceway

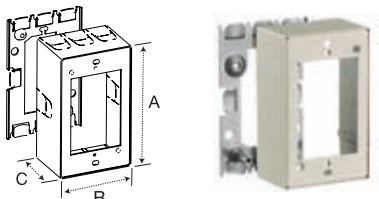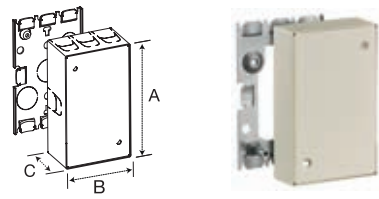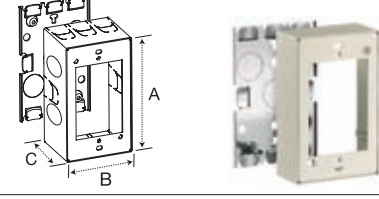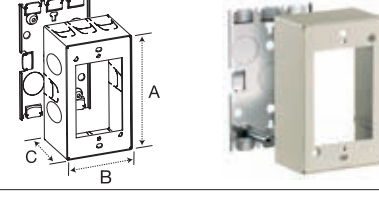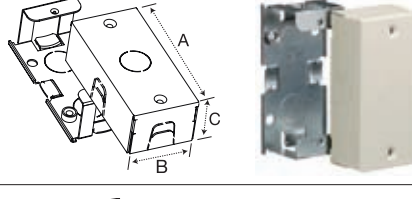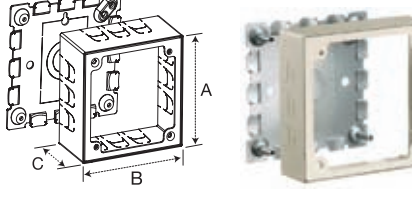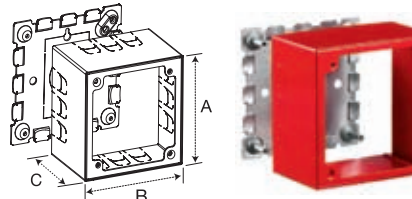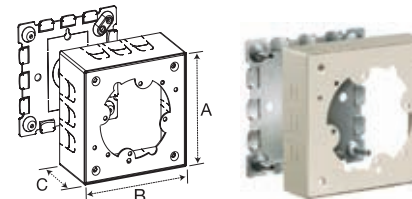

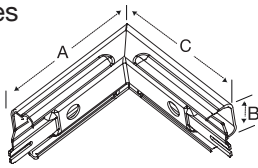

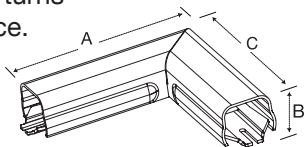

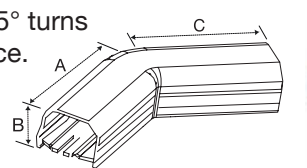

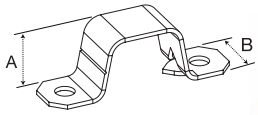







Specialty Boxes*		Catalog Number	Color
Extension Box For extensions from existing flush switch and receptacle boxes		HBL5751IV A: 4.54" (115.32) B: 2.82" (71.63) C: 1.375" (35.00)	Ivory
		HBL5751AIV A: 4.54" (115.32) B: 2.82" (71.63) C: 1.75" (44.45)	Ivory
Blank Extension Box For extensions from existing flush switch and receptacle boxes where it is desired to blank original outlet.		HBL5760IV A: 4.54" (115.32) B: 2.82" (71.63) C: 1.13" (28.70)	Ivory
Low Profile Switch and Receptacle Box For low profile switches and receptacles. Base has 1/2 in. trade size KOs.		HBL5748SIV A: 4.54" (115.32) B: 2.82" (71.63) C: 1.13" (28.70)	Ivory
Combination Switch and Receptacle Box For connecting to surface runs of 1/2 in. trade size conduit, one raceway twistout on each side and three raceway twistouts on top and bottom.		HBL5745IV A: 4.54" (115.32) B: 2.82" (71.63) C: 1.375" (35.00)	Ivory
Utility Box For use as a tee, cross, pull box, junction box or blank box. Base has 1/2 in. trade size KOs.		HBL57242IV A: 4.12" (104.78) B: 2.00" (50.80) C: 1.39" (35.31)	Ivory
Alarm Device Box For surface mounting of alarm devices and safety signals. Fits 4 in. (102.00) square boxes.		HBL5752IV HBL5752R A: 4.54" (115.32) B: 4.64" (117.86) C: 1.375" (35.00)	Ivory Red
Extra Deep Alarm Device Box For surface mounting of alarm devices and safety signals. Cover is 2.75 in. (70.00) deep. Fits 4 in. (102.00) square boxes.		HBL5753IV HBL5753R A: 4.54" (115.32) B: 4.64" (117.86) C: 2.75" (70.00)	Ivory Red
Distribution Box Twistouts permit use of three parallel raceway runs on each side. Cover takes devices with mounting screw centers of 2.75 in. (70.00), 3.5 in. (89.00), 4.0625 in. (103.00) and canopy fixture not larger than 4.625 in. (117.00). Can be used with HBL5736IV (blank cover) to create junction box.		HBL5735IV A: 4.54" (115.32) B: 4.64" (117.86) C: 1.375" (35.00)	Ivory

*Note: Use catalog number **HBL5791** for connecting 1/2 in. EMT to all HBL5700 Series rectangular boxes.

Round Extension and Fixture Boxes*	4.75 inches	Outside Diameter		Color
		5.50 inches	6.375 inches	
Extension Box with Open Base For mounting on 3.25 in. (83.00) or 4 in. (102.00) conduit boxes or other recessed outlets.	HBL5737IV A: 1.02" (26.00) B: 4.75" (120.65)	HBL5737AIV A: 1.02" (26.00) B: 5.50" (140.00)	HBL5739AIV A: 1.02" (26.00) B: 6.375" (162.00)	Ivory
Fixture Box with Solid Base To hang fixtures. Cover takes any device with mounting screw centers of 2.75 in. (70.00), 3.5 in. (89.00) and 4.06 in. (103.00). Can be used as a pull or junction box when used with HBL5736IV (blank cover).	HBL5738IV A: 1.02" (26.00) B: 4.75" (120.65)	HBL5738AIV A: 1.02" (26.00) B: 5.50" (140.00)	HBL5739IV A: 1.02" (26.00) B: 6.375" (162.00)	Ivory
Other Round Boxes and Covers*				
Outlet Box For devices with mounting screw centers of 1.47 in. (37.00), 1.63 in. (41.00), 1.69 in. (44.00) or 1.84 in. (46.00). Will take device that mounts on G or H type conduit fittings.			HBL5733IV A: 1.02" (26.00) B: 3.00" (76.00)	Ivory
Blank Cover For use with HBL5733IV. Has 1/2 in. trade size KO in center.			HBL5731IV A: .24" (6.10) B: 2.40" (60.96)	Ivory
Blank Cover For use with HBL5735IV, HBL5737IV, HBL5737AIV, HBL5739AIV, HBL5738IV, HBL5738AIV and HBL5739IV. Has 1/2 in. trade size KO in center.			HBL5736IV A: .38" (9.75) B: 4.19" (106.30)	Ivory
Fanbox with Solid Base Cover accepts fan bracket with mounting centers of 3.2 in. (81.00). Rated for fans and fixtures up to 50 lbs.			HBL5738AFIV A: 1.02" (26.00) B: 4.76" (120.90)	Ivory
Round Fixture Box for Audible Alarms For installing round audible alarms.			HBL5739AABIV A: 1.62" (41.15) B: 6.50" (165.10)	Ivory

*Note: Use catalog number **HBL5791** for connecting 1/2 in. EMT to all HBL5700 Series round boxes (except **HBL5733IV** and **HBL5739AABIV**).

HBL500 and HBL750 Single Channel Metal Raceway


Fittings		HBL500 Series	HBL750 Series	Color	
Internal Elbow For inside surface at right angles.		HBL517IV A: 3.33" (84.51) B: .58" (14.73) C: 3.33" (84.51)		HBL717IV A: 3.33" (84.51) B: .90" (22.86) C: 3.33" (84.51)	Ivory
External Elbow For outside surfaces at right angles.		HBL518IV A: 2.59" (65.71) B: .58" (14.73) C: 2.59" (65.71)		HBL718IV A: 2.59" (65.71) B: .90" (22.86) C: 2.59" (65.71)	Ivory
90° Flat Elbow For right angle turns on same surface.		HBL511IV A: 2.68" (68.13) B: .61" (15.50) C: 2.68" (68.13)		HBL711IV A: 2.68" (68.13) B: .90" (22.86) C: 2.68" (68.13)	Ivory
45° Flat Elbow For diagonal 45° turns on same surface.		HBL512IV A: 2.46" (62.61) B: .58" (14.73) C: 2.46" (62.61)		HBL712IV A: 2.70" (68.49) B: .91" (23.06) C: 2.70" (68.49)	Ivory
Mounting Strap (one- or two-hole) For mounting HBL500 or HBL750 Raceway to surface. Convert to one-hole by breaking off at score.		HBL504IV A: .58" (14.73) B: .50" (12.70)		HBL704IV A: .90" (22.86) B: .50" (12.70)	Ivory
Bushing Protect wires from potential abrasion. Fits into end of HBL500 or HBL750 Raceway.		HBL502B A: .35" (8.83) B: .70" (17.68)		HBL702B A: .60" (15.24) B: .70" (17.68)	Zinc Plated Steel
Connection Cover To cover potential openings where two lengths of HBL500 or HBL750 Raceway come together.		HBL506IV A: .60" (15.24) B: .80" (20.31)		HBL706IV A: .91" (23.10) B: .80" (20.31)	Ivory
Transition Fitting For transitioning from either Wiremold® V500 to Hubbell HBL500 Raceway or Wiremold® V700 to Hubbell HBL750 Raceway.		HBL500TFIV A: .65" (16.51) B: .89" (22.61) C: 2.15" (54.61)		HBL750TFIV A: .98" (24.89) B: .89" (22.61) C: 2.15" (54.61)	Ivory

Wiremold® is a registered trademark of The Wiremold Company.

Fittings


HBL500 and HBL750 Series Color

Internal Elbow - Bend Radius
For inside surface at right angles requiring a 1.5 in. (38.1mm) bend radius.
Suitable for Category 5, 5e, 6 and 6a applications.

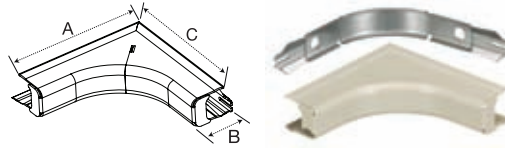


HBL5717BRIV Ivory
A: 3.33" (84.51)
B: .91" (23.11)
C: 3.33" (84.51)

External Elbow - Bend Radius
For outside surfaces at right angles requiring a 1.5 in. (38.1mm) bend radius.
Suitable for Category 5, 5e, 6 and 6a applications.

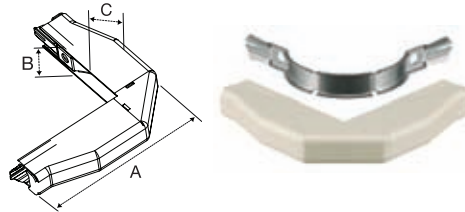


HBL5718BRIV Ivory
A: 4.86" (123.43)
B: .78" (19.80)
C: 1.35" (34.28)

Flat Elbow - Bend Radius
For right angle turns requiring a 1.5 in. (38.1mm) bend radius.
Suitable for Category 5, 5e, 6 and 6a applications.

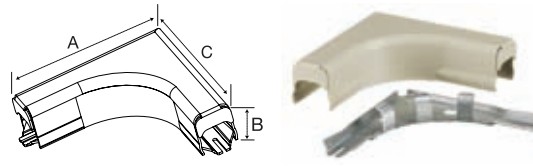


HBL5711BRIV Ivory
A: 3.16" (80.34)
B: .91" (23.11)
C: 3.16" (80.34)

Tee - Bend Radius
For branches at right angles requiring a 1.5 in. (38.1mm) bend radius.
Suitable for Category 5, 5e, 6 and 6a applications.

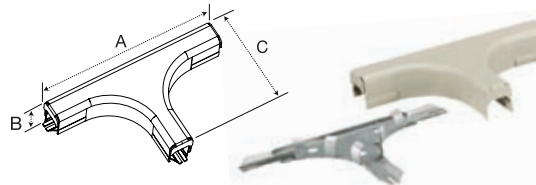


HBL5715BRIV Ivory
A: 5.55" (140.88)
B: .90" (22.86)
C: 3.16" (80.34)

Tee
For branches at right angles.

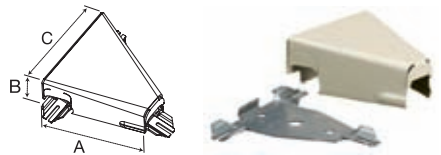


HBL5715IV Ivory
A: 3.06" (77.67)
B: 1.14" (28.86)
C: 3.03" (76.96)

Internal Twisted Elbows
For 90° twist with 90° turn.
For double turn at right angles from one to another. From a flat run on a sidewall to a flat run on a ceiling, edge of door or window trim.




Right Elbow	Left Elbow	Ivory
HBL5711RHIV	HBL5711LHIV	
A: 2.98" (75.72)	A: 2.98" (75.72)	
B: .94" (23.75)	B: .94" (23.75)	
C: 3.00" (76.20)	C: 3.00" (76.20)	

Corner Box
For connecting HBL500 or HBL750 Raceway from ceiling or corner. Each leg of base has 1/2 in. trade size KO.

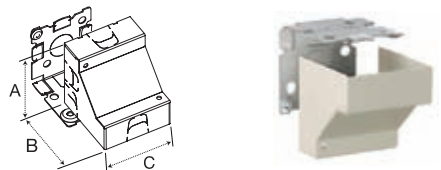

HBL5719IV Ivory
A: 2.50" (63.50)
B: 2.50" (63.50)
C: 2.40" (60.96)

Coupling
For joining and supporting lengths of HBL500 or HBL750 Raceway.




HBL5701C Galvanized Steel
A: 2.00" (50.80)

HBL500 and HBL750 Single Channel Metal Raceway

Fittings

Support Clip

For supporting lengths of HBL500 or HBL750 Raceway.




HBL500 & HBL750 Series **Color**

HBL5703IV
A: 2.51" (63.75)

Ivory

Elbow Box Connector

For connecting raceway at right angles to conduit boxes, panel boxes, etc. having KO for trade size conduit.

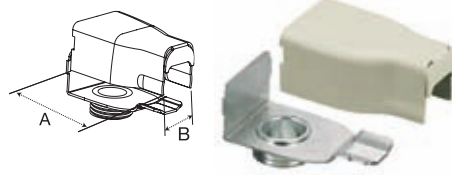


HBL5783IV
A: 2.13" (54.05)
B: 1.24" (31.50)

Ivory

Elbow Conduit Connector

For connecting raceway at right angles to 1/2 in. trade size conduit or armored cable connectors.

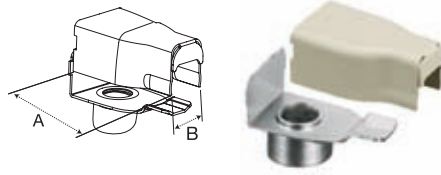


HBL5784IV
A: 2.13" (54.05)
B: 1.24" (31.50)

Ivory

Combination Connector

For connecting raceway, without offsetting, to any 3.25 in. (83.00) or 4 in. (102.00) outlet box mounted on the surface with a KO for 1/2 in. trade size conduit. Spring steel bushing (included) eliminates need for conduit nipple and locknut.

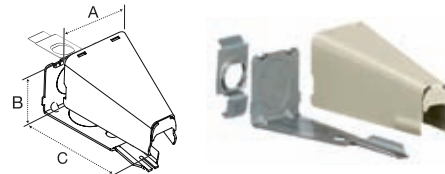


HBL5785IV
A: 1.64" (41.78)
B: 1.27" (32.26)
C: 2.90" (73.72)

Ivory

Adjustable Offset Connector

Two 1/2 in. KOs for panel or conduit connection. Eliminates offsetting raceway when connecting to surface type panel boxes. One 1/2 in. chase nipple and locknut furnished.

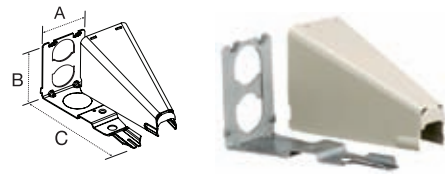


HBL5786IV
A: 1.50" (38.10)
B: 1.84" (46.74)
C: 3.89" (98.87)

Ivory

Entrance Connector

One 3/4 in. KOs for panel or conduit connection. One 3/4 in. chase nipple and locknut furnished.

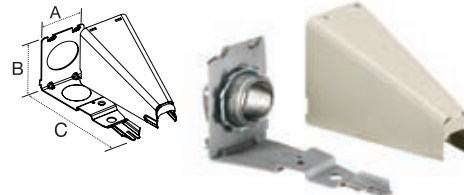


HBL5786AIV
A: 1.50" (38.10)
B: 1.84" (46.74)
C: 3.89" (98.87)

Ivory









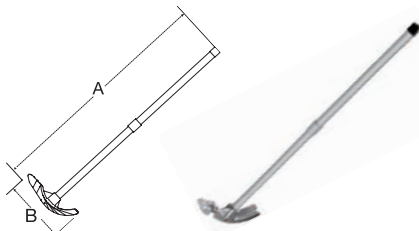

Flexible Section

For getting around offsets, side bends, twisted turns or curved surfaces.

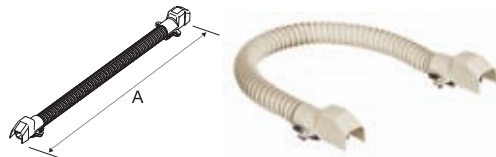












HBL5700FIV
A: 18.00" (457.20)

Ivory

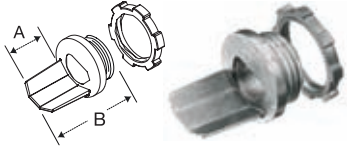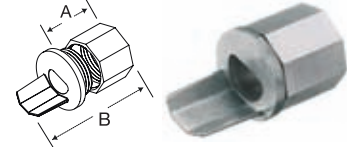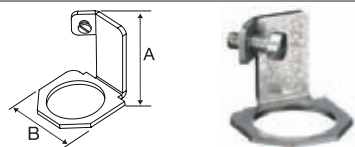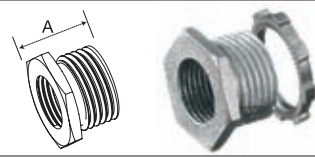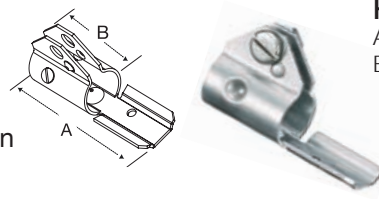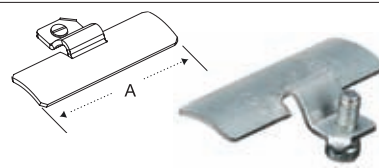
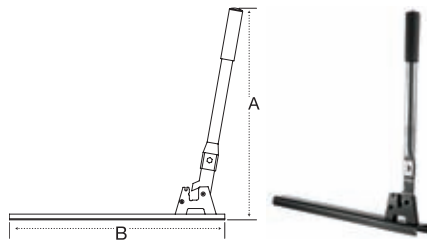

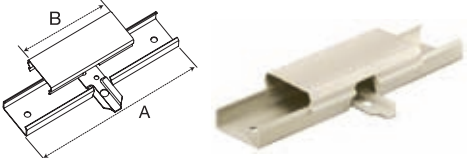
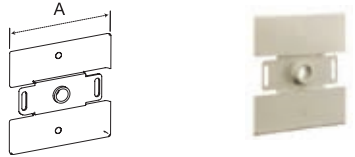
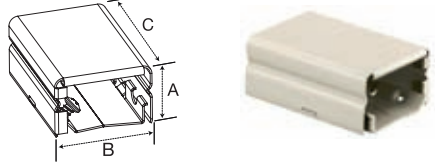
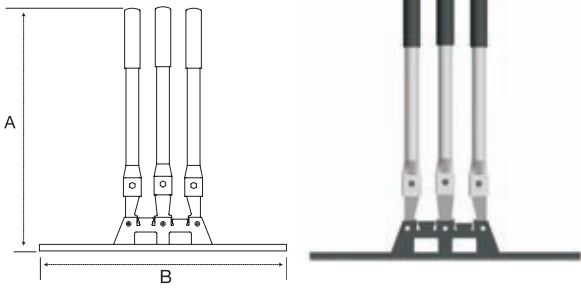


Fittings		HBL500 & HBL750 Series	Color	
Box Connector For connecting raceway to conduit boxes or panel boxes having KO for conduit. May also be used for conduit type fittings.		HBL5781 ½" (12.7) Male A: .75" (19.1) B: 1.24" (31.62)	HBL5781A ¾" (19.1) Male A: .75" (19.1) B: 1.24" (31.62)	Zinc Plated Steel
Conduit Connector For connecting raceway to conduit.		HBL5782C ½" (12.7) Female A: .75" (19.1) B: 1.75" (44)	HBL5782A ¾" (19.1) Female A: .75" (19.1) B: 1.75" (44)	Zinc Plated Steel
Grounding Clamp Provides grounding means for ½ in. trade size conduit using locknut.		HBL5709GC A: 1.04" (26.03) B: 1.18" (29.84)		Galvanized Steel
Special Nipple For hanging or connecting either .375 in. (9.5) or .5 in. (12.7) fixtures to Hubbell fittings with ½ in. trade size KOs.		HBL5780 A: .63" (16.00)		Zinc Plated Steel
Armored Cable Connector For connecting 14/2, 14/3, 12/2 and 12/3 "MC" and armored cable to Hubbell fittings. A short piece of HBL500IV/ HBL750IV Raceway must be used between this connector and the Hubbell fitting. Not for connection to ½ in. (12.7) flex conduit.		HBL5790B A: 2.00" (50.80) B: .99" (25.25)		Galvanized Steel
Ground Clamp Used to provide additional grounding of raceway or to ground remotely located devices. Attach ground wire to screw as required by National Electrical Code.		HBL5709 A: 2.00" (50.80)		Galvanized Steel
Tools		HBL500 Series	HBL750 Series	
Cutter Portable cutter for HBL500 and HBL750 Series Raceways.		HBL605CUT A: 19.70" (499.30) B: 20.00" (508.00)	HBL607CUT A: 19.64" (498.76) B: 20.00" (508.00)	
Cutter Replacement Blade		HBL605K A: 4.31" (109.51) B: 1.50" (38.04)	HBL607K A: 4.31" (109.51) B: 1.76" (44.78)	
Raceway Bender Portable bender for HBL500 and HBL750 Series Raceways.		HBL600B A: 35.47" (901.03) B: 9.41" (238.99)	HBL600B A: 35.47" (901.03) B: 9.41" (238.99)	
Touch-Up Paint		HBL500 & HBL750 Series	Color	
Touch-Up Paint Pen		HBLIWEP		Ivory

HBL2000 Series Metal Raceway

Raceway		Catalog Number	Length	Color
Single Channel Base and Cover Cover is 0.025 in. (0.635mm) thick up to 300V AC applications. Packed 50 ft. (15m) per carton, 5 ft. (1.5m) lengths.		HBL2000BCIV HBL2000BCGY A: 60.00" (1524.00) B: 1.31" (33.27) C: .83" (21.08)	5 ft.	Ivory Gray
Single Channel Base and Cover Cover is 0.040 in. (1.016mm) thick up to 600V AC or higher capacity power applications (up to 26 #12AWG wires). Packed 50 ft. (15m) per carton, 5 ft. (1.5m) lengths.		HBL2000BCAIV HBL2000BCAGY A: 60.00" (1524.00) B: 1.31" (33.27) C: .83" (21.08)	5 ft.	Ivory Gray
Base Packed 50 ft. (15m) per carton, 5 ft. (1.5m) lengths.		HBL2000B5IV HBL2000B5GY A: 60.00" (1524.00) B: 1.31" (33.27)	5 ft.	Ivory Gray
Cover Cover is 0.025 in. (0.635mm) thick up to 300V AC applications. Packed 50 ft. (15m) per carton, 5 ft. (1.5m) lengths.		HBL2000CIV HBL2000CGY A: 60.00" (1524.00) B: 1.31" (33.27)	5 ft.	Ivory Gray
Cover Cover is 0.040 in. (1.016mm) thick up to 600V AC or higher capacity power applications (up to 26 #12AWG wires). Packed 50 ft. (15m) per carton, 5 ft. (1.5m) lengths.		HBL2000CAIV HBL2000CAGY A: 60.00" (1524.00) B: 1.31" (33.27)	5 ft.	Ivory Gray
Wire Clip (Plated) For holding conductors in place. For use with HBL2000CIV/GY Cover Only.		HBL2000WC A: .44" (11.18) B: .24" (6.03) C: 1.24" (31.50)		Galvanized Steel
Wire Clip (Plated) For holding conductors in place. For use with HBL2000CAIV/GY Cover Only.		HBL2000WCA A: .44" (11.18) B: .60" (15.17) C: 1.24" (31.50)		Galvanized Steel
Coupling (Plated) For joining lengths of HBL2000 Raceway.		HBL2001C A: 2.00" (50.80)		Galvanized Steel
Supporting Clip For supporting lengths of HBL2000 Raceway at any point. Mount with #6 flat head fastener. Has set screw for locking to raceway.		HBL2003SC A: 2.00" (50.80)		Galvanized Steel
Boxes		Catalog Number		Color
One-Gang Device Box For deep switches and receptacles. Base has one 1/2 in. trade size KO and rectangular KO for extension to wall box.		HBL2048IV HBL2048GY A: 4.54" (115.32) B: 1.75" (44.45) C: 2.82" (71.63)		Ivory Gray
Two-Gang Device Box For deep switches and receptacles. Base has one 1/2 in. trade size KO and rectangular KO for extension to wall box.		HBL20482IV HBL20482GY A: 4.54" (115.32) B: 1.75" (44.45) C: 4.64" (117.86)		Ivory Gray

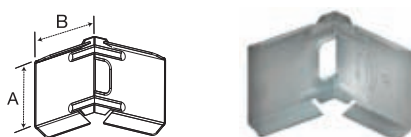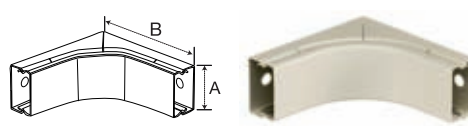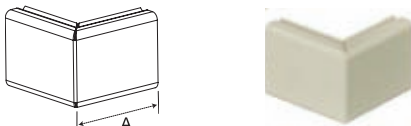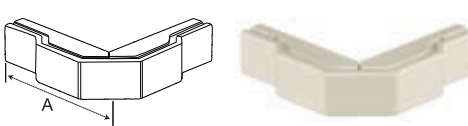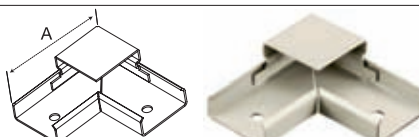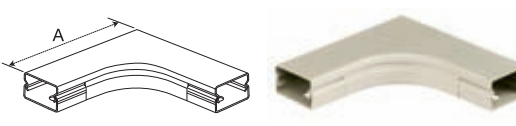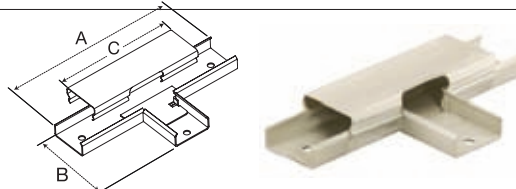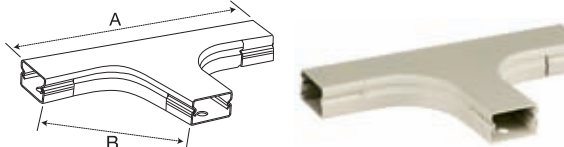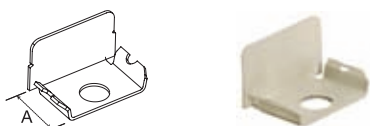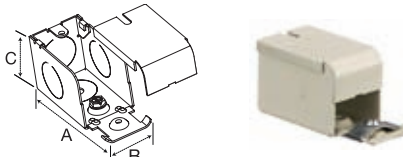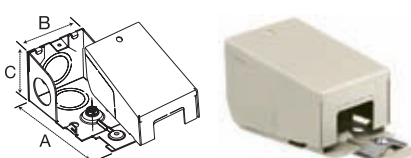Fittings	Catalog Number	Color
<p>Internal Corner Coupling For surfaces at right angles, or for use as a straight-through fitting. Furnished with one fiber bushing.</p> 	<p>HBL2017TC A: 1.30" (32.98) B: 1.40" (35.56)</p>	<p>Galvanized Steel</p>
<p>Internal Elbow-Bend Radius For inside surface at right angles requiring a 1.5 in. (38.1mm) bend radius. Suitable for Category 5, 5e, 6 and 6a applications.</p> 	<p>HBL2017BRIV HBL2017BRGY A: .85" (21.56) B: 3.47" (88.11)</p>	<p>Ivory Gray</p>
<p>External Elbow Coupling For right angle turns around external corners.</p> 	<p>HBL2018CIV HBL2018CGY A: 1.88" (47.75)</p>	<p>Ivory Gray</p>
<p>External Elbow-Bend Radius For outside surfaces at right angles requiring a 1.5 in. (38.1mm) bend radius. Suitable for Category 5, 5e, 6 and 6a applications.</p> 	<p>HBL2018BRIV HBL2018BRGY A: 5.11" (129.72)</p>	<p>Ivory Gray</p>
<p>90° Flat Elbow For right angle turns on same surface.</p> 	<p>HBL2011IV HBL2011GY A: 2.56" (65.02)</p>	<p>Ivory Gray</p>
<p>Flat Elbow-Bend Radius For branches at right angles requiring a 1.5 in. (38.1mm) bend radius. Suitable for Category 5, 5e, 6 and 6a applications.</p> 	<p>HBL2011BRIV HBL2011BRGY A: 4.29" (109.03)</p>	<p>Ivory Gray</p>
<p>Tee Fitting For branches at right angles. Couplings furnished.</p> 	<p>HBL2015IV HBL2015GY A: 6.00" (152.40) B: 2.81" (71.44) C: 4.00" (101.60)</p>	<p>Ivory Gray</p>
<p>Tee Fitting-Bend Radius For branches at right angles. Couplings furnished. Suitable for Category 5, 5e, 6 and 6a applications.</p> 	<p>HBL2015BRIV HBL2015BRGY A: 7.35" (186.78) B: 4.33" (110.00)</p>	<p>Ivory Gray</p>
<p>Blank End Fitting For closing open end of HBL2000 Raceway.</p> 	<p>HBL2010BIV HBL2010BGY A: .78" (19.94)</p>	<p>Ivory Gray</p>
<p>Entrance End Fitting For connecting HBL2000 Raceway with one 1/2 in. conduit and armored cable connectors.</p> 	<p>HBL2010A2IV HBL2010A2GY A: 3.01" (76.45) B: 1.30" (33.02) C: 1.49" (37.85)</p>	<p>Ivory Gray</p>
<p>Large Capacity Entrance End Fitting Offers larger capacity than HBL2010A2IV/GY. One 1/2 in. trade size KOs on end, each side and bottom.</p> 	<p>HBL2010A3IV HBL2010A3GY A: 3.69" (93.80) B: 2.02" (51.18) C: 1.79" (45.36)</p>	<p>Ivory Gray</p>

HBL2000 Series Metal Raceway

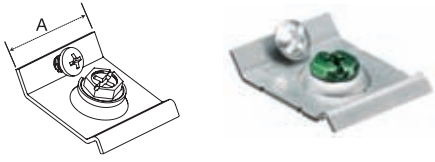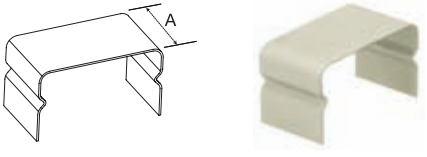Fittings		Catalog Number	Color
Ground Clamp (Plated) For connection of equipment grounding conductor to provide an additional ground to raceway.		HBL2009GC A: 1.00" (25.64)	Galvanized Steel
Cover Clip Use to cover potential openings where two pieces of HBL2000 Raceway cover come together.		HBL2006IV HBL2006GY A: .75" (19.05)	Ivory Gray
End Reducing Connector For connecting HBL2000 Raceway to HBL500 Raceway through end of HBL2000 Raceway.		HBL2089EIV A: .78" (19.81)	Ivory
Side Reducing Connector For connecting HBL2000 Raceway to HBL500 Raceway through side of HBL2000 Raceway.		HBL2089IV A: 6.00" (152.40) B: 3.25" (82.55)	Ivory
Flush Plate Adaptor For feeding HBL2000 Raceway from an existing wall outlet.		HBL2051HIV HBL2051HGY A: 4.50" (114.30)	Ivory Gray
Transition Fitting For transitioning from Wiremold® 2000 Raceway to Hubbell HBL2000 Raceway.		HBL2000TFIV HBL2000TFGY A: .82" (20.71) B: 1.38" (35.12) C: 2.04" (51.82)	Ivory Gray
Cutter	Catalog Number		
Cutter Portable cutter for HBL2000 Series Raceway.		HBL620C A: 19.64" (498.83) B: 20.00" (508.00)	
Cutter Replacement Blade		HBL620BCK A: 4.50" (115.06) B: 1.10" (27.94)	
Touch-Up Paint	Catalog Number	Color	
Touch-Up Paint Pen		HBLIWEP HBLGWEP	Ivory Gray

Wiremold® is a registered trademark of The Wiremold Company. Hubbell Inc. is not affiliated with The Wiremold Company.



Metal PlugTrak® - 3 Ft. Base and Cover

Catalog Number		Amp	Circuits	# Single Receptacles	Receptacle Spacing (in.)
Ivory	Gray				
HBL20GB306IV	HBL20GB306GY	15	Single	6	6
HBL20IG306IV	HBL20IG306GY	15	IG/Single	6	6
HBL24GB306IV	HBL24GB306GY	20	Single	6	6

Metal PlugTrak® - 5 Ft. Base and Cover

Catalog Number		Amp	Circuits	# Single Receptacles	Receptacle Spacing (in.)
Ivory	Gray				
HBL20GB506IV	HBL20GB506GY	15	Single	10	6
HBL20GB512IV	HBL20GB512GY	15	Single	5	12
HBL20GBA512IV	HBL20GBA512GY	15	Two	5	12
HBL20IG512IV	HBL20IG512GY	15	IG/Single	5	12
HBL24GB506IV	HBL24GB506GY	20	Single	10	6
HBL24GB512IV	HBL24GB512GY	20	Single	5	12
HBL24GBA512IV	HBL24GBA512GY	20	Two	5	12

Metal PlugTrak® - 6 Ft. Base and Cover

Catalog Number		Amp	Circuits	# Single Receptacles	Receptacle Spacing (in.)
Ivory	Gray				
HBL20GB606IV	HBL20GB606GY	15	Single	12	6
HBL20GB609IV	HBL20GB609GY	15	Single	8	9
HBL20GB612IV	HBL20GB612GY	15	Single	6	12
HBL20GB618IV	HBL20GB618GY	15	Single	4	18
HBL20GBA609IV	HBL20GBA609GY	15	Two	8	9
HBL20GBA612IV	HBL20GBA612GY	15	Two	6	12
HBL20GBA618IV	HBL20GBA618GY	15	Two	4	18
HBL20IG606IV	HBL20IG606GY	15	IG/Single	12	6
HBL24GB606IV	HBL24GB606GY	20	Single	12	6
HBL24GB612IV	HBL24GB612GY	20	Single	6	12
HBL24GB618IV	HBL24GB618GY	20	Single	4	18
HBL24GBA612IV	HBL24GBA612GY	20	Two	6	12
HBL24GBA618IV	HBL24GBA618GY	20	Two	4	18

Portable Metal PlugTrak®

Catalog Number		Length	Cord Length	Amp	Circuits	# Single Receptacles
Ivory	Gray					
HBL20C215IV	HBL20C215GY	40 In.	6 Ft.	15	Single	6
HBL20C315IV	HBL20C315GY	64 In.	6 Ft.	15	Single	8

Notes: Hubbell Metal PlugTrak is supplied with two **HBL2010B(IV)** or **(GY)** Blank End Fittings and one **HBL2001C**.
 "IV" suffix to catalog number for ivory finish. "GY" suffix to catalog number for gray finish.
 Outlets match raceway color. "IG" Isolated receptacles are orange color.

Boxes and Fittings

Description	Color	Catalog Number
One-Gang Device Box	Ivory Gray	HBL2048IV HBL2048GY
Two-Gang Device Box	Ivory Gray	HBL20482IV HBL20482GY
Internal Corner Coupling	Galv. Steel	HBL2017TC
External Elbow	Ivory Gray	HBL2018CIV HBL2018CGY
Flat Elbow	Ivory Gray	HBL2011IV HBL2011GY
Tee	Ivory Gray	HBL2015IV HBL2015GY
Entrance End Fitting	Ivory Gray	HBL2010A2IV HBL2010A2GY
Large Entrance End Fitting	Ivory Gray	HBL2010A3IV HBL2010A3GY
Blank End Fitting	Ivory Gray	HBL2010BIV HBL2010BGY
Cover Clip	Ivory Gray	HBL2006IV HBL2006GY
Supporting Clip	Galv. Steel	HBL2003SC
Coupling	Galv. Steel	HBL2001C

For detailed descriptions, photos and dimensions see pages 14-16.




Hubbell Metal Raceway

HBL3000 Series Product Applications



Catalog Number	Description
1 HBL3000CEIV HBL3000BIV	5 ft. Cover 10 ft. Base
2 HBL3011EIV	90° Flat Elbow
3 HBL3006EIV	Cover Clip
4 HBL3043BEIV	Duplex Receptacle Cover and Device Bracket

Catalog Number	Description
5 HBL3048RIV	Rectangular Receptacle Cover and Device Bracket
6 HBL3017CEIV	Internal Corner Coupling
7 HBL3010BIV	Blank End Fitting
8 HBL3036HEIV	Blank Cover and Bracket

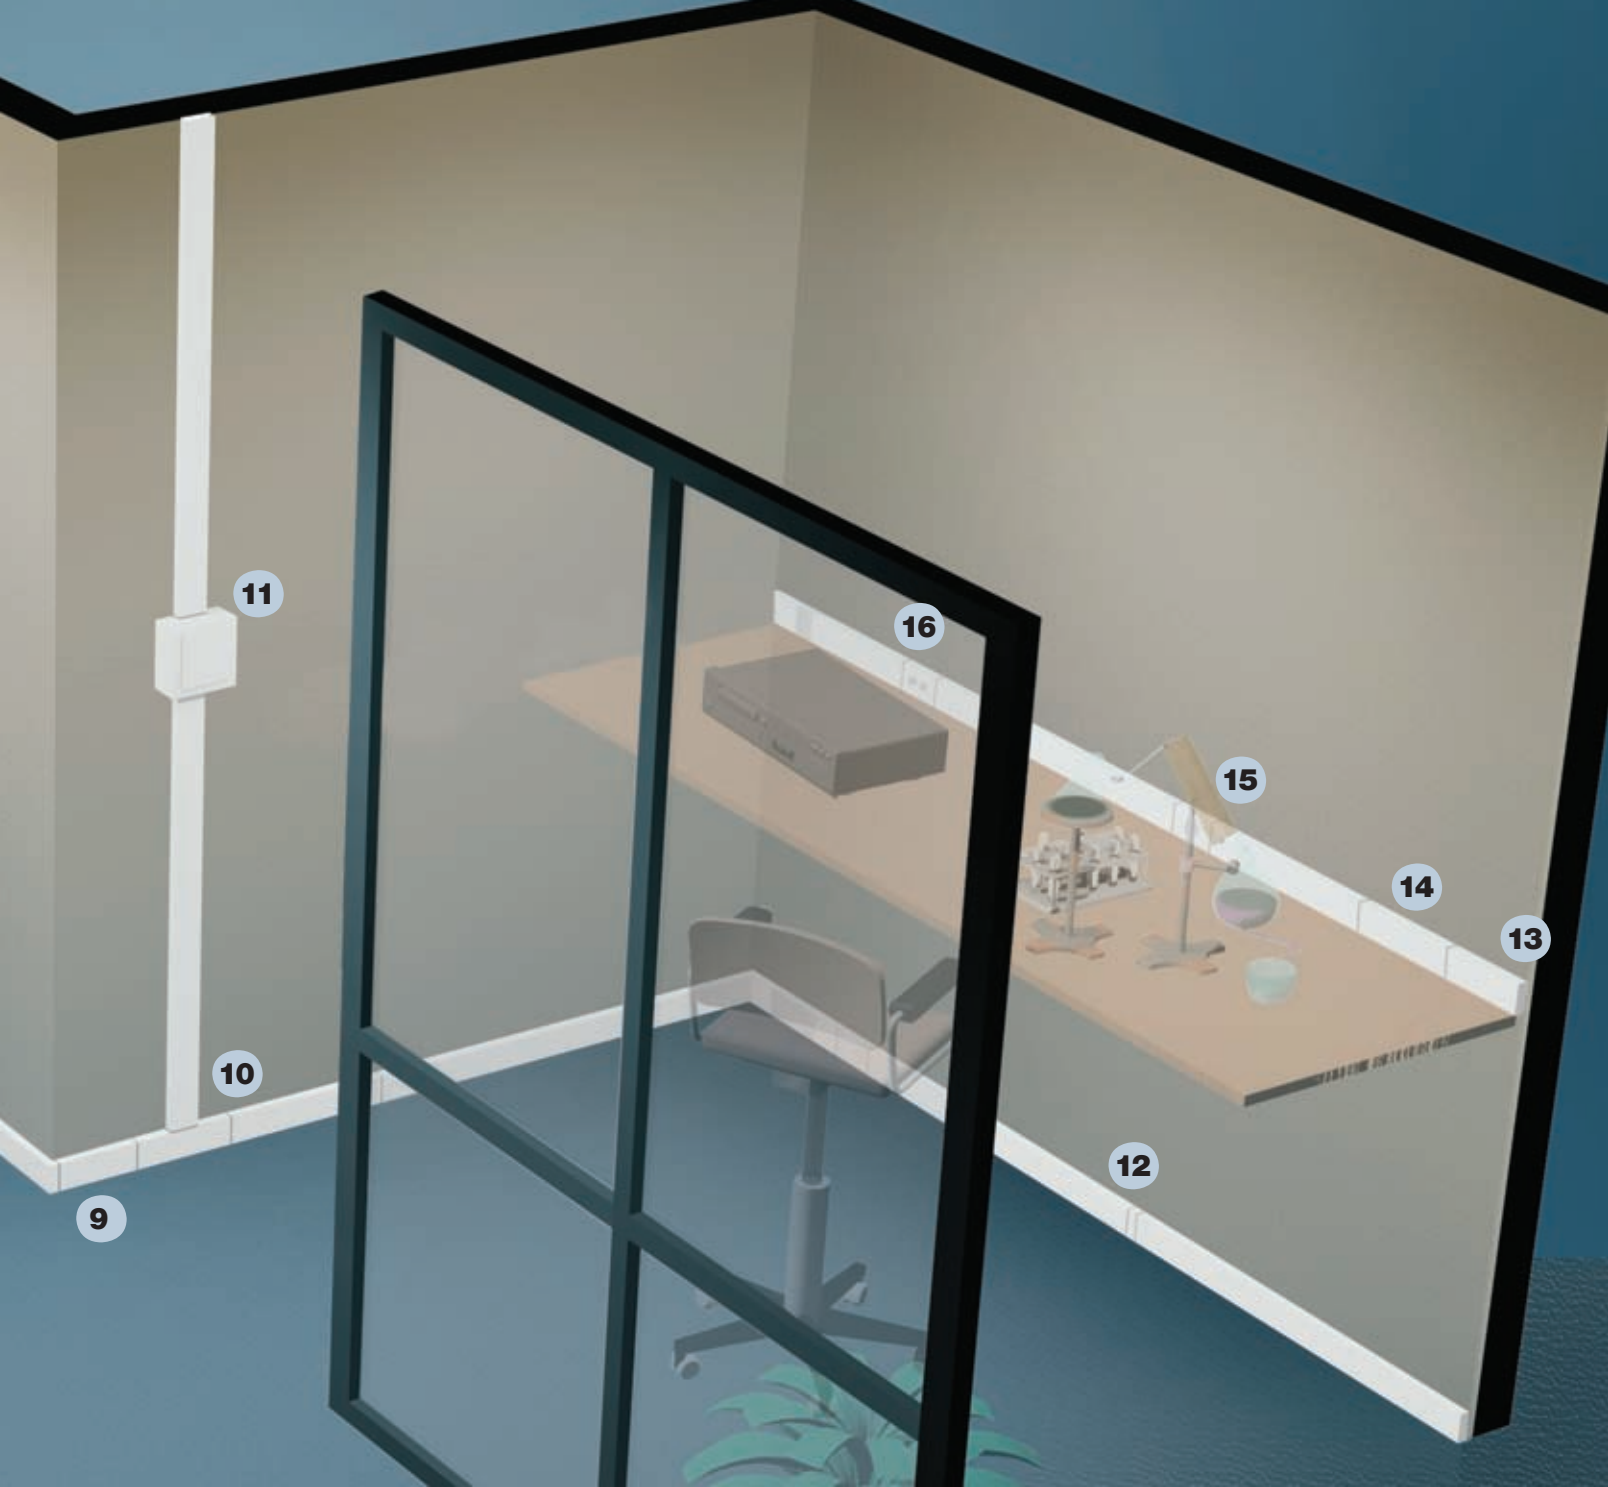

Catalog Number	Description
9 HBL3018AEIV	External Corner Coupling
10 HBL3015EIV	Tee Fitting
11 HBL30442IV	Two-Gang Extra Deep Switch and Receptacle Box
12 HBL3000TFIV	Transition Fitting Wiremold® 3000 Raceway to Hubbell HBL3000 Series Raceway

Catalog Number	Description
13 HBL3010AEIV	Entrance End Fitting
14 HBL3000C195IV	19.5 in. Precut Cover
15 HBL3027AEIV	Single Receptacle Cover and Device Bracket
16 HBL3046BEIV	High Strain Duplex Receptacle Cover and Device Bracket

Wiremold® is a registered trademark of The Wiremold Company.

HBL3000 Series Metal Raceway



Extensive Line

- Full line of large, single channel, two piece metal raceway.
- Easily mounts on walls or bench tops.
- Large single channel base for power or datacom cables.
- UL Listed and CSA Certified.
- Available in ivory or gray powder coat finish.

Advantage ^{HUBBELL}



Plates and Covers

- Wide range of covers and cover plates accommodate the most demanding applications.
- Removable cover and cover plates provide easy access to wiring compartment.
- Precut covers and plates provide quick installation and are available in common configurations.

Advantage ^{HUBBELL}

Transition Fittings

- UL Classified to transition from Wiremold® 3000 Series Metal Raceway to Hubbell HBL3000 Series Metal Raceway.
- Reducer fitting provides transition from Hubbell HBL3000 Series to Hubbell HBL2000 Series Raceway.



Wiremold® 3000 Series to Hubbell HBL3000 Series utilizing Hubbell transition fitting.

Advantage HUBBELL

Boxes

- Hubbell Handi-Screw eliminates “difficult-to-install” long screws for faster mounting.
- Rounded corners eliminate sharp edges.
- One seam construction provides “clean” look.
- Large capacity allows for the installation of 30, 50 or 60A receptacles.
- Utility box can be used as a tee, cross, junction box or as a branch circuit extension.




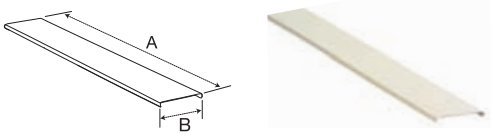

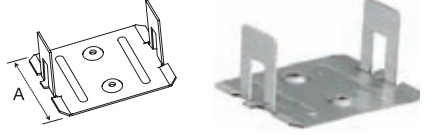
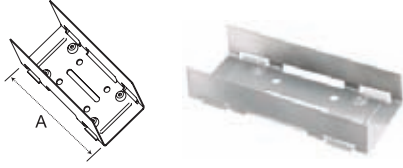
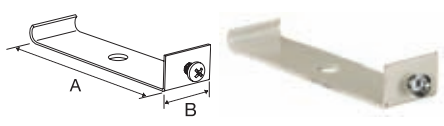
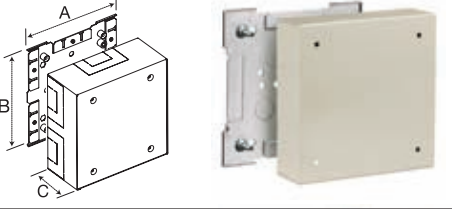
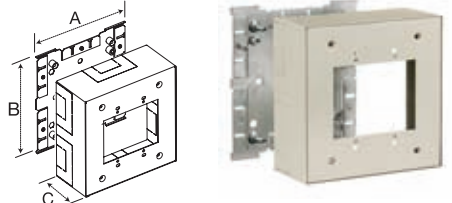






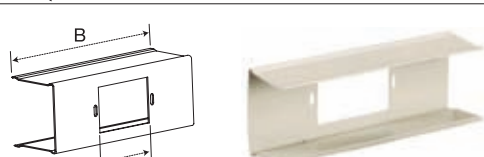

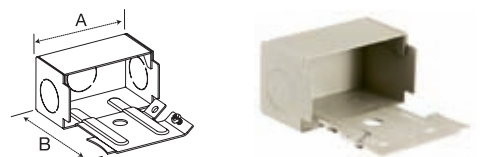
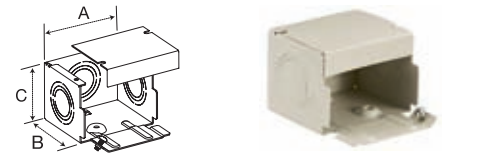

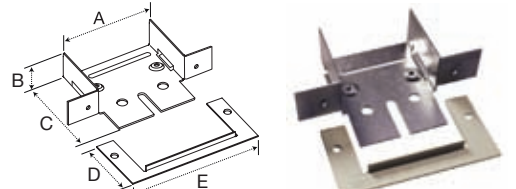
Wiremold® is a registered trademark of The Wiremold Company.

Advantage HUBBELL





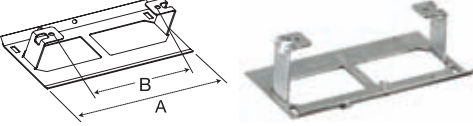
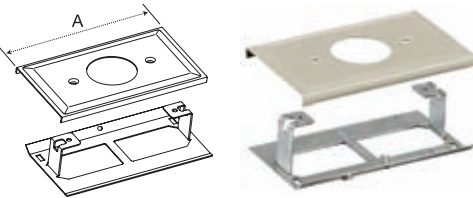
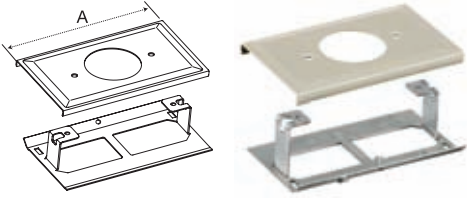
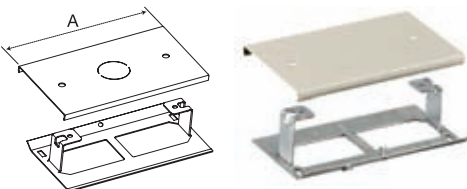
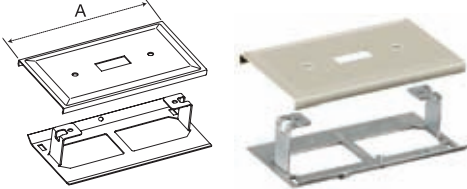
HBL3000 Series Metal Raceway

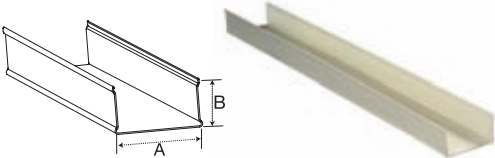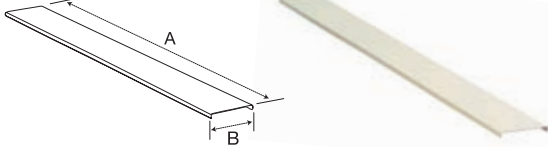Available in
PRE-WIRED

Raceway		Catalog Number	Length	Color
Single Channel Base Packed 50 ft. (15m) per carton, 10 ft. (3m) lengths.		HBL3000BIV HBL3000BGY A: 2.67" (67.94) B: 1.47" (37.34)	10 ft.	Ivory Gray
Cover Packed 50 ft. (15m) per carton, 5 ft. (1.5m) lengths.		HBL3000CEIV HBL3000CEGY A: 60.00" (1524.00) B: 2.75" (69.85)	5 ft.	Ivory Gray
7.5 in. Precut Cover For mounting devices on 12 in. (305.00) centers. Packed 10 pieces per carton.		HBL3000C075IV HBL3000C075GY A: 7.50" (190.50) B: 2.75" (69.85)	7.5 in.	Ivory Gray
19.5 in. Precut Cover For mounting devices on 24 in. (610.00) centers. Packed 10 pieces per carton.		HBL3000C195IV HBL3000C195GY A: 19.50" (495.30) B: 2.75" (69.85)	19.5 in.	Ivory Gray
Wire Clip (Plated) For holding conductors in place.		HBL3000WCGY A: 1.00" (25.40)		Galvanized Steel
Coupling (Plated) For joining lengths of HBL3000 Raceway.		HBL3001GY A: 2.20" (55.75)		Galvanized Steel
Rigid Inside Coupling (Plated) For joining lengths of HBL3000 Raceway when added rigidity is required, i.e. raceway suspended overhead.		HBL3001AGY A: 6.00" (152.40)		Galvanized Steel
Supporting Clip For supporting lengths of HBL3000 Raceway at any point. Mount with #8 flat head fastener. Has set screw for locking to raceway.		HBL3003IV HBL3003GY A: 2.81" (71.33) B: .75" (19.05)		Ivory Gray
Boxes		Catalog Number		Color
Utility Box Cover has twistouts on all sides, allows for box to be used as tee, cross, junction box or for branch circuit extensions.		HBL3028IV HBL3028GY A: 6.41" (162.89) B: 6.41" (162.89) C: 1.90" (48.26)		Ivory Gray
Two-Gang Extra Deep Switch and Receptacle Box For standard 30, 50 and 60A straight blade receptacles.		HBL30442IV HBL30442GY A: 6.38" (162.05) B: 6.38" (162.05) C: 2.75" (69.85)		Ivory Gray







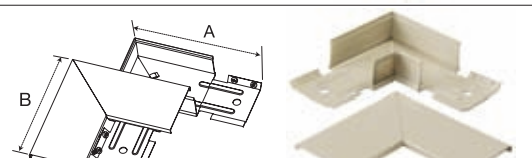

Fittings	Catalog Number	Color
<p>Internal Corner Coupling For surfaces at right angles or for use as a straight-through fitting.</p> 	<p>HBL3017TCEIV HBL3017TCEGY A: 2.61" (66.29)</p>	<p>Ivory Gray</p>
<p>External Corner Coupling For right angle turns around external corners.</p> 	<p>HBL3018AEIV HBL3018AEGY A: 4.00" (101.60)</p>	<p>Ivory Gray</p>
<p>90° Flat Elbow For right angle turns on same surface.</p> 	<p>HBL3011EIV HBL3011EGY A: 6.40" (162.40) B: 6.00" (152.40)</p>	<p>Ivory Gray</p>
<p>Tee Fitting For branches at right angles. Couplings furnished.</p> 	<p>HBL3015EIV HBL3015EGY A: 10.31" (261.94) B: 8.00" (203.20)</p>	<p>Ivory Gray</p>
<p>Wall Box Connector For connecting to HBL3000 Raceway from a flush mounted wall box.</p> 	<p>HBL3014CIV HBL3014CGY A: 3.28" (83.31) B: 8.00" (203.20)</p>	<p>Ivory Gray</p>
<p>Blank End Fitting For closing open end of HBL3000 Raceway. Has concentric ½ in. and ¾ in. trade size KOs.</p> 	<p>HBL3010BIV HBL3010BGY A: 2.71" (68.92) B: 1.79" (45.36) C: 1.41" (35.84)</p>	<p>Ivory Gray</p>
<p>Entrance End Fitting For connecting HBL3000 Raceway with ½ in. conduit and armored cable connectors.</p> 	<p>HBL3010AEIV HBL3010AEGY A: 2.75" (69.85) B: 3.42" (86.87)</p>	<p>Ivory Gray</p>
<p>Entrance End Fitting For connecting HBL3000 Raceway with rigid or flexible conduit. Concentric ½ in., ¾ in. and 1 in. trade size KOs on end and each side.</p> 	<p>HBL3010CIV HBL3010CGY A: 2.75" (69.85) B: 3.25" (82.55) C: 2.00" (50.80)</p>	<p>Ivory Gray</p>
<p>Take-Off Connector (Reducer) Transition Hubbell HBL3000 Raceway to Hubbell HBL2000 Raceway.</p> 	<p>HBL3200REDIV HBL3200REDGY A: 2.75" (69.85) B: 2.25" (57.15)</p>	<p>Ivory Gray</p>
<p>Panel Connector To connect HBL3000 Raceway with surface type boxes.</p> 	<p>HBL3086IV HBL3086GY A: 4.60" (116.71) B: 1.19" (30.16) C: 3.00" (76.20) D: 1.94" (49.40) E: 3.76" (95.50)</p>	<p>Ivory Gray</p>

HBL3000 Series Metal Raceway

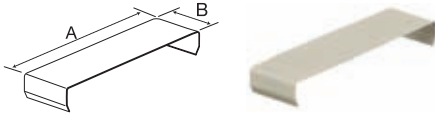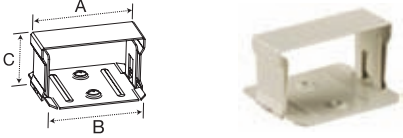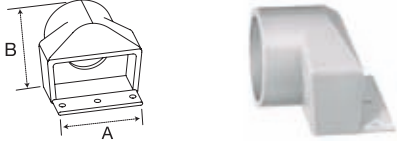Fittings		Catalog Number	Color
<p>Cover Clip Use to cover potential openings where two pieces of Hubbell HBL3000 Raceway come together.</p> 	<p>HBL3006EIV HBL3006EGY A: 2.78" (70.60) B: .75" (19.05)</p>	<p>Ivory Gray</p>	
<p>Transition Fitting For transitioning from Wiremold® 3000 Raceway to Hubbell HBL3000 Raceway.</p> 	<p>HBL3000TFIV HBL3000TFGY A: 2.85" (72.39) B: 2.15" (54.61) C: 1.50" (38.04)</p>	<p>Ivory Gray</p>	
<p>Conduit Connector To connect end of HBL3000 Raceway to 1½ in. trade size conduit or armored cable.</p> 	<p>HBL3082GY A: 2.91" (74.00) B: 2.75" (69.85)</p>	<p>Gray</p>	
<p>Tap-Off Fitting Has concentric ½ in. and ¾ in. trade size KO's and twistout for communication cables.</p> 	<p>HBL3046H2IV HBL3046H2GY A: 4.75" (120.65)</p>	<p>Ivory Gray</p>	
Device Bracket and Cover Plates		Catalog Number	Color
<p>Device Bracket For mounting standard devices in HBL3000 Raceway. Use with commercially available flush plate (not furnished).</p> 	<p>HBL3007CGY A: 4.50" (114.30) B: 3.28" (83.31)</p>	<p>Galvanized Steel</p>	
<p>Single Receptacle Cover For installing straight blade and locking single receptacles with face diameters of 1.38 in. – 1.39 in. (35mm-36mm). Includes HBL3007CGY device bracket.</p> 	<p>HBL3027AEIV HBL3027AEGY A: 4.50" (114.30)</p>	<p>Ivory Gray</p>	
<p>Single Receptacle Cover For installing straight blade and locking single receptacles with face diameters of 1.56 in. – 1.57 in. (40mm). Includes HBL3007CGY device bracket.</p> 	<p>HBL3033JEIV HBL3033JEGY A: 4.50" (114.30)</p>	<p>Ivory Gray</p>	
<p>Blank Cover Has one ½ in. trade size KO in center. Includes HBL3007CGY bracket.</p> 	<p>HBL3036HEIV HBL3036HEGY A: 4.50" (114.30)</p>	<p>Ivory Gray</p>	
<p>Switch Cover For installing single-pole, two-pole, three-way or four-way switches. Includes HBL3007CGY device bracket.</p> 	<p>HBL3040CEIV HBL3040CEGY A: 4.50" (114.30)</p>	<p>Ivory Gray</p>	

Wiremold® is a registered trademark of the Wiremold Company.



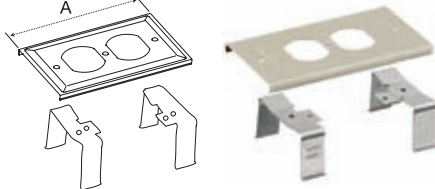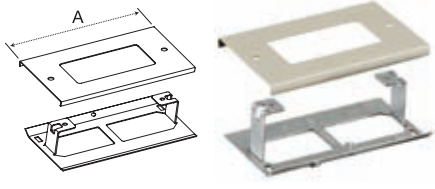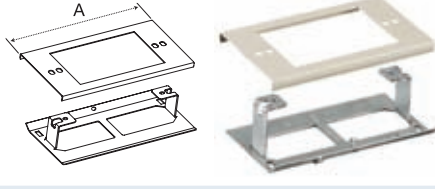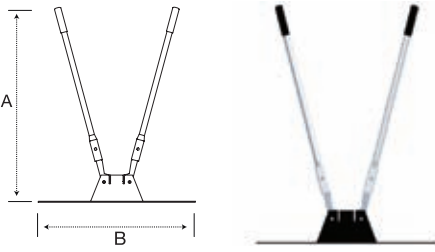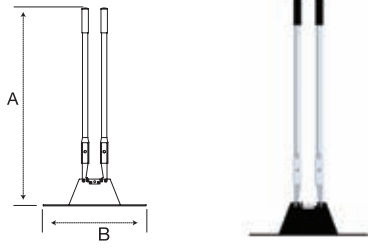








Device Bracket and Covers/Plates		Catalog Number	Color
<p>Duplex Receptacle Cover For installing 15A and 20A duplex receptacles and duplex communication devices. Includes HBL3007CGY device bracket.</p>		<p>HBL3043BEIV HBL3043BEGY A: 4.50" (114.30)</p>	<p>Ivory Gray</p>
<p>Duplex Receptacle Cover For high strain/vibration. For installing 15A and 20A duplex receptacles and duplex communication devices. Includes device brackets.</p>		<p>HBL3046BEIV HBL3046BEGY A: 4.50" (114.30)</p>	<p>Ivory Gray</p>
<p>Rectangular Style Line® Receptacle Cover For installing 15A and 20A rectangular duplex receptacles, GFCI and surge devices. Includes HBL3007CGY device bracket.</p>		<p>HBL3048RIV HBL3048RGY A: 4.50" (114.30)</p>	<p>Ivory Gray</p>
<p>Extension Cover Cover accepts shallow-type 30A and 50A devices and standard commercially available flush plates. Includes HBL3007CGY device bracket. See pages 130-131 for plate options.</p>		<p>HBL3051LEIV HBL3051LEGY A: 4.50" (114.30)</p>	<p>Ivory Gray</p>
Tools		Catalog Number	
<p>Base Cutter Portable cutter for HBL3000 Raceway base.</p>		<p>HBL630B A: 37.14" (943.48) B: 30.00" (782.00)</p>	
<p>Replacement Blade Kit Base kit.</p>		<p>HBL630BDK A: 8.50" (215.90) B: 1.78" (45.34)</p>	
<p>Cover Cutter Portable cutter for HBL3000 Raceway cover.</p>		<p>HBL630C A: 38.48" (977.34) B: 20.00" (508.00)</p>	
<p>Replacement Blade Kit Cover kit.</p>		<p>HBL630CDK A: 7.00" (177.80) B: 1.10" (27.94)</p>	
Touch-Up Paint		Catalog Number	Color
<p>Touch-Up Paint Pen</p>		<p>HBLIWEP HBLGWEP</p>	<p>Ivory Gray</p>





Hubbell Metal Raceway



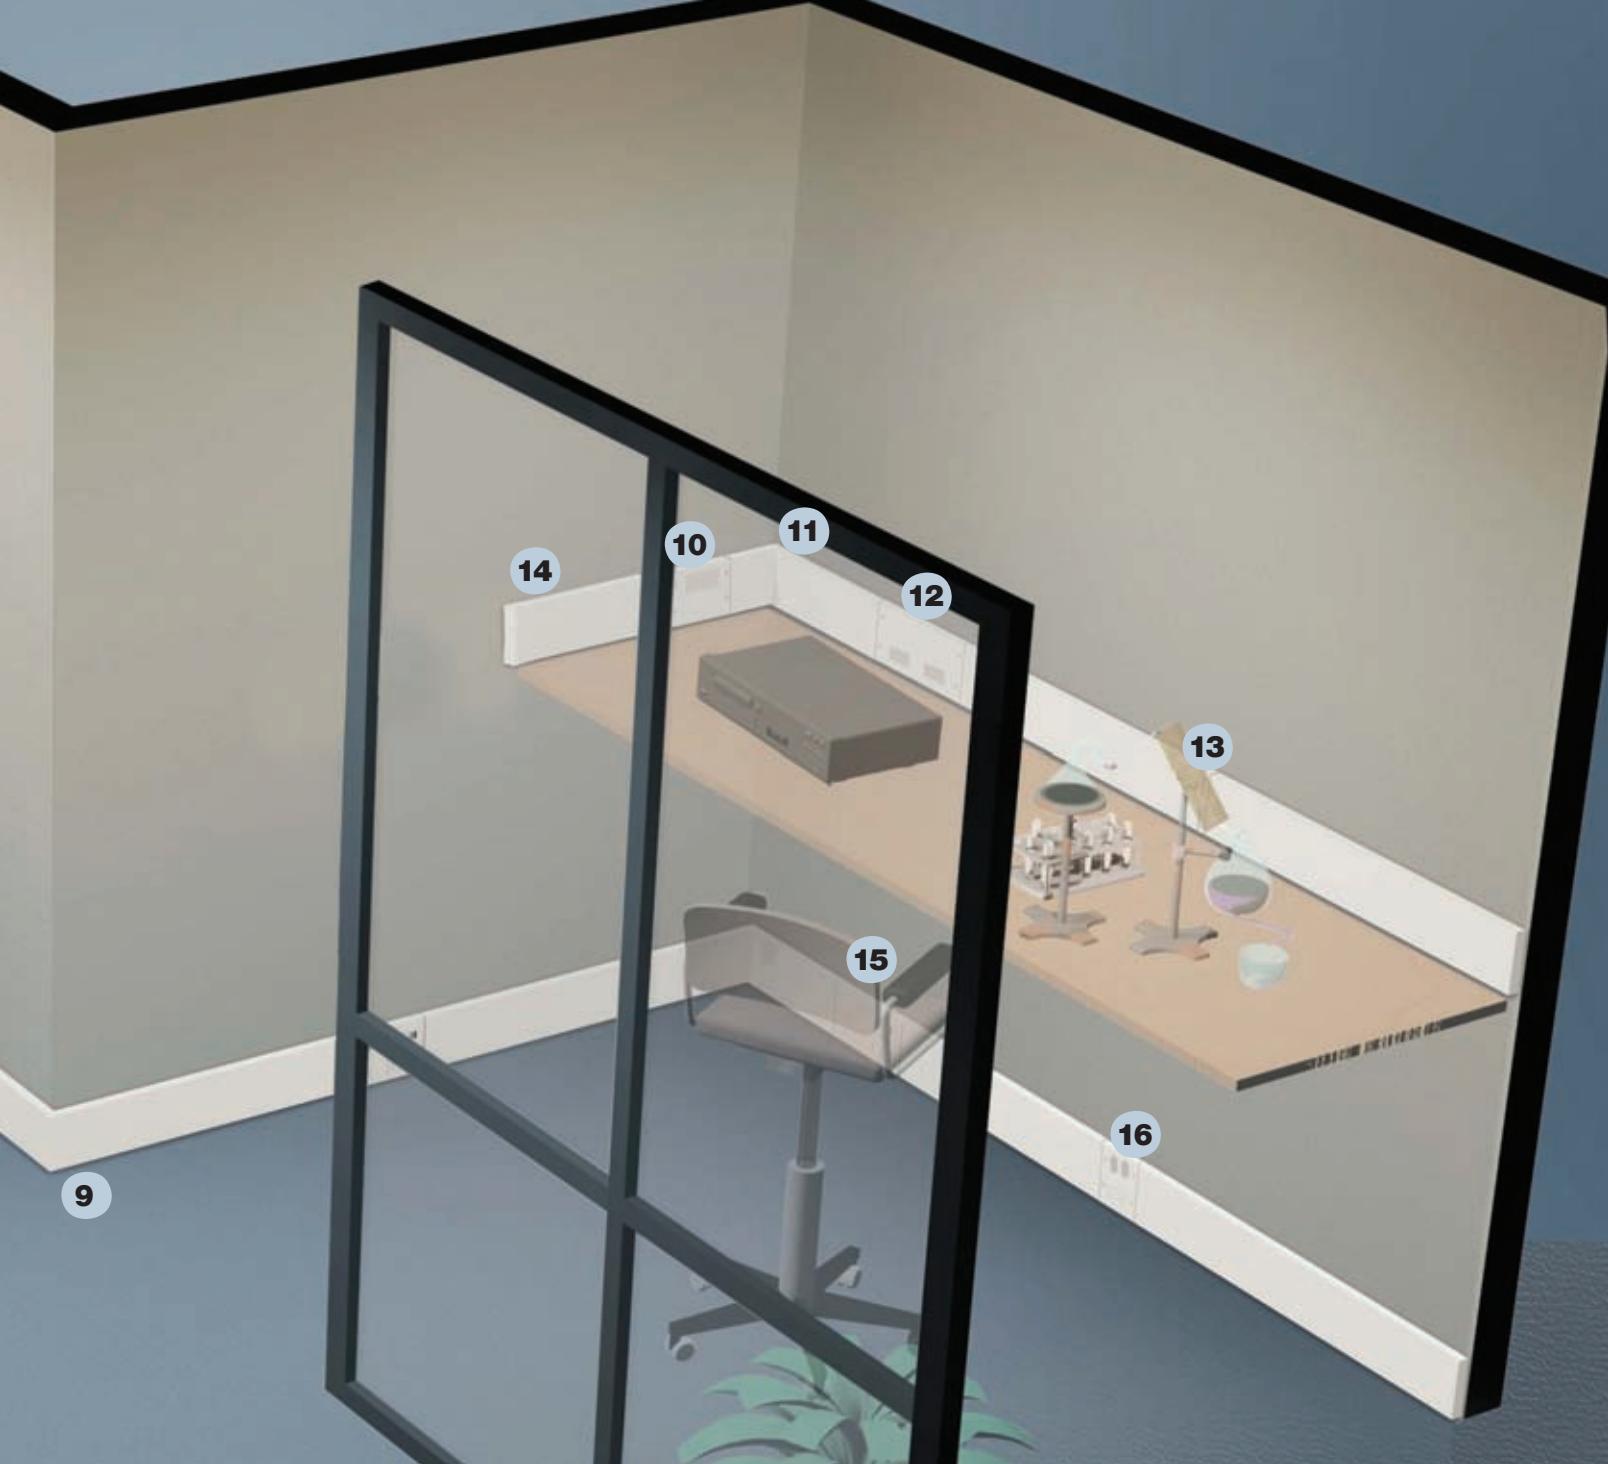

HBL4750 Series Product Applications



Catalog Number	Description	Catalog Number	Description
1 HBL4750CIV HBL4750B10IV	 5 ft. Cover 10 ft. Base	5 HBL4747BXIV	 Overlapping Plate, Two-Gang Duplex Receptacle, Blank
2 HBL4711DFOIV	 90° Flat Elbow	6 HBL4750IV	 Device Mounting Bracket
3 HBL4756IV	 Connection Cover	7 HBL4710BIV	 Blank End Fitting
4 HBL4747BBIV	 Overlapping Plate, Two-Gang, Two Duplex Receptacles	8 HBL47472BBBBIV	 Overlapping Plate, Four-Gang, Four Duplex Receptacles



Catalog Number	Description
9 HBL4718DFOIV	 External Elbow
10 HBL4747RXIV	 Overlapping Two-Gang Plate, Style Line® Receptacle, Blank
11 HBL4717DFOIV	 Internal Elbow
12 HBL47472RRXXIV	 Overlapping Plate, Four-Gang, Two Style Line Receptacles, Two Blanks

Catalog Number	Description
13 HBL4750TFIV	 Transition Fitting
14 HBL4750C195IV	 19.5 in. Precut Cover
15 HBL47472BBFFIV	 Overlapping Plate, Four-Gang, Two Duplex Receptacles, Two Modular Furnitures
16 HBL4747BFIV	 Overlapping Plate, Two-Gang, Duplex Receptacle, Modular Furniture


HBL4750 Series Metal Raceway



HBL4750 Device Bracket

- HBL4750 Device Bracket Plate provides excellent solution for power, data, voice, audio and video applications.
- For use with Hubbell KP plates and Hubbell iSTATION™ modules and bezels.
- Provides flush finish with overlap feature to hide potential miscuts.

Advantage ^{HUBBELL}

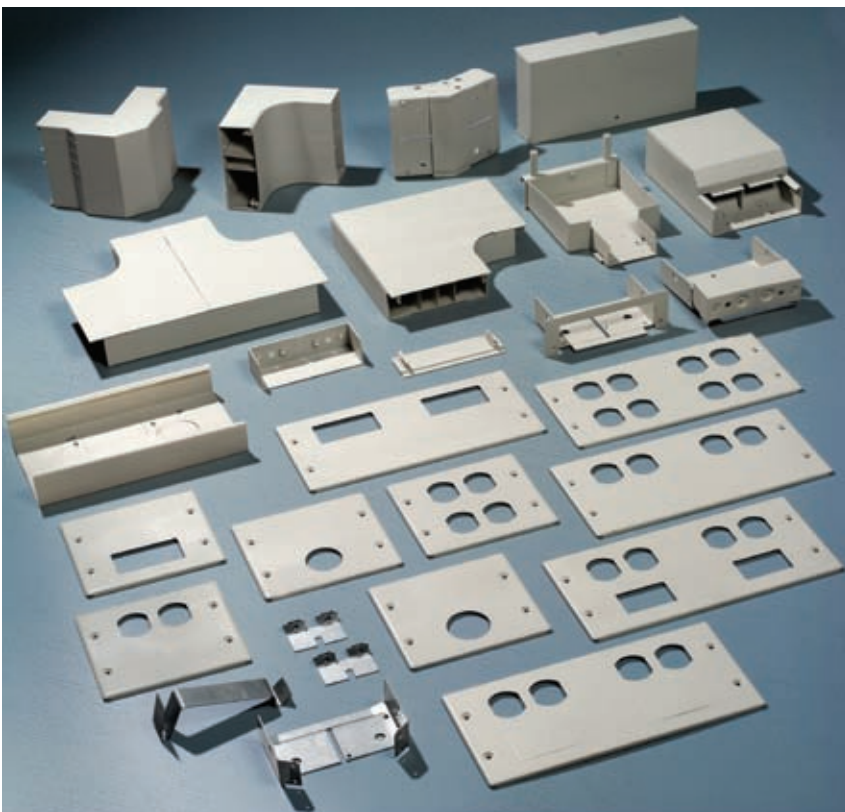


Extensive Line

- 1¼" bend radius fittings meet TIA/EIA requirements.
- Integral bend radius offers a fixed solution that does not have to be installed as an option.
- Large cross sectional area provides for maximum cable capacity throughout entire system.
- Available external, internal, flat, tee and entrance end fittings.
- UL Listed, CSA Certified.
- Available in ivory or gray powder coat finish.

Advantage ^{HUBBELL}

Application Capacity and Flexibility

- Flexible channel divider provides industry leading data capacity in the same profile with a 2/3 datacom split.
- By-Pass Divider opening accepts GFCI or surge devices to be mounted in 70/30 divided channel.
- Greater capacity offers more room for moves, adds and changes.
- 50/50 split available by utilizing standard divider and divider clips.
- Raceway channel can also be used with no divider for maximum cable fill in single service applications.

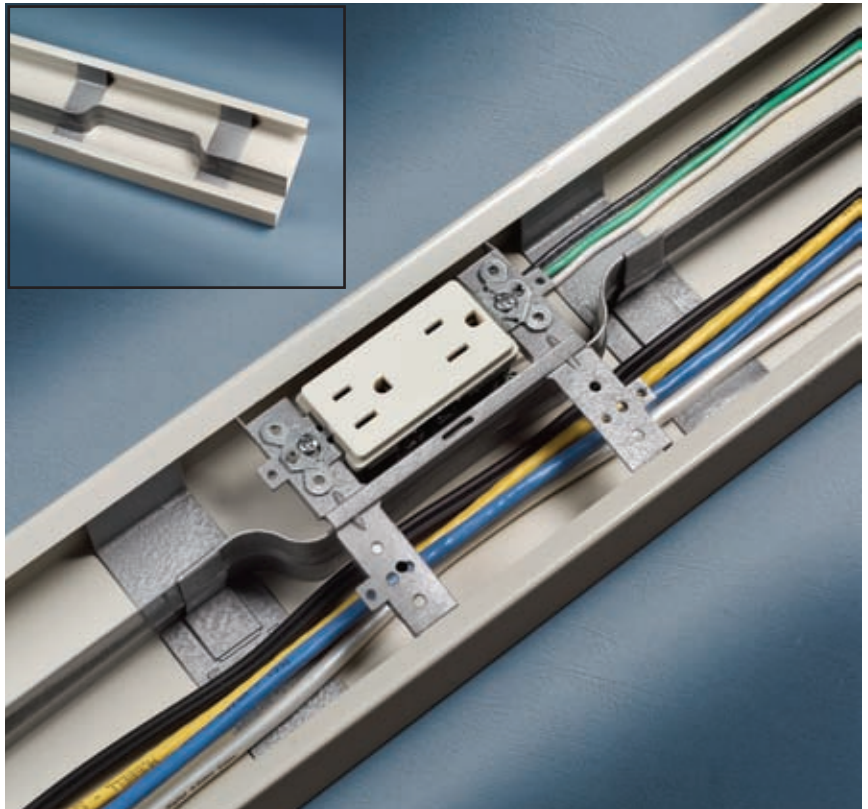

Advantage HUBBELL

Plates and Covers

- Wide variety of overlapping cover plates provide flexibility for power, data, voice, audio and video applications.
- Cover plates accept wide selection of Hubbell iSTATION™ modules and bezels.
- Cover plates help to conceal unsightly gaps caused by miscuts.
- Precut cover options allow for 12" (305mm), 18" (343mm), 24" (495mm) and 36" (800mm) center mounting.
- Open System architecture available.



Advantage HUBBELL


HBL4750 Series Metal Raceway

Available in **PRE-WIRED**

Raceway		Catalog Number	Length	Color
Base Packed 50 ft. (15.24m) per carton, 10 ft. (3m) lengths.		HBL4750B10IV HBL4750B10GY A: 120" (3048.00) B: 4.76" (120.90) C: 1.62" (41.20)	10 ft.	Ivory Gray
Cover Packed 50 ft. (15.24m) per carton, 5 ft. (1.5m) lengths.		HBL4750CIV HBL4750CGY A: 60.00" (1524.0) B: 4.75" (120.65)	5 ft.	Ivory Gray
7.5 in. Precut Cover For mounting devices on 12 in. (305.00) centers. Packed 10 pieces per carton.		HBL4750C075IV HBL4750C075GY A: 7.50" (190.50) B: 4.75" (120.65)	7.5 in.	Ivory Gray
13.5 in. Precut Cover For mounting devices on 18 in. (457.00) centers. Packed 10 pieces per carton.		HBL4750C135IV HBL4750C135GY A: 13.50" (342.90) B: 4.75" (120.65)	13.5 in.	Ivory Gray
19.5 in. Precut Cover For mounting devices on 24 in. (610.00) centers. Packed 10 pieces per carton.		HBL4750C195IV HBL4750C195GY A: 19.50" (495.30) B: 4.75" (120.65)	19.5 in.	Ivory Gray
31.5 in. Precut Cover For mounting devices on 36 in. (915.00) centers. Packed 10 pieces per carton.		HBL4750C315IV HBL4750C315GY A: 31.50" (800.10) B: 4.75" (120.65)	31.5 in.	Ivory Gray
Wire Clip (Plated) For holding conductors in place.		HBL4750WCGY A: 4.60" (116.74) B: 1.58" (40.13) C: 1.00" (25.40)		Galv. Steel
Divider Divides HBL4750 Raceway into two channels. Packed 50 ft. (15.24m) per carton, 5 ft. (1.5m) lengths. HBL4751DA Divider Clips are required to hold divider in place.		HBL4750DGY A: 60.00" (1524.00) B: 1.51" (38.46)	5 ft.	Painted Steel
By-Pass Divider Divides HBL4750 Raceway into two channels with a 70/30 split. Allows for a larger power or datacom wire fill. HBL4751DA Divider Clips are required to hold divider in place.		HBL4750BP A: 7.12" (180.74) B: .89" (22.54)		Painted Steel
Coupling (Plated) For joining lengths of HBL4750 Raceway. Sold in pairs.		HBL4751AC A: 1.47" (37.30) B: .42" (10.59)		Galv. Steel
Divider Clip Required for holding HBL4750DGY in place. Use one every 2.5 ft. (.762m).		HBL4751DA A: 4.64" (117.77) B: 1.46" (37.07)		Galv. Steel

Fittings


Internal Or External 45° Elbow
For making internal or external turns in a run of HBL4750 Raceway.



Catalog Number Color


HBL4712TXIV Ivory
HBL4712TXGY Gray
A: 6.04" (153.45)
B: 4.59" (116.59)

Internal Elbow (Divided)
For inside surfaces at right angles. Full capacity 1¼ in. bend radius internal elbow.




HBL4717DFOIV Ivory
HBL4717DFOGY Gray
A: 4.74" (120.47)
B: 4.75" (120.65)

Internal Elbow (Undivided)
For inside surfaces at right angles.




HBL4717IV Ivory
HBL4717GY Gray
A: 4.74" (120.47)
B: 4.75" (120.65)

Inverted Internal Elbow
Connecting a vertical run of HBL4750 Raceway with a horizontal run.




HBL4717NIV Ivory
HBL4717NGY Gray
A: 4.60" (116.84)
B: 1.66" (42.29)

Internal Corner Coupling (Plated)
Making an internal corner while continuing original run in a straight line.




HBL4717TCAGY Galvanized Steel
A: 4.59" (116.59)
B: 2.71" (68.73)
C: 1.47" (37.34)

External Elbow (Divided)
For right angle turns around external corners. Full capacity 1¼ in. bend radius external elbow.



HBL4718DFOIV Ivory
HBL4718DFOGY Gray
A: 4.88" (123.90)
B: 4.76" (120.90)

External Elbow (Undivided)
For right angle turns around external corners.




HBL4718IV Ivory
HBL4718GY Gray
A: 4.88" (123.90)
B: 4.76" (120.90)

HBL4750 Series Metal Raceway

Fittings

Flat Elbow (Divided)

For right angle turns on same surface. Full capacity 1¼ in. bend radius flat elbow.



Catalog Number


Color

HBL4711DFOIV
HBL4711DFOGY
A: 7.23" (183.76)
B: 1.62" (41.15)

Ivory
Gray

Flat Elbow (Undivided)

For right angle turns on same surface.




HBL4711IV
HBL4711GY
A: 7.23" (183.76)
B: 1.62" (41.15)

Ivory
Gray

Tee Fitting (Divided)

For branches at right angles. Full capacity 1¼ in. bend radius tee fitting.

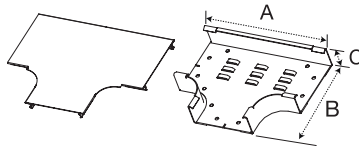


HBL4715DFOIV
HBL4715DFOGY
A: 10.93" (277.63)
B: 7.27" (184.54)
C: 1.62" (41.15)

Ivory
Gray

Tee Fitting (Undivided)

For branches at right angles.


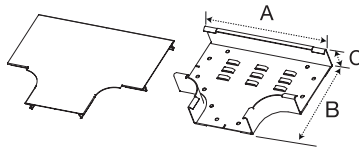


HBL4715IV
HBL4715GY
A: 10.93" (277.63)
B: 7.27" (184.54)
C: 1.62" (41.15)

Ivory
Gray

Wall Box Connector

For back feeding HBL4750 Raceway.




HBL4714AIV
HBL4714AGY
A: 12.00" (304.80)
B: 4.75" (120.65)
C: 1.62" (41.15)

Ivory
Gray

Blank End Fitting

For closing open end of HBL4750 Raceway. Has two ½ in. trade size KOs.




HBL4710BIV
HBL4710BGY
A: 4.59" (116.50)
B: 1.64" (41.60)
C: 1.31" (33.37)

Ivory
Gray

Entrance End Fitting (Divided)

For connecting HBL4750 Raceway with rigid or flexible conduit. Concentric ¾ in., 1 in. and 1¼ in. trade size KOs on back and end. Full capacity 1¼ in. bend radius entrance end fitting. Includes ¾ in., 1 in., 1¼ in. KO and removable divider.




HBL4710DFOIV
HBL4710DFOGY
A: 6.76" (171.70)
B: 4.76" (120.90)
C: 2.66" (67.50)

Ivory
Gray

Fittings

Entrance End Fitting (Undivided)

For connecting HBL4750 Raceway with rigid or flexible conduit. Concentric 3/4 in., 1 in. and 1 1/4 in. trade size KOs on back and end.




Catalog Number **Color**

HBL4710IV Ivory
HBL4710GY Gray
 A: 6.76" (171.70)
 B: 4.76" (120.90)
 C: 2.66" (67.50)

Take-Off Connector (HBL4750 To HBL3000)


For 90° tee connection of HBL3000 Raceway from HBL4750 Raceway.



HBL4774AIV Ivory
HBL4774AGY Gray
 A: 11.31" (287.38)
 B: 4.88" (124.00)
 C: 3.14" (79.78)

Connection Cover (Standard)


For covering potential openings where two covers come together.



HBL4756AIV Ivory
HBL4756AGY Gray
 A: 4.77" (121.16)
 B: .75" (19.05)
 C: .13" (3.36)

Connection Cover (Heavy Duty)


For covering potential openings where two covers come together.



HBL4756IV Ivory
HBL4756GY Gray
 A: 4.75" (120.65)
 B: 1.58" (40.13)
 C: .59" (14.89)

Panel Connector


To connect HBL4750 Raceway with surface type panel boxes.



HBL4786AIV Ivory
HBL4786AGY Gray
 A: 7.50" (190.50)

Transition Fitting


For transitioning Wiremold® 4000 Raceway to Hubbell HBL4750 Raceway.



HBL4750TFIV Ivory
HBL4750TFGY Gray
 A: 5.02" (127.53)
 B: 2.79" (70.78)

Two-Gang Tap-Off Fitting























Has four concentric 1/2 in. and 3/4 in. trade size KOs.



HBL4746H2IV Ivory
HBL4746H2GY Gray
 A: 4.75" (120.65)
 B: 4.75" (120.65)



Wiremold® is a registered trademark of The Wiremold Company.

HBL4750 Series Metal Raceway

Mounting Bracket		Catalog Number	Color
Device Mounting Bracket Mounting bracket for mounting Hubbell KP plates, iSTATION™ modules and bezels. See pages 54-55 for datacom product selection.	 	HBL4750IV HBL4750GY A: 5.25" (133.35) B: 4.76" (120.90)	Ivory Gray
One-Gang Commercial Device Plate Vertical Mount Use with commercially available one-gang flush plates. See pages 130-131 for plate options. For single service applications only.	 	HBL4747CVMIV HBL4747CVMGY A: 2.50" (63.50) B: 4.75" (120.65)	Ivory Gray
Two-Gang Commercial Device Plate Vertical Mount Use with commercially available two-gang flush plates. See pages 130-131 for plate options. For single service applications only.	 	HBL4747CVM2IV HBL4747CVM2GY A: 4.32" (109.86) B: 4.75" (120.65)	Ivory Gray
Overlapping Cover Plates (Include Mounting Bracket)		Catalog Number	Color
Two-Gang Cover, Single Round Opening, One Blank For single receptacle with face diameter of 1.38 in. to 1.39 in. (35.00 to 36.00).	 	HBL4747AXIV HBL4747AXGY A: 5.43" (137.97) B: 4.75" (120.65)	Ivory Gray
Two-Gang, One Duplex Receptacle Opening, One Blank For 15A and 20A duplex receptacles and duplex communication frames.	 	HBL4747BXIV HBL4747BXGY A: 5.43" (137.97) B: 4.75" (120.65)	Ivory Gray
Two-Gang, Two Duplex Receptacle Openings For 15A and 20A duplex receptacles and duplex communication frames.	 	HBL4747BBIV HBL4747BBGY A: 5.43" (137.97) B: 4.75" (120.65)	Ivory Gray
Two-Gang, One Duplex Receptacle, One Modular Furniture For 15A and 20A duplex receptacles and duplex communication plates. Includes modular furniture with two keystone twistouts.	 	HBL4747BFIV HBL4747BFGY A: 5.43" (137.97) B: 4.75" (120.65)	Ivory Gray
Two-Gang, Single Round Receptacle, One Blank For single receptacle with face diameter of 1.56 in. to 1.58 in. (39.00 to 40.00).	 	HBL4747JXIV HBL4747JXGY A: 5.43" (137.97) B: 4.75" (120.65)	Ivory Gray
Two-Gang, One Style Line® Receptacle, One Blank For Style Line rectangular receptacles, GFCI and surge devices and rectangular communication devices.	 	HBL4747RXIV HBL4747RXGY A: 5.43" (137.97) B: 4.75" (120.65)	Ivory Gray
Two-Gang, One Style Line® Receptacle, One Modular Furniture For Style Line rectangular receptacles, GFCI and surge devices and rectangular communication devices. Includes modular furniture with two keystone twistouts.	 	HBL4747RFIV HBL4747RFGY A: 5.43" (137.97) B: 4.75" (120.65)	Ivory Gray
Two-Gang, One Duplex Receptacle, One Style Line® Receptacle For 15A and 20A duplex receptacles and Style Line rectangular receptacles, GFCI, surge devices and rectangular communication devices.	 	HBL4747BRIV HBL4747BRGY A: 5.43" (137.97) B: 4.75" (120.65)	Ivory Gray

Overlapping Cover Plates (Include Mounting Bracket)



Four-Gang, Four Duplex Receptacle Openings
For 15A and 20A duplex receptacles and duplex communication frames.



Catalog Number Color


HBL47472BBBBIV Ivory
HBL47472BBBBGY Gray
A: 10.22" (259.56)
B: 4.75" (120.65)

Four-Gang, Two Duplex Receptacles, Two Modular Furniture
For 15A and 20A duplex receptacles and duplex communication plates. Includes two modular furniture with two keystone twistouts.




HBL47472BBFFIV Ivory
HBL47472BBFFGY Gray
A: 10.22" (259.56)
B: 4.75" (120.65)

Four-Gang, Two Duplex Receptacles, Two Blanks
For 15A and 20A duplex receptacles and duplex communication plates. Includes two blanks.




HBL47472BBXXIV Ivory
HBL47472BBXXGY Gray
A: 10.22" (259.56)
B: 4.75" (120.65)

Four-Gang, Two Style Line® Receptacles, Two Blanks
For Style Line rectangular receptacles, GFCI and surge devices and rectangular communication devices. Includes two blanks.




HBL47472RRXXIV Ivory
HBL47472RRXXGY Gray
A: 10.22" (259.56)
B: 4.75" (120.65)

Two-Gang, One Duplex Receptacle, One Ortronics® Series II® Mini Adapter Bezel
For 15A and 20A duplex receptacles and duplex communication plates. Includes Series II® Mini Adapter Bezel.




HBL4747BSIV Ivory
HBL4747BSGY Gray
A: 5.43" (137.97)
B: 4.75" (120.65)

Two-Gang, One Duplex Receptacle, One Ortronics® TracJack® Mini Adapter Bezel
For 15A and 20A duplex receptacles and duplex communication plates. Includes TracJack® Mini Adapter Bezel.




HBL4747BTIV Ivory
HBL4747BTGY Gray
A: 5.43" (137.97)
B: 4.75" (120.65)

Two-Gang, One Opening for One-Gang Commercial Device Plate, One Blank
Use with commercially available one-gang flush plates. See pages 130-131 for plate options.




HBL4747C1IV Ivory
HBL4747C1GY Gray
A: 5.43" (137.97)
B: 4.75" (120.65)

Two-Gang, One Opening for Two-Gang Commercial Device Plate
Use with commercially available two-gang flush plates. See pages 130-131 for plate options.




HBL4747C2IV Ivory
HBL4747C2GY Gray
A: 5.43" (137.97)
B: 4.75" (120.65)

Four-Gang, Two Duplex Receptacles, Two Ortronics® Series II® Mini Adapter Bezels
For 15A and 20A duplex receptacles and duplex communication plates. Includes two Series II® Mini Adapter Bezels.



HBL47472BBSSIV Ivory
HBL47472BBSSGY Gray
A: 10.22" (259.56)
B: 4.75" (120.65)


Four-Gang, Two Duplex Receptacles, Two Ortronics® TracJack® Mini Adapter Bezels
For 15A and 20A duplex receptacles and duplex communication plates. Includes two TracJack® Mini Adapter Bezels.



HBL47472BBTTIV Ivory
HBL47472BBTTGY Gray
A: 10.22" (259.56)
B: 4.75" (120.65)

Cutters


Base Cutter
Cutter for cutting base of HBL4750 Raceway.



Catalog Number

HBL640B
A: 38.31" (973.14)
B: 30.00" (762.00)
HBL640BDK
(Replacement Blade)

Cover Cutter
Cutter for cutting cover of HBL4750 Raceway.



Catalog Number

HBL640C
A: 35.89" (911.54)
B: 30.00" (762.00)
HBL640CDK
(Replacement Blade)

Ortronics®, Series II® and TracJack® are registered trademarks of The Ortronics Company.


Hubbell Metal Raceway





HBL6750 Series Product Applications





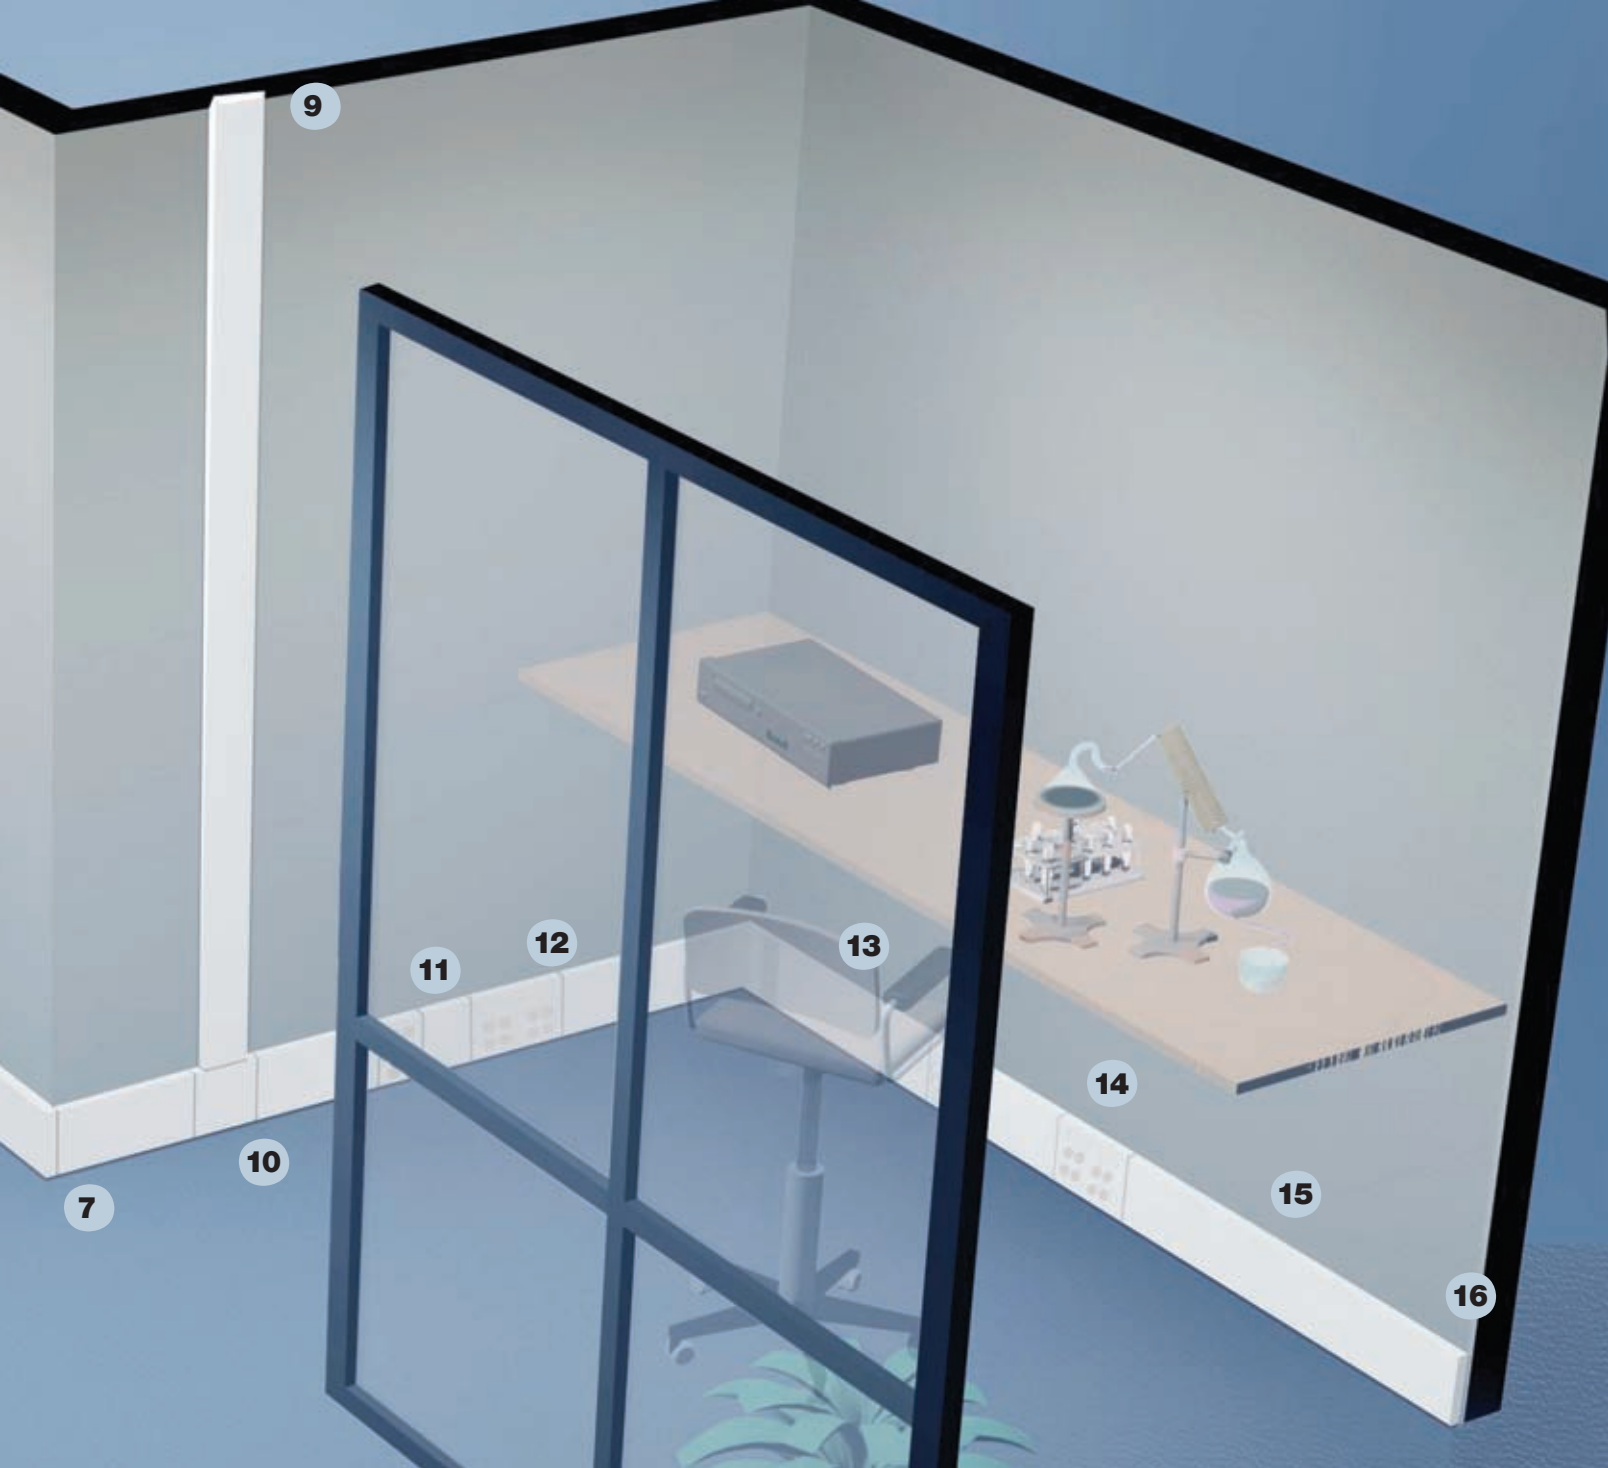

Catalog Number	Description
1 HBL6750CIV HBL6750B10IV	5 ft. Cover 10 ft. Base
2 HBL6711DFOIV	1 1/4" Radius Full Capacity Flat Elbow
3 HBL6756IV	Cover Clip
4 HBL67473BBBBBBIV	Overlapping Plate, Six-Gang, Six Duplex Receptacles

Catalog Number	Description
5 HBL6717DFOIV	1 1/4" Radius Full Capacity Internal Elbow
6 HBL6747BBBIV	Overlapping Plate, Three- Gang, Three Duplex Receptacles
7 HBL6718DFOIV	1 1/4" Radius Full Capacity External Elbow
8 HBL67473RRRRXXIV	Overlapping Plate, Six- Gang, Four Style Line® Receptacles, Two Blanks



Catalog Number	Description
9 HBL4750CIV HBL4750B10IV	 5 ft. Cover 10 ft. Base
10 HBL6774AIV	 Take-Off Connector (HBL6750 - HBL4750)
11 HBL6750IV	 Three-Gang Device Mounting Bracket
12 HBL67473BBBBXXIV	 Overlapping Plate, Six-Gang, Four Duplex Receptacles, Two Blanks

Catalog Number	Description
13 HBL6714AIV	 Connector Fitting
14 HBL67473BBBBFFIV	 Overlapping Plate, Six-Gang, Four Duplex Receptacles, Two Modular Furnitures
15 HBL6750C315IV	 31.5 in. Precut Cover
16 HBL6710BIV	 Blank End Fitting

HBL6750 Series Metal Raceway



Bracket and Devices

- HBL6750 Device Bracket Plate provides excellent solution for three channel power, data, voice, audio and video applications.
- For use with Hubbell KP plates and Hubbell iSTATION™ modules and bezels.
- Provides flush finish with overlap feature to hide potential miscuts.

Advantage ^{HUBBELL}




Maximum Capacity

- HBL6750 Series options include single channel (no divider), two channel (1/3, 2/3 divider) or three channel (1/3, 1/3, 1/3 divider).
- HBL6750 Series offers maximum capacity in a low profile raceway.
- HBL6750, two channel version, features industry leading capacity equivalent to a HBL4750 single channel profile with an additional channel.
- Low profile raceway provides a less conspicuous profile than competitive versions.
- Available in 10 ft. lengths.

Advantage ^{HUBBELL}

Unique Line of Fittings

- 1¼" bend radius fittings meet TIA/EIA requirements.
- Integral bend radius offers a fixed solution that does not have to be field installed.
- Large cross sectional area provides for maximum cable capacity throughout entire system.
- Available external, internal, flat, tee and entrance end fittings.
- UL Listed, CSA Certified.
- Available in ivory or gray powder coat finish.

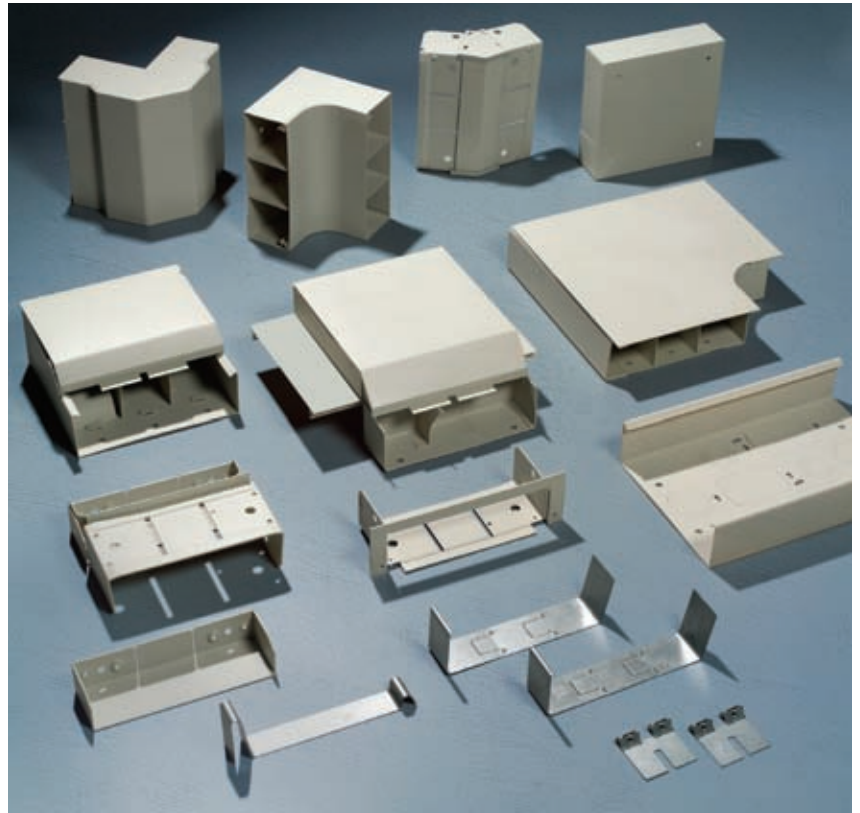

Advantage HUBBELL

Plates and Covers








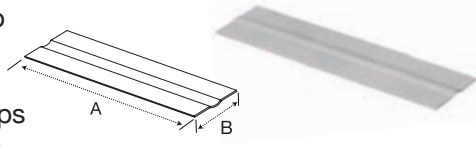
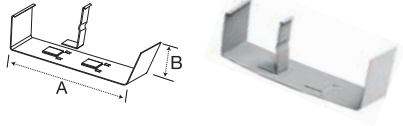

- Wide variety of overlapping cover plates provide flexibility for power, data, voice, audio and video applications.
- Available in both three and six-gang options.
- Cover plates accept wide selection of Hubbell iSTATION™ modules and bezels.
- Cover plates help to conceal unsightly gaps caused by miscuts.
- Precut cover options allow for 12" (305mm), 18" (343mm), 24" (495mm) and 36" (800mm) "on-center" mounting.
- Open System architecture available.



Advantage HUBBELL


HBL6750 Series Metal Raceway

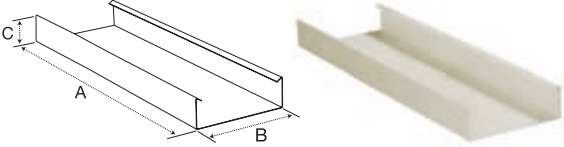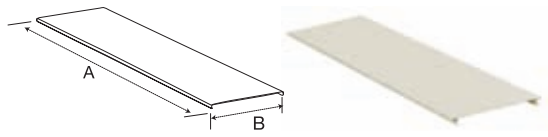Available in
PRE-WIRED

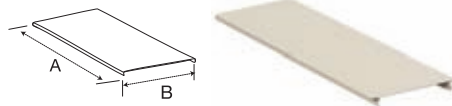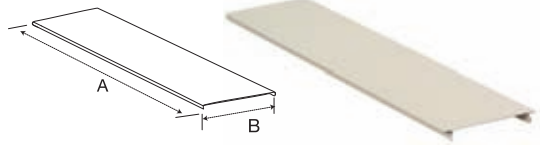Raceway		Catalog Number	Length	Color
Single Channel Base Packed 20 ft. (6.1m) per carton, 10 ft. (3m) lengths.		HBL6750B10IV HBL6750B10GY A: 120.00" (3048.00) B: 6.75" (171.45) C: 2.12" (53.85)	10 ft.	Ivory Gray
Cover Packed 20 ft. (6.1m) per carton, 5 ft. (1.5m) lengths.		HBL6750CIV HBL6750CGY A: 60.00" (1524.00) B: 6.75" (171.45)	5 ft.	Ivory Gray
7.5 in. Precut Cover For mounting devices on 12 in. (305.00) centers. Packed 10 pieces per carton.		HBL6750C075IV HBL6750C075GY A: 7.50" (190.50) B: 6.75" (171.45)	7.5 in.	Ivory Gray
13.5 in. Precut Cover For mounting devices on 18 in. (457.00) centers. Packed 10 pieces per carton.		HBL6750C135IV HBL6750C135GY A: 13.50" (342.90) B: 6.75" (171.45)	13.5 in.	Ivory Gray
19.5 in. Precut Cover For mounting devices on 24 in. (610.00) centers. Packed 10 pieces per carton.		HBL6750C195IV HBL6750C195GY A: 19.50" (495.30) B: 6.75" (171.45)	19.5 in.	Ivory Gray
31.5 in. Precut Cover For mounting devices on 36 in. (915.00) centers. Packed 10 pieces per carton.		HBL6750C315IV HBL6750C315GY A: 31.50" (800.10) B: 6.75" (171.45)	31.5 in.	Ivory Gray
Wire Clip (Plated) For holding conductors in place.		HBL6750WCGY A: 6.61" (167.80) B: 2.09" (53.05)		Galvanized Steel
Divider Divides HBL6750 Raceway into two or three channels. Packed 50 ft. (15.24m) per carton, 5 ft. (1.5m) lengths. HBL6751DAGY Divider Clips are required to hold divider in place.		HBL6750DAGY A: 60.00" (1524.00) B: 2.03" (51.56)	5 ft.	Painted Steel
Divider Clip (Plated) Required for holding HBL6750DAGY in place. Use one every 2.5 ft. (.762m).		HBL6751DAGY A: 6.60" (167.67) B: 1.97" (50.10)		Galvanized Steel
Coupling (Plated) For joining lengths of HBL6750 Raceway. Sold in pairs.		HBL6751A A: 2.00" (50.71) B: .42" (10.59)		Galvanized Steel

Fittings

Internal or External 45° Elbow
For making internal or external turns in a run of HBL6750 Raceway.



Catalog Number


Color

HBL6712TXIV
HBL6712TXGY
A: 6.53" (165.93)
B: 6.56" (166.62)

Ivory
Gray

Internal Elbow (Divided)

For inside surface at right angles. Full capacity 1¼ in. bend radius internal elbow.




HBL6717DFOIV
HBL6717DFOGY
A: 4.74" (120.47)
B: 6.75" (171.45)

Ivory
Gray

Internal Elbow (Undivided)

For inside surface at right angles.




HBL6717IV
HBL6717GY
A: 4.74" (120.47)
B: 6.75" (171.45)

Ivory
Gray

Inverted Internal Elbow

For connecting a vertical run of HBL6750 Raceway with a horizontal run.




HBL6717NIV
HBL6717NGY
A: 6.56" (166.62)
B: 5.13" (130.30)

Ivory
Gray

Internal Corner Coupling (Plated)

Making an internal corner while continuing original run in a straight line.




HBL6717TCAGY
A: 6.56" (166.62)
B: 1.94" (49.28)

Gray

External Elbow (Divided)

For right angle turns around external corners. Full capacity 1¼ in. bend radius external elbow.




HBL6718DFOIV
HBL6718DFOGY
A: 5.83" (148.21)
B: 6.75" (171.45)

Ivory
Gray

External Elbow (Undivided)

For right angle turns around external corners.



HBL6718IV
HBL6718GY
A: 5.83" (148.21)
B: 6.75" (171.45)


Ivory
Gray

HBL6750 Series Metal Raceway

Fittings

Flat Elbow (Divided)

For right angle turns on same surface. Full capacity 1¼ in. bend radius flat elbow.



Catalog Number

Color

HBL6711DFOIV

Ivory

HBL6711DFOGY

Gray

A: 9.23" (234.45)

B: 6.75" (171.45)



C: 2.14" (54.23)

D: 9.83" (249.69)

E: 6.75" (171.45)

Flat Elbow (Undivided)

For right angle turns on same surface.



HBL6711IV

Ivory

HBL6711GY

Gray

A: 9.23" (234.45)

B: 6.75" (171.45)


C: 2.14" (54.23)

D: 9.83" (249.69)

E: 6.75" (171.45)

Tee Fitting (Divided)

For branches at right angles. Full capacity 1¼ in. bend radius tee fitting.



HBL6715DFOIV

Ivory

HBL6715DFOGY

Gray

A: 8.75" (222.25)

B: 6.63" (168.40)



C: 3.56" (90.48)

D: 7.92" (201.07)

E: 6.75" (171.45)

Tee Fitting (Undivided)

For branches at right angles.



HBL6715IV

Ivory

HBL6715GY

Gray

A: 8.75" (222.25)

B: 6.63" (168.40)


C: 3.56" (90.48)

D: 7.92" (201.07)

E: 6.75" (171.45)

Wall Box Connector

For back feeding HBL6750 Raceway.



HBL6714AIV

Ivory

HBL6714AGY

Gray


A: 6.75" (171.45)

B: 2.14" (54.28)

C: 9.90" (251.46)

Blank End Fitting

For closing open end of HBL6750 Raceway. Has three ½ in. trade size KOs.



HBL6710BIV

Ivory

HBL6710BGY

Gray


A: 6.56" (166.62)

B: 1.98" (50.41)

C: 1.33" (33.90)

Entrance End Fitting (Divided)

For connecting HBL6750 Raceway with rigid or flexible conduit. Concentric ¾ in., 1 in. and 1¼ in. trade size KOs on back and end. Full capacity 1¼ in. bend radius entrance end fitting. Includes ¾ in., 1 in. and 1¼ in. KO and removable dividers.



HBL6710DFOIV

Ivory

HBL6710DFOGY

Gray


A: 6.75" (171.45)

B: 6.75" (171.45)

C: 3.18" (80.71)

Fittings


Entrance End Fitting (Undivided)
 For connecting HBL6750 Raceway with rigid or flexible conduit.
 Concentric 3/4 in., 1 in. and 1 1/4 in. trade size KOs on back and end.



Catalog Number **Color**


HBL6710IV Ivory
HBL6710GY Gray
 A: 6.75" (171.45)
 B: 6.75" (171.45)
 C: 3.18" (80.71)

Take-off Connector (HBL6750-HBL4750)
 For 90° tee connection of HBL4750 Raceway from HBL6750 Raceway.




HBL6774AIV Ivory
HBL6774AGY Gray
 A: 14.36" (364.76)
 B: 6.75" (171.45)
 C: 11.47" (291.29)
 D: 6.72" (170.69)

Connection Cover (Standard)
 For covering potential openings where two covers come together.




HBL6756AIV Ivory
HBL6756AGY Gray
 A: 6.75" (171.45)
 B: .59" (14.89)

Connection Cover (Heavy Duty)
 For covering potential openings where two covers come together.




HBL6756IV Ivory
HBL6756GY Gray
 A: 6.75" (171.45)
 B: .59" (14.89)

Panel Connector
 To connect HBL6750 Raceway with surface type panel boxes.




HBL6786IV Ivory
HBL6786GY Gray
 A: 7.51" (190.86)
 B: 2.00" (50.83)
 C: 7.89" (200.37)
 D: 2.38" (60.34)

Transition Fitting
 For transitioning from Wiremold® 6000 Raceway to Hubbell HBL6750 Raceway.



HBL6750TFIV Ivory
HBL6750TFGY Gray
 A: 4.35" (110.42)
 B: 6.96" (176.87)

Three-Gang Tap-Off Fitting
 Has six concentric 1/2 in. and 3/4 in. trade size KOs.



HBL6746HHHIV Ivory
HBL6746HHHGY Gray
 A: 4.35" (110.42)
 B: 6.96" (176.87)

Wiremold® is a registered trademark of The Wiremold Company.


HBL6750 Series Metal Raceway

Mounting Brackets

Device Mounting Bracket

Mounting bracket for mounting Hubbell KP plates, iSTATION™ modules and bezels.

See pages 54-55 for datacom product selection.




Catalog Number Color

HBL6750IV Ivory
HBL6750GY Gray
 A: 5.25" (133.35)
 B: 6.75" (171.45)

Three-Gang, One Opening for One-Gang Commercial Device Plate, Two Blanks


Use with commercially available one-gang flush plates. See pages 130-131 for plate options.



HBL6747C1IV Ivory
HBL6747C1GY Gray
 A: 5.43" (137.97)
 B: 6.75" (171.45)

Three-Gang, One Opening for Two-Gang Commercial Device Plate, One Blank

Use with commercially available two-gang flush plates. See pages 130-131 for plate options.




HBL6747C2IV Ivory
HBL6747C2GY Gray
 A: 5.43" (137.97)
 B: 6.75" (171.45)

Overlapping Cover Plates

Three-Gang, One Single Round Opening, Two Blanks

For single receptacle with face diameter of 1.38 in. to 1.39 in. (35mm to 36mm).




Catalog Number Color

HBL6747AXXIV Ivory
HBL6747AXXGY Gray
 A: 5.43" (137.97)
 B: 6.75" (171.45)

Three-Gang, One Duplex Receptacle Opening, Two Blanks


For 15A and 20A duplex receptacles and duplex communication plates.



HBL6747BXXIV Ivory
HBL6747BXXGY Gray
 A: 5.43" (137.97)
 B: 6.75" (171.45)

Three-Gang, Three Duplex Receptacle Openings


For 15A and 20A duplex receptacles and duplex communication plates.



HBL6747BBBIV Ivory
HBL6747BBBGY Gray
 A: 5.43" (137.97)
 B: 6.75" (171.45)

Three-Gang, Two Duplex Receptacles, One Modular Furniture


For 15A and 20A duplex receptacles and duplex communication plates. Includes modular furniture with two keystone twistouts.



HBL6747BBFIV Ivory
HBL6747BBFGY Gray
 A: 5.43" (137.97)
 B: 6.75" (171.45)

Three-Gang, One Single Round Receptacle, Two Blanks


For single receptacle with face diameter of 1.56 in. to 1.58 in. (39mm to 40mm).



HBL6747JXXIV Ivory
HBL6747JXXGY Gray
 A: 5.43" (137.97)
 B: 6.75" (171.45)

Three-Gang, One Style Line® Receptacle, Two Blanks


For one Style Line rectangular receptacle, GFCI or surge device or rectangular communication device.



HBL6747RXXIV Ivory
HBL6747RXXGY Gray
 A: 5.43" (137.97)
 B: 6.75" (171.45)

Three-Gang, Two Style Line® Receptacles, One Modular Furniture


For two Style Line rectangular receptacles, GFCI, surge devices and rectangular communication devices. Includes modular furniture with two keystone twistouts.



HBL6747RRFIV Ivory
HBL6747RRFGY Gray
 A: 5.43" (137.97)
 B: 6.75" (171.45)

Overlapping Cover Plates


Six-Gang, Six Duplex Receptacle Openings
For 15A and 20A duplex receptacles and duplex communication plates.



Catalog Number **Color**


HBL67473BBBBBBIV Ivory
HBL67473BBBBBBGY Gray
A: 10.22" (259.56)
B: 6.75" (171.45)

Six-Gang, Four Duplex Receptacles, Two Modular Furniture
For 15A and 20A duplex receptacles and duplex communication plates. Includes two modular furniture with two keystone twistouts.




HBL67473BBBBBFFIV Ivory
HBL67473BBBBBFFGY Gray
A: 10.22" (259.56)
B: 6.75" (171.45)

Six-Gang, Four Duplex Receptacles, Two Blanks
For four 15A and 20A duplex receptacles and duplex communication plates.




HBL67473BBBBXXIV Ivory
HBL67473BBBBXXGY Gray
A: 10.22" (259.56)
B: 6.75" (171.45)

Six-Gang, Four Style Line® Receptacles, Two Blanks
For four Style Line rectangular receptacles, GFCI and surge devices and rectangular communication devices.




HBL67473RRRRXXIV Ivory
HBL67473RRRRXXGY Gray
A: 10.22" (259.56)
B: 6.75" (171.45)

Three-Gang, Two Duplex Receptacles, One Ortronics® Series II® Mini Adapter Bezel
For two 15A and 20A duplex receptacles and duplex communication plates. Includes Series II® Mini Adapter Bezel.




HBL6747BBSIV Ivory
HBL6747BBSGY Gray
A: 5.43" (137.97)
B: 6.75" (171.45)

Three-Gang, Two Duplex Receptacles, One Ortronics® TracJack® Mini Adapter Bezel
For 15A and 20A duplex receptacles and duplex communication plates. Includes TracJack® Mini Adapter Bezel.




HBL6747BBTIV Ivory
HBL6747BBTGY Gray
A: 5.43" (137.97)
B: 6.75" (171.45)

Six-Gang, Four Duplex Receptacles, Two Ortronics® Series II® Mini Adapter Bezels
For 15A and 20A duplex receptacles and duplex communication plates. Includes two Series II® Mini Adapter Bezels.



HBL67473BBBBSSIV Ivory
HBL67473BBBBSSGY Gray
A: 10.22" (259.56)
B: 6.75" (171.45)


Six-Gang, Four Duplex Receptacles, Two Ortronics® TracJack® Mini Adapter Bezels
For 15A and 20A duplex receptacles and duplex communication plates. Includes two TracJack® Mini Adapter Bezels.



HBL67473BBBBTTIV Ivory
HBL67473BBBBTTGY Gray
A: 10.22" (259.56)
B: 6.75" (171.45)

Cutters


Base Cutter
Cutter for cutting base of HBL6750 Raceway.



Catalog Number

HBL660B
A: 38.93" (988.83)
B: 30.00" (762.00)
HBL660BDK
(Replacement Blade)

Cover Cutter
Cutter for cutting cover of HBL6750 Raceway.




Catalog Number

HBL660C
A: 36.89" (936.94)
B: 30.00" (762.00)
HBL660CDK
(Replacement Blade)

Ortronics®, Series II® and TracJack® are registered trademarks of The Ortronics Company.

Hubbell Metal Raceway

HBLALU3800 and HBLALU4800 Series Aluminum Raceway Product Applications

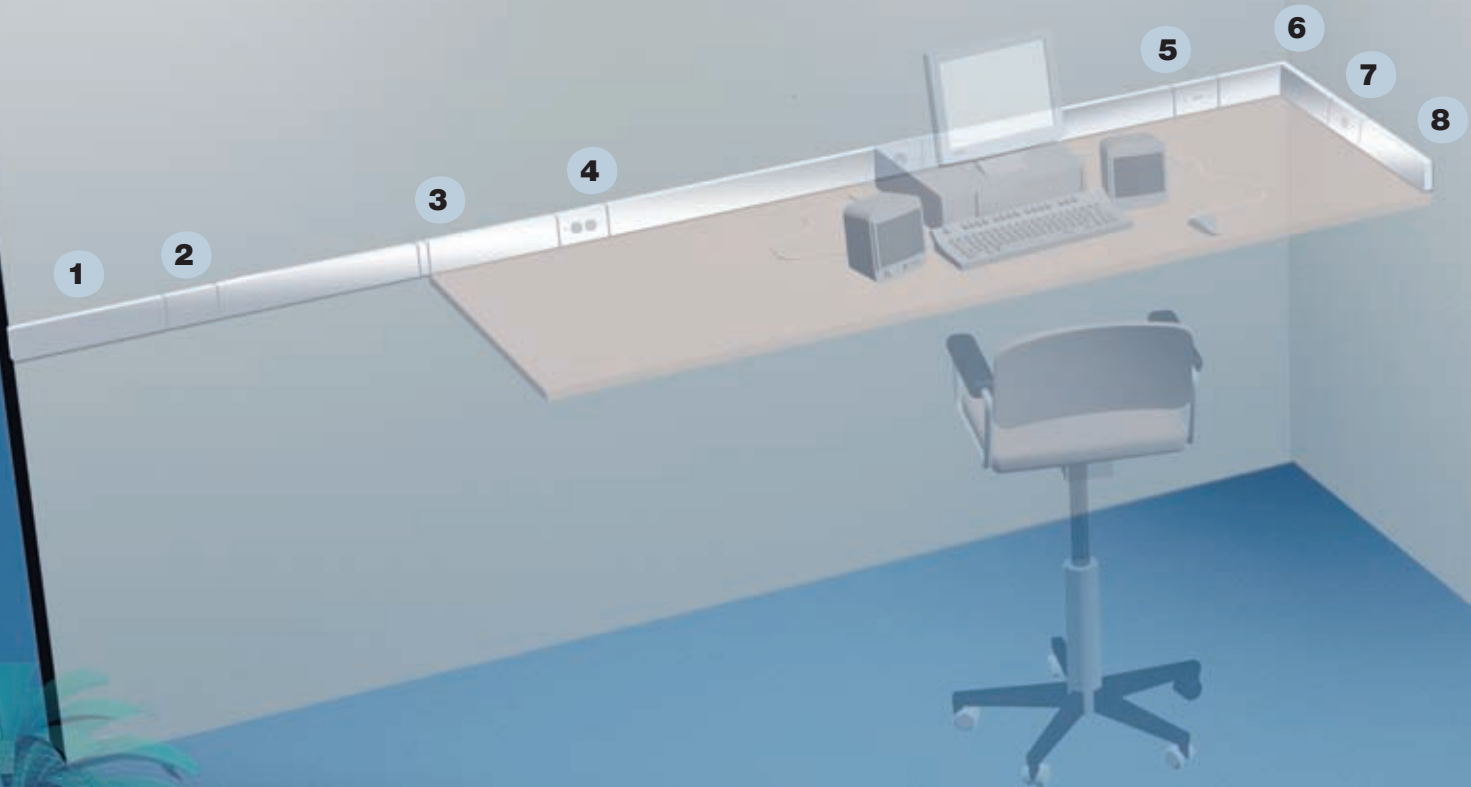

Catalog Number	Description
1 HBLALUC5 HBLALU3800B10	5 ft. Cover 10 ft. Base
2 HBLALUBL	Blank Cover
3 HBLALU3806	Cover Clip
4 HBLALUDR	Duplex Receptacle Cover

Catalog Number	Description
5 HBLALUN	Toggle Switch Cover
6 HBLALU3817	Internal Elbow
7 HBLALUE	Single Receptacle Cover (1.40" (35.40mm))
8 HBLALU3810B	Entrance End Fitting



Catalog Number	Description
9 HBLALU4810B	Blank End Fitting
10 HBLALUC5 HBLALU4800B10	5 ft. Cover 10 ft. Base
11 HBLALULPB HBLALUBL	Low Profile Bezel Cover Blank Cover
12 HBLALU4817	Internal Elbow

Catalog Number	Description
13 HBLALULPB HBLALUG	Low Profile Bezel Cover GFCI/Surge/Style Line® Cover
14 HBLALUBL HBLALUDR	Blank Cover Duplex Receptacle Cover
15 HBLALU4806	Cover Clip
16 HBLALU4810B2	Entrance End Fitting


HBLALU3800 and HBLALU4800 Series Aluminum Raceway



Single and Two Channel

- Single and two channel aluminum raceways.
- Satin anodized finish.
- Resists oxidation, corrosion and fading.
- Can be installed as recessed or surface mounted.
- UL Listed and CSA Certified.

Advantage ^{HUBBELL}

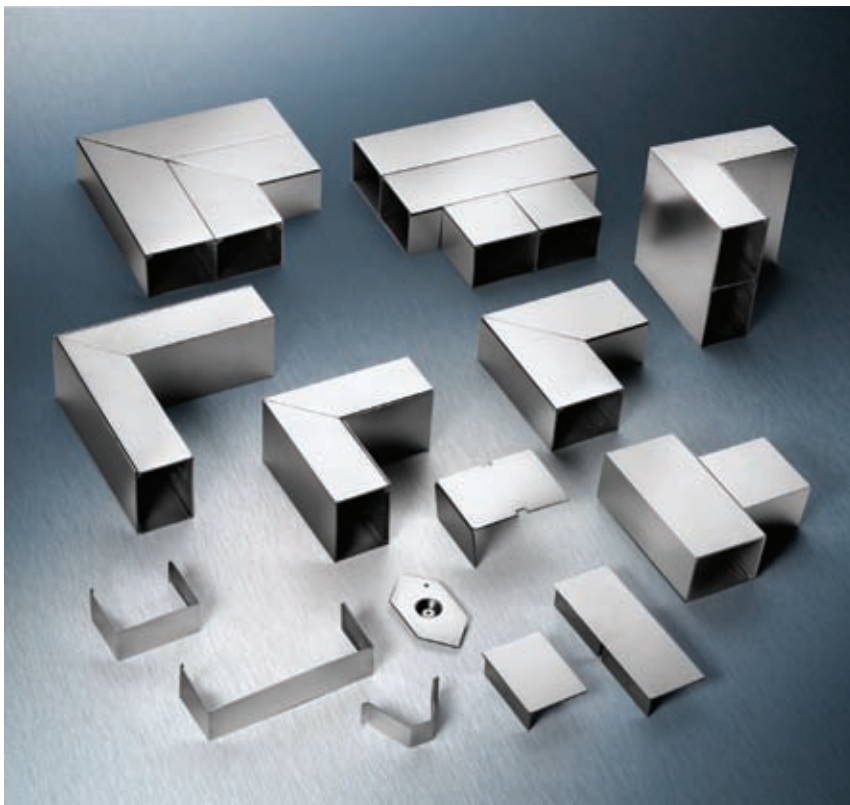

Wide Selection of Fittings

- External, internal, flat and tee fittings available to accommodate all types of applications.
- Available in both single and two channel versions.

Advantage ^{HUBBELL}

Split Covers

- Single and two channel raceway utilize common cover.
- Split covers allow access to one service at a time.
- Common aesthetics throughout line.



Advantage HUBBELL

Compatible Cover Plates























- Cover plates can be used for both HBLALU3800 and HBLALU4800 Raceways.
- Cover plates offer option for most common power device applications.
- Low profile bezel cover accommodates Hubbell iSTATION™ modules.
- Open System data option available.

























Advantage HUBBELL

HBLALU3800 Series Aluminum Raceway

Available in
PRE-WIRED

Raceway		Catalog Number	Length	Color
Single Channel Base Satin anodized finish. Packed 40 ft. (12.19m) per carton, 10 ft. (3m) lengths.	 	HBLALU3800B10 A: 2.10" (53.34) B: 3.00" (76.20)	10 ft.	Anodized Aluminum
Cover Satin anodized finish. Packed 40 ft. (12.19m) per carton, 5 ft. (1.5m) lengths.	 	HBLALUC5 A: 3.00" (76.20)	5 ft.	Anodized Aluminum
Fittings		Catalog Number		Color
Wire Clip For holding conductors in place. Can be used for either HBLALU3800 or HBLALU4800 Raceway.	 	HBLALUWC A: 1.00" (25.40)		Anodized Aluminum
Internal Elbow For making a 90° internal turn in a raceway run.	 	HBLALU3817 A: 6.00" (152.40) B: 6.00" (152.40)		Anodized Aluminum
Inverted Internal Elbow For connecting a vertical run of HBLALU3800 with a horizontal run with its cover facing up.	 	HBLALU3817N A: 6.00" (152.40) B: 5.98" (151.89)		Anodized Aluminum
External Elbow For making a 90° external turn in a raceway run.	 	HBLALU3818 A: 6.00" (152.40) B: 6.00" (152.40)		Anodized Aluminum
Flat Elbow For making a 90° flat turn in a raceway run.	 	HBLALU3811 A: 6.00" (152.40) B: 6.00" (152.40)		Anodized Aluminum
Tee For branch connections of two runs of HBLALU3800 Raceway.	 	HBLALU3815 A: 6.00" (152.40) B: 6.00" (152.40)		Anodized Aluminum
Blank End Fitting For closing end of raceway.	 	HBLALU3810B A: 3.00" (76.20) B: 2.31" (58.74)		Anodized Aluminum
Entrance End Fitting For feeding raceway, has concentric 1/2 in. and 3/4 in. trade size KOs.	 	HBLALU3810B1 A: 3.00" (76.20) B: 2.31" (58.74)		Anodized Aluminum
Cover Clip To cover seam where lengths of HBLALU3800 Raceway come together.	 	HBLALU3806 A: 1.38" (34.92)		Stainless Steel








Raceway		Catalog Number	Length	Color
Two Channel Base Satin anodized finish. Packed 40 ft. (12.19m) per carton, 10 ft. (3m) lengths.	 	HBLALU4800B10 A: 2.10" (53.34) B: 6.00" (152.40)	10 ft.	Anodized Aluminum
Cover Satin anodized finish. Packed 40 ft. (12.19m) per carton, 5 ft. (1.5m) lengths.	 	HBLALUC5 A: 3.00" (76.20)	5 ft.	Anodized Aluminum
Fittings		Catalog Number		Color
Wire Clip Used for holding conductors in place on raceway. Can be used for either HBLALU3800 or HBLALU4800 Raceway.	 	HBLALUWC A: 1.00" (25.40)		Anodized Aluminum
Internal Elbow (Two Channel) For making a 90° internal turn in a raceway run.	 	HBLALU4817 A: 6.00" (152.40) B: 6.00" (152.40)		Anodized Aluminum
Inverted Internal Elbow (Two Channel) For connecting a vertical run of HBLALU4800 with a horizontal run with its cover facing up.	 	HBLALU4817N A: 6.00" (152.40) B: 5.98" (151.89)		Anodized Aluminum
External Elbow (Two Channel) For making a 90° external turn in a raceway run.	 	HBLALU4818 A: 6.00" (152.40) B: 6.00" (152.40)		Anodized Aluminum
Flat Elbow (Two Channel) For making a 90° flat turn in a raceway run.	 	HBLALU4811 A: 9.00" (228.60) B: 9.00" (228.60)		Anodized Aluminum
Tee (Two Channel) For branch connections of two runs of HBLALU4800 Raceway.	 	HBLALU4815 A: 9.00" (228.60) B: 9.00" (228.60)		Anodized Aluminum
Blank End Fitting (Two Channel) For closing end of raceway.	 	HBLALU4810B A: 6.00" (152.40) B: 2.31" (58.74)		Anodized Aluminum
Entrance End Fitting (Two Channel) For feeding raceway, has two concentric 1/2 in. and 3/4 in. trade size KOs.	 	HBLALU4810B2 A: 6.00" (152.40) B: 2.31" (58.74)		Anodized Aluminum
Cover Clip To cover seam where lengths of HBLALU4800 Raceway come together.	 	HBLALU4806 A: 1.38" (34.92)		Stainless Steel

HBLALU3800 and HBLALU4800 Series Aluminum Raceway

Fittings for HBLALU3800 and HBLALU4800 Aluminum Raceway		Catalog Number	Color
Couplings (Pair) To join lengths of cover or base.		HBLALU01 A: 2.85" (72.39) B: 4.00" (101.80)	Anodized Aluminum
Grounding Adapter For connection of equipment grounding.		HBLALU09 #10-32 Locking Screw	Anodized Aluminum
Internal Corner Coupling For butting two raceway sections to form an internal 90° turn in a raceway run.		HBLALU17A A: 4.00" (101.80) B: 2.00" (50.83)	Anodized Aluminum
Blank Cover To cover 12 in. (305.00) section of raceway.		HBLALUBL A: 3.00" (76.20) B: 12.00" (304.80)	Anodized Aluminum
Low Profile Bezel Cover For Hubbell iSTATION™ modules. KPIMBZGY bezel required. See pages 54-55 for datacom product selection. For installing keystone IFP series plates, use catalog number HBLALULPBA.		HBLALULPB A: 3.00" (76.20) B: 12.00" (304.80)	Anodized Aluminum
Duplex Receptacle Cover For duplex receptacles and duplex communication plates.		HBLALUDR A: 3.00" (76.20) B: 12.00" (304.80)	Anodized Aluminum
Single Receptacle Cover For single receptacle with face diameters of 1.38 in. – 1.39 in. (35.00 - 36.00).		HBLALUE A: 3.00" (76.20) B: 12.00" (304.80)	Anodized Aluminum
Single Receptacle Cover For single receptacle with face diameters of 1.56 in. – 1.59 in. (39.00 - 40.39).		HBLALUF A: 3.00" (76.20) B: 12.00" (304.80)	Anodized Aluminum
Rectangular Style Line Cover For Style Line rectangular duplex receptacle, GFCI, surge device or rectangular communication device.		HBLALUG A: 3.00" (76.20) B: 12.00" (304.80)	Anodized Aluminum
Single Receptacle Cover For single receptacle with face diameter of 2.13 in. (54.10).		HBLALUJ A: 3.00" (76.20) B: 12.00" (304.80)	Anodized Aluminum
Toggle Switch Cover For single-pole, two-pole, three-way or four-way switches.		HBLALUN A: 3.00" (76.20) B: 12.00" (304.80)	Anodized Aluminum
Ortronics® Cover Plate For two Ortronics TracJack® or one Series II® datacom insert. Both bezels included.		HBLALUABRT A: 3.00" (76.20) B: 12.00" (304.80)	Anodized Aluminum

Ortronics®, Series II® and TracJack® are registered trademarks of The Ortronics Company.

Metal Raceway Wire Fill Capacities															
Series	Channel Area (sq. in.)	Power (THHN/T90 Nylon)			Voice		Data (Copper Cables)					Data (Multimode Fiber Optic Cables)			
		14 AWG	12 AWG	10 AWG	4-Pair	25-Pair	Type RG59U	Cat. 5e	Cat. 6	Cat. 6A	Cat. 6 STP	(2) or (4) Fiber Round Cable	Fiber Optic Jumpers	Fiber Optic Zip Cord	
		Wire O.D. (in.):	0.111	0.13	0.164	0.19	0.41	0.242	0.21	0.25	0.35	0.29	0.19	0.118	.12 X .24
		Wire Area (sq. in.):	0.0097	0.0133	0.0211	0.0283	0.1320	0.0460	0.0346	0.0491	0.0962	0.0660	0.0283	0.0109	0.0288
		Wire Fill Capacity	40%			40%	40%	40%	40%	40%	40%	40%	40%	40%	40%
HBL500		0.22	7	5	3	3	1	2	3	2	1	1	3	8	3
HBL750		0.40	12	9	5	6	1	3	5	3	2	2	6	15	6
HBL2000		0.89	7	7	0	13	3	8	10	7	4	5	13	33	12
HBL2000A		0.86	35	26	16	11	1	7	9	7	4	5	13	33	12
HBL3000		3.70	152	111	70	52	11	32	43	30	15	22	52	136	51
HBL4750	No Barriers	7.20	296	216	136	102	22	63	83	59	30	44	102	264	100
	Barrier Centered Ch. A	3.10	127	93	58	44	9	27	36	25	13	19	44	114	43
	Barrier Centered Ch. B	3.30	127	93	58	47	10	29	38	27	14	20	47	121	46
	Barrier Offset Ch. A	2.10	86	63	39	30	6	18	24	17	9	13	30	77	29
	Barrier Offset Ch. B	4.30	176	129	81	61	13	37	50	35	18	26	61	158	60
HBL6750	No Barriers	13.77	566	412	259	195	42	120	159	112	57	83	195	505	191
	Barrier Offset 1/3 Ch. A	4.59	189	138	86	65	14	40	53	37	19	28	65	168	64
	Barrier Offset 2/3 Ch. B	9.18	379	278	173	130	28	80	106	75	38	56	130	337	128
HBLALU3800		5.80	214	156	98	82	18	50	67	47	24	35	82	213	81
	Center Barrier/ Both Channels	11.60	428	312	196	164	35	101	134	95	48	70	164	426	161
	Center Barrier/ 1 Channel	5.80	214	156	98	82	18	50	67	47	24	35	82	213	81

Note: Pathway (Raceway) fill shall be 40% maximum.
Raceway fittings and outlets/receptacles reduce the cross section of the raceway system, thus reducing overall cable fill capacity.

Physical Properties

Material Steel
Anodized Aluminum

Codes/Standards

NEC Article 386
TIA/EIA 569B
UL Standard UL 5
Listings E253976 /E253830 /E253833
CSA Standard C22.2 no. 62
Certification LR87514

Metal PlugTrak Specifications

NEC Article 380
Receptacle Rating NEMA 5-15R and NEMA 5-20R
Wire #12 AWG Stranded Copper
Receptacle Face Thermoplastic

Plates and Outlets for Metal Raceway

Device Bracket for HBL4750 and HBL6750 Series Metal Raceway

Ivory metal raceway matches almond devices and plates.

1. Choose Device Mounting Bracket

Color
Ivory
Gray

HBL4750 Series



HBL4750IV
HBL4750GY

HBL6750 Series



HBL6750IV
HBL6750GY

2. Choose One-Gang Flush "KP" Plates

Color
Almond
Gray



KP8AL
KP8GY
Duplex



KP26AL
KP26GY
Style Line®



KP7AL
KP7GY
Receptacle
(1.41 ID)



KP720AL
KP720GY
Receptacle
(1.60 ID)



KP1AL
KP1GY
Toggle



KPIMBZAL
KPIMBZGY
Module Bezel
(Accepts all
iSTATION™
modules located
on pages 134-135)

Color
Almond
Gray



KP212AL
KP212GY
(2) Coax



KP2163AL
KP2163GY
(3) Keystone
Jacks



KP14AL
KP14GY
Blank



KP2162AL
KP2162GY
(2) Keystone
Jacks



KP2140AL
KP2140GY
Coax/Jack

Communication Outlet Plates and Frames

Ivory metal raceway matches almond devices and plates. For HBL3000 series raceway applications, catalog number HBL3051LEIV/GY must be used with plates and devices.

Color
Almond
Gray



IFP126AL
IFP126GY
Style Line®



ISF2AL
ISF2GY
Style Line®
2-Port



ISF3AL
ISF3GY
Style Line®
3-Port



ISF4AL
ISF4GY
Style Line®
4-Port



ISF6AL
ISF6GY
Style Line®
6-Port

Color
Almond
Gray



IFP18AL
IFP18GY
Duplex



BR106AL
BR106G
Duplex
2-Port



Q106AL
Q106G
Duplex
4-Port



IFP12AL
IFP12GY
Flush
2-Port



IFP13AL
IFP13GY
Flush
3-Port



IFP14AL
IFP14GY
Flush
4-Port



IFP16AL
IFP16GY
Flush
6-Port

Painted Steel Plates

Description	Color	One-Gang	Two-Gang	Three-Gang	Four-Gang	Five-Gang	Six-Gang
Switch	Almond	SP1AL	SP2AL	SP3AL	SP4AL	SP5AL	SP6AL
	Gray	SP1G	SP2G	—	—	—	—
Duplex	Almond	SP8AL	SP82AL	SP83AL	—	—	—
	Gray	SP8G	SP82G	—	—	—	—
Style Line®	Almond	PHPS1AL	PHPS2AL	PHPS3AL	PHPS4AL	PHPS5AL	PHPS6AL
	Gray	PHPS1G	PHPS2G	—	—	—	—

Description	Color	Combination	
Single receptacle	Almond	SP7AL	SP18AL
	Gray	SP7G	SP18G
	Almond	SP28AL	PJS126AL
	Gray	SP28G	PJS126G
			—
			PJS226G

Description	Color	One-Gang	Two-Gang	Three-Gang	One-Gang	Two-Gang	Three-Gang
Blank	Almond	Box Mount	SP24BAL	SP34BAL	Strap Mount	SP24AL	SP34AL
	Gray	SP14BAL	SP24BG	—	SP14AL	SP24G	—
		SP14BG			SP14G		

iSTATION™ Frame Modules

Front loading plate will accept any modules in three unit combinations. Angled fixtures to be used in bottom opening only. Use **KPIMBZAL/GY** plate with modules for HBL4750 and HBL6750 Series device mounting bracket located on page 54. See pages 134-135 for complete iSTATION™ module offering. Ivory metal raceway matches almond devices and plates.

1. Choose Plate Frame

Color
Almond
Gray

IMF1AL
IMF1GY



IMF2AL
IMF2GY



2. Choose Modules Select modules in three unit combinations.

Blank Module
.5 Unit



Color
Almond
Gray

IMB05AL
IMB05GY

Blank Module
1 Unit



IMB1AL
IMB1GY

Blank Module
1.5 Unit



IMB15AL
IMB15GY

Keystone Flat
1 Unit




IM1K1AL
IM1K1GY

Keystone Flat
1 Unit



IM2K1AL
IM2K1GY

Keystone Opening
Hole size for mounting
all Hubbell Jacks.



Keystone Angled
1.5 Unit



Color
Almond
Gray

IM1KA15AL
IM1KA15GY

Keystone Angled
1.5 Unit



IM2KA15AL
IM2KA15GY

SC 1 Duplex Angled
1.5 Unit



IM1SCA15AL
IM1SCA15GY

SC 2 Duplex Angled
2 Unit



IM2SCA2AL
IM2SCA2GY

Keystone Recessed
1 Unit



IM1IA15AL
IM1IA15GY

Keystone Recessed
1.5 Unit



IM2IA15AL
IM2IA15GY

Snap Fit Connector Fittings

Snap Fit connectors to be used with any plate with a standard keystone opening. Not recommended for use with KP plates. For KP applications use **KPIMBZOW** bezel and appropriate iSTATION™ modules located on pages 134-135. Use appropriate iSTATION™ modules for SC fiber adapters. See pages 132-133 for complete offering. Ivory metal raceway matches almond devices and plates.

Blank
(10 Pack)



Color
Almond
Gray

SFBAL10
SFBG10

F-Type
Coupler
Nickel



SFFALX
SFFGX

F-Type
Coupler
Gold



SFFGAL
SFFGGY

BNC
Connector



SFBAL
SFBGY

S-Video
110



SFSV110AL
SFSV110GY

S-Video
F/F Coupler



SFSVAL
SFSVGY

Speaker Post
Connector



SFSPGBK*
SFSPGR**

3.5mm
Stereo Jacks



SF35SJAL
SF35SJGY

*Office White Housing with Black Ring Color. **Office White Housing with Red Ring Color.

RCA Gold
Pass-through
F/F Coupler
Yellow Insulator



Color
Almond
Gray

SFRCYFFAL
SFRCYFFGY

RCA Gold
Pass-through
F/F Coupler
Red Insulator



SFRCRFFAL
SFRCRFFGY

RCA Gold
Pass-through
F/F Coupler
White Insulator



SFRCWFFAL
SFRCWFFGY

RCA 110
Punchdown
Yellow Insulator



SFRC110Y
(Black housing only)

RCA 110
Punchdown
Red Insulator



SFRC110R
(Black housing only)

RCA 110
Punchdown
White Insulator



SFRC110W
(Black housing only)

Xcelerator Keystone Jacks

Ivory metal raceway matches almond devices and plates.

Cat. 5e, Almond
T568A, T568B, RJ45
HXJ5EAL



Cat. 6, Almond
T568A, T568B, RJ45
HXJ6AL



6 Position USOC,
Almond, RJ25
HXJUAL



Jack Color Options (Replaces AL Suffix)

OW=Office White GY=Gray BK=Black W=White OR=Orange R=Red Y=Yellow B=Blue GN=Green EI=Elec Ivory

Cross Reference -

HBL500, HBL750 and HBL2000 Series Metal Raceway

Hubbell Catalog Number	Mono-Systems, Inc.™	Wiremold®	Hubbell Catalog Number	Mono-Systems, Inc.™	Wiremold®
HBL500 Series			500 Series		
HBL502B	SMS502	502	HBL57472IV	SMS57472	V5747-2
HBL605CUT	SMS605	605	HBL57473IV	SMS57473	V5747-3
HBL600B	N/A	600B	HBL5748IV	SMS5748	V5748
HBL605K	N/A	605K	HBL57482IV	SMS57482	V5748-2
HBL500TFIV	N/A	N/A	HBL57483IV	SMS57483	V5748-3
HBL50010IV	SMS500	V500-10	HBL57484IV	SMS57484	V5748-4
HBL5005IV	N/A	V500-5	HBL57485IV	SMS57485	V5748-5
HBL504IV	SMS504	V504	HBL57486IV	SMS57486	V5748-6
HBL506IV	SMS506	V506	HBL5751IV	SMS5751	V5751
HBL511IV	SMS511	V511	HBL5751AIV	N/A	V5751A
HBL512IV	SMS512	V512	HBL5752IV	SMS5752	V5752
HBL517IV	SMS517	V517	HBL5753IV	SMS5753	V5753
HBL518IV	SMS518	V518	HBL5760IV	SMS5760	V5760
HBL750 Series			700 Series		
HBL607CUT	SMS607	607	HBL5783IV	SMS5783	V5783
HBL702B	SMS702	702	HBL5784IV	SMS5784	V5784
HBL607K	N/A	607K	HBL5785IV	SMS5785	V5785
HBL750TFIV	N/A	N/A	HBL5786IV	SMS5786	V5786
HBL75010IV	SMS700	V700-10	HBL5786AIV	N/A	N/A
HBL7505IV	N/A	V700-5	HBL5711BRIV	SMS5711-1	N/A
HBL704IV	SMS704	V704	HBL5715BRIV	N/A	N/A
HBL706IV	SMS706	V706	HBL5717BRIV	SMS5717-1	N/A
HBL711IV	SMS711	V711	HBL5718BRIV	SMS5718-1	N/A
HBL712IV	SMS712	V712	HBL2000 Series		
HBL717IV	SMS717	V717	2000 Series		
HBL718IV	SMS718	V718	HBL620C	SMS621BC	620
HBL500/HBL750 Series			500/700 Series		
HBL5701C	SMS5701	5701	HBL2001C	SMS2101	2001
HBL5709	SMS5709	5709	HBL2003SC	SMS2103	2003
HBL5780	SMS5780	5780	HBL2009GC	SMS2109	2009
HBL5781	SMS5781	5781	HBL2000WC	SMS2100WC	2000WC
HBL5782C	SMS5782	5782	HBL2000WCA	N/A	N/A
HBL5791	N/A	5791	HBL2017TC	SMS2117TC	2017TC
HBL5709GC	N/A	5709GC	HBL620BCK	N/A	620BCK
HBL5781A	SMS5781A	5781A	HBL2000B5GY	N/A	G2000B-5
HBL5782A	SMS5782A	5782A	HBL2000BCGY	N/A	G2000BC
HBL5790B	SMS5790B	5790B	HBL2000BCAGY	N/A	N/A
HBL5752R	SMS5752R	R5752	HBL2000CGY	N/A	G2000C
HBL5753R	SMS5753R	R5753	HBL2000CAGY	N/A	G2100C
HBL5700FIV	SMS5700F	V5700F	HBL2006GY	N/A	G2006
HBL5703IV	SMS5703	V5703	HBL2010A2GY	N/A	G2010A2
HBL5711LHIV	SMS5711LH	V5711LH	HBL2010A3GY	N/A	G2010A3
HBL5711RHIV	SMS5711RH	V5711RH	HBL2010BGY	N/A	G2010B
HBL5715IV	SMS5715	V5715	HBL2011GY	N/A	G2011
HBL5719IV	SMS5719	V5719	HBL2011BRGY	N/A	N/A
HBL57242IV	SMS57242	V57242	HBL2015GY	N/A	G2015
HBL5731IV	SMS5731	V5731	HBL2015BRGY	N/A	N/A
HBL5733IV	SMS5733	V5733	HBL2017BRGY	N/A	N/A
HBL5735IV	SMS5735	V5735	HBL2018BRGY	N/A	N/A
HBL5736IV	SMS5736	V5736	HBL2018CGY	N/A	G2018C
HBL5737IV	SMS5737	V5737	HBL2048GY	N/A	G2048
HBL5737AIV	SMS5737A	V5737A	HBL20482GY	N/A	G2048-2
HBL5738IV	SMS5738	V5738	HBL2051HGY	N/A	G2051H
HBL5738AIV	SMS5738A	V5738A	HBL2000TFIV	N/A	N/A
HBL5738AFIV	SMS5738AF	V5738AF	HBL2000TFGY	N/A	N/A
HBL5739IV	SMS5739	V5739	HBL2000B5IV	N/A	V2000B-5
HBL5739AIV	SMS5739A	V5739A	HBL2000BCIV	SMS2100B	V2000BC
HBL5744IV	SMS5744	V5744	HBL2000BCAIV	N/A	N/A
HBL57442IV	SMS57442	V5744-2	HBL2000CIV	SMS2100C	V2000C
HBL57443IV	SMS57443	V5744-3	HBL2000CAIV	SMS2100C	V2100C
HBL5744SIV	SMS5744S	V5744S	HBL2006IV	SMS2106	V2006
HBL5744S2IV	SMS5744S2	V5744S-2	HBL2010A2IV	SMS2110A	V2010A2
HBL5744S3IV	SMS5744S3	V5744S-3	HBL2010A3IV	SMS2110C	V2010A3
HBL5745IV	SMS5745	V5745	HBL2010BIV	SMS2110B	V2010B
HBL5747IV	SMS5747	V5747	HBL2011IV	SMS2111	V2011
			HBL2011BRIV	SMS2111-FO	N/A
			HBL2015IV	SMS2115	V2015
			HBL2015BRIV	SMS2115-FO	N/A
			HBL2017BRIV	SMS2117TC-FO	N/A
			HBL2018BRIV	SMS2118A-FO	N/A

Wiremold® is a registered trademark of The Wiremold Company. Mono-Systems, Inc.™ is a trademark of Mono-Systems, Inc. Hubbell Inc. is not affiliated with Mono-Systems, Inc.™ or The Wiremold Company.



Cross Reference - HBL3000 & HBL4750 Metal Raceway

Hubbell Catalog Number	Mono- Systems, Inc.™	Wiremold®	Hubbell Catalog Number	Mono- Systems, Inc.™	Wiremold®
HBL2018CIV	SMS2118A	V2018C	HBL3046BEIV	N/A	V3046BE
HBL2048IV	SMS2141	V2048	HBL3046H2IV	N/A	V3046H-2
HBL20482IV	SMS21412	V2048-2	HBL3048RIV	SMS3023-I	V3048R
HBL2051HIV	SMS2051H	V2051H	HBL3051LEIV	SMS3051-I	V3051LE
HBL2089IV	N/A	V2089	HBL3086IV	SMS3086-I	V3086
HBL2089EIV	N/A	V2089E			
HBL3000 Series		3000 Series	HBL4750 Series		4000 Series
HBL630B	SMS632B	630B	HBL4751AC	SMS4202	4001A
HBL630BDK	N/A	630BDK	HBL4750IV	N/A	V4050
HBL630C	SMS632C	630C	HBL640C	SMS642C	640C
HBL630CDK	N/A	630CDK	HBL4750B10GY	SMS4200	G4000B-10
HBL3000BGY	SMS3200	G3000B	HBL4750C075GY	SMS4261	G4000C075
HBL3000C075GY	N/A	G3000C075	HBL4750C195GY	SMS4265	G4000C195
HBL3000C195GY	N/A	G3000C195	HBL640B	SMS642B	640B
HBL3000CEGY	SMS3003	G3000CE	HBL4747RXIV	N/A	V4047RX
HBL3000WCGY	SMS3006	G3000WC	HBL4747RFIV	N/A	V4047RF
HBL3001GY	SMS3002	G3001	HBL4747C1GY	N/A	G4047C-1
HBL3001AGY	SMS3001	G3001A	HBL4747BXGY	N/A	G4047BX
HBL3003GY	SMS3008	G3003	HBL4747RXGY	N/A	G4047RX
HBL3006EGY	SMS3007	G3006E	HBL4747RFGY	N/A	G4047RF
HBL3007CGY	SMS3022	G3007C	HBL4747JXGY	N/A	G4047JX
HBL3010AEGY	SMS3005	G3010AE	HBL4747C2GY	N/A	G4047C-2
HBL3010BGY	SMS3004	G3010B	HBL4715DFOGY	SMS4211FO	G4015DFO
HBL3010CGY	SMS3005	G3010C	HBL4717NGY	N/A	G4017N
HBL3011EGY	SMS3009	G3011E	HBL4746H2GY	N/A	G4046H-2
HBL3014CGY	SMS3030	G3014C	HBL4718DFOGY	SMS4218FO	G4018FO
HBL3015EGY	SMS3010	G3015E	HBL47472BBFFGY	N/A	G4047-2BBFF
HBL3017TCEGY	SMS3014	G3017TCE	HBL47472BBBBGY	N/A	G4047-2BBBB
HBL3018AEGY	SMS3018	G3018AE	HBL47472BBSSGY	N/A	G4047-2BBSS
HBL3027AEGY	N/A	G3027AE	HBL47472BBXXGY	N/A	G4047-2BBXX
HBL3028GY	SMS3028	G3028	HBL47472BBTGY	N/A	G4047-2BBTT
HBL3033JEGY	SMS3045	G3033JE	HBL4747AXGY	N/A	G4047AX
HBL3036HEGY	SMS3053	G3036HE	HBL47472RRXXGY	N/A	G4047-2RRXX
HBL3040CEGY	SMS3048	G3040CE	HBL4747BFGY	N/A	G4047BF
HBL3043BEGY	SMS3046	G3043BE	HBL4747BBGY	N/A	G4047BB
HBL30442GY	SMS3062	G3044-2	HBL4747BRGY	N/A	N/A
HBL3046BEGY	N/A	G3046BE	HBL4747BRIV	N/A	N/A
HBL3046H2GY	N/A	G3046H-2	HBL4747BTGY	N/A	G4047BT
HBL3048RGY	SMS3023	G3048R	HBL4747BSGY	N/A	G4047BS
HBL3051LEGY	SMS3051	G3051LE	HBL4774AGY	N/A	G4074A
HBL3082GY	N/A	G3082	HBL4750GY	N/A	G4050
HBL3086GY	SMS3086	G3086	HBL47472RRXXIV	N/A	V4047-2RRXX
HBL3200REDIV	N/A	N/A	HBL47472BBXXIV	N/A	V4047-2BBXX
HBL3200REDGY	N/A	N/A	HBL4747BBIV	N/A	V4047BB
HBL3000TFIV	N/A	N/A	HBL4747AXIV	N/A	V4047AX
HBL3000TFGY	N/A	N/A	HBL4747BFIV	N/A	V4047BF
HBL3000BIV	SMS3000-I	V3000B	HBL4747BTIV	N/A	V4047BT
HBL3000C075IV	N/A	V3000C075	HBL4747BSIV	N/A	V4047BS
HBL3000C195IV	N/A	V3000C195	HBL4747C1IV	N/A	V4047C-1
HBL3000CEIV	SMS3003-I	V3000CE	HBL4747BXIV	N/A	V4047BX
HBL3003IV	SMS3008-I	V3003	HBL4747JXIV	N/A	V4047JX
HBL3006EIV	SMS3007-I	V3006E	HBL4747C2IV	N/A	V4047C-2
HBL3010AEIV	SMS3005-I	V3010AE	HBL4750CIV	SMS4203-I	V4000C
HBL3010BIV	SMS3004-I	V3010B	HBL4750B10IV	SMS4200-I	V4000B-10
HBL3010CIV	SMS3005-I	V3010C	HBL4750C315IV	SMS4267-I	V4000C315
HBL3011EIV	SMS3009-I	V3011E	HBL4750C195IV	SMS4265-I	V4000C195
HBL3014CIV	SMS3030-I	V3014C	HBL4711DFOIV	SMS4209FO-I	V4011FO
HBL3015EIV	SMS3010-I	V3015E	HBL4711IV	SMS4209-I	V4011
HBL3017TCEIV	SMS3014-I	V3017TCE	HBL4710DFOIV	SMS4205-I	V4010DFO
HBL3018AEIV	SMS3018-I	V3018AE	HBL4710IV	SMS4205-I	V4010
HBL3027AEIV	N/A	V3027AE	HBL4710BIV	SMS4204-I	V4010B
HBL3028IV	SMS3028-I	V3028	HBL4756IV	N/A	V4006
HBL3033JEIV	SMS3045-I	V3033JE	HBL4756AIV	N/A	V4006
HBL3036HEIV	SMS3053-I	V3036HE	HBL4714AIV	SMS4230-I	V4014A
HBL3040CEIV	SMS3048-I	V3040CE	HBL4712TXIV	SMS4215-I	V4012TX
HBL3043BEIV	SMS3046-I	V3043BE	HBL4750C135IV	SMS4263-I	V4000C135
HBL30442IV	SMS3062-I	V3044-2	HBL4750C075IV	SMS4261-I	V4000C075
			HBL4717DFOIV	SMS4214FO-I	V4017FO

Wiremold® is a registered trademark of The Wiremold Company. Mono-Systems, Inc.™ is a trademark of Mono-Systems, Inc. Hubbell Inc. is not affiliated with Mono-Systems, Inc.™ or The Wiremold Company.



Cross Reference -

HBL4750 and HBL6750 Series Metal Raceway

Hubbell Catalog Number	Mono-Systems, Inc.™	Wiremold®	Hubbell Catalog Number	Mono-Systems, Inc.™	Wiremold®
HBL4717IV	SMS4214-I	V4017	HBL6747BBTGY	N/A	G4047BT
HBL4715DFOIV	SMS4211FO-I	V4015DFO			(4000 Series Two-Gang)
HBL4715IV	SMS4211-I	V4015	HBL6747BXXGY	N/A	G4047BX
HBL4718DFOIV	SMS4218FO-I	V4018FO			(4000 Series Two-Gang)
HBL4718IV	SMS4218-I	V4018	HBL6747C1GY	N/A	G4047C-1 (4000 Series
HBL4717NIV	N/A	V4017N			One-Gang Overlapping)
HBL47472BBBBIV	N/A	V4047-2BBBB	HBL6747C2GY	N/A	G4047C-2 (4000 Series
HBL4746H2IV	N/A	V4046H-2			Two-Gang Overlapping)
HBL47472BBTTIV	N/A	V4047-2BBTT	HBL6747JXXGY	N/A	G4047JX
HBL47472BBSSIV	N/A	V4047-2BBSS			(4000 Series Two-Gang)
HBL4747CVMGY	N/A	G6007C-1	HBL6747RRFGY	N/A	G4047RF
HBL4786AGY	SMS4286	G4086A			(4000 Series Two-Gang)
HBL4750TFIV	N/A	N/A	HBL6747RXXGY	N/A	G4047RX
HBL4747CVM2GY	N/A	G6007C-2			(4000 Series Two-Gang)
HBL4750BP	N/A	N/A	HBL67473RRRRXXGY	N/A	G4047-2RRXX
HBL4750TFGY	N/A	N/A	HBL6750GY	N/A	G4050
HBL4756GY	N/A	G4006	HBL6750B10GY	SMS4400	G6000B-10
HBL4751DA	SMS4201	4001DA	HBL6750CGY	SMS4203	G6000C
HBL640BDK	N/A	640BDK	HBL6750DAGY	SMS4407	G6000DA
HBL640CDK	N/A	640CDK	HBL6750WCGY	SMS4406	G6000WC
HBL4750CGY	SMS4203	G4000C	HBL6751DAGY	SMS4401	G6001DA
HBL4750C135GY	SMS4263	G4000C135	HBL6756GY	SMS4408	G6006
HBL4750C315GY	SMS4267	G4000C315	HBL6756AGY	SMS4408	G6006
HBL4750DGY	SMS4207	G4000D	HBL6710BGY	SMS4404	G6010B
HBL4750WCGY	SMS4206	G4000WC	HBL6711DFOGY	SMS4419	G6011TX
HBL4710BGY	SMS4204	G4010B	HBL6711GY	SMS4419	G6011TX
HBL4710DFOGY	SMS4205	G4010DFO	HBL6712TXGY	SMS4415	G6012TX
HBL4710GY	SMS4205	G4010	HBL6714AGY	SMS4430	G6014A
HBL4711DFOGY	SMS4209FO	G4011FO	HBL6717DFOGY	SMS4418	G6017TX
HBL4711GY	SMS4209	G4011	HBL6717GY	SMS4418	G6017TX
HBL4712TXGY	SMS4215	G4012TX	HBL6774AGY	SMS4473	G6074A
HBL4714AGY	SMS4230	G4014A	HBL6786GY	SMS4486	G6086
HBL4717DFOGY	SMS4214FO	G4017FO	HBL6750C075IV	N/A	N/A
HBL4717GY	SMS4214	G4017	HBL6750C075GY	N/A	N/A
HBL4717TCAGY	N/A	G4017TCA	HBL6750C135IV	N/A	N/A
HBL4774AIV	N/A	V4074A	HBL6750C135GY	N/A	N/A
HBL4786AIV	SMS4286-I	V4086A	HBL6750C195IV	N/A	N/A
HBL4747CVMIV	N/A	V6007C-1	HBL6750C195GY	N/A	N/A
HBL4747CVM2IV	N/A	V6007C-2	HBL6750C315IV	N/A	N/A
			HBL6750C315GY	N/A	N/A
HBL6750 Series		6000 Series	HBL6715DFOIV	SMS4410-I	N/A
HBL6751A	SMS4402	6001A	HBL6715IV	SMS4410-I	N/A
HBL660C	SMS644C	640C	HBL6715DFOGY	N/A	N/A
HBL660CDK	N/A	640CDK	HBL6715GY	SMS4410	N/A
HBL660B	SMS644B	660B	HBL6717NIV	N/A	N/A
HBL660BDK	N/A	660BDK	HBL6717NGY	N/A	N/A
HBL6718DFOGY	N/A	G4018FO	HBL6717TCAGY	N/A	N/A
HBL6718GY	SMS4418	G6017TX	HBL6710DFOIV	N/A	N/A
HBL6746HHHGY	N/A	G4046H-2	HBL6710DFOGY	N/A	N/A
		(4000 Series Two-Gang)	HBL6750TFIV	N/A	N/A
HBL67473BBBBBBGY	N/A	G4047-2BBBB	HBL6750TFGY	N/A	N/A
		(4000 Series Two-Gang)	HBL6718DFOIV	N/A	N/A
HBL67473BBBBFFGY	N/A	G4047-2BBFF	HBL6746HHHIV	N/A	V4018FO
		(4000 Series Two-Gang)			V4046H-2
HBL67473BBBBSSGY	N/A	G4047-2BBSS			(4000 Series Two-Gang)
		(4000 Series Two-Gang)	HBL67473BBBBBXXGY	N/A	V4047-2BBBBB
HBL67473BBBBTTGY	N/A	G4047-2BBTT			(4000 Series Two-Gang)
		(4000 Series Two-Gang)	HBL67473BBBBFFIV	N/A	V4047-2BBFF
HBL67473BBBBXXGY	N/A	G4047-2BBXX			(4000 Series Two-Gang)
		(4000 Series Two-Gang)	HBL67473BBBBSSIV	N/A	V4047-2BBSS
HBL6747AXXGY	N/A	G4047AX			(4000 Series Two-Gang)
		(4000 Series Two-Gang)	HBL67473BBBBTTIV	N/A	V4047-2BBTT
HBL6747BBBGY	N/A	G4047BB			(4000 Series Two-Gang)
		(4000 Series Two-Gang)	HBL67473BBBBBXXIV	N/A	V4047-2BBXX
HBL6747BBFGY	N/A	G4047BF			(4000 Series Two-Gang)
		(4000 Series Two-Gang)	HBL6747AXXIV	N/A	V4047AX
HBL6747BBSGY	N/A	G4047BS			(4000 Series Two-Gang)
		(4000 Series Two-Gang)	HBL6747BBBIV	N/A	V4047BB
					(4000 Series Two-Gang)

Wiremold® is a registered trademark of The Wiremold Company. Mono-Systems, Inc.™ is a trademark of Mono-Systems, Inc. Hubbell Inc. is not affiliated with Mono-Systems, Inc.™ or The Wiremold Company.




Cross Reference -

HBL6750 Series, Metal PlugTrak® and Aluminum Metal Raceway

Hubbell Catalog Number	Mono-Systems, Inc.™	Wiremold®	Hubbell Catalog Number	Mono-Systems, Inc.™	Wiremold®
HBL6747BBFIV	N/A	V4047BF (4000 Series Two-Gang)	HBL20GBA609IV	19GBA609	V20GBA609
HBL6747BBSIV	N/A	V4047BS (4000 Series Two-Gang)	HBL20GBA612IV	19GBA612	V20GBA612
HBL6747BBTIV	N/A	V4047BT (4000 Series Two-Gang)	HBL20GBA618IV	19GBA618	V20GBA618
HBL6747BXXIV	N/A	V4047BX (4000 Series Two-Gang)	HBL20IG512IV	19IG512	V20IG512
HBL6747C1IV	N/A	V4047C-1 (4000 Series One-Gang Overlapping)	HBL20IG606IV	19IG606	V20IG606
HBL6747C2IV	N/A	V4047C-2 (4000 Series Two-Gang Overlapping)	HBL24GB306IV	192GB306	V24GB306
HBL6747JXXIV	N/A	V4047JX (4000 Series Two-Gang)	HBL24GB506IV	192GB506	V24GB506
HBL6747RRFIV	N/A	V4047RF (4000 Series Two-Gang)	HBL24GB512IV	192GB512	V24GB512
HBL6747RXXIV	N/A	V4047RX (4000 Series Two-Gang)	HBL24GBA512IV	192GBA512	V24GBA512
HBL67473RRRRXXIV	N/A	V4047-2RRXX	HBL24GB606IV	192GB606	V24GB606
HBL6750IV	N/A	V4050	HBL24GB612IV	192GB612	V24GB612
HBL6750B10IV	SMS4400-I	V6000B-10	HBL24GB618IV	192GB618	V24GB618
HBL6750CIV	SMS4203-I	V6000C	HBL24GBA612IV	192GBA612	V24GBA612
HBL6756IV	SMS4408-I	V6006	HBL24GBA618IV	192GBA618	V24GBA618
HBL6710BIV	SMS4404-I	V6010B			
HBL6711DFOIV	SMS4419-I	V6011TX	HBLALU3800 Series		ALA3800 Series
HBL6711IV	SMS4419-I	V6011TX	HBLALU3800B10	SWA3300	ALA3800B-10
HBL6712TXIV	SMS4415-I	V6012TX	HBLALU3806	SWA3306	ALA3806
HBL6714AIV	SMS4430-I	V6014A	HBLALU3810B	SWA3304	ALA3810B
HBL6774AIV	SMS4473-I	V6074A	HBLALU3810B1	SWA3304	ALA3810B1
HBL6786IV	SMS4486-I	V6086	HBLALU3811	SWA3309	ALA3811
			HBLALU3815	SWA3310	ALA3815
			HBLALU3817	SWA3314	ALA3817
			HBLALU3817N	N/A	ALA3817N
			HBLALU3818	SWA3318	ALA3818
			HBLALUC5	SWA3303	ALAC-5
			HBLALUWC	N/A	ALAWC
			HBLALU4800 Series		ALA4800 Series
Metal PlugTrak		Metal Plugmold®	HBLALU01	SWA4802	ALA01
HBL20C215IV	SSC40	V20-C2	HBLALU09	SWA33GC	ALA09
HBL20C215GY	N/A	G20-C2	HBLALU17A	N/A	ALA17A
HBL20C315IV	SSC52	N/A	HBLALU4800B10	SWA4804	ALA4800B-10
HBL20C315GY	N/A	N/A	HBLALU4806	SWA4806	ALA4806
HBL20GB306GY	N/A	G20GB306	HBLALU4810B	SWA4804	ALA4810B
HBL20IG306GY	N/A	G20IG306	HBLALU4810B2	SWA4804	ALA4810B2
HBL20GB506GY	N/A	G20GB506	HBLALU4811	SWA4809	ALA4811
HBL20GB512GY	N/A	G20GB512	HBLALU4815	SWA4810	ALA4815
HBL20GB606GY	N/A	G20GB606	HBLALU4817	SWA4814	ALA4817
HBL20GB609GY	N/A	G20GB609	HBLALU4817N	SWA4817	ALA4817N
HBL20GB612GY	N/A	G20GB612	HBLALU4818	SWA4818	ALA4818
HBL20GB618GY	N/A	G20GB618	HBLALUABRT	N/A	ALA-ABRT
HBL20GBA512GY	N/A	G20GBA512	HBLALUBL	N/A	ALA-BL
HBL20GBA609GY	N/A	G20GBA609	HBLALUDR	SWA3346/SWA4846	ALA-DR
HBL20GBA612GY	N/A	G20GBA612	HBLALUE	SWA3325/SWA4825	ALA-E
HBL20GBA618GY	N/A	G20GBA618	HBLALUF	SWA3345/SWA4826	ALA-F
HBL20IG512GY	N/A	G20IG512	HBLALUG	SWA3323/SWA4823	ALA-G
HBL20IG606GY	N/A	G20IG606	HBLALUJ	SWA4845	ALA-J
HBL24GB306GY	N/A	G24GB306	HBLALUN	SWA3348/SWA4848	ALA-N
HBL24GB506GY	N/A	G24GB506	HBLALULPB	N/A	N/A
HBL24GB512GY	N/A	G24GB512			
HBL24GBA512GY	N/A	G24GBA512	Touch-up Paint		Touch-up Paint
HBL24GB606GY	N/A	G24GB606	HBLGWEP	SMSPT-G	GWE-S
HBL24GB612GY	N/A	G24GB612	HBLIWEP	SMSPT-I	IWE-S
HBL24GB618GY	N/A	G24GB618			
HBL24GBA612GY	N/A	G24GBA612			
HBL24GBA618GY	N/A	G24GBA618			
HBL20GB306IV	19GB306	V20GB306			
HBL20IG306IV	19IG306	V20IG306			
HBL20GB506IV	19GB506	V20GB506			
HBL20GB512IV	19GB512	V20GB512			
HBL20GB606IV	19GB606	V20GB606			
HBL20GB609IV	19GB609	V20GB609			
HBL20GB612IV	19GB612	V20GB612			
HBL20GB618IV	19GB618	V20GB618			
HBL20GBA512IV	19GBA512	V20GBA512			

Wiremold® is a registered trademark of The Wiremold Company. Mono-Systems, Inc.™ is a trademark of Mono-Systems, Inc. Hubbell Inc. is not affiliated with Mono-Systems, Inc.™ or The Wiremold Company.

Hubbell PolyTrak® Non-Metallic Raceway Product Applications

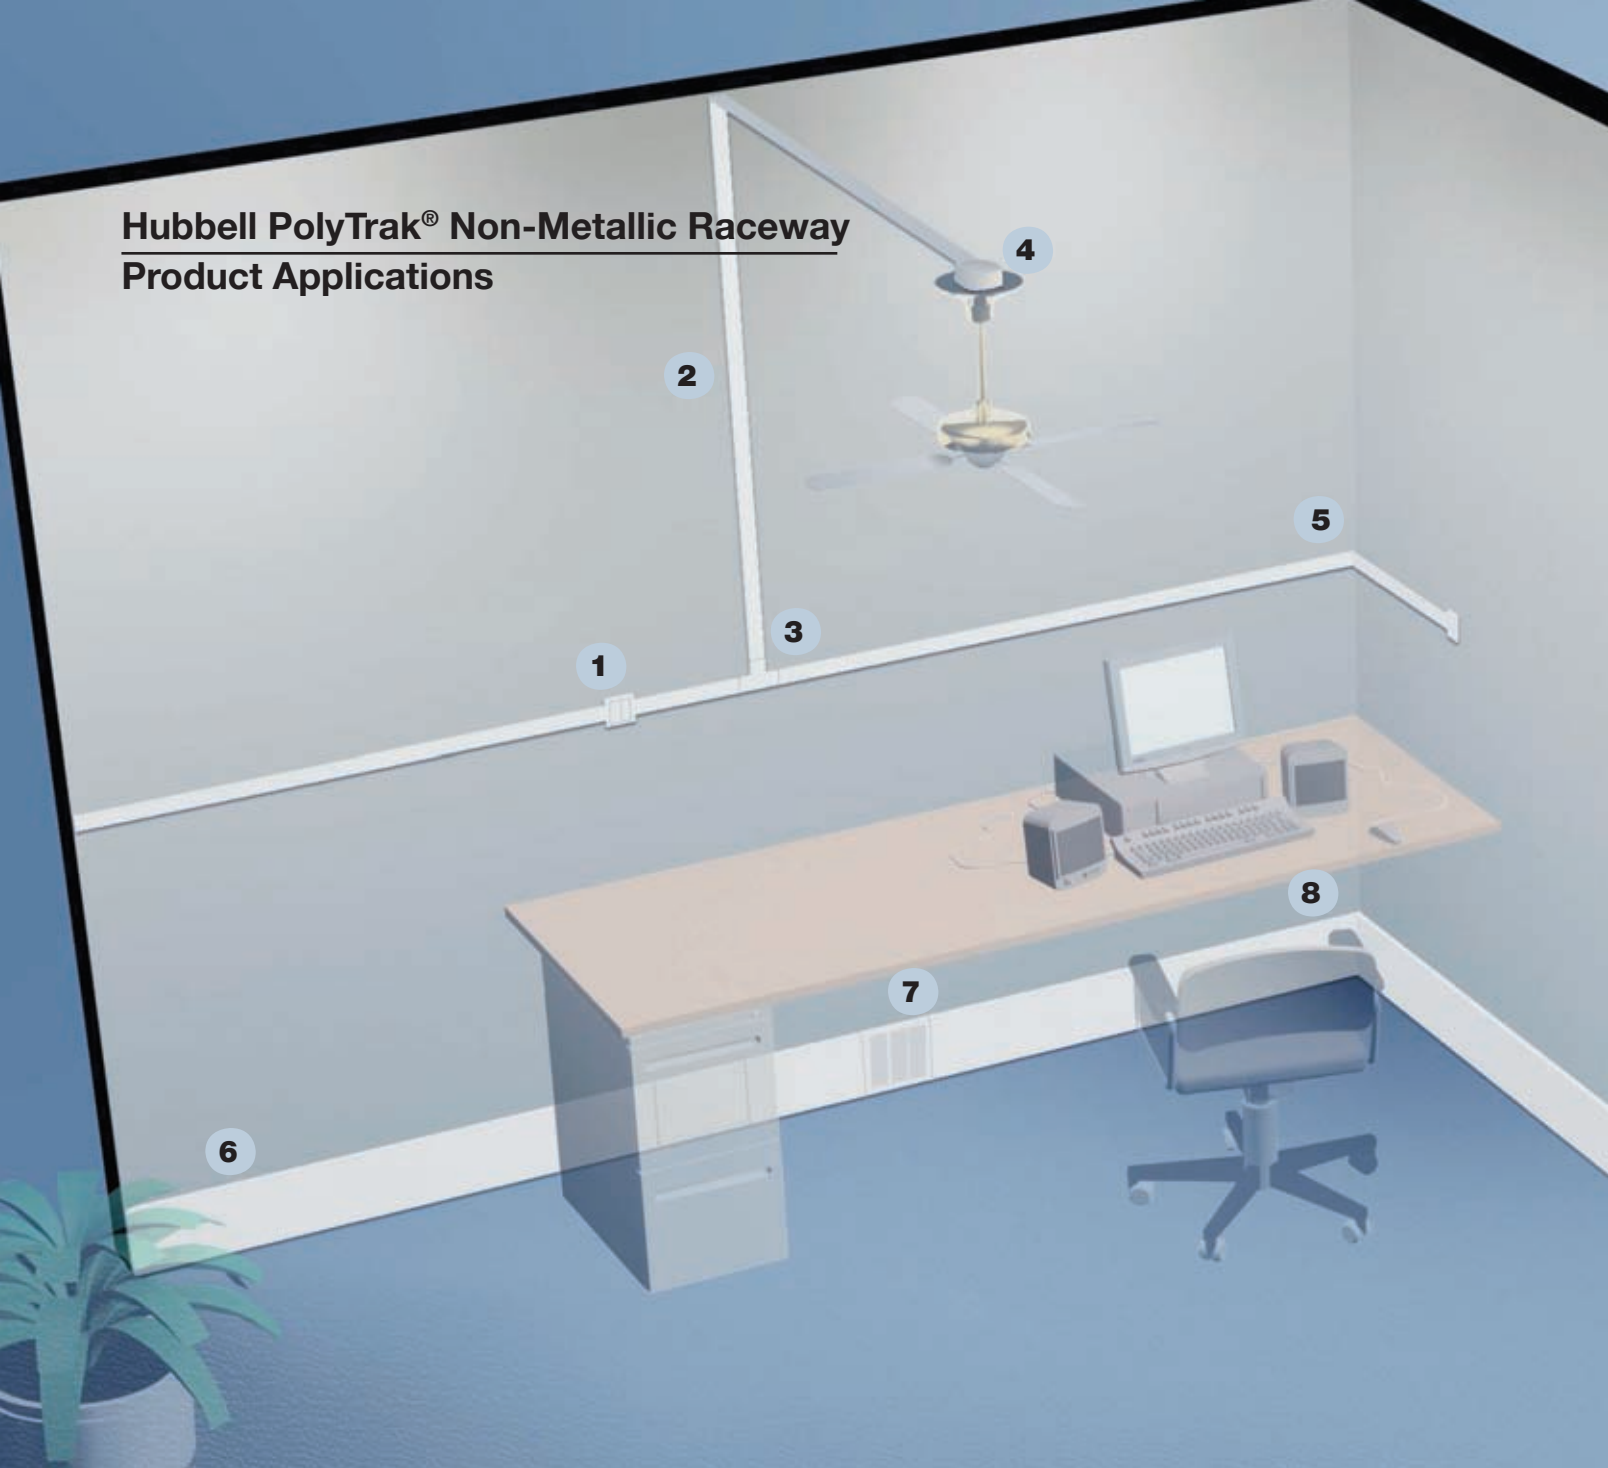

Catalog Number	Description
1 PDB12TGD	Two-Gang Divided Box for WallTrak®, LANTrak® and PremiseTrak® (Latching)
2 PP1BC7	7 ft. PremiseTrak (Latching) Single Channel
3 PP1TCBC	Tee Fitting (Base and Cover) for PremiseTrak (Latching)
4 PDB12LF	Round Lighting Fixture Box for WallTrak, LANTrak and PremiseTrak (Latching)

Catalog Number	Description
5 PP1IEBC	Internal Elbow (Base and Cover) for PremiseTrak (Latching)
6 PS3BC10	10 ft. (Base and Cover) Super BaseTrak® Three Channel Raceway
7 PS3FCIB3G	Three-Gang Full Capacity Raised Inline Box Super BaseTrak
8 PS3IEBC	Internal Elbow (Base and Cover) for Super BaseTrak



Catalog Number	Description
9 PLP1CACF	Conduit Adapter/Ceiling Fitting for LANTrak and PremiseTrak (Latching)
10 PDB12LPB	Low Profile Box WallTrak, LANTrak and PremiseTrak (Latching)
11 PL1FEBC	Flat Elbow (Base and Cover) LANTrak
12 PT156112	PlugTrak® 6 ft. 15 Amp Single Circuit Six Duplex Receptacles 12" Spacing

Catalog Number	Description
13 PB3REDA	Reducer BaseTrak® to WallTrak
14 PB3FCIB3G	Three-Gang Full Capacity Raised Inline Box PB3 BaseTrak
15 PB3IND2G	Two-Gang Inline Box PB3 BaseTrak
16 PB3BC10	10 ft. (Base and Cover) PB3 BaseTrak Raceway


Non-Metallic Surface Raceway



Complete Line of Raceway

- PolyTrak Non-Metallic Surface Raceway is a complete system with raceway, fittings, boxes and devices.
- Sizes range from single channel PremiseTrak to three channel Super BaseTrak for all types of surface raceway requirements.
- Single and two channel latching raceways are dual-rated for both power and data applications, reducing inventory requirements.
- UL Listed and CSA Certified to 600 volts.
- Office white color.

Advantage HUBBELL

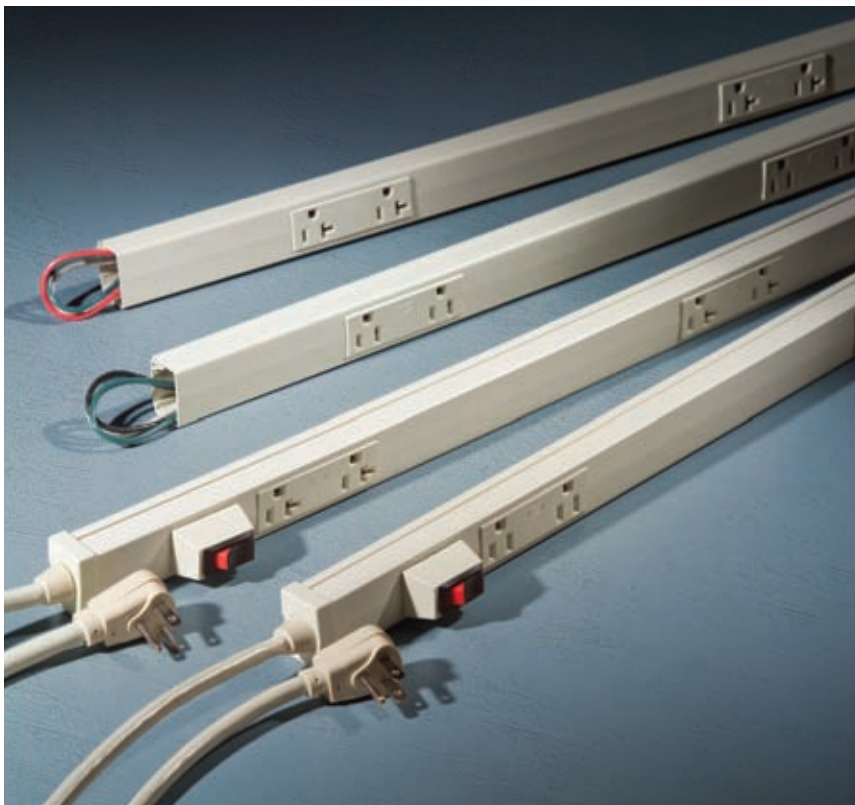

Non-Metallic PlugTrak

- Available as hard wired multi-outlet assembly or relocatable power tap.
- Hubbell designed and manufactured 15 or 20 Amp receptacles.
- UL Listed and CSA Certified.
- Office white color.

Hard wired multi-outlet PlugTrak:

- Available in 5 ft. or 6 ft. lengths.
- Available in single, two circuit and is inherently an isolated ground product.
- Multiple spacing configurations.
- Hard wired PlugTrak mates with LANTrak fittings and boxes.


Portable PlugTrak:

- Available in 3 ft. or 5 ft. lengths.
- 6 ft. length 15 or 20 Amp molded cord set allows reliable access.
- Pre-punched holes makes mounting easy.

Advantage HUBBELL

One Box, Three Systems

- Boxes have three cut-aways that can be utilized with WallTrak, LANTrak and PremiseTrak (Latching) systems.
- Reduces inventory requirements.
- Eliminates need to order three separate boxes.
- Boxes available in low, standard and deep profiles.
- Two-gang divided box available for power, data, voice, audio and video applications.
- Boxes utilize Hubbell KP plates or iSTATION™ modules and bezels.

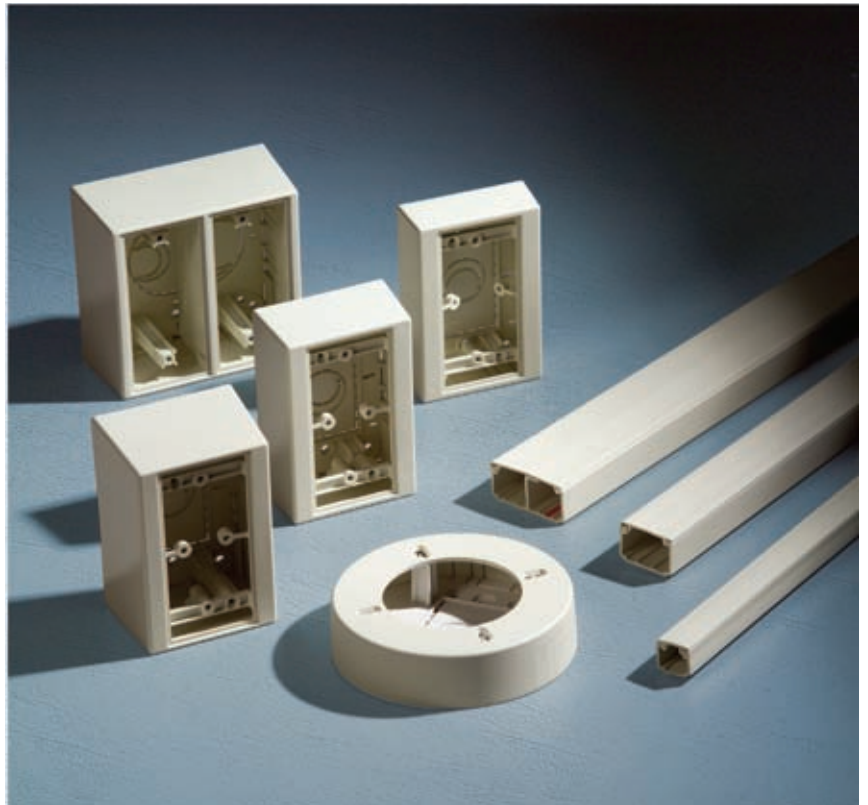















Flush or Full Capacity Boxes

- Super BaseTrak and BaseTrak raceway offer multiple solutions for box installation.
- Super BaseTrak inline three-gang box allows maximum capacity in a flush design.
- Super BaseTrak and BaseTrak available in single, two and three-gang full capacity boxes.
- Three and two channel BaseTrak (PB3 and PB2) available with one and two-gang inline boxes.
- Full capacity in-line boxes eliminate the need to de-rate the wire-fill capacity due to the intrusion of datacom devices into the raceway channel.




PT1 PremiseTrak® (Non-Latching) Non-Metallic Raceway

Raceway		Catalog Number	Length	Color	
Base and Cover Single channel raceway. Available in 5 ft. (1.5m) and 7 ft. (2.1m) lengths.			PT1BC5	5 ft.	Office
			PT1BC7	7 ft.	White
A: .68" (17.30) B: .75" (18.90)					
Base and Cover (with adhesive) Single channel raceway. Available in 5 ft. (1.5m) and 7 ft. (2.1m) lengths.			PT1ABC5	5 ft.	Office
			PT1ABC7	7 ft.	White
A: .68" (17.30) B: .75" (18.90)					
Switch and Receptacle Boxes		Catalog Number	Color		
One-Gang Low Profile Box For shallow switches and receptacles. See pages 81-82 for recommended plate options.			PT12LPB	Office	
				White	
A: 3.25" (82.55) B: 4.90" (124.46) C: 1.12" (28.50)					
One-Gang Standard Box For standard switches and receptacles. See pages 81-82 for recommended plate options.			PT12SBA	Office	
				White	
A: 3.25" (82.55) B: 4.90" (124.46) C: 1.63" (41.40)					
One-Gang Deep Box For deep devices or applications where additional room is beneficial. See pages 81-82 for recommended plate options.			PT12DBA	Office	
				White	
A: 3.25" (82.55) B: 4.90" (124.46) C: 1.91" (48.40)					
Two-Gang Deep Box For deep devices or applications where additional room is beneficial. Uses two-gang "KP" or "IFP" plates for data application. Uses two-gang KP plate for power application. See pages 81-82 for recommended plate options.			PT12TGB	Office	
				White	
A: 5.06" (128.52) B: 4.90" (124.46) C: 1.91" (48.40)					
Round Box		Catalog Number	Color		
Round Lighting Fixture Box To hang fixtures.			PT12LFB	Office	
				White	
A: 5.31" (134.87) B: 1.04" (26.50)					


Fittings

Internal Elbow - Cover Only
For inside surfaces at right angles.




Catalog Number **Color**
PT11E Office
A: 1.34" (34.04) White
B: 0.89" (22.61)
C: 1.34" (34.04)

External Elbow - Cover Only
For outside surfaces at right angles.




PT11EE Office
A: 1.24" (27.69) White
B: 0.88" (22.35)
C: 1.24" (27.69)

Flat Elbow - Cover Only
For right angle turns on same surface.




PT11FE Office
A: 1.33" (33.78) White
B: 1.33" (33.78)
C: 0.74" (18.70)

Tee - Cover Only
For T-connection off PremiseTrak® Raceway.




PT11TC Office
A: 1.77" (44.90) White
B: 1.33" (33.78)
C: 0.74" (18.70)

Splice Cover
For covering potential openings where two lengths of raceway come together.




PT11SC Office
A: 1.00" (25.40) White
B: 0.89" (22.61)
C: 0.74" (18.70)

End Cap
For closing end of raceway.



















PT11EC Office
A: 0.88" (22.35) White
B: 0.74" (18.70)
C: 0.89" (22.61)

Conduit Adapter/Ceiling Fitting
For connecting conduit to raceway. Also use for ceiling feeds. Has combination 1/2 in., 3/4 in. and 1 in. trade size KOs.



PT12CA Office
A: 1.64" (41.60) White
B: 1.62" (41.00)
C: 2.50" (63.50)

PP1 PremiseTrak® (Latching) Non-Metallic Raceway


Raceway		Catalog Number	Length	Color
Base and Cover Single channel raceway. Available in 5 ft. (1.5m) and 7 ft. (2.1m) lengths.	 	PP1BC5 PP1BC7 A: 0.77" (19.60) B: 0.84" (21.30)	5 ft. 7 ft.	Office White
Base and Cover (with adhesive) Single channel raceway. Available in 5 ft. (1.5m) and 7 ft. (2.1m) lengths.	 	PP1ABC5 PP1ABC7 A: 0.77" (19.60) B: 0.84" (21.30)	5 ft. 7 ft.	Office White
Switch and Receptacle Boxes One-Gang Low Profile Box For shallow switches and receptacles. See pages 81-82 for recommended plate options.	 	PDB12LP A: 3.25" (82.55) B: 4.90" (124.46) C: 1.25" (31.75)		Office White
One-Gang Standard Box For standard switches and receptacles. See pages 81-82 for recommended plate options.	 	PDB12S A: 3.25" (82.55) B: 4.90" (124.46) C: 1.78" (45.21)		Office White
One-Gang Deep Box For deep devices or applications where additional room is beneficial. See pages 81-82 for recommended plate options.	 	PDB12D A: 3.25" (82.55) B: 4.90" (124.46) C: 2.44" (61.98)		Office White
Two-Gang Deep Divided Box For deep switches, receptacles and communication devices. See pages 81-82 for recommended plate options.	 	PDB12TGD A: 5.06" (128.52) B: 4.90" (124.46) C: 2.44" (61.98)		Office White
Two-Gang Deep Undivided Box For low voltage applications only. See pages 81-82 for recommended plate options.	 	PDB12TGLV A: 5.06" (128.52) B: 4.90" (124.46) C: 2.44" (61.98)		Office White
Round Box Round Lighting Fixture Box To hang fixtures.	 	PDB12LF A: 5.31" (134.87) B: 1.29" (32.77)		Office White

Catalog Number

Fittings


Cover Only Base & Cover Color

Internal Elbow
Full capacity 1¼ in. bend radius internal elbow.




PP1IE	PP1IEBC	Office White
A: 2.40" (60.96)	A: 2.40" (60.96)	
B: 1.03" (26.16)	B: 1.03" (26.16)	
C: 2.40" (60.96)	C: 2.40" (60.96)	

External Elbow
Full capacity 1¼ in. bend radius external elbow.




PP1EE	PP1EEBC	Office White
A: 4.47" (113.54)	A: 4.47" (113.54)	
B: 1.03" (26.16)	B: 1.03" (26.16)	
C: 4.47" (113.54)	C: 4.47" (113.54)	

Flat Elbow
Full capacity 1¼ in. bend radius flat elbow.




PP1FE	PP1FEBC	Office White
A: 2.62" (66.55)	A: 2.62" (66.55)	
B: 2.62" (66.55)	B: 2.62" (66.55)	
C: 0.85" (21.59)	C: 0.85" (21.59)	

Tee
Full capacity 1¼ in. bend radius tee.




PP1TC	PP1TCBC	Office White
A: 4.22" (107.19)	A: 4.22" (107.19)	
B: 2.62" (66.55)	B: 2.62" (66.55)	
C: 0.85" (21.59)	C: 0.85" (21.59)	

Splice Cover
For covering potential openings where two lengths of raceway come together.




PP1SC		Office White
A: 1.09" (27.69)		
B: 1.02" (25.91)		
C: 0.85" (21.59)		

Safety Strap
For preventing potential tampering with PP1 PremiseTrak cover. Can also be used as a splice cover.





PP1SS		Office White
A: 0.62" (15.75)		
B: 1.94" (49.28)		
C: 0.86" (21.84)		

End Cap
For closing end of raceway.














PP1EC		Office White
A: 1.00" (25.40)		
B: 0.84" (21.34)		
C: 0.77" (19.56)		

Conduit Adapter/Ceiling Fitting
For connecting conduit to raceway. Also use for ceiling feeds. Has combination ½ in., ¾ in. and 1 in. trade size KOs.



PLP1CACF	Office White
A: 2.29" (58.17)	
B: 3.31" (84.07)	
C: 3.90" (99.06)	

PL1 LANTrak® (Latching) Non-Metallic Raceway


Raceway		Catalog Number	Length	Color
Base and Cover Single channel raceway. Available in 5 ft. (1.5m) and 7 ft. (2.1m) lengths.	 	PL1BC5 PL1BC7 A: 1.04" (26.40) B: 1.38" (35.00)	5 ft. 7 ft.	Office White
Base and Cover (with adhesive) Single channel raceway. Available in 5 ft. (1.5m) and 7 ft. (2.1m) lengths.	 	PL1ABC5 PL1ABC7 A: 1.04" (26.40) B: 1.38" (35.00)	5 ft. 7 ft.	Office White
Switch and Receptacle Boxes				
One-Gang Low Profile Box For shallow switches and receptacles. See pages 81-82 for recommended plate options.	 	PDB12LP A: 3.25" (82.55) B: 4.90" (124.46) C: 1.25" (31.75)		Office White
One-Gang Standard Box For standard switches and receptacles. See pages 81-82 for recommended plate options.	 	PDB12S A: 3.25" (82.55) B: 4.90" (124.46) C: 1.78" (45.21)		Office White
One-Gang Deep Box For deep devices or applications where additional room is beneficial. See pages 81-82 for recommended plate options.	 	PDB12D A: 3.25" (82.55) B: 4.90" (124.46) C: 2.44" (61.98)		Office White
Two-Gang Deep Divided Box For deep switches, receptacles and communication devices. See pages 81-82 for recommended plate options.	 	PDB12TGD A: 5.06" (128.52) B: 4.90" (124.46) C: 2.44" (61.98)		Office White
Two-Gang Deep Undivided Box For low voltage applications only. See pages 81-82 for recommended plate options.	 	PDB12TGLV A: 5.06" (128.52) B: 4.90" (124.46) C: 2.44" (61.98)		Office White
Round Box				
Round Lighting Fixture Box To hang fixtures.	 	PDB12LF A: 5.31" (134.87) B: 1.29" (32.77)		Office White

Catalog Number

Fittings

Cover Only Base & Cover Color

Internal Elbow
Full capacity 1¼ in. bend radius internal elbow.




PL1IE
A: 2.51" (63.75)
B: 1.57" (39.88)
C: 2.51" (63.75)

PL1IEBC
A: 2.51" (63.75)
B: 1.57" (39.88)
C: 2.51" (63.75)

Office White

External Elbow
Full capacity 1¼ in. bend radius external elbow.




PL1EE
A: 5.06" (128.52)
B: 1.57" (39.88)
C: 5.06" (128.52)

PL1EEBC
A: 5.06" (128.52)
B: 1.57" (39.88)
C: 5.06" (128.52)

Office White

Flat Elbow
Full capacity 1¼ in. bend radius flat elbow.




PL1FE
A: 3.19" (81.03)
B: 3.19" (81.03)
C: 1.11" (28.19)

PL1FEBC
A: 3.19" (81.03)
B: 3.19" (81.03)
C: 1.11" (28.19)

Office White

Tee
Full capacity 1¼ in. bend radius tee.




PL1TC
A: 4.75" (120.65)
B: 3.15" (80.01)
C: 1.11" (28.19)

PL1TCBC
A: 4.75" (120.65)
B: 3.15" (80.01)
C: 1.11" (28.19)

Office White


Splice Cover
For covering potential openings where two lengths of raceway come together.



PL1SC
A: 1.12" (28.45)
B: 1.55" (39.37)
C: 1.11" (28.19)

Office White


Safety Strap
For preventing potential tampering with PL1 LANTrak cover. Can also be used as a splice cover.



PL1SS
A: 0.62" (15.75)
B: 2.68" (68.07)
C: 1.12" (28.45)

Office White



End Cap
For closing end of raceway.



PL1EC
A: 1.00" (25.40)
B: 1.39" (35.31)
C: 1.04" (26.42)

Office White















Conduit Adapter/Ceiling Fitting
For connecting conduit to raceway. Also use for ceiling feeds. Has combination ½ in., ¾ in. and 1 in. trade size KOs.



PLP1CACF
A: 2.29" (58.17)
B: 3.31" (84.07)
C: 3.90" (99.06)

Office White


PW1 WallTrak® Low Profile Non-Metallic Raceway

Raceway	Catalog Number	Length	Color
Base and Cover Single channel raceway. Available in 5 ft. (1.5m) and 7 ft. (2.1m) lengths.	PW1BC5 PW1BC7 A: .50" (12.70) B: 1.19" (30.30)	5 ft. 7 ft.	Office White
			
Base and Cover (with adhesive) Single channel raceway. Available in 5 ft. (1.5m) and 7 ft. (2.1m) lengths.	PW1ABC5 PW1ABC7 A: .50" (12.70) B: 1.19" (30.30)	5 ft. 7 ft.	Office White
			
Boxes	Catalog Number	Color	
One-Gang Low Profile Box For shallow switches and receptacles. See pages 81-82 for recommended plate options.	PW1LPB A: 3.25" (82.55) B: 4.90" (124.46) C: 1.13" (28.70)	Office White	
			
One-Gang Standard Box For standard switches and receptacles. See pages 81-82 for recommended plate options.	PW1SBA A: 3.25" (82.55) B: 4.90" (124.46) C: 1.63" (41.40)	Office White	
			
One-Gang Deep Box For deep devices or applications where additional room is beneficial. See pages 81-82 for recommended plate options.	PW1DBA A: 3.25" (82.55) B: 4.90" (124.46) C: 1.91" (48.51)	Office White	
			
Two-Gang Deep Box For deep devices or applications where additional room is beneficial. Uses two-gang "KP" or "IFP" plates for data application. Uses two-gang KP plate for power application. See pages 81-82 for recommended plate options.	PW1TGB A: 5.06" (128.52) B: 4.90" (124.46) C: 1.91" (48.51)	Office White	
			
Round Box	Catalog Number	Color	
Round Lighting Fixture Box To hang fixtures.	PW1LFB A: 5.31" (134.87) B: 1.04" (26.41)	Office White	
			

Fittings

Internal Elbow - Cover Only

For inside surfaces at right angles.



Catalog Number

PW1IE


A: 1.75" (44.45)
B: 1.43" (36.32)
C: 1.75" (44.45)

Color

Office White

External Elbow - Cover Only

For outside surfaces at right angles.




PW1EE

A: 1.50" (38.10)
B: 1.43" (36.32)
C: 1.50" (38.10)

Office White

Flat Elbow - Cover Only

For right angle turns on same surface.




PW1FE

A: 2.18" (55.37)
B: 2.18" (55.37)
C: .60" (15.24)

Office White

Tee - Cover Only

For T-connection off PremiseTrak® Raceway.




PW1TC

A: 2.93" (74.42)
B: 2.18" (55.37)
C: .60" (15.24)

Office White

Splice Cover

For covering potential openings where two lengths of raceway come together.




PW1SC

A: 1.00" (25.40)
B: 1.43" (36.32)
C: .60" (15.24)

Office White

End Cap

For closing end of raceway.




PW1EC

A: 1.00" (25.40)
B: 1.24" (31.50)
C: .50" (12.70)

Office White

Conduit Adapter/Ceiling Fitting

For connecting conduit to raceway. Also use for ceiling feeds. Has 1/2 in. trade size KO and combination 1/2 in. and 3/4 in. trade size KOs.























PW1CA

A: 1.40" (35.56)
B: 2.34" (59.44)
C: 3.22" (81.79)

Office White

PW2 WallTrak® (Latching) Non-Metallic Raceway


Raceway		Catalog Number	Length	Color
Base and Cover Two channel raceway. Available in 5 ft. (1.5m) and 7 ft. (2.1m) lengths.	 	PW2BC5 PW2BC7 A: 1.04" (26.40) B: 2.12" (53.85)	5 ft. 7 ft.	Office White
Base and Cover (with adhesive) Two channel raceway. Available in 5 ft. (1.5m) and 7 ft. (2.1m) lengths.	 	PW2ABC5 PW2ABC7 A: 1.04" (26.40) B: 2.12" (53.85)	5 ft. 7 ft.	Office White
Switch and Receptacle Boxes		Catalog Number		Color
One-Gang Low Profile Box For shallow switches and receptacles. See pages 81-82 for recommended plate options.	 	PDB12LP A: 3.25" (82.55) B: 4.90" (124.46) C: 1.25" (31.75)		Office White
One-Gang Standard Box For standard switches and receptacles. See pages 81-82 for recommended plate options.	 	PDB12S A: 3.25" (82.55) B: 4.90" (124.46) C: 1.78" (45.21)		Office White
One-Gang Deep Box For deep devices or applications where additional room is beneficial. See pages 81-82 for recommended plate options.	 	PDB12D A: 3.25" (82.55) B: 4.90" (124.46) C: 2.44" (61.98)		Office White
One-Gang Divider For use with PDB12S and PDB12D one-gang boxes. Required when two services are passing through box.	 	PDB1DIV A: 2.79" (70.86) B: 1.40" (35.56) C: 0.94" (23.88)		Office White
Two-Gang Deep Divided Box For deep devices or applications where additional room is beneficial. See pages 81-82 for recommended plate options.	 	PDB12TGD A: 5.06" (128.52) B: 4.90" (124.46) C: 2.44" (61.98)		Office White
Two-Gang Divider For use with PDB12TGD two-gang box only. Required when two services are passing through box and mounting devices perpendicular to raceway.	 	PDB2DIV A: 4.62" (117.35) B: 2.76" (70.10) C: 0.94" (23.88)		Office White
Two-Gang Deep Undivided Box For low voltage applications only. See pages 81-82 for recommended plate options.	 	PDB12TGLV A: 5.06" (128.52) B: 4.90" (124.46) C: 2.44" (61.98)		Office White
Round Box		Catalog Number		Color
Round Lighting Fixture Box To hang fixtures.	 	PDB12LF A: 5.31" (134.87) B: 1.29" (32.77)		Office White

Catalog Number

Fittings

Cover Only Base & Cover Color

Internal Elbow
Full capacity 1¼ in. bend radius internal elbow.




PW2IE
A: 2.83" (71.88)
B: 2.32" (58.93)
C: 2.83" (71.88)

PW2IEBC
A: 2.83" (71.88)
B: 2.32" (58.93)
C: 2.83" (71.88)

Office White

External Elbow
Full capacity 1¼ in. bend radius external elbow.




PW2EE
A: 5.00" (127.00)
B: 2.32" (58.93)
C: 5.00" (127.00)

PW2EEBC
A: 5.00" (127.00)
B: 2.32" (58.93)
C: 5.00" (127.00)

Office White

Flat Elbow
Full capacity 1¼ in. bend radius flat elbow.




PW2FE
A: 3.94" (100.08)
B: 3.94" (100.08)
C: 1.11" (28.19)

PW2FEBC
A: 3.94" (100.08)
B: 3.94" (100.08)
C: 1.11" (28.19)

Office White

Tee
Full capacity 1¼ in. bend radius tee.




PW2TC
A: 5.42" (137.67)
B: 3.91" (99.31)
C: 1.90" (48.26)

PW2TCBC
A: 5.42" (137.67)
B: 3.91" (99.31)
C: 1.90" (48.26)

Office White


Splice Cover
For covering potential openings where two lengths of raceway come together.



PW2SC
A: 1.11" (28.19)
B: 2.30" (58.42)
C: 1.11" (28.19)

Office White


Safety Strap
For preventing potential tampering with PW2 WallTrak cover. Can also be used as a splice cover.



PW2SS
A: 0.62" (15.75)
B: 3.43" (87.12)
C: 1.12" (28.45)

Office White


End Cap
For closing end of PW2 WallTrak Raceway.



PW2EC
A: 1.00" (25.40)
B: 2.14" (54.36)
C: 1.04" (26.42)

Office White


Reducer
Reduces from PW2 WallTrak Raceway to one or two PP1 PremiseTrak Raceway(s).



PW2RED
A: 1.62" (41.15)
B: 2.40" (60.96)
C: 1.15" (29.21)








Office White



Conduit Adapter/Ceiling Fitting
For connecting conduit to raceway. Also use for ceiling feeds. Has combination ½ in., ¾ in. and 1 in. trade size KOs.









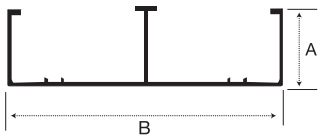PW2CACF
A: 4.18" (106.17)
B: 3.32" (84.33)
C: 4.20" (106.68)

Office White


Raceway		Catalog Number	Length	Color
Base Two channel raceway. Available in 5 ft. (1.5m) and 10 ft. (3m) lengths.	 	PB2B5	5 ft.	Office
		PB2B10	10 ft.	White
A: 1.42" (36.00) B: 4.50" (114.30)				
Cover Cover allows access to multiple channels. Available in 5 ft. (1.5m) and 10 ft. (3m) lengths.	 	PB2C5	5 ft.	Office
		PB2C10	10 ft.	White
B: 4.50" (114.30)				
Split Cover Cover allows separation of channels and access to a single channel. Available in 5 ft. (1.5m) and 10 ft. (3m) lengths. Two split covers are required for each raceway section.	 	PB2SPL5	5 ft.	Office
		PB2SPL10	10 ft.	White
B: 2.22" (56.30)				
Wire Clip For holding conductors in place.		PB2WC		Office White

Box		Catalog Number	Color
Two-Gang Inline Box For switches, receptacles and communication devices. Provides flush look. See pages 81-82 for recommended plate options.	 	PB2IND2G	Office White
		A: 7.66" (194.56) B: 4.74" (120.40) C: 1.84" (46.74)	

Fittings		Catalog Number	Color
Internal Elbow - Base and Cover Full capacity 1¼ in. bend radius internal elbow.	 	PB3IEBCA	Office White
		A: 4.36" (110.74) B: 4.72" (119.89) C: 4.36" (110.74)	
External Elbow - Base and Cover Full capacity 1¼ in. bend radius external elbow.	 	PB3EEBCA	Office White
		A: 6.48" (164.59) B: 4.72" (119.89) C: 6.48" (164.59)	
Flat Elbow - Base and Cover Full capacity 1¼ in. bend radius flat elbow.	 	PB3FEBCA	Office White
		A: 7.64" (194.66) B: 7.64" (194.66) C: 1.71" (43.43)	

Fittings

Tee - Base and Cover
Full capacity 1¼ in. bend radius tee.



Catalog Number


PB3TCBCA
A: 7.37" (187.20)
B: 7.08" (179.83)
C: 2.72" (69.09)

Color

Office
White

Splice Cover

For covering potential openings where two lengths of raceway come together.




PB3SC

A: 1.56" (39.62)
B: 4.74" (120.40)
C: 1.69" (42.93)

Office
White

Safety Strap

For preventing potential tampering with PB2 BaseTrak cover. Can also be used as a splice cover.




PB3SS

A: 1.50" (38.10)
B: 6.01" (152.65)
C: 1.74" (44.20)

Office
White

End Cap

For closing end of PB2 BaseTrak Raceway.




PB3ECA

A: 2.02" (51.31)
B: 4.68" (118.97)
C: 1.72" (43.69)

Office
White

Reducer

Reduces from PB2 BaseTrak Raceway to PW2 WallTrak Raceway.




PB3REDA

A: 3.50" (88.90)
B: 4.72" (119.89)
C: 1.73" (43.94)

Office
White

Conduit Adapter/Ceiling Fitting

For connecting conduit to raceway. Also use for ceiling feeds. Has combination ½ in., ¾ in., 1 in., 1¼ in. and 1½ in. trade size KOs.




PB2CACF

A: 4.72" (119.89)
B: 5.22" (132.70)
C: 6.30" (160.02)

Office
White

Surface Panel Connector

For connecting PB2 Raceway with surface type panel boxes.




















PB3SPCA

A: 2.22" (56.39)
B: 5.66" (143.76)
C: 1.60" (40.64)

Office
White

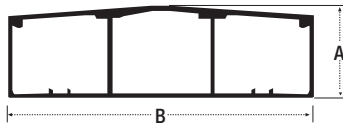PB3 BaseTrak® Non-Metallic Raceway

Raceway		Catalog Number	Length	Color
Base and Cover Three channel raceway. Available in 5 ft. (1.5m) and 10 ft. (3m) lengths.	 	PB3BC5	5 ft.	Office
		PB3BC10	10 ft.	White
		A: 1.63" (41.40) B: 4.50" (114.30)		
Wire Clip For holding conductors in place.		PB3WC		Office White
				
Boxes		Catalog Number		Color
One-Gang Inline Box For switches, receptacles and communication devices. Provides flush look. See pages 81-82 for recommended plate options.	 	PB3IND		Office White
		A: 7.70" (195.58) B: 4.84" (122.94) C: 2.02" (51.30)		
Two-Gang Inline Box For switches, receptacles and communication devices. Barriers allow separation of power and datacom. Removal of barriers allows for expanded capacity. See pages 81-82 for recommended plate options.	 	PB3IND2G		Office White
		A: 7.00" (177.80) B: 4.75" (120.65) C: 3.22" (81.78)		
One-Gang Full Capacity Box One-gang box that allows full capacity from PB3 raceway to box for either power or datacom applications. See pages 81-82 for recommended plate options.	 	PB3FCIB		Office White
		A: 4.38" (111.25) B: 4.80" (121.92) C: 3.17" (80.52)		
Two-Gang Full Capacity Box Two-gang box that allows full capacity from PB3 raceway to box for any combination of power and datacom applications. See pages 81-82 for recommended plate options.	 	PB3FCIB2G		Office White
		A: 7.20" (182.88) B: 4.80" (121.92) C: 3.17" (80.52)		
Three-Gang Full Capacity Box Three-gang box that allows full capacity from PB3 raceway to box for any combination of power and datacom applications. See pages 81-82 for recommended plate options.	 	PB3FCIB3G		Office White
		A: 9.96" (252.98) B: 4.80" (121.92) C: 3.17" (80.52)		
Fittings		Catalog Number		
Internal Elbow Full capacity 1¼ in. bend radius internal elbow.	 	PB3IE	PB3IEBCA	Office White
		A: 4.36" (110.74) B: 4.72" (119.89) C: 4.36" (110.74)		A: 4.36" (110.74) B: 4.72" (119.89) C: 4.36" (110.74)
External Elbow Full capacity 1¼ in. bend radius external elbow.	 	PB3EE	PB3EEBCA	Office White
		A: 6.48" (164.59) B: 4.72" (119.89) C: 6.48" (164.59)		A: 6.48" (164.59) B: 4.72" (119.89) C: 6.48" (164.59)


Catalog Number

Fittings

Cover Only Base & Cover Color

Flat Elbow

Full capacity 1¼ in. bend radius flat elbow.



PB3FE

A: 7.64" (194.66)
B: 7.64" (194.66)
C: 1.71" (43.43)


PB3FEBCA

A: 7.64" (194.66)
B: 7.64" (194.66)
C: 1.71" (43.43)

Office
White

Tee

Full capacity 1¼ in. bend radius tee.




PB3TCBCA

A: 7.37" (187.20)
B: 7.08" (179.83)
C: 2.72" (69.09)

Office
White

Splice Cover

For covering potential openings where two lengths of raceway come together.




PB3SC

A: 1.56" (39.62)
B: 4.74" (120.40)
C: 1.69" (42.93)

Office
White

Safety Strap

Prevents potential tampering with PB3 BaseTrak cover. Can also be used as a splice cover.




PB3SS

A: 1.50" (38.10)
B: 6.01" (152.65)
C: 1.74" (44.20)

Office
White

End Cap

For closing end of PB3 BaseTrak Raceway.




PB3ECA

A: 2.02" (51.31)
B: 4.68" (118.97)
C: 1.72" (43.69)

Office
White

Reducer

Reduces from PB3 BaseTrak Raceway to PW2 WallTrak Raceway.




PB3REDA

A: 3.50" (88.90)
B: 4.72" (119.89)
C: 1.73" (43.94)

Office
White

Conduit Adapter/Ceiling Fitting

For connecting conduit to raceway. Also use for ceiling feeds. Has combination ½ in., ¾ in., 1 in., 1¼ in. and 1½ in. trade size KOs.




PB3CACF

A: 4.72" (119.89)
B: 5.22" (132.70)
C: 6.30" (160.02)

Office
White

Surface Panel Connector

For connecting PB3 Raceway with surface type panel boxes.




PB3SPCA

A: 2.22" (56.39)
B: 5.66" (143.76)
C: 1.60" (40.64)

Office
White

Transition Fitting

Transitions horizontal PB3 BaseTrak to vertical PW2 WallTrak, PL1 LANTrak or PP1 PremiseTrak.




PB3TRBC

A: 3.22" (81.79)
B: 7.28" (184.91)
C: 2.42" (61.47)

Office
White

Transition Fitting

Transitions from BT3 (old style) BaseTrak Raceway to PB3 (new style) BaseTrak Raceway.





BTPB3TF

A: 2.22" (56.39)
B: 5.66" (143.76)
C: 1.35" (34.29)



Office
White



PS3 Super BaseTrak® Non-Metallic Raceway



Available in
PRE-WIRED



Raceway		Catalog Number	Length	Color	
Base and Cover Three channel raceway. Available in 5 ft. (1.5m) and 10 ft. (3m) lengths.			PS3BC5	5 ft.	Office
			PS3BC10	10 ft.	White
		A: 1.97" (50.00) B: 6.70" (170.20)			



Wire Clip For holding conductors in place.		PS3WC	Office White
--	---	--------------	-----------------



Boxes		Catalog Number	Color	
Three-Gang Inline Box For any combination of power and datacom applications. Provides flush look. See pages 81-82 for recommended plate options.			PS3IND	Office White
			A: 7.00" (177.80) B: 6.95" (176.53) C: 2.28" (57.91)	

One-Gang Full Capacity Box One-gang box that allows full capacity from PS3 raceway to box for either power or datacom applications. See pages 81-82 for recommended plate options.			PS3FCIB	Office White
		A: 4.38" (111.25) B: 6.95" (176.53) C: 3.46" (87.88)		

Two-Gang Full Capacity Box Two-Gang box that allows full capacity from PS3 raceway to box for any combination of power and datacom applications. See pages 81-82 for recommended plate options.			PS3FCIB2G	Office White
		A: 7.20" (182.88) B: 6.95" (176.53) C: 3.46" (87.88)		

Three-Gang Full Capacity Box Three gang box that allows full capacity from PS3 raceway to box for any combination of power and datacom applications. See pages 81-82 for recommended plate options.			PS3FCIB3G	Office White
		A: 9.96" (252.98) B: 6.95" (176.53) C: 3.46" (87.88)		

Fittings		Catalog Number		
		Cover Only	Base & Cover	Color
Internal Elbow Full capacity 1¼ in. bend radius internal elbow.			PS3IE	Office White
			PS3IEBC	Office White
		A: 4.36" (110.74) B: 6.93" (176.02) C: 4.36" (110.74)		


External Elbow Full capacity 1¼ in. bend radius external elbow.			PS3EE	Office White
			PS3EEBC	Office White
		A: 6.81" (172.97) B: 6.93" (176.02) C: 6.81" (172.97)		

Catalog Number

Fittings

Cover Only Base & Cover Color

Flat Elbow
Full capacity 1¼ in. bend radius flat elbow.




PS3FE
A: 9.85" (250.19)
B: 9.85" (250.19)
C: 2.08" (52.83)

PS3FEBC
A: 9.85" (250.19)
B: 9.85" (250.19)
C: 2.08" (52.83)

Office
White


Tee
Full capacity 1¼ in. bend radius tee.



PS3TCBC
A: 10.00" (254.00)
B: 9.68" (245.87)
C: 3.30" (83.82)

Office
White


Splice Cover
For covering potential openings where two lengths of raceway come together.



PS3SC
A: 1.56" (39.62)
B: 6.95" (176.53)
C: 2.03" (51.62)

Office
White


Safety Strap
Prevents potential tampering with PS3 Super BaseTrak cover. Can also be used as a splice cover.



PS3SS
A: 1.50" (38.10)
B: 8.24" (209.30)
C: 2.08" (52.85)

Office
White


End Cap
For closing end of PS3 Super BaseTrak Raceway.



PS3EC
A: 1.50" (38.10)
B: 6.88" (174.75)
C: 2.06" (52.32)

Office
White


Reducer
Reduces from PS3 Super BaseTrak Raceway to PB3 BaseTrak Raceway.



PS3RED
A: 4.81" (122.17)
B: 6.93" (176.02)
C: 2.05" (52.07)

Office
White


Conduit Adapter/Ceiling Fitting
For connecting conduit to raceway. Also use for ceiling feeds. Has combination ½ in., ¾ in., 1 in., 1¼ in. and 1½ in. trade size KOs.



PS3CACF
A: 6.93" (176.02)
B: 4.32" (109.73)
C: 6.29" (159.77)

Office
White

Surface Panel Connector
To connect PS3 Raceway with surface type panel boxes.



PS3SPC
A: 1.00" (25.40)
B: 7.87" (199.90)
C: 2.54" (64.52)

Office
White

Non-Metallic PlugTrak®

Non-Metallic PlugTrak® - 5 Ft. Base and Cover



Catalog Number	Amps	Circuits	# Duplex Receptacles	Receptacle Spacing (in.)
PT155112	15	Single	5	12
PT155212	15	Two	5	12
PT155115	15	Single	4	15
PT155130	15	Single	2	30
PT205112	20	Single	5	12
PT205212	20	Two	5	12
PT205115	20	Single	4	15
PT205215	20	Two	4	15
PT205130	20	Single	2	30

Non-Metallic PlugTrak® - 6 Ft. Base and Cover




Catalog Number	Amps	Circuits	# Duplex Receptacles	Receptacle Spacing (in.)
PT156112	15	Single	6	12
PT156212	15	Two	6	12
PT156118	15	Single	4	18
PT156124	15	Single	3	24
PT206106	20	Single	12	6
PT206206	20	Two	12	6
PT206112	20	Single	6	12
PT206212	20	Two	6	12
PT206118	20	Single	4	18
PT206218	20	Two	4	18
PT206124	20	Single	3	24
PT206224	20	Two	3	24
PT206136	20	Single	2	36

Non-Metallic Portable PlugTrak®



Boxes	Catalog Number
One-Gang Low Profile	PDB12LP




One-Gang Standard	PDB12S
-------------------	--------



One-Gang Deep	PDB12D
---------------	--------




Two-Gang Deep Divided	PDB12TGD
-----------------------	----------



Round Lighting Fixture	PDB12LF
------------------------	---------




Fittings	Catalog Number
Internal Elbow Base and Cover	PL1IEBC




Internal Elbow Cover Only	PL1IE
---------------------------	-------



External Elbow Base and Cover	PL1EEBC
-------------------------------	---------



Fittings	Catalog Number
External Elbow Cover Only	PL1EE



Flat Elbow Base and Cover	PL1FEBC
---------------------------	---------



Flat Elbow Cover Only	PL1FE
-----------------------	-------



Tee Base and Cover	PL1TCBC
--------------------	---------



Tee Cover Only	PL1TC
----------------	-------



Splice Cover	PL1SC
--------------	-------



Security Cap	PL1SS
--------------	-------



End Cap	PL1EC
---------	-------



Conduit Adapter/Ceiling Fitting	PLP1CACF
---------------------------------	----------



Catalog Number	Amp	Length	Cord Length	# Duplex Receptacles
PT153112P	15	3 Foot	6 Foot	3
PT155112P	15	5 Foot	6 Foot	5
PT203112P	20	3 Foot	6 Foot	3
PT205112P	20	5 Foot	6 Foot	5
PL1MC (Mounting Clip)				

“KP” Plates



Two-Gang Plates (Two-Gang KP plates for use with PT12TGB only)



*Accepts all iSTATION™ modules located on pages 134-135.

Keystone IFP Plates



Communication Plates and Frames



iSTATION™ Frames and Modules

Front loading plate will accept any modules in three unit combinations. Angled fixtures to be used in bottom opening only.

One-Gang
Plate Frame
IMF10W




Two-Gang
Plate Frame
IMF20W



See pages 134-135 for complete iSTATION™ module offering.

Snap Fit Connector Fittings

Snap Fit connectors to be used with any plate with a standard keystone opening. Not recommended for use with KP plates. For KP applications use KPIMBZOW bezel and appropriate iSTATION™ modules located on pages 134-135. Use appropriate iSTATION™ module for SC fiber adapters. See pages 132-133 for complete Snap Fit offering.

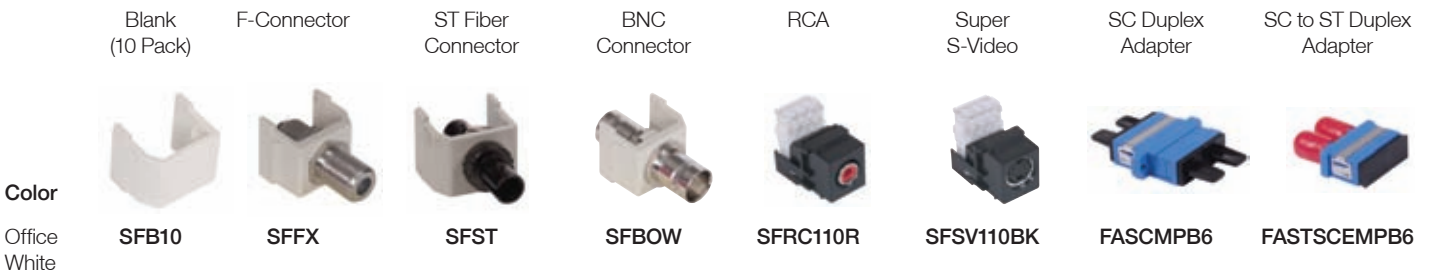

Xcelerator® Keystone Jacks

Cat. 5e, Office White
T568A, T568B, RJ45
HXJ5EOW



Cat. 6, Office White
T568A, T568B, RJ45
HXJ6OW



6 Position USOC,
Office White, RJ25
HXJUOW



Jack Color Options (Replaces OW Suffix)



Technical Data - Non-Metallic Surface Raceway

Non-Metallic Raceway Wire Fill Capacities															
		Power (THHN/T90 Nylon)			Voice		Data (Copper Cables)					Data (Multimode Fiber Optic Cables)			
		14 AWG	12 AWG	10 AWG	4-Pair	25-Pair	Type RG59U	Cat. 5e	Cat. 6	Cat. 6A	Cat. 6 STP	(2) or (4) Fiber Round Cable	Fiber Optic Jumpers	Fiber Optic Zip Cord	
		Wire O.D. (in.):	0.111	0.13	0.164	0.19	0.41	0.242	0.21	0.25	0.35	0.29	0.19	0.118	.12 X .24
		Wire Area (sq. in.):	0.0097	0.0133	0.0211	0.0283	0.1320	0.0460	0.0346	0.0491	0.0962	0.0660	0.0283	0.0109	0.0288
Series	Channel	Channel Area (sq. in.)	Wire Fill Capacity			40%	40%	40%	40%	40%	40%	40%	40%	40%	40%
PT1	A	0.29	5	8	5	4	1	3	3	2	1	2	4	11	4
PP1	A	0.38	12	11	8	5	1	3	4	3	2	2	5	14	5
PL1	A	1.03	42	34	22	15	3	9	12	8	4	6	15	38	14
PW1	A	0.30	6	10	4	4	0	2	3	2	1	2	4	11	4
PW2 [A][B]	A+B	1.60	41	36	22	23	5	14	18	13	7	10	23	59	22
	A	0.81	12	22	12	11	2	7	9	7	3	5	11	30	11
	B	0.79	12	22	10	11	2	7	9	6	3	5	11	29	11
PB2 [A][B]	A+B	5.72	60	36	45	81	17	50	66	47	24	35	81	210	79
	A or B	2.86	42	30	28	40	9	25	33	23	12	17	40	105	40
PB3 [A][B][C]	A+B+C	5.57	60	36	45	79	17	48	64	45	23	34	79	204	77
	A or C	1.80	42	30	28	25	5	16	21	15	7	11	25	66	25
	B	1.97	42	30	28	28	6	17	23	16	8	12	28	72	27
PS3 [A][B][C]	A+B+C	10.58	72	66	78	150	32	92	122	86	44	64	150	388	147
	A or C	3.41	42	36	42	48	10	30	39	28	14	21	48	125	47
	B	3.76	42	36	42	53	11	33	43	31	16	23	53	138	52

Note: Pathway (Raceway) fill shall be 40% Maximum. Raceway fittings and outlets/receptacles reduce the cross section of the raceway system, thus reducing overall cable fill capacity.

Recommended Plate to Box Compatibility Selection Chart

Non-Metallic Raceway Box Series		PS3 Series				PB3 Series					PB2 Series	PDB12 Series			PT12 & PW1 Series	
Plate Style	Sample Catalog No.	IND	FCIB	FCIB2G	FCIB3G	IND	IND2G	FCIB	FCIB2G	FCIB3G	IND2G	LP, S, D	TGD	TGLV	LP(B), S(BA), D(BA)	TGB
One-Gang KP Series Plate	KP8	X	X	X	X	X	X	X	X	X	X	X	X		X	
One-Gang KP Series Bezel	KPIMBZ	X	X	X	X	X	X	X	X	X	X	X	X		X	
One-Gang Standard Data Plate	IFP12OW		X	X	X	X		X	X	X		X			X	
One-Gang iSTATION™ Plate Frame	IMF1OW		X	X	X	X		X	X	X		X			X	
Style Line® Data Plate	IFP126OW		X	X	X	X		X	X	X		X			X	
Duplex Data Plate	IFP18OW		X	X	X	X		X	X	X		X			X	
Two-Gang iSTATION™ Plate Frame	IMF2OW													X		X
Two-Gang Standard Data Plate	IFP29OW													X		X
Two-Gang KP Series Plate	KP82															X

Note: Hubbell Office White plates and devices color match all non-metallic raceway systems.

Physical Properties

(When tested in accordance with UL 5A)
 Impact Resistance5 ft. lbs.
 Crush Resistance300 lbs.
 Temperature Range.-25.6° to 158° F
 Flame RatingUL94V-0
 MaterialUV Stabilized PVC

Codes/Standards

NEC Article388
 EIA/TIA569A
 UL StandardUL 5A
 ListingsE118895 / E119190
 CSA StandardC22.2 no. 62
 Certified.LR87514

PlugTrak Specifications

NEC Article(s)380
 Receptacle Rating .NEMA 5-15R & 5-20R
 Wire.#12 AWG Stranded
 Copper
 Receptacle Face . . .Thermoplastic



	Page
SystemOne86
Round Non-Metallic88
Round Cast Iron89
Round Stamped Steel89
Rectangular Non-Metallic90
Rectangular Cast Iron92
Rectangular Stamped Steel93
Recessed 4 & 8-Gang94
Recessed 6-Gang95
Recessed 2-Gang96
Round For Wood Floors97
Rectangular For Wood Floors97
Cover/Receptacle Chart98



SystemOne 4x4



SystemOne Multimedia



Traditional Recessed



Traditional Flush

Hubbell Floor Boxes

Featuring the unique capabilities of Hubbell's SystemOne universal cover and sub-plate design, Hubbell has expanded its floor box offering to provide industry leading flexibility while accommodating an extensive range of applications. Hubbell SystemOne is constructed to give customers the ability to create personal solutions for their most demanding, power, data and audio/video requirements. In addition, Hubbell continues to offer a complete variety of traditional flush and recessed floor box options.

Whatever your requirement, Hubbell has a solution. Combined with Hubbell SystemOne fire-rated poke-through products that offer the same unique advantages, Hubbell's entire delivery system package is second to none in providing a consistent aesthetic and functional solution for your power, data and audio/video needs.



Hubbell SystemOne Floor Box applications...



Multi-Service Applications

This Hubbell SystemOne sub-plate incorporates 2 standard Style Line® rectangular openings. These can be used for a variety of power and/or data applications. It will accommodate 15 or 20 amp, standard, isolated ground, GFCI or surge protected receptacles. Using communication frames it can provide up to a 6-port multi-service or a 12-port all communication solution.



Multimedia Applications

Other Hubbell SystemOne sub-plates are designed to meet the growing needs of the audio and video markets. Some sub-plates provide power outlets with Hubbell's audio/video products including 15-Pin SVGA, RCA, S-Video, 3.5mm stereo, and XLR microphone jacks. Another sub-plate can accommodate Extron® Electronics' MAAP and AAP series audio/video modules.



4X4 Applications

Provides maximum power capacity for flush, multi-service applications. This sub-plate features a pre-wired four outlet 20A, 125V receptacle and four openings for Snap Fit flush mount Hubbell modular jacks and audio/video Snap Fit connectors.

Advantage ^{HUBBELL}

■ Best in Class Products

Easily upgraded as user's needs change.


■ Ease of Installation

Modular sub-plate design facilitates quick and efficient moves, adds and changes.

■ Application Solutions

Highest capacity and widest variety of power, data and audio/video solutions.

Traditional Floor Boxes...

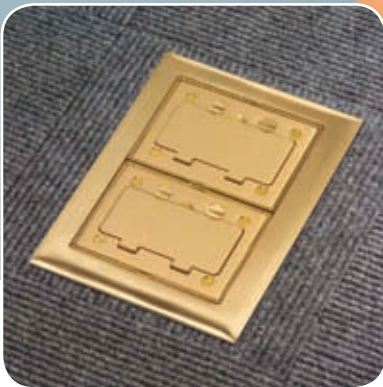

Flush Applications

Hubbell offers a wide variety of traditional solutions including single and multi-gang cast iron, stamped steel and non-metallic floor boxes in both round and rectangular designs. These boxes can be finished with either brushed brass or aluminum covers and flanges to match any office décor. All Hubbell floor box assemblies exceed UL scrub water exclusion requirements.



Recessed Applications

For applications where recessed connections are desired, Hubbell has a complete line of recessed stamped steel and cast iron floor boxes, from two to eight gangs. A variety of modular face plates are available to meet a wide array of power, data, voice and audio/video requirements. Carpet and tile cover/flange assemblies are offered in painted brass, aluminum, black, gray, brown and ivory colors.



Wooden Floor Applications

Hubbell offers round, single service and rectangular, multi-service floor boxes for wooden floor applications. The rectangular boxes are available in one, two and three-gang options and feature removable barriers for maximum capacity while maintaining separation of power and low voltage. A variety of covers and flanges are available in brushed aluminum or brass to meet aesthetic requirements.

Hubbell SystemOne Non-Metallic Floor Box




Saves time and money on installation with a simple saw cut after pour adjustment.

Oversized 1½" data conduit hub provides for increased cable capacity and helps maintain proper bend radius suitable for Category 6/6a, 5e, coax and fiber cables.

Parallel conduit hubs reduce labor and material costs and facilitate easier wire pulling in dual-service applications.

- Provides an economical, easy to install in-floor delivery system for large, open plan spaces.
- Accepts all Hubbell SystemOne universal covers and sub-plates for both single and dual service applications.
- Convenient cubic inch capacity markings on inside allow for easy inspection.
- Corresponding graduated cubic inch markings on dividers.
- High-strength rigid PVC construction that is non-corrosive.
- Supplied with concrete cap, conduit reducers, and conduit hub plugs.

Hubbell SystemOne Universal Cover



Hinged doors open 180 degrees flush to the carpet flange or tile.

Screws allow each door to be secured independently.

Universal carpet or tile flange can be used for Hubbell SystemOne Fire-Rated Poke-Through or PVC Floor Box.

- Cast aluminum construction available in durable black, gray, brass, aluminum and ivory powder coat finishes.
- Features ScrubShield™ technology that exceeds UL514C scrub water exclusion requirements.
- Provides consistent look and maximum functionality throughout the installed life.

Hubbell SystemOne Sub-Plates

While no one can predict the future, Hubbell's modular sub-plate design allows users to economically upgrade Hubbell SystemOne Floor Boxes to accommodate future moves, adds and changes.



- Hubbell 4X4: four 20A, 125V receptacles, four openings for voice/data jacks and multimedia connectors.
- Hubbell iSTATION™ front loading modular connectivity.
- Accommodates Extron® Electronics' Architectural Series audio/video system integration products.
- Ortronics®, Siemon™, Panduit®, SYSTIMAX® and keystone options enable maximum data flexibility.
- Large capacity and multi-service furniture feed applications.
- Accommodates GFCI, surge and standard Style Line® receptacles.
- Twist-Lock® receptacle with or without jack openings.

Extron® is a registered trademark of Extron Electronics.
 Siemon™ is a trademark of The Siemon Company.
 Panduit® is a registered trademark of Panduit Corp.
 SYSTIMAX® is a registered trademark of CommScope, Inc.
 Ortronics® is a registered trademark of Ortronics/Legrand.

Hubbell SystemOne Non-Metallic Floor Box

S1PFB Round Multi-Service PVC Floor Box

Features (2) 1½" hubs for low voltage and (2) 1" hubs for power. Includes concrete cap, conduit hub plugs, reducers, cover mounting clips and **S1DIV1** side by side divider. All other sub-plates include the appropriate dividers. Universal cover and sub-plate must be ordered separately.



Min. Depth of Pour

Capacity

Diameter (External) 5.75"

Diameter (Internal) 5.00"

Height 6.00"

Hubs (2) 1½" and (2) 1" conduit hubs

Conduit Selection Accepts ¾", 1", 1¼", 1½" schedule 40 and schedule 80 rigid PVC conduit and E.N.T. (electrical non-metallic tubing).

Ranges from 3" to 5" depending on application. See sub-plates below for details.

100 cubic inches prior to cutting level to floor (19.5 cubic inches per inch of depth).

S1DIV1 Replacement Side by Side Divider

For replacement purposes only. Used to isolate compartments when catalog number **S1SP** (Style Line®/GFCI) sub-plate is used.



Hubbell SystemOne Universal Covers

Universal, Cast Aluminum Carpet Flange & Cover Assembly

Catalog Number

S1CFCBRS Brass

S1CFCAL Aluminum

S1CFCBL Black

S1CFCGY Gray

S1CFCI Ivory

■ Cast aluminum construction

■ Powder coat finish



Universal, Cast Aluminum Tile Flange & Cover Assembly

Catalog Number

S1TFCBRS Brass

S1TFCAL Aluminum

S1TFCBL Black

S1TFCGY Gray

S1TFCI Ivory

■ Cast aluminum construction

■ Powder coat finish



Sub-Plates

Catalog Number

S1SP Style Line®/GFCI


(2) Style Line openings for power and/or datacom applications.



Catalog Number

S1SP4X4 Hubbell 4 X 4


(4) 20A, 125V receptacles. (4) Keystone openings for Hubbell jacks or flush A/V connectors.



Catalog Number

S1SPTL Single Recept. + Data

20 or 30A Twist-Lock® receptacle (1.56" OD). (2) Keystone openings for Hubbell jacks or flush A/V connectors.



S1SP4IM Hubbell Datacom

1 unit flush iSTATION™ opening. 3 unit recessed iSTATION™ opening for data, voice, and A/V applications. See pages 134-135 for module options.



S1SP3IM Hubbell Datacom + Power

(1) 20A, 125V receptacle. 3 unit recessed iSTATION™ opening for data, voice, and A/V applications. See pages 134-135 for module options.



S1SPFFBRS Brass Furniture

S1SPFFAL Alum. Feed Cover/

S1SPFFBL Black Flange

S1SPFFGY Gray


(1) ¾" & (1) 1½" N.P.T. plugs for power and/or datacom applications.

Universal Cover not required. Includes carpet flange.




S1SPEXT1 Extron® MAAP + Power

(1) 20A, 125V receptacle. Recessed opening for (3) single Extron MAAP Series adapter plates.




S1SPEXT2 Extron AAP + Power

(1) 20A, 125V receptacle. Recessed opening for (1) single Extron MAAP and (2) single AAP Series adapter plates.




S1SPEXT3 Extron Datacom

Recessed opening for (2) single Extron MAAP and (2) single AAP Series adapter plates.




S1SPORT Ortronics Series II® + Power

(1) 20A, 125V receptacle. Recessed opening for (3) 1 unit Ortronics Series II modules.




S1SPTRAC Ortronics TracJack® + Power

(1) 20A, 125V receptacle. Recessed bezel for (6) Ortronics TracJack modules.




S1SPMAX Siemon MAX® + Power

(1) 20A, 125V receptacle. Recessed bezel for (6) Siemon MAX modules.



S1SP4X4PA Panduit Mini-Com® 4 X 4

(4) 20A, 125V receptacles (4) Openings for Panduit Mini-Com Connectivity.



S1SP4X4SYS SYSTIMAX® 4 X 4

(4) 20A, 125V receptacles. (4) Openings for SYSTIMAX Connectivity.



Extron® is a registered trademark of Extron Electronics. MAX® is a registered trademark of The Siemon Company. Mini-Com® and Panduit® are registered trademarks of Panduit Corp. SYSTIMAX® is a registered trademark of CommScope, Inc. TracJack®, Series II® & Ortronics® are registered trademarks of Ortronics/Legrand.

○ Signifies minimum depth of concrete pour in inches for Hubbell SystemOne **S1PFB** Floor Box.

Flush Round Single or Multi-Service Non-Metallic Floor Box

Catalog Number

PFB1 Round Single or Low Capacity Multi-Service PVC Floor Box

Features (2) 1" and (2) 3/4" conduit hubs. Includes concrete cover and four dual purpose reducer/closure plugs. (2) 1" plugs close off 1" hub or reduce 1" to 3/4". (2) 3/4" plugs close off 3/4" hub or reduce 3/4" to 1/2".



Min. Depth of Pour Capacity

3.00"
100 cubic inches prior to cutting level to floor (19.5 cubic inches per inch of depth).

Diameter (External)

5.75"

Diameter (Internal)

5.00"

Height

6.00"

Hubs

(2) 1" and (2) 3/4" conduit hubs

Conduit Selection

Accepts 1/2", 3/4", 1" schedule 40 and schedule 80 rigid PVC conduit and E.N.T. (electrical non-metallic tubing). Use catalog number PFBYA1 3/4" "Y" adapter to feed parallel runs of 3/4" conduit.

PFBA1A Adapter

Required for all applications.



PFBT1A Low Voltage Divider

Required for use with catalog number PFB1 when used in multi-service applications. Accepts Hubbell standard duplex receptacles or 15A Twist-Lock® duplex receptacles (HBL4700 series).



PFBYA1 "Y" Adapter

3/4" "Y" adapter to feed parallel runs of 3/4" conduit.

Flush Round Covers and Flanges

Multi-Service Cover and Flange Assemblies

Includes floor box cover with duplex flaps, (2) 1/2" dia. low voltage feed through holes and matching carpet flange.

SF39253A



Brass

PFBCBRA



Brown Plastic

PFBCIA



Ivory Plastic

PFBCGYA



Gray Plastic

PFBCBKA



Black Plastic

Single Service Covers

Brass
Aluminum

S3925

SA3925



Duplex Flap

S3725

SA3725



Duplex Screw

S2525

SA2525



2 1/8" x 3/4" Combination

S2725

SA2725



2 1/8" x 1" Combination

S2925

SA2925



2 1/8" Single Receptacle

S3525

—



2 3/8" Single Receptacle

S3325

—



2 1/8" Single Receptacle (Terrazzo Floor)

Metal Carpet Flange

Use with single service covers for carpet applications.

S3082



Brass

Adapter Ring

Use with single service covers for tile applications.

S5016



Brass

SA5016



Aluminum

Furniture Feed Plate

PFBP1



Steel

One Piece Cover and Carpet Flange

Brass

SF3925*



Duplex Flap

SF2525*



2 1/8" x 3/4" Combination

SF2725*



2 1/8" x 1" Combination








SF2925*



2 1/8" Single Receptacle

* Catalog number S5016 adapter ring is required for mounting SF series covers onto PFBA1A.

Flush Round Single Service Floor Boxes

Box Material	Cast Iron				Stamped Steel		
Collar Material	Cast Iron		Cast Iron		Stamped Steel		Stamped Steel
Brass	B2536	B253641	B2506	B2506415	B2537	B2527	B2529
Aluminum	BA2536	—	—	—	BA2537	BA2527	BA2529
							
Min. Depth of Pour	3.75"	3.75"	4.75"	4.75"	3.00"	4.00"	3.00"
Adjustability (Fully, Semi, Non)	Fully	Fully	Fully	Fully	Fully	Fully	Fully
Before Pour External Height Adjustment	1.25"	1.25"	—	—	1.25"	1.25"	1.25"
After Pour Internal Height Adjustment	.38"	.38"	.63"	.63"	.38"	.38"	.38"
Cubic Inch Capacity	33.00	33.00	50.80	50.80	33.00	54.00	37.30
Dimensions - A	4.19"	4.19"	4.19"	4.19"	4.19"	4.19"	4.19"
Dimensions - B	3.09"	3.09"	4.75"	4.75"	2.81"	3.88"	2.91"
Threaded Hub Sizes	(4) 3/4"	(4) 1"	(4) 1 1/4"	(4) 1 1/2"	(4) 3/4"	—	—
Knockouts - Opposite Sides	—	—	—	—	—	(1) 1" & (1) 3/4"	(2) 1/2" & (1) 3/4"
Knockouts - Opposite Ends	—	—	—	—	—	(1) 1 1/4" & (1) 3/4"	(1) 1/2" & (1) 1/2"
Knockouts - Bottom	—	—	—	—	—	(3) 1/2" & (2) 3/4"	(3) 1/2" & (2) 3/4"

Flush Round Single Service Covers and Flanges

Single Service Covers

Brass	S3925	S3725	S2525	S2725	S2925	S3525	S3325
Aluminum	SA3925	SA3725	SA2525	SA2725	SA2925	—	—
							
	Duplex Flap	Duplex Screw	2 1/8" x 3/4" Combination	2 1/8" x 1" Combination	2 1/8" Single Receptacle	2 3/8" Single Receptacle	2 1/8" Single Receptacle (Terrazzo Floor)

Carpet Flanges

5 1/4" Diameter	S3182	SA3182	S3079	Carpet Flange 6 1/4" Diameter	S3082
					
	Brass	Aluminum	Clear Polycarbonate	Brass	

One Piece Cover and Carpet Flange

Brass	SF3925	SF2525	SF2725	SF2925
				
	Duplex Flap	2 1/8" x 3/4" Combination	2 1/8" x 1" Combination	2 1/8" Single Receptacle

Flush Rectangular Non-Metallic Floor Boxes with Non-Metallic Covers

Number of Gangs	1-Gang PFBRG1	2-Gang PFBRG2	3-Gang PFBRG3
			
Min. Depth of Pour	3.00"	3.00"	3.00"
Cubic in. Capacity per Gang	14.3 per 1" depth	14.3 per 1" depth	14.3 per 1" depth
Dimensions – A	3.60"	6.82"	10.04"
Dimensions – B	5.44"	8.66"	11.87"
Dimensions – C	5.42"	5.42"	5.42"
Dimensions – D	6.90"	6.90"	6.90"
Dimensions – E	6.00"	6.00"	6.00"
Dimensions – F	4.88"	8.13"	11.35"
Dimensions – G	6.00"	6.00"	6.00"
Hubs	(4) 1"	(6) 1"	(8) 1"
Reducers/Plugs	(4) 1" to 3/4"	(6) 1" to 3/4"	(8) 1" to 3/4"

Flush Rectangular Non-Metallic Covers and Flanges

Required Components for Carpet Applications

Carpet Flanges

No. of Gangs

Black
Brown
Gray
Ivory

1-Gang

PFBRFBL1
PFBRFBR1
PFBRFGY1
PFBRFI1



2-Gang

PFBRFBL2
PFBRFBR2
PFBRFGY2
PFBRFI2



3-Gang

PFBRFBL3
PFBRFBR3
PFBRFGY3
PFBRFI3



Cover with Duplex and
Style Line® Inserts

One Required per Gang

PFBR826BLA
PFBR826BRA
PFBR826GYA
PFBR826IA



Duplex
Insert

Cover

Style Line
Insert

Required Components for Tile Applications

Mounting Collar

One Required per Gang

PFBRMC



Cover Frame

One Required per Gang

PFBRFRA



Cover with Duplex and Style Line®
Inserts - Gray

One Required per Gang

PFBR826GYA



Duplex
Insert

Cover

Style Line
Insert

Flush Rectangular Non-Metallic Floor Boxes with Metal Covers

Number of Gangs	1-Gang PFBRG1	2-Gang PFBRG2	3-Gang PFBRG3
			
Min. Depth of Pour	3.00"	3.00"	3.00"
Cubic in. Capacity per Gang	14.3 per 1" depth	14.3 per 1" depth	14.3 per 1" depth
Dimensions – A	3.60"	6.82"	10.04"
Dimensions – B	5.44"	8.66"	11.87"
Dimensions – C	5.42"	5.42"	5.42"
Dimensions – D	6.90"	6.90"	6.90"
Dimensions – E	6.00"	6.00"	6.00"
Dimensions – F	4.88"	8.13"	11.35"
Dimensions – G	6.00"	6.00"	6.00"
Hubs	(4) 1"	(6) 1"	(8) 1"
Reducers/Plugs	(4) 1" to 3/4"	(6) 1" to 3/4"	(8) 1" to 3/4"

Flush Rectangular Metal Covers and Flanges

Required Components for Carpet and Tile Applications

Adapter Collar – One Required per Gang

Gray **PFBRAC**



Adapter Frame and Grounding Lug – One Required per Gang

Brass

S5017G

Aluminum

SA5017G



Covers – One Required per Gang

Brass	S3825	S3625	S3826	S2425	S2625	S2825	S3813
Aluminum	SA3825	SA3625	SA3826	SA2425	SA2625	–	SA3813
							
	Duplex Flap	Duplex Screw	Style Line® Opening	2 1/8" x 3/4" Combination	2 1/8" x 1" Combination	2 1/8" Single Receptacle	Blank






Carpet Flanges (Not Required for Tile Applications)

Tapered Flange









No. of Gangs	1-Gang	2-Gang	3-Gang
Brass	SB3083	SB3084	SB3085
Aluminum	SA3083	SA3084	SA3085



Flush Rectangular Cast Iron Floor Boxes








Box Material	Cast Iron								
Collar Material									
Brass	B2436	B243641	B4233	B423341	B4333	B433361	B2414	B4214	B4314
Aluminum	BA2436	—	BA4233	—	BA4333	—	—	—	—
									
Min. Depth of Pour	3.75"	3.75"	3.75"	3.75"	3.75"	3.75"	2.00"	2.00"	2.00"
Adjustability (Fully, Semi, Non)	Fully	Fully	Fully	Fully	Fully	Fully	Semi	Semi	Semi
Before Pour External Height Adjustment	1.25"	1.25"	1.25"	1.25"	1.25"	1.25"	1.25"	1.25"	1.25"
After Pour Internal Height Adjustment	.38"	.38"	.63"	.63"	.63"	.63"	—	—	—
Cubic Inch Capacity	33.00	33.00	36.50 Per Gang	36.50 Per Gang	34.80 Middle Ends	34.80 Middle Ends	16.00	16.00 Per Gang	16.00 Per Gang
Dimensions - A	4.38"	4.38"	4.38"	4.38"	4.38"	4.38"	4.38"	4.38"	4.38"
Dimensions - B	3.19"	3.19"	3.44"	3.44"	3.44"	3.44"	2.00"	2.00"	2.00"
Dimensions - C	3.19"	3.19"	6.38"	6.38"	9.56"	9.56"	3.19"	6.38"	9.56"
Threaded Hub Sizes	(4) 3/4"	(4) 1"	(6) 3/4"	(4) 1" & (2) 3/4"	(8) 3/4"	(6) 1" & (2) 3/4"	(2) 3/4"	(4) 3/4"	(6) 3/4"

Flush Rectangular Floor Box Covers and Flanges

Covers								
Brass	S3825	S3625	S3826	S2425	S2625	S2825	S3425	S3813
Aluminum	SA3825	SA3625	SA3826	SA2425	SA2625	—	—	SA3813
								
	Duplex Flap	Duplex Screw	Style Line® Opening	2 1/8" x 3/4" Combination	2 1/8" x 1" Combination	2 1/8" Single Receptacle	2 3/8" Single Receptacle	Blank

Carpet Flanges	1-Gang	2-Gang	3-Gang
Brass	SB3083	SB3084	SB3085
Aluminum	SA3083	SA3084	SA3085
Clear Polycarbonate	S3083	S3084	S3085
			

Flush Rectangular Stamped Steel Floor Boxes





Box Material	Stamped Steel					
Collar Material						
Brass	B2431	B2432	B2433	B2421	B2422	B2423
Aluminum	BA2431	BA2432	BA2433	BA2421	BA2422	BA2423
						
Min. Depth of Pour	3.75"	3.75"	3.75"	2.75"	2.75"	2.75"
Adjustability (Fully, Semi, Non)	Fully	Fully	Fully	Fully	Fully	Fully
Before Pour External Height Adjustment	1.25"	1.25"	1.25"	1.25"	1.25"	1.25"
After Pour Internal Height Adjustment	.50"	.50"	.50"	.50"	.50"	.50"
Cubic Inch Capacity	60.00	52.80 Per Gang	50.80 Per Gang	39.50	35.00 Per Gang	34.00 Per Gang
Dimensions - A	4.38"	4.38"	4.38"	4.38"	4.38"	4.38"
Dimensions - B	3.72"	3.72"	3.72"	2.74"	2.74"	2.74"
Dimensions - C	3.19"	6.44"	9.67"	3.19"	6.44"	9.67"
Knockouts - Opposite Sides	(1) Concentric 3/4", 1", 1 1/4"	(2) Concentric 3/4", 1", 1 1/4"	(3) Concentric 3/4", 1", 1 1/4"	(2) 1/2", (1) 3/4"	(4) Concentric 1/2", 3/4"	(6) Concentric 1/2", 3/4"
Knockouts - Opposite Ends	(1) Concentric 3/4", 1", 1 1/4"	(1) Concentric 3/4", 1", 1 1/4"	(1) Concentric 3/4", 1", 1 1/4"	(1) 1/2", (1) 3/4"	(2) Concentric 1/2", 3/4"	(2) Concentric 1/2", 3/4"
Knockouts - Bottom	(2) Concentric 3/4", 1", 1 1/4"	(4) Concentric 3/4", 1", 1 1/4"	(6) Concentric 3/4", 1", 1 1/4"	(2) Concentric 3/4", 1", 1 1/4"	(4) Concentric 3/4", 1", 1 1/4"	(6) Concentric 3/4", 1", 1 1/4"

Flush Rectangular Floor Box Covers and Flanges

Covers								
Brass	S3825	S3625	S3826	S2425	S2625	S2825	S3425	S3813
Aluminum	SA3825	SA3625	SA3826	SA2425	SA2625	—	—	SA3813
								
Duplex Flap	Duplex Screw	Style Line® Opening	2 1/8" x 3/4" Combination	2 1/8" x 1" Combination	2 1/8" Single Receptacle	2 3/8" Single Receptacle	Blank	

Carpet Flanges			
Brass	SB3083	SB3084	SB3085
Aluminum	SA3083	SA3084	SA3085
Clear Polycarbonate	S3083	S3084	S3085
			

Recessed 4 and 8-Gang Floor Boxes

Box Material	Stamped Steel			Cast Iron
Style	4-Gang Deep HBLCFB301BASE 	4-Gang Shallow HBLCFB401BASE 	8-Gang Deep HBLCFB501BASE 	4-Gang Shallow HBLCFB401CB 
Min. Depth of Pour	4.25"	3.00"	5.25"	3.25"
Adjustability (Fully, Semi, Non)	Fully	Fully	Fully	Fully
Before Pour External Height Adjustment	1.50"	1.50"	1.50"	1.50"
After Pour Internal Height Adjustment	.75"	.75"	.75"	.75"
Wiring Chambers	4 (1 per gang)	4 (1 per gang)	4 (1 per 2 gangs)	4 (1 per gang)
Cubic Inch Capacity	29.50 per chamber	25.50 per chamber	49.50 per chamber	25.50 per chamber
L x W x H	10.0" x 10.0" x 4.0"	10.0" x 10.0" x 2.63"	10.0" x 10.0" x 5.13"	10.0" x 10.0" x 3.13"
Threaded Hubs / chamber	–	–	–	(2) 1"
Knockouts per chamber	(1) Concentric 1/2", 3/4" (1) Concentric 3/4", 1" (1) 1 1/4"	(3) Concentric 1/2", 3/4"	(1) Concentric 1/2", 3/4" (1) Concentric 3/4", 1" (1) 1 1/4"	–

Recessed Floor Box Covers

Hubbell - Screw Type Face Plates

Steel Cover and Flange Assembly HBLTCGNTSW



Granite







HBLTCGNTBKS









Black

HBLST302SGY*	HBLDE301SGY*	HBLTO310SGY*	HBLTL318GY*	HBLTL319SGY*	HBLBL300SGY*
					
Duplex	Style Line®	Toggle	Single Receptacle (1.39" Boss Dia.)	Single Receptacle (1.56" Boss Dia.)	Blank

Open Systems - Screw Type Face Plates

HBLIMFGSY*	HBL317SGY*	HBLAM303SGY*	HBLAMP313SGY*	HBLKR314SGY*	HBLLT309SGY*
					
Hubbell iSTATION™ (See pages 134-135 for module options)	Hubbell 6-Port	AMP-ACO	AMP 6-Port	Krone®/Leviton®	SYSTIMAX®

* Catalog number indicated is gray, replace "GY" with the following to designate color: "BK" for Black, "WA" for White, "I" for Ivory.

HBLPA308SGY*	HBLNO309SGY*	HBLSI305SGY*	HBLSI315SGY*	HBLOR306SGY*	HBLORT322SGY*
					
Panduit Mini-Com®	NORDX® 6-Port (For Cat. 5e jacks only)	Siemon CT® Series	Siemon MAX® Series	Ortronics Series II®	Ortronics TracJack®

AMP is a registered trademark of Tyco Electronics Corp. Krone is a registered trademark of Krone, Inc. Leviton is a registered trademark of Leviton. MAX and CT Series are registered trademarks of The Siemon Company. Mini-Com and Panduit are registered trademarks of Panduit Corp. NORDX is a registered trademark of Belden/CDT, Inc. SYSTIMAX is a registered trademark of CommScope, Inc. TracJack, Series II and Ortronics are registered trademarks of Ortronics/Legrand.

Recessed 6-Gang Floor Boxes


Stamped Steel

LCFBSSA	Min. Depth of Pour	3.50"
	Adjustability (Fully, Semi, Non)	Fully
	Before Pour External Height Adjustment	1.25"
	Wiring Chambers	6
	Cubic Inch Capacity per Chamber	(4) at 38.20 (2) at 25.40
	L x W x H	12.5" x 12.5" x 6.18"
	Knockouts per Chamber	(1) Concentric 1", 1 1/4" (1) 3/4"



Cast Iron

LCFBCA	Min. Depth of Pour	3.65"
	Adjustability (Fully, Semi, Non)	Fully
	Before Pour External Height Adjustment	1.25"
	Wiring Chambers	6
	Cubic Inch Capacity per Chamber	(4) at 36.80 (2) at 25.40
	L x W x H	13.0" x 13.0" x 6.35"
	Threaded Hub Sizes per Chamber	(1) 3/4" (1) 1 1/4"



Recessed Floor Box Covers

Smooth Metallic Cover, Flange and Cable Doors for Carpet Applications

LCFBCBRSTC



Brass Finish

LCFBCALTC



Aluminum Finish

LCFBCGYTC



Gray

LCFBCBKTC



Black

Metallic Cover, Flange and Cable Doors for Carpet Applications - Carpet Insert Required

LCFBCBRSC



Brass Finish

LCFBCALC



Aluminum Finish

LCFBCGYC



Gray

LCFBCBKC



Black

Reinforced Non-Metallic Cover, Flange and Cable Doors for Carpet Applications - Carpet Insert Required

LCFBCBRA



Brown

LCFBCGYA



Gray

LCFBCIA



Ivory

LCFBCBKA



Black


Smooth Metallic Cover and Cable Doors for Tile Applications

LCFBCBRST



Brass Finish

LCFBCALT



Aluminum Finish

LCFBCGYT



Gray

LCFBCBKT



Black

Face Plates

LCFBP8



Duplex

LCFBP26




Style Line®

LCFBP720



Single Receptacle
(for 1.56" boss dia.)

LCFBIM





3 Unit iSTATION™
(See pages 134-135
for module options)

LCFBP14



Blank

Recessed 2-Gang Floor Boxes

Stamped Steel			Cast Iron				
	3SFBS	Min. Depth of Pour	3.00"		3SFBC	Min. Depth of Pour	3.00"
		Adjustability (Fully, Semi, Non)	Fully			Adjustability (Fully, Semi, Non)	Fully
		Before Pour External Height Adjustment	1.25"			Before Pour External Height Adjustment	1.25"
		After Pour Internal Height Adjustment	.44"			After Pour Internal Height Adjustment	.44"
		Wiring Chambers	2			Wiring Chambers	2
		Cubic Inch Capacity per Chamber	22.40			Cubic Inch Capacity per Chamber	21.60
		L x W x H	12.25" x 5.50" x 2.88"			L x W x H	12.88" x 6.00" x 3.00"
		Knockouts				Threaded Hub Sizes	
		Opposite Ends	(1) 1"			Opposite Ends	(1) 1¼"
		Opposite Sides	(2) ¾"			Opposite Sides	(2) ¾"
	Center Area	Concentric 1", 1¼" (each side)		Center Area	(1) 1¼" (each side)		

Recessed Floor Box Covers – Carpet Applications

Reinforced Non-Metallic Cover, Flange and Cable Doors

3SFBCBRA



Brown

3SFBCIA



Ivory

3SFBCGYA



Gray

3SFBCBKA



Black

Face Plates

3SFBRP



Duplex Knockout

3SFBD5



Style Line® Opening

3SFBS



Single Receptacle Opening (for 1.39" boss dia.)

3SFBB



Blank

3SFBT5



Voice / Data (2) Jack Knockouts (.6" x .75")

3SFBIM











3 unit iSTATION™ Opening (See pages 134-135 for module options)

Flush Floor Boxes for Wooden Floors

Box Material	Rectangular Stamped Steel			Round Cast Iron	
Collar Material					
Brass	B2481	B2482	B2483	B2588	B2588275
					
Gangs	Single	Two	Three	Single	Single
Adjustability (Fully, Semi, Non)	Semi	Semi	Semi	Non	Non
External Height Adjustment	1.00"	1.00"	1.00"	—	—
Cubic Inch Capacity	42.00	42.50 Per Gang	42.50 Per Gang	18.50	18.50
Dimensions - A	4.50"	4.50"	4.50"	4.19"	4.19"
Dimensions - B	3.13"	3.13"	3.13"	3.75"	3.75"
Dimensions - C	3.20"	6.42"	9.64"	—	—
Hubs/Knockouts - Opposite Sides	(1) Concentric 1/2", 3/4", 1"	(2) Concentric 1/2", 3/4", 1"	(3) Concentric 1/2", 3/4", 1"	—	(2) 3/4"
Hubs/Knockouts - Bottom	(1) Concentric 1/2" - 1 1/4"	(2) Concentric 1/2" - 1 1/4"	(3) Concentric 1/2" - 1 1/4"	(2) 1/2"	(2) 1/2"

Flush Floor Box Covers and Flanges

Rectangular Covers

Brass	S3825	S3625	S3826	S2425	S2625	S2825	S3425	S3813
Aluminum	SA3825	SA3625	SA3826	SA2425	SA2625	—	—	SA3813
								
	Duplex Flap	Duplex Screw	Style Line® Opening	2 1/8" x 3/4" Combination	2 1/8" x 1" Combination	2 1/8" Single Receptacle	2 3/8" Single Receptacle	Blank





Round Covers

Brass	S3925	S3725	S2525	S2725	S2925	S3525	S3325	Round Flanges S3082 (6 1/4" Dia.) SA3182 (5 1/4" Dia.)
Aluminum	SA3925	SA3725	SA2525	SA2725	SA2925	—	—	
								
	Duplex Flap	Duplex Screw	2 1/8" x 3/4" Comb.	2 1/8" x 1" Comb.	2 1/8" Single Receptacle	2 3/8" Single Receptacle	2 1/8" Single Rec. (Terrazzo Floor)	





































Rectangular Flanges (Required)

Brass	SB3083W	SB3084W	SB3085W
Aluminum	SA3083W	SA3084W	SA3085W
			
	1-Gang	2-Gang	3-Gang

One Piece Brass Cover and Carpet Flange


SF3925	SF2525	SF2725	SF2925
			
Duplex Flap	2 1/8" x 3/4" Combination	2 1/8" x 1" Combination	2 1/8" Single Receptacle

Hubbell Floor Box Cover to Receptacle Compatibility Chart

Cover Style		Terazzo (2 1/8")	2 3/8"	2 1/8"	2 1/8"	Single Receptacle	Duplex Flap	Duplex Plug	Style Line®
Hubbell SystemOne						S1SPTL 			S1SP 
Round		S3325 	S3525 	S(A)2925 S(A)2725 S(A)2525 			S(A)3925 	S(A)3725 	
Rectangular			S3425 		S2825 S(A)2625 S(A)2425 		S(A)3825 	S(A)3625 	S(A)3826 
Rating	NEMA Config.								
2P, 3W 15A, 125V	5-15R 	HBL5251 HBL5261 IG5251 IG5261	HBL5251 HBL5261 IG5251 IG5261	HBL5251 HBL5261 IG5251 IG5261	HBL5251 HBL5261 IG5251 IG5261		CR5252 CR5262 CR5252IG HBL5252 HBL5262 IG5262	CR5252 CR5262 CR5252IG HBL5252 HBL5262 IG5262	HBL2152 IG2152 GF15L GFST15 HBL5260SA HBL5262SA
2P,3W 15A, 125V	L5-15R 	HBL4710 IG4710	HBL4710 IG4710	HBL4710 IG4710	HBL4710 IG4710		HBL4700 IG4700A HBL4792 HBL4794 HBL4795	HBL4700 IG4700A HBL4792 HBL4794 HBL4795	
2P, 3W 15A, 250V	6-15R 	HBL5651 HBL5661 IG5661	HBL5651 HBL5661 IG5661	HBL5651 HBL5661 IG5661	HBL5651 HBL5661 IG5661		HBL5652 HBL5662 IG5662	HBL5652 HBL5662 IG5662	
2P, 3W 15A, 250V	L6-15R 	HBL4560 IG4560	HBL4560 IG4560	HBL4560 IG4560	HBL4560 IG4560		HBL4550 IG4550A	HBL4550 IG4550A	
2P, 3W 15A, 277V	7-15R 						HBL5302	HBL5302	
2P, 3W 15A, 277V	L7-15R 	HBL4760	HBL4760	HBL4760	HBL4760		HBL4750	HBL4750	
2P, 3W 20A, 125V	5-20R 	HBL5351 HBL5361 IG5361	HBL5351 HBL5361 IG5361	HBL5351 HBL5361 IG5361	HBL5351 HBL5361 IG5361		CR5352 CR5362 CR5352IG HBL5352 HBL5362 IG5362	CR5352 CR5362 CR5352IG HBL5352 HBL5362 IG5362	HBL2162 IG2162 GF20L GFST20 HBL5360SA HBL5362SA
2P, 3W 20A, 125V	5-20R 						HBL5392	HBL5392	
2P, 3W 20A, 125V	L5-20R 	HBL2310 IG2310	HBL2310 IG2310	HBL2310 IG2310	HBL2310 IG2310	HBL2310 IG2310			
2P, 3W 20A, 250V	6-20R 	HBL5461 IG5461	HBL5461 IG5461	HBL5461 IG5461	HBL5461 IG5461		HBL5462 IG5462	HBL5462 IG5462	
2P, 3W 20A, 250V	L6-20R 	HBL2320 IG2320	HBL2320 IG2320	HBL2320 IG2320	HBL2320 IG2320	HBL2320 IG2320			
2P, 3W 30A, 125V	L5-30R 	HBL2610 IG2610	HBL2610 IG2610	HBL2610 IG2610	HBL2610 IG2610	HBL2610 IG2610			
2P, 3W 30A, 250V	L6-30R 	HBL2620 IG2620	HBL2620 IG2620	HBL2620 IG2620	HBL2620 IG2620	HBL2620 IG2620			
3P, 4W, 20A 125/250V	14-20R 	HBL8410	HBL8410	HBL8410	HBL8410				
	L14-20R 	HBL2410 IG2410	HBL2410 IG2410	HBL2410 IG2410	HBL2410 IG2410	HBL2410 IG2410			
3P, 4W, 20A 3Ø 250V	15-20R 	HBL8420	HBL8420	HBL8420	HBL8420				
	L15-20R 	HBL2420 IG2420	HBL2420 IG2420	HBL2420 IG2420	HBL2420 IG2420	HBL2420 IG2420			
3P, 4W, 30A 125/250V	L14-30R 	HBL2710 IG2710	HBL2710 IG2710	HBL2710 IG2710	HBL2710 IG2710	HBL2710 IG2710			
3P, 4W, 30A 3Ø 250V	L15-30R 	HBL2720 IG2720	HBL2720 IG2720	HBL2720 IG2720	HBL2720 IG2720	HBL2720 IG2720			
3P, 4W, 30A 3Ø 600V	L17-30R 	HBL2740	HBL2740	HBL2740	HBL2740	HBL2740			
4P, 5W, 20A 3Ø Y 120/208V	L21-20R 	HBL2510 IG2510	HBL2510 IG2510	HBL2510 IG2510	HBL2510 IG2510	HBL2510 IG2510			
4P, 5W, 20A 3Ø Y 347/600V	L23-20R 	HBL2530	HBL2530	HBL2530	HBL2530	HBL2530			
4P, 5W, 30A 3Ø Y 120/208V	L21-30R 	HBL2810 IG2810	HBL2810 IG2810	HBL2810 IG2810	HBL2810 IG2810	HBL2810 IG2810			
4P, 5W, 30A 3Ø Y 347/600V	L23-30R 	HBL2830	HBL2830	HBL2830	HBL2830	HBL2830			

Note: Plate/device combinations on this page represent the most common configurations. Consult the full-line catalog for additional device configurations that could fit your application. Use appropriately designed floor box for application. (ie. proper cubic inch capacity, depth, etc.)

	Page
Zone Distribution System	102
Pre-Wired Raised Access Floor Box . . .	102
Unloaded Raised Access Floor Box . . .	103
Face Plates	103
Wiring Schematics	104

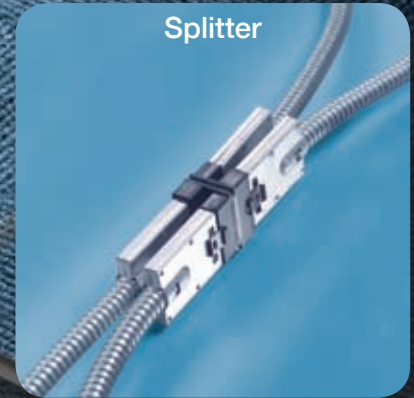

Hubbell CONNEXION Zone Distribution System

Effective utilization of open space depends on the availability of power, communications and the ability to reconfigure the space with minimal down time. As infrastructure requirements change, conventional wiring systems fail to provide the flexibility required to support constantly changing personnel and ever evolving technologies. The Hubbell CONNEXION Zone Distribution System is a factory assembled, flexible, modular system that delivers power and data in raised floor installations. This unique system increases the value of the infrastructure and meets the challenges posed by new construction and renovation in commercial offices, retail outlets and educational facilities. By improving cable management, enhancing flexibility, and reducing administration expense, the CONNEXION Zone Distribution System allows for power and communications to be located where needed for efficient relocations and upgrades.



Zone Distribution Box

The zone distribution box (ZDB) is the conversion point between hard wiring (conventional pipe and wire) done by the on-site electrical contractor and the pre-manufactured zone distribution system.



Extender Cables

The extender cable is the link between the zone distribution box and point of use furniture feeds and raised access floor boxes. Extender cables carry all 8 conductors to every point in the zone offering the greatest degree of circuit capacity – all 8 wires go everywhere!



Splitter

A "one-in" "three-out" device that allows power to be distributed to more than one location, without running cables back to the ZDB. This allows the potential to power up more than one furniture feed or floor box off a single ZDB feed.

Advantage

■ Best in Class Products

All 8-wires go everywhere!
This provides future capacity to reconfigure quickly and safely.

■ Ease of Installation

CONNEXION makes relocations and upgrades quick and efficient by reducing the expense of administration.

■ Application Solutions

Hubbell offers comprehensive technical support including CAD drawings, specification text, data sheets, and bid submittal preparation support.



Furniture Feed

Furniture feed boxes transition the Hubbell CONNEXION Zone Distribution System with any other 8 wire partitioned modular furniture or cubicle. The furniture feed can also be used as a junction box to convert zoned power back to conventional wiring.






Pre-wired and AFB Series Raised Access Floor Boxes

The Hubbell AFB Series of recessed, stamped steel boxes are suitable for the majority of raised floor applications providing the flexibility, accessibility, capacity and depth profiles needed. These multi-service boxes are available in 4- or 8-gang options in a variety of power configurations. They utilize Hubbell modular screw type plates and open systems modular connectivity face plates for delivering power, voice, and data. A single reversible metallic cover/flange assembly mounts to all box sizes and has been designed with a large cable door to provide ample room for exiting cords.




Hubbell CONNEXION Zone Distribution System

Zone Distribution Boxes		Splitter Modules		
	Catalog Number		Catalog Number	
	422 System (2+2)	PDCS42222	422 System	SPLITTER422
	422 System (3+1)	PDCS42231	332 System	SPLITTER332
	332 System	PDCS332		
Extender Cable Female To Female		Extender Cable Female To Open		
	Catalog Number		Catalog Number	
	422 System	EXT422xxFF8W	422 System, 15 in.	EXT42201FO8W
	332 System	EXT332xxFF8W	332 System, 15 in.	EXT33201FO8W
	* replace xx with "05" for 5 ft., "10" for 10 ft., "15" for 15 ft. and "20" for 20 ft. Custom lengths are available upon request.			
			422 System, 15 ft.	EXT42215FO8W
			332 System, 15 ft.	EXT33215FO8W
				
Extender Cable Male To Open		Furniture Feed		
	Catalog Number		Catalog Number	
	422 System, 15 in.	EXT42201MO8W	422 System	FIJB422
	332 System, 15 in.	EXT33201MO8W	322 System	FIJB332
	422 System, 15 ft.	EXT42215MO8W		
	332 System, 15 ft.	EXT33215MO8W		



Pre-Wired Raised Access Floor Boxes

Step 1 – Select a Raised Floor Box Series

Box Series	Description	Dimensions	Cubic Inch Capacity	Conduit Knockouts	
AFB301	4-Gang Deep w/ Metal Cover	10.00"L x 10.00"W x 4.0"H	4 x 29.5 (483.0)	½", ¾", 1", 1¼"	
AFB401	4-Gang Shallow w/ Metal Cover	10.00"L x 10.00"W x 2.63"H	4 x 25.5 (418.0)	½", ¾"	
AFB501	8-Gang Deep w/ Metal Cover	10.00"L x 10.00"W x 5.13"H	4 x 49.5 (811.0)	½", ¾", 1", 1¼"	
	AFB101	4-Gang Deep w/ Non-Metallic Cover	9.00"L x 7.00"W x 5.25"H	4 x 23.5 (385.0)	½", ¾", 1"

Step 2 – Use Device Selection Chart to Configure Gangs

- Step 2A** If customer needs the 4-gang deep box:
- Step 2B** Choose 422 or 332 System {4 = 422, 3 = 332}
- Step 2C** Gang 1 - Configure using selection chart
- Step 2D** Gang 2 - Configure using selection chart
- Step 2E** Gang 3 - Configure using selection chart
- Step 2F** Gang 4 - Configure using selection chart

(Configured Catalog Number)

- AFB301
- AFB3014
- AFB3014A
- AFB3014AE
- AFB3014AEH
- AFB3014AEHZ

Device Selection Chart	
Catalog Letter	Description
A	Line 1, 20A Duplex
B	Line 1, 20A, IG Duplex
E	Line 2, 20A Duplex
F	Line 2, 20A, IG Duplex
I	Line 3, 20A Duplex
H	Line 3, 20A, IG Duplex
O	Line 4, 20A Duplex
P	Line 4, 20A, IG Duplex
Z	Unpopulated Gang

Unloaded Raised Access Floor Boxes




Raised Access Floor Boxes with Metallic Cover (included)

Description	Catalog Number
4-Gang Deep, Gray Metallic Cover	AFB301GNT*
4-Gang Deep, Black Metallic Cover	AFB301BK*
4-Gang Shallow Gray Metallic Cover	AFB401GNT*
4-Gang Deep, Black Metallic Cover	AFB401BK*
8-Gang Deep Gray Metallic Cover	AFB501GNT*
8-Gang Deep, Black Metallic Cover	AFB501BK*

Replacement Metallic Cover and Flange

Description	Catalog Number
Cover Flange, Gray	HBLTCGNT
Cover Flange, Black	HBLTCGNTBK

♦Note: For City of Chicago approved versions, use following part numbers: **HBLAFB301BASEC, HBLAFB401BASEC and HBLAFB501BASEC**. Cover must be ordered separately (i.e. **HBLTCGNT** and **HBLTCGNTBK**). These versions do not include knockouts and meet construction requirements for CCEA-2000.



COMING SOON!



Raised Access Floor Boxes with Non-Metallic Cover (included)

Description	Catalog Number
4-Gang Deep, Gray Non-Metallic Cover	HBLAFB101GNT*
4-Gang Deep, Black Non-Metallic Cover	HBLAFB101BK*

Replacement Non-Metallic Cover and Flange

Description	Catalog Number
Cover Flange, Gray	HBLAFB101TCGNT*
Cover Flange, Black	HBLAFB101TCBK*

* Note: Insert for tile applications included.

COMING SOON!



Hubbell - Screw Type Face Plates

HBLST302SGY* **HBLDE301SGY*** **HBLTO310SGY*** **HBLTL318GY*** **HBLTL319SGY*** **HBLBL300SGY*** **HBLIMFSGY*** **HBL317SGY***



Duplex



Style Line®



Toggle



Single Receptacle
(1.39" Boss Dia.)



Single Receptacle
(1.56" Boss Dia.)



Blank



Hubbell
iSTATION™
(See pages 134-135
for module options)



Hubbell
6-Port

Open Systems - Screw Type Face Plates

HBLAM303SGY* **HBLAMP313SGY*** **HBLKR314SGY*** **HBLLT309SGY*** **HBLPA308SGY*** **HBLNO309SGY***



AMP-ACO



AMP 6-Port



Krone®/Leviton®



SYSTIMAX®



Panduit Mini-Com®



NORDX® 6-Port
(For Cat. 5e jacks only)

HBLSI305SGY*



Siemon
CT® Series

HBLSI315SGY*



Siemon
MAX® Series

HBLOR306SGY*



Ortronics
Series II®

HBLORT322SGY*



Ortronics
TracJack®

* Catalog number indicated is gray, replace "GY" with the following to designate color: "BK" for Black, "WA" for White, "I" for Ivory.

AMP is a registered trademark of Tyco Electronics Corp. Krone is a registered trademark of Krone, Inc. Leviton is a registered trademark of Leviton. MAX® and CT® Series are registered trademarks of The Siemon Company. Mini-Com® and Panduit® are registered trademarks of Panduit Corp. NORDX® is a registered trademark of Belden/CDT, Inc. SYSTIMAX® is a registered trademark of CommScope, Inc. TracJack®, Series II® and Ortronics® are registered trademarks of Ortronics/Legrand.



CONNEXION - Wiring Schematics


The CONNEXION System is offered in three different 20A per circuit wiring types to support the unique requirements of an infrastructure. The basic system has the capacity of delivering up to eight wires throughout the network consisting of hots, neutrals, grounds, and isolated grounds.

4/2/2 System Configuration (4-Hots, 2-Neutrals, 2-Grounds)

3 + 1 Wiring Configuration

Appropriate in areas where moderate amounts of sensitive equipment are used, and where separation from other circuits and isolated grounding are required.


- 3 circuits share #10 AWG neutral to manage harmonics for general purpose use
- 1 isolated ground circuit for sensitive equipment
- Component Rating: 20 amperes at 120/208 or 120/240 volt
- 8-Wires (4 Hots, 2 Neutrals, 2 Grounds)

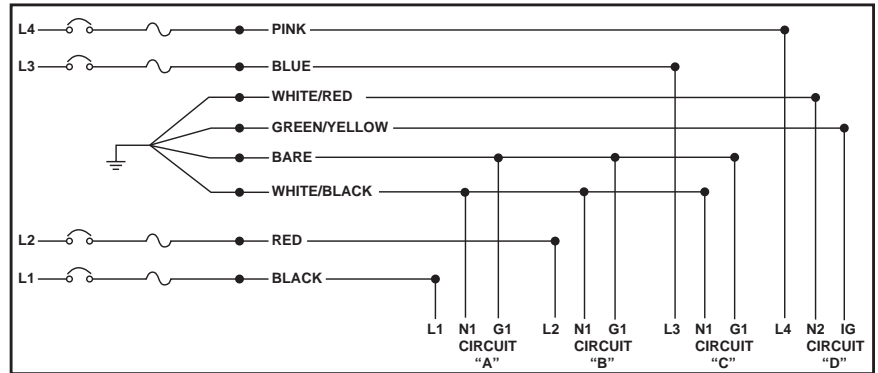

2 + 2 Wiring Configuration

Appropriate in areas where a high concentration of sensitive equipment (computers, printers) is needed and minimal amounts of conventional equipment exist.

- 2 circuits share #10 AWG neutral to manage harmonics for general purpose use
- 2 isolated ground circuits for sensitive equipment
- Component Rating: 20 amperes at 120/208 or 120/240 volt
- 8-Wires (4 Hots, 2 Neutrals, 2 Grounds)

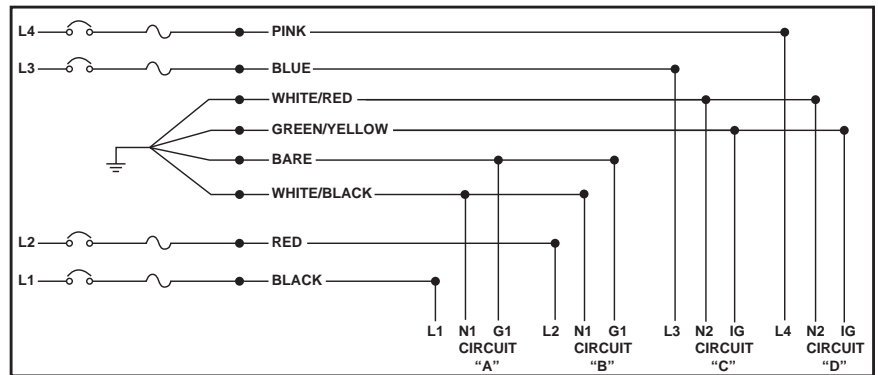


3/3/2 System Configuration (3-Hots, 3-Neutrals, 2-Grounds)

2 + 1 Wiring Configuration

Appropriate where either a 120/240 volt or 120/208 volt 3Ø Y power distribution system exists and separate neutral conductors are desired.

- 2 circuits for general purpose use
- 1 isolated ground circuit for sensitive equipment
- Each circuit has its own neutral to manage harmonics
- Component Rating: 20 amperes at 120/208 or 120/240 volt
- 8-Wires (3 Hots, 3 Neutrals, 2 Grounds)

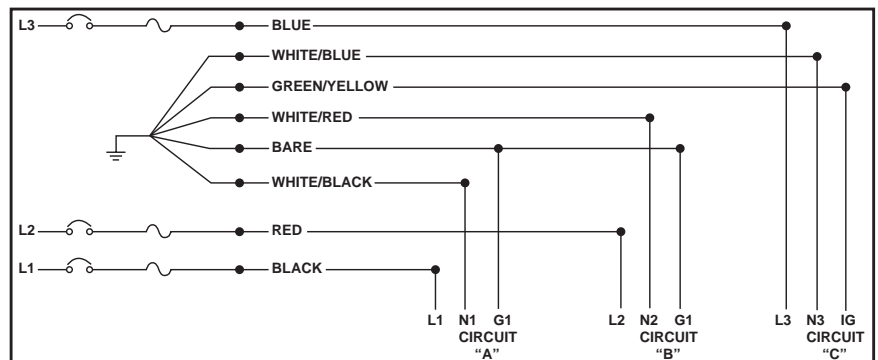

Hubbell Fire-Rated Poke-Throughs **HUBBELL**

	Page
SystemOne (4" Core)	108
Flush 2x2 (3" Core)	112
Flush Duplex (3" Core)	113
Flush Furniture Feed (3" Core)	114
Pedestal (2" & 3" Core)	115




Hubbell Fire-Rated Poke-Throughs


Featuring the innovative capabilities of Hubbell's SystemOne Delivery System line, Hubbell has expanded its offering of Fire-Rated Poke-Through (FRPT) products, making it the most extensive in the industry. Hubbell SystemOne FRPTs install in a 4" core hole and provide users the flexibility to create personal solutions for their most demanding applications.

For those requiring a 3" diameter FRPT, Hubbell continues to provide a wide variety of traditional solutions for flush, pedestal and furniture feed applications. All Hubbell FRPT products include a "step-down" feature, enabling wiring, installation and if necessary, removal from the floor above.

Whatever combination of power, data and audio/video connections are required, Hubbell provides the answer; bringing consistent, aesthetic and functional solutions to the desktop.

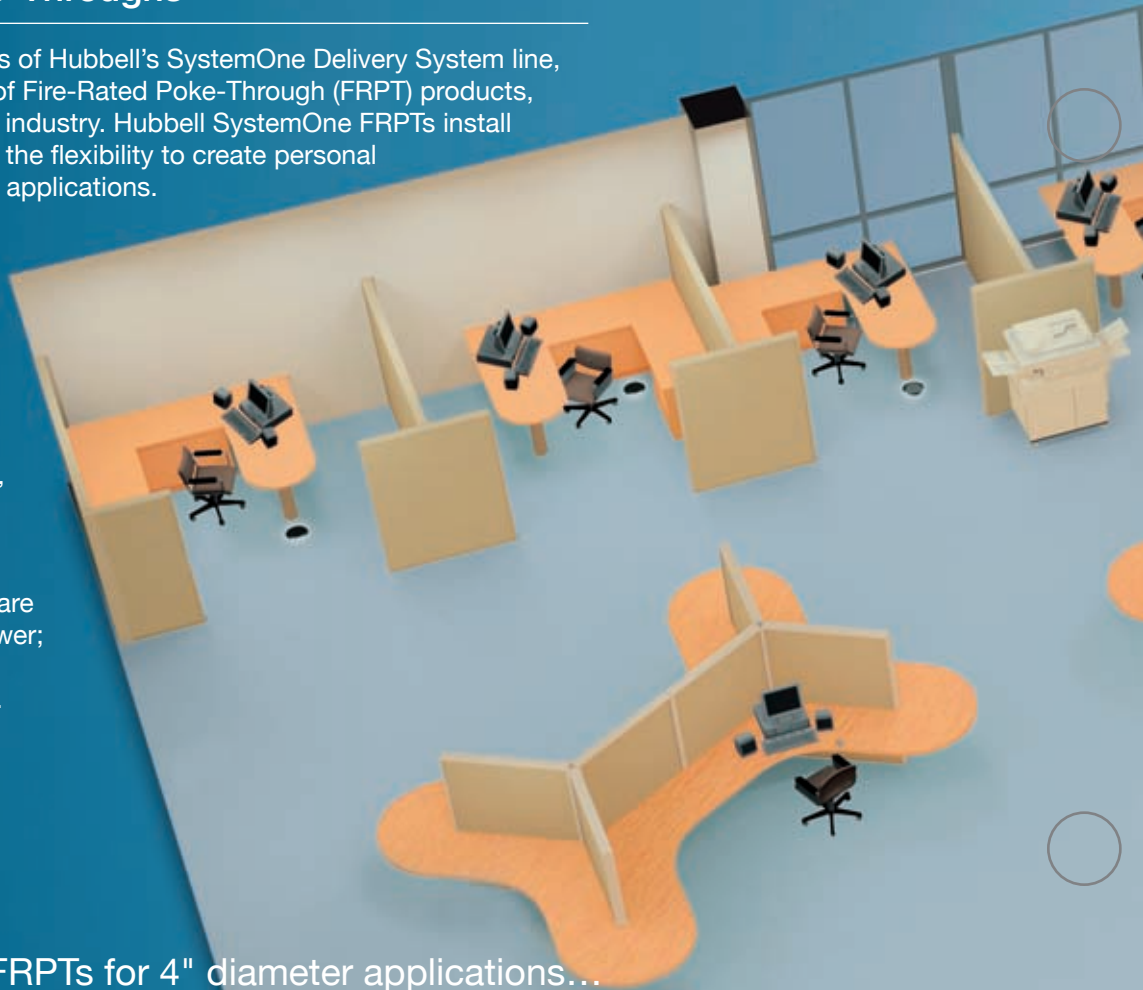

Hubbell SystemOne FRPTs for 4" diameter applications...

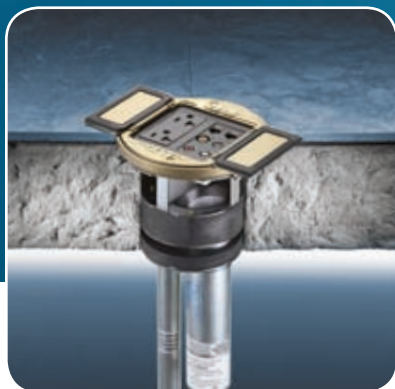

Multi-Service Applications

This Hubbell SystemOne sub-plate incorporates 2 Style Line® rectangular openings. These can be used for a variety of power and/or data applications. It will accommodate 15 or 20 amp, standard, isolated ground, GFCI or surge protected duplex receptacles. Using communication frames it can provide up to a 6-port multi-service or a 12-port all communication solution.



Multimedia Applications

Other Hubbell SystemOne sub-plates are designed to meet the growing needs of the audio and video markets. Some sub-plates provide power outlets with Hubbell's audio/video products including 15-pin SVGA, RCA, S-Video, 3.5mm stereo, and XLR microphone jacks. Another sub-plate can accommodate Extron® Electronics' MAAP and AAP series audio/video modules.



4X4 Applications

Provides maximum power capacity for flush, multi-service applications. This sub-plate features a pre-wired four outlet 20A, 125V receptacle and four openings for Hubbell's Snap Fit, flush mount modular jacks and audio/video connectors.

Advantage ^{HUBBELL}

- **Best in Class Products**
Easily upgraded as user's needs change.
- **Ease of Installation**
Clips allow installation and removal from above the floor.
- **Application Solutions**
Highest capacity and widest variety of power, data and A/V solutions.

Traditional FRPTs for 3" and 2" diameter applications...




Flush Applications

Hubbell offers a variety of single and multi-service flush fire-rated poke-through products. It incorporates a Hubbell Style Line®, 20 amp, duplex receptacle and two Hubbell Category 5e data jacks. The jacks mount flush to the cover for an unobtrusive appearance. Various colors and all brass versions are available.



Pedestal Applications

Hubbell offers single and multi-service pedestal style FRPTs for those applications requiring above-the-floor connections. Available in 2, 4 or 6-gang sizes, pedestal FRPTs provide additional power and low voltage connections to the desktop than most flush configurations in a 3" core hole.

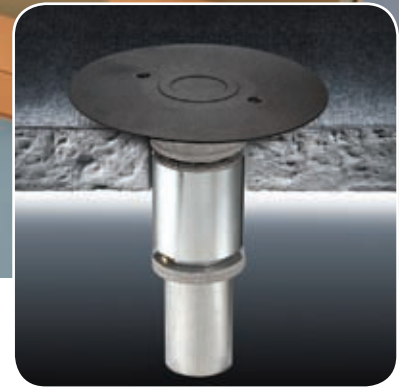

Furniture Feed Applications

Hubbell offers single and multiple service flush and pedestal style FRPTs that deliver power and voice/data cabling to feed furniture systems. Various models can feed up to 2" conduit and can accommodate up to 36 Category 5e data cables.

Hubbell SystemOne Through-Floor Fittings



Step down installation clips allow the fitting to be installed or removed from the floor above.


Barrier expands during fire conditions to maintain the floor's fire rating.

Adjustable lower fire barrier accommodates concrete floor thicknesses from 2¼" to 7".

Features dual 1" EMT conduit tubes for increased cable capacity.

- Accepts all Hubbell SystemOne covers and sub-plates.
- Excellent solution for both retrofit and new construction.
- Brings power, voice, data and multimedia precisely where needed.
- Installs in 4" core hole.
- UL listed for use in 1 - 4 hr fire rated floors.

Hubbell SystemOne Universal Cover



Hinged doors open 180 degrees flush to the carpet flange or tile.

Screws allow each door to be secured independently.

Universal carpet or tile flange can be used for Hubbell SystemOne Fire-Rated Poke-Through or PVC Floor Box.

- Cast aluminum construction available in durable black, gray, brass, aluminum and ivory powder coat finishes.
- Features ScrubShield™ technology that exceeds UL514C scrub water exclusion requirements.
- Provides consistent look and maximum functionality throughout the installed life.

Hubbell SystemOne Sub-Plates

While no one can predict the future, Hubbell's modular sub-plate design allows users to economically upgrade Hubbell SystemOne FRPTs to accommodate future moves, adds and changes.



- Hubbell 4X4: four 20A, 125V receptacles, four openings for voice/data jacks and multimedia connectors.
- Hubbell iSTATION™ front loading modular connectivity.
- Accommodates Extron® Electronics' Architectural Series audio/video system integration products.
- Ortronics®, Siemon™, Panduit®, SYSTIMAX® and keystone options enable maximum data flexibility.
- Large capacity and multi-service furniture feed applications.
- Accommodates GFCI, surge and standard Style Line® receptacles.
- Twist-Lock® receptacle with or without jack openings.

Extron® is a registered trademark of Extron Electronics.
 Siemon™ is a trademark of The Siemon Company.
 Panduit® is a registered trademark of Panduit Corp.
 SYSTIMAX® is a registered trademark of CommScope, Inc.
 Ortronics® is a registered trademark of Ortronics/Legrand.



Hubbell SystemOne – Poke-Through (One Piece Units)

Description

One-Piece 4X4 Poke-Through

Assembled-unit includes Hubbell SystemOne 4X4 floor fitting (**S1PT4X4FIT**) with four pre-wired 20A, 125V receptacles and four keystone opening sub-plate (**S1SP4X4**) to accept Hubbell modular jacks and flush multimedia Snap Fit connectors. Receptacles feature single or two circuit wiring as well as isolated ground capability. Finish flange and universal carpet cover (**S1CFC**) assembly are supplied in aluminum, brass, black or gray finishes.



Color

Aluminum Finish
Brass Finish
Black Finish
Gray Finish

Catalog Number

S1PT4X4AL
S1PT4X4BRS
S1PT4X4BL
S1PT4X4GY



One-Piece Dual Style Line® Poke-Through

Assembled-unit includes a Hubbell SystemOne dual channel floor fitting (**S1PTFIT**) and two Style Line opening sub-plate (**S1SP**) to accept two Style Line or surge receptacle or one GFCI and one Style Line receptacle. Additionally, outlet frames can be used to convert the application to a 6-port multi-service or a 12-port all communication solution. Finish flange and universal carpet cover (**S1CFC**) assembly are supplied in aluminum, brass, black or gray finishes.



Aluminum Finish
Brass Finish
Black Finish
Gray Finish

S1PTAL
S1PTBRS
S1PTBL
S1PTGY



One-Piece Modular A/V Poke-Through

Assembled-unit includes a Hubbell SystemOne A/V through floor fitting (**S1PTAVFIT**) and a Hubbell SystemOne sub-plate (**S1SP3IM**) to provide a 20A power outlet and a recessed single-gang 3 Unit iSTATION™ opening. This comprehensive data/voice/audio/and video solution can accommodate 15-Pin VGA, RCA, S-Video, 3.5mm Stereo, and XLR microphone jacks. Finish flange and universal carpet cover (**S1CFC**) assembly are supplied in aluminum, brass, black or gray finishes.



Aluminum Finish
Brass Finish
Black Finish
Gray Finish

S1PT3IMAL
S1PT3IMBRS
S1PT3IMBL
S1PT3IMGY



Aluminum Finish



Brass Finish



Black Finish



Gray Finish



Hubbell SystemOne – Poke-Through (Three Piece Units)

Step One - Choose Sub-plate

Hubbell SystemOne Sub-plates

	Catalog Number
Hubbell 4X4	S1SP4X4

Features four pre-wired 20A, 125V receptacles and four openings for Hubbell Xcelerator™ Jacks and Snap Fit flush audio/video connectors. Use with **S1PT4X4FIT**.

Style Line®/GFCI	S1SP
Features two rectangular Style Line openings. Additionally, two data outlet frames can be used to provide 12-ports of flush connectivity. Use with S1PTFIT (recommended) or S1PTAVFIT .	

Features two rectangular Style Line openings. Additionally, two data outlet frames can be used to provide 12-ports of flush connectivity. Use with **S1PTFIT** (recommended) or **S1PTAVFIT**.

Hubbell Datacom + Power	S1SP3IM
Features one pre-wired 20A, 125V receptacle and a recessed single-gang 3-unit iSTATION™ opening. This comprehensive power/data/voice/audio/ and video solution can accommodate 15-Pin VGA, RCA, S-Video, 3.5mm Stereo, and XLR microphone jacks. Use with S1PTAVFIT (recommended) or S1PTFIT .	

Features one pre-wired 20A, 125V receptacle and a recessed single-gang 3-unit iSTATION™ opening. This comprehensive power/data/voice/audio/ and video solution can accommodate 15-Pin VGA, RCA, S-Video, 3.5mm Stereo, and XLR microphone jacks. Use with **S1PTAVFIT** (recommended) or **S1PTFIT**.

Open Systems Sub-plates

	Catalog Number
Extron® MAAP + Power	S1SPEXT1

Features one pre-wired 20A, 125V receptacle and a recessed opening for 3 single Extron MAAP Series Adapter Plates. Use with **S1PTAVFIT** (recommended) or **S1PTFIT**.

Extron AAP + Power	S1SPEXT2
Features one pre-wired 20A, 125V receptacle and a recessed opening for 1 single Extron MAAP Series Adapter Plate and 2 single AAP Series Adapter Plates. Use with S1PTAVFIT (recommended) or S1PTFIT .	

Features one pre-wired 20A, 125V receptacle and a recessed opening for 1 single Extron MAAP Series Adapter Plate and 2 single AAP Series Adapter Plates. Use with **S1PTAVFIT** (recommended) or **S1PTFIT**.

Extron Datacom	S1SPEXT3
Features recessed openings for 2 single Extron MAAP Series Adapter Plates and 2 single AAP Series Adapter Plates. Use with S1PTAVFIT (recommended) or S1PTFIT .	

Features recessed openings for 2 single Extron MAAP Series Adapter Plates and 2 single AAP Series Adapter Plates. Use with **S1PTAVFIT** (recommended) or **S1PTFIT**.

Ortronics Series II® + Power	S1SPORT
Features one pre-wired 20A, 125V receptacle and a recessed single-gang opening for three 1 unit size Ortronics Series II Modules. Use with S1PTAVFIT (recommended) or S1PTFIT .	

Features one pre-wired 20A, 125V receptacle and a recessed single-gang opening for three 1 unit size Ortronics Series II Modules. Use with **S1PTAVFIT** (recommended) or **S1PTFIT**.

	Catalog Number
All Modular Datacom	S1SP4IM

Features a recessed single-gang 3 unit and a flush 1 unit iSTATION™ opening. Accepts up to eight UTP, fiber, and audio/video connectors. Use with **S1PTAVFIT** (recommended) or **S1PTFIT**.

Single Recept. + Data	S1SPTL
20 or 30A Twist-Lock® receptacle (1.56" OD). (2) Keystone openings for Hubbell jacks or flush A/V connectors. Use with S1PT4X4FIT .	

20 or 30A Twist-Lock® receptacle (1.56" OD). (2) Keystone openings for Hubbell jacks or flush A/V connectors. Use with **S1PT4X4FIT**.

Furniture Feed Cover	
Features one 1½" N.P.T. plug opening for low voltage and one ¼" N.P.T. plug opening for power. Includes carpet flange – no universal cover required. Use with S1PTAVFIT (recommended) or S1PTFIT .	

Features one 1½" N.P.T. plug opening for low voltage and one ¼" N.P.T. plug opening for power. Includes carpet flange – no universal cover required. Use with **S1PTAVFIT** (recommended) or **S1PTFIT**.

Aluminum Finish	S1SPFFAL
Brass Finish	S1SPFFBR
Black Finish	S1SPFFBL
Gray Finish	S1SPFFGY



Extron® is a registered trademark of Extron Electronics.
 MAX® is a registered trademark of The Siemon Company.
 Mini-Com® and Panduit® are registered trademarks of Panduit Corp.
 SYSTIMAX® is a registered trademark of CommScope, Inc.
 TracJack®, Series II® & Ortronics® are registered trademarks of Ortronics/Legrand.

Step Two - Choose Hubbell SystemOne Through Floor Fitting

Description

Catalog Number

4X4 Through Floor Fitting

S1PT4X4FIT

Through floor fitting with two 3/4" E.M.T. for communications and one 3/4" E.M.T. for power. For use with Hubbell SystemOne Universal Covers and 4X4 and Twist-Lock® series sub-plates only. Universal cover and sub-plate ordered separately.

Dual Channel Through Floor Fitting

S1PTFIT

Through floor fitting with two 1" E.M.T. trade size conduit stems to feed power and communication services. For use with Hubbell SystemOne universal covers and all Hubbell sub-plates except 4X4 and Twist-Lock® series. Universal cover and sub-plate ordered separately.

A/V Through Floor Fitting

S1PTAVFIT

Through floor fitting with one 3/4" E.M.T. trade size conduit stem for power and one 1 1/2" E.M.T. trade size conduit stem for communication services. Ideal for demanding, large capacity audio/video and data requirements. For use with Hubbell SystemOne universal covers and all Hubbell sub-plates except 4X4 and Twist-Lock® series. Universal cover and sub-plate ordered separately.



Step Three - Choose Hubbell SystemOne Universal Covers

(Not required for furniture feed applications).

Universal cover assembly installs on the new Hubbell SystemOne fire rated poke-through floor fittings and accommodates all Hubbell SystemOne sub-plates for carpet and tile applications.

Carpet Assembly Covers



Tile Assembly Covers



2X2 Flush FRPT 3" Diameter – One Piece Units

Catalog Number

PT2X2BL	Black	2X2 Aluminum Poke-Through
PT2X2GY	Gray	
PT2X2IGBL*	Black	
PT2X2IGGY*	Gray	



* Includes pre-wired 20A isolated ground duplex Style Line receptacle.

Complete assembled unit

- **PT2X2FIT** through-floor fitting.
- Pre-wired 20A duplex Style Line® receptacle & (2) Category 5e data jacks.
- Non-metallic cover.
- Painted aluminum flange.
- UL Listed and CSA Certified.

Catalog Number

PT2X2BRS3	Black/Brass	2X2 Brass Poke-Through
PT2X2BRS	Brass Finish/Brass	
PT2X2IGBRS3*	Black/Brass	
PT2X2IGBRS*	Brass Finish/Brass	



* Includes pre-wired 20A isolated ground duplex Style Line receptacle.

Complete assembled unit

- **PT2X2FIT** through-floor fitting.
- Pre-wired 20A duplex Style Line receptacle & (2) Category 5e data jacks.
- Non-metallic cover.
- Solid brass flange.
- UL Listed and CSA Certified.

2X2 Flush FRPT 3" Diameter – Two Piece Units

Through-Floor Fitting

Catalog Number

PT2X2FIT

Multi-Channel Through-Floor Fitting

Through-floor fitting with (1) 3/4" trade size conduit stem with junction box for power and (2) 1/2" trade size conduit stems for low voltage entrances.



Specifications:

- UL Listed and CSA Certified.
- 1 - 4 hour fire rating (1 - 3 hour for steel floor units and concrete topping (D900 Series Design)).
- For 2 1/4" to 7" floor thickness.
- UL installation spacing. Minimum 2 ft. on center and not more than one per 65 sq. ft. of floor area.

Service Fittings

Catalog Number

PT2X2SFBL	Black	2X2 Aluminum Service Fitting
PT2X2SFGY	Gray	

- Pre-wired 20A duplex Style Line receptacle & (2) Category 5e data jacks.
- Non-metallic cover.
- Painted aluminum flange.
- UL Listed and CSA Certified.



Catalog Number

PT2X2SFBR33	Black/Brass	2X2 Brass Service Fitting
PT2X2SFBR3	Brass Finish/Brass	

- Pre-wired 20A duplex Style Line receptacle & (2) Category 5e data jacks.
- Non-metallic cover.
- Solid brass flange.
- UL Listed and CSA Certified.



Accessories

Catalog Number

PT2X2CBBL	Black	Non-Metallic Replacement Covers
PT2X2CGY	Gray	
PT2X2CBRS	Brass Finish	



Flush Duplex FRPT 3" Diameter – One Piece Units

Catalog Number

PT7FSDBLA	Black
PT7FSDGYA	Gray
PT7FSDIA	Ivory
PT7FSDBRA	Brown
PT7IGFSDGYA*	Gray
PT7IGFSDIA*	Ivory

* Includes pre-wired 20A isolated ground duplex receptacle.

Complete assembled unit

- **PT7FSD** through-floor fitting.
- Pre-wired 20A duplex receptacle.
- Non-metallic flip lid cover with (2) 1/2" diameter low voltage feed through holes.
- Painted aluminum flange.
- UL Listed and CSA Certified.

Flush Aluminum Poke-Through



Catalog Number

PT7FSDBRS2A	All Brass	Flush Brass Poke-Through
PT7FSDBRS3A	Black/Brass	
PT7IGFSDBRSA*	All Brass	

* Includes pre-wired 20A isolated ground duplex receptacle.

Complete assembled unit

- **PT7FSD** through-floor fitting.
- Pre-wired 20A duplex receptacle.
- All brass or black non-metallic cover option.
- Flip lid cover with (2) 1/2" diameter low voltage feed through holes.
- Solid brass flange.
- UL Listed and CSA Certified.



Flush FRPT 3" Diameter – Two Piece Units

Through-Floor Fitting

Catalog Number

PT7FSD (with Junction Box)
PT73SD (without Junction Box)

Through-floor fitting with (1) 3/4" trade size conduit stem for power and (2) 1/2" low voltage feed through holes.

Multi-Channel Through Floor Fitting



Specifications:

- UL Listed and CSA Certified.
- 1 - 4 hour fire rating (1- 3 hour for steel floor units and concrete topping, D900 Series Design).
- For 2 1/4" to 7" floor thickness.
- UL installation spacing. Minimum 2 ft. on center and not more than 1 per 65 sq. ft. of floor area.

Service Fittings

Catalog Number

FRFBLA	Black
FRFGYA	Gray
FRFIA	Ivory
FRFBRA	Brown

- Pre-wired 20A duplex receptacle.
- Non-metallic flip lid cover with (2) 1/2" diameter low voltage feed-through holes.
- Painted aluminum flange.
- UL Listed and CSA Certified.

Flush Aluminum Service Fitting



Catalog Number

FRFBRS2A	Solid Brass	Flush Brass Service Fitting

- Pre-wired 20A duplex receptacle.
- Solid brass flip lid cover with (2) 1/2" diameter low voltage feed-through holes.
- Solid brass flange.
- UL Listed and CSA Certified.



Accessories

Catalog Number

PFBRCLBA	Black
PFBRCGYA	Gray
PFBRCLIA	Ivory
PFBRCLBRA	Brown

Non-Metallic Replacement Covers





Catalog Number



BRS2RCA	Solid Brass	All Brass Replacement Covers





Large Capacity, Low Voltage Flush Furniture Feed FRPT 3" Diameter – Two Piece Units

Catalog Number		Catalog Number		
PT2FIT	Large Capacity, Low Voltage Through Floor Fitting	FF2BRS	Brass Finish	Large Capacity Cover/Flange
		FF2BK	Black	
		FF2GY	Gray	
<p>Through floor fitting with (1) 2" trade size conduit stem. Will accommodate up to 36 Category 5e cables.</p> <p>Specifications:</p> <ul style="list-style-type: none"> ■ UL Listed and CSA Certified. ■ 1-2 hour fire rating. ■ For 2¼" to 7" floor thickness. ■ UL installation spacing. Minimum 2 ft. on center and not more than 1 per 65 sq. ft. of floor area. 		<p>Specifications:</p> <ul style="list-style-type: none"> ■ UL Listed and CSA Certified. ■ Cover/flange with 1¼" and 2" trade size combination knockout. ■ Painted aluminum cover and flange. 		
				



Flush Furniture Feed FRPT 3" Diameter – One Piece Units

Catalog Number		Catalog Number		
PT73FFSDGY	Gray	PT7FFSDGY	Gray	Single Service Furniture Feed Poke-Through
PT73FFSDI	Ivory	PT7FFSDI	Ivory	
<p>Complete assembled unit</p> <ul style="list-style-type: none"> ■ PT73SD floor fitting. ■ Aluminum cover with (2) ½" threaded hubs for low voltage and (1) ¾" threaded hub for power. ■ Painted aluminum flange. ■ UL Listed and CSA Certified. 		<p>Complete assembled unit</p> <ul style="list-style-type: none"> ■ PT71SD floor fitting. ■ Aluminum cover with (1) KO to accept a ¾" connector. ■ Painted aluminum flange. ■ UL Listed and CSA Certified. 		
				

Flush Furniture Feed FRPT 3" Diameter – Two Piece Units

Through-Floor Fittings		Catalog Number		
PT73SD	3 Service Furniture Feed Through-Floor Fitting	PT71SD	Single Service Furniture Feed Through-Floor Fitting	
<p>Through-floor fitting with (1) ¾" trade size conduit stem for power and (2) ½" low voltage conduit holes.</p> <p>Specifications:</p> <ul style="list-style-type: none"> ■ UL Listed and CSA Certified. ■ 1 - 4 hour fire rating (1 - 3 hour for steel floor units and concrete topping, D900 Series Design). 		<p>Through-floor fitting with (1) ¾" trade size conduit stem for power or low voltage applications.</p> <p>Specifications:</p> <ul style="list-style-type: none"> ■ UL Listed and CSA Certified. ■ For 2¼" to 7" floor thickness. ■ UL installation spacing. Minimum 2 ft. on center and not more than 1 per 65 sq. ft. of floor area. 		
				

Service Fittings

Catalog Number		Catalog Number		
FRF3BK	Black	FRF1BK	Black	Single Service Furniture Feed Service Fitting
FRF3GY	Gray	FRF1GY	Gray	
FRF3I	Ivory	FRF1BRS	Brass Finish	
<p>Aluminum cover with (2) ½" threaded hubs for low voltage and (1) ¾" threaded hub for power.</p> <ul style="list-style-type: none"> ■ Painted aluminum flange. ■ UL Listed and CSA Certified. 		<p>Aluminum cover with (1) KO to accept a ¾" connector.</p> <ul style="list-style-type: none"> ■ Painted aluminum flange. ■ UL Listed and CSA Certified. 		
				

Painted Pedestal FRPT 3" Diameter – Two Piece Unit

Through-Floor Fitting

Catalog Number

PT7XC

Large Capacity Multi-Service Pedestal Through Floor Fitting

Through floor fitting with (1) 1 1/4" trade size conduit stem for low voltage and (1) 1/2" trade size conduit stem for power applications.

Specifications:

- UL Listed and CSA Certified.
- 1 - 4 hour fire rating (1 - 3 hour for steel floor units and concrete topping, D900 Series Design).
- For 2 1/4" to 7" floor thickness.
- UL installation spacing. Minimum 2 ft. on center and not more than 1 per 65 sq. ft. of floor area.



Painted Pedestal FRPT 2" Diameter – Two Piece Unit

Through-Floor Fitting

Catalog Number

PT27A

Multi-Service Pedestal Through Floor Fitting

Through floor fitting with (1) 3/4" trade size conduit stem for low voltage and (1) 1/2" trade size conduit stem for power applications.

Specifications:

- UL Listed and CSA Certified.
- 1 - 4 hour fire rating (1 - 3 hour for steel floor units and concrete topping, D900 Series Design).
- For 2 1/4" to 7" floor thickness.
- UL installation spacing. Minimum 2 ft. on center and not more than 1 per 65 sq. ft. of floor area.



Pedestal Service Fittings (Order 1 plate per gang)

Catalog Number

FR280BKA Black **2-Gang**
FR280GYA Gray

Use with **PT27A** only.



Catalog Number

FR480BKA Black **4-Gang**
FR480GYA Gray

Use with **PT27A** or **PT7XC**.



Catalog Number

FR680BKA Black **6-Gang**
FR680GYA Gray

Use with **PT27A** or **PT7XC**.



- Painted aluminum housing with low voltage barrier(s). Plates and devices sold separately.
- For additional barriers, use catalog number **FRBR1** (see page 116).
- UL Listed and CSA Certified.

Pedestal Face Plates (Order 1 plate per gang)

Catalog Number

SS2309DBKA Black **Duplex**
SS2309DGYA Gray



SS2309SLBKA Black **Style Line/**
SS2309SLGYA Gray **GFCI**



SS2309SBKA Black **Single Rec.**
SS2309SGYA Gray **(1.39" OD)**



SS2309BBKA Black **Blank**
SS2309BGYA Gray



Catalog Number

SS2309FBKA Black **Furniture Feed**
SS2309FGYA Gray **(3/4" KO)**



SS2309F1BKA Black **Furniture Feed**
SS2309F1GYA Gray **(1" KO)**



SS2309TBKA Black **Bushed Data**
SS2309TGYA Gray **Opening (1" ID)**



- Painted aluminum plates.
- UL Listed and CSA Certified.

Brushed Aluminum Pedestal FRPT 3" Diameter – Two Piece Unit

Through-Floor Fitting

Catalog Number

PT7XC

Large Capacity Multi-Service Pedestal Through-Floor Fitting

Through floor fitting with (1) 1 1/4" trade size conduit stem for low voltage and (1) 1/2" trade size conduit stem for power applications.

Specifications:

- UL Listed and CSA Certified.
- 1 - 4 hour fire rating (1 - 3 hour for steel floor units and concrete topping, D900 Series Design).
- For 2 1/4" to 7" floor thickness.
- UL installation spacing. Minimum 2 ft. on center and not more than 1 per 65 sq. ft. of floor area.



Pedestal Service Fitting

Catalog Number

FR80AL Brushed Aluminum

2-Gang Pedestal Service Fitting

For use with **PT7XC** only.

- Brushed aluminum housing with low voltage barrier. Plates and devices sold separately.
- UL Listed and CSA Certified.



Plates

Catalog Number

SS309D Duplex



SS309S Single Rec. (1.39" OD)



SS309B Blank



SS309DS Style Line/GFCI



Catalog Number

SS309T Bushed Data Opening (1" ID)



SS309SF* Furniture Feed (3/4" KO)



SS309BF* Furniture Feed Blank



* For furniture feed applications using **SS309SF**, a **SS309BF** blank must be used for 2nd plate.

- 302/304 Stainless steel plates (**SS309SF** & **SS309BF** are aluminum).
- UL Listed and CSA Certified.

3" Diameter FRPT Accessories

Catalog Number

FRP250 Gray Closure Plug

Textured aluminum plug seals 3" core hole when FRPT is no longer required and is removed. Maintains the floor's 1 - 4 hour fire rating. UL Listed and CSA Certified.



AP2GY Gray Flush FRPT
AP2I Ivory Abandonment Plate

Use with **PT7FSD**, **PT73SD** or **PT71SD** only. Covers the opening when FRPT is abandoned. Service fitting is removed and through-floor fitting remains.



FF3GY Gray Multi-Service Furniture Feed
FF3I Ivory Replacement Inserts

Use as a replacement cover for **PT73FFSD** series, or to convert installed **PT7FSD** series into furniture feed FRPTs. Includes (2) 1/2" threaded hubs for low voltage and (1) 3/4" threaded hub for power. (UL listed only.)



Catalog Number

EXT13 PT7XC Extension Kit

Extends **PT7XC** FRPT to accommodate between 7" and 13" floor thickness.



AP22 2-Gang Gray Pedestal FRPT
AP42 4-Gang Gray Abandonment Plate

Use with **PT27A** or **PT7XC** Only. Covers the opening when FRPT is abandoned. Service fitting is removed and through-floor fitting remains.




FRBR1 Low Voltage Barrier


Use with **FR280**, **FR480**, and **FR680** pedestal service fittings only when additional power/low voltage separation is required.



	Page
Boxes and Flanges118
Face Plates119
Technical Information.120

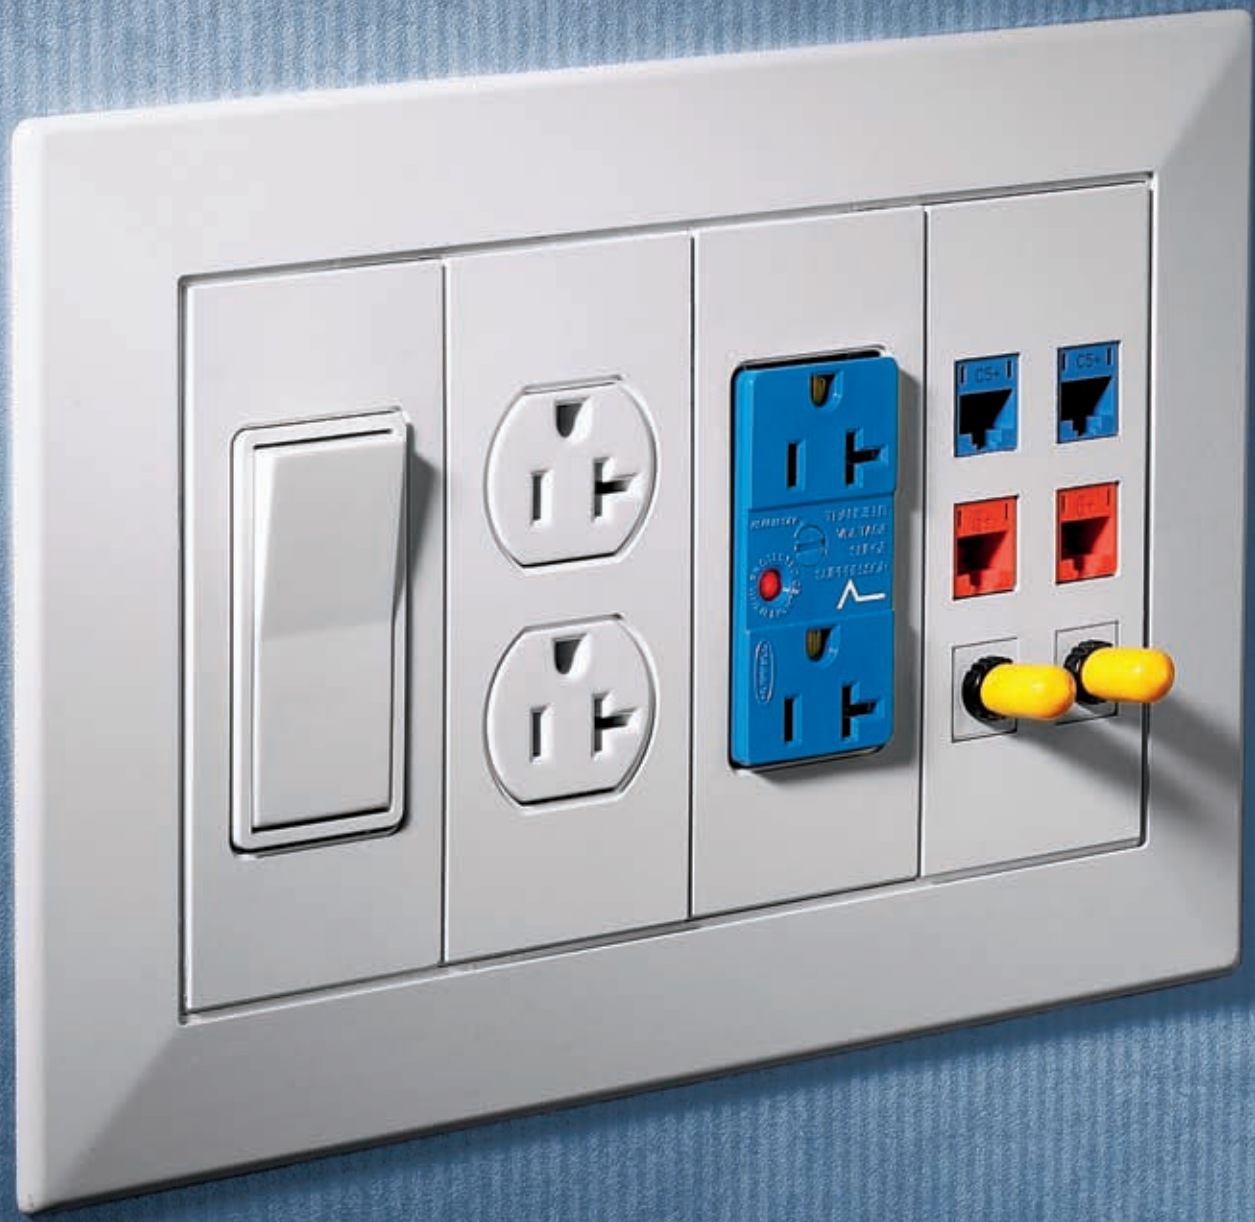

Multi-Connect – Recessed Wall Boxes and Flanges



1-Gang

2-Gang



3-Gang



4-Gang



6-Gang



1-Gang


2-Gang



3-Gang



4-Gang

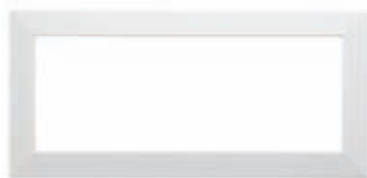

6-Gang

Multi-Service Recessed Wall Boxes for Drywall Applications

Description	Catalog Number
Multi-service recessed wall box, 1-gang, for drywall applications.	HBLWSCS1
Multi-service recessed wall box, 2-gang, for drywall applications.	HBLWSCS2
Multi-service recessed wall box, 3-gang, for drywall applications.	HBLWSCS3
Multi-service recessed wall box, 4-gang, for drywall applications.	HBLWSCS4
Multi-service recessed wall box, 6-gang, for drywall applications.	HBLWSCS6
Barrier for use with above boxes when used in multi-service applications.	HBLSCSBW

Low Voltage Recessed Wall Boxes for Drywall Applications

Description	Catalog Number
Low voltage recessed wall box, 2-gang, for drywall applications.	HBLWSCS2MMO
Low voltage recessed wall box, 3-gang, for drywall applications.	HBLWSCS3MMO
Low voltage recessed wall box, 4-gang, for drywall applications.	HBLWSCS4MMO
Low voltage recessed wall box, 6-gang, for drywall applications.	HBLWSCS6MMO

Multi-Service Recessed Wall Boxes for Masonry Applications

Description	Catalog Number
Multi-service recessed wall box, 1-gang, for masonry applications.	HBLWSCS1MBD
Multi-service recessed wall box, 2-gang, for masonry applications.	HBLWSCS2MBD
Multi-service recessed wall box, 3-gang, for masonry applications.	HBLWSCS3MBD
Multi-service recessed wall box, 4-gang, for masonry applications.	HBLWSCS4MBD
Multi-service recessed wall box, 6-gang, for masonry applications.	HBLWSCS6MBD
Barrier for use with above boxes when used in multi-service applications.	HBLSCSBMBD

Wall Box Flanges - Trim Rings

Description	Color	Catalog Number
Wall box flange for 1-gang boxes.	White	HBLTRIM1WWA
	Ivory	HBLTRIM1WI
	Gray	HBLTRIM1WGY
	Black	HBLTRIM1WBK
Wall box flange for 2-gang boxes.	White	HBLTRIM2WWA
	Ivory	HBLTRIM2WI
	Gray	HBLTRIM2WGY
	Black	HBLTRIM2WBK
Wall box flange for 3-gang boxes.	White	HBLTRIM3WWA
	Ivory	HBLTRIM3WI
	Gray	HBLTRIM3WGY
	Black	HBLTRIM3WBK
Wall box flange for 4-gang boxes.	White	HBLTRIM4WWA
	Ivory	HBLTRIM4WI
	Gray	HBLTRIM4WGY
	Black	HBLTRIM4WBK
Wall box flange for 6-gang boxes.	White	HBLTRIM6WWA
	Ivory	HBLTRIM6WI
	Gray	HBLTRIM6WGY
	Black	HBLTRIM6WBK

Multi-Connect – Screw and Snap-In Modular Face Plates




Color	Duplex	Style Line®	Toggle	Blank	Hubbell 6-Port	Hubbell iSTATION™ (See pages 134-135 for module options)
-------	--------	-------------	--------	-------	----------------	---

White	HBLST302SWA	HBLDE301SWA	HBLTO310SWA	HBLBL300SWA	HBL317SWA	HBLIMFSWA*
Ivory	HBLST302SI	HBLDE301SI	HBLTO310SI	HBLBL300SI	HBL317SI	HBLIMFSI*
Black	HBLST302SBK	HBLDE301SBK	HBLTO310SBK	HBLBL300SBK	HBL317SBK	HBLIMFSBK*
Gray	HBLST302SGY	HBLDE301SGY	HBLTO310SGY	HBLBL300SGY	HBL317SGY	HBLIMFSGY*

For Snap-in style plates eliminate “S” suffix from catalog number (HBLST302SWA - screw type. HBLST302WA - snap-in type).

Note: Catalog numbers listed above are traditional screw type.

* See pages 134-135 for complete iSTATION™ module product offering.

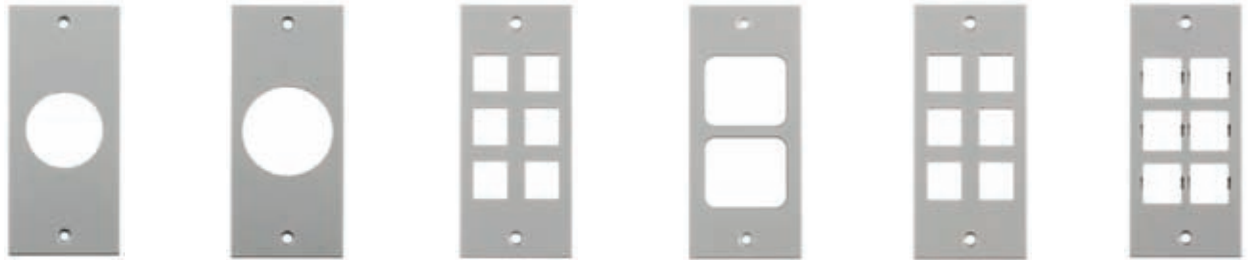


Color	Single Recept. (1.39" Boss Dia.)	Single Recept. (1.56" Boss Dia.)	AMP 6-Port	AMP-ACO	Krone®/Leviton®	SYSTIMAX®
-------	-------------------------------------	-------------------------------------	------------	---------	-----------------	-----------

White	HBLTL318WA	HBLTL319SWA	HBLAMP313SWA	HBLAM303SWA	HBLKR314SWA	HBLLT309SWA
Ivory	HBLTL318I	HBLTL319SI	HBLAMP313SI	HBLAM303SI	HBLKR314SI	HBLLT309SI
Black	HBLTL318BK	HBLTL319SBK	HBLAMP313SBK	HBLAM303SBK	HBLKR314SBK	HBLLT309SBK
Gray	HBLTL318GY	HBLTL319SGY	HBLAMP313SGY	HBLAM303SGY	HBLKR314SGY	HBLLT309SGY

For Snap-in style plates eliminate “S” suffix from catalog number (HBLST302SWA - screw type. HBLST302WA - snap-in type).

Note: Catalog numbers listed above are traditional screw type.

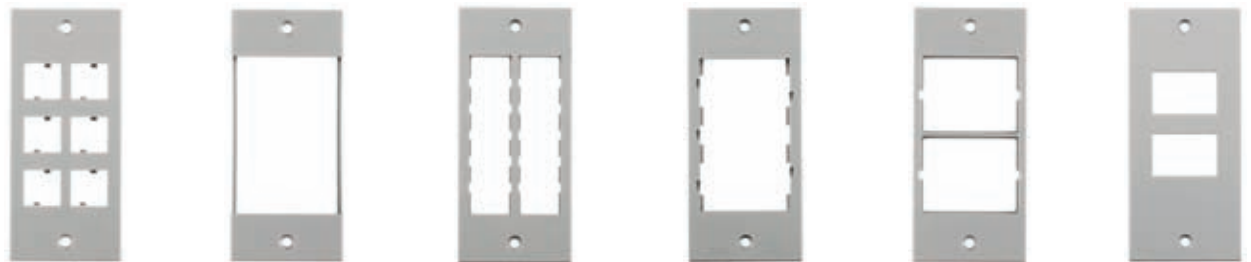

Color	NORDX® 6-Port (For Cat. 5e jacks only)	Ortronics Series II®	Ortronics TracJack®	Panduit®	Siemon CT® Series	Siemon MAX® Series
-------	---	----------------------	---------------------	----------	-------------------	--------------------

White	HBLNO309SWA	HBLOR306SWA	HBLORT322SWA	HBLPA308SWA	HBLSI305SWA	HBLSI315SWA
Ivory	HBLNO309SI	HBLOR306SI	HBLORT322SI	HBLPA308SI	HBLSI305SI	HBLSI315SI
Black	HBLNO309SBK	HBLOR306SBK	HBLORT322SBK	HBLPA308SBK	HBLSI305SBK	HBLSI315SBK
Gray	HBLNO309SGY	HBLOR306SGY	HBLORT322SGY	HBLPA308SGY	HBLSI305SGY	HBLSI315SGY

For Snap-in style plates eliminate “S” suffix from catalog number (HBLST302SWA - screw type. HBLST302WA - snap-in type).

Note: Catalog numbers listed above are traditional screw type.

AMP is a registered trademark of Tyco Electronics Corp. Krone® is a registered trademark of Krone, Inc. Leviton® is a registered trademark of Leviton. MAX® and CT® Series are registered trademarks of The Siemon Company. Mini-Com® and Panduit® are registered trademarks of Panduit Corp. NORDX® is a registered trademark of Belden/CDT, Inc. SYSTIMAX® is a registered trademark of CommScope, Inc. TracJack®, Series II® and Ortronics® are registered trademarks of Ortronics/Legrand.



Multi-Connect – Recessed Wall Boxes and Flanges

Dimensional Data

Hubbell Type	Height	Width	Depth	Gangs
HBLWSCS1	4.44" (112.8)	2.56" (65.0)	2.75" (69.8)	1
HBLWSCS2	4.44" (112.8)	4.56" (115.8)	2.75" (69.8)	2
HBLWSCS3	4.44" (112.8)	6.56" (166.6)	2.75" (69.8)	3
HBLWSCS4	4.44" (112.8)	8.56" (217.4)	2.75" (69.8)	4
HBLWSCS6	4.44" (112.8)	12.56" (319.0)	2.75" (69.8)	6
HBLWSCS2MMO	4.88" (123.8)	4.75" (120.7)	3.50" (88.9)	2
HBLWSCS3MMO	4.88" (123.8)	6.75" (171.4)	3.50" (88.9)	3
HBLWSCS4MMO	4.88" (123.8)	9.25" (235.0)	3.50" (88.9)	4
HBLWSCS6MMO	4.88" (123.8)	13.25" (336.6)	3.50" (88.9)	6
HBLWSCS1MBD	4.88" (123.8)	2.75" (69.9)	3.50" (88.9)	1
HBLWSCS2MBD	4.88" (123.8)	4.79" (120.7)	3.50" (88.9)	2
HBLWSCS3MBD	4.88" (123.8)	6.75" (171.4)	3.50" (88.9)	3
HBLWSCS4MBD	4.88" (123.8)	9.25" (235.0)	3.50" (88.9)	4
HBLWSCS6MBD	4.88" (123.8)	13.25" (336.6)	3.50" (88.9)	6
HBLTRIM1W	6.75" (171.4)	4.25" (107.9)	.25" (6.3)	1
HBLTRIM2W	6.75" (171.4)	6.25" (158.7)	.25" (6.3)	2
HBLTRIM3W	6.75" (171.4)	8.25" (209.5)	.25" (6.3)	3
HBLTRIM4W	6.75" (171.4)	10.25" (260.3)	.25" (6.3)	4
HBLTRIM6W	6.75" (171.4)	13.25" (336.5)	.25" (6.3)	6

Cable Access Knockouts and Openings

Hubbell Type	Quantity	Size	Location	Type
HBLWSCS1MBD	2	1/2" x 3/4"	Top & Bottom	Knockouts
HBLWCS2MBD	4	1/2" x 3/4"	Top & Bottom	Knockouts
HBLWSCS3MBD	6	1/2" x 3/4"	Top & Bottom	Knockouts
HBLWSCS4MBD	8	1/2" x 3/4"	Top & Bottom	Knockouts
HBLWSCS6MBD	12	1/2" x 3/4"	Top & Bottom	Knockouts
HBLWSCS2MMO	1	2"	Top & Bottom	Opening
HBLWSCS3MMO	1	1 1/4"	Side	Knockouts
	1	1 1/4"	Top	Opening
	4	1/2" x 3/4"	Top	Knockouts
	1	2"	Bottom	Opening
HBLWSCS4MMO	1	1 1/4"	Side	Knockouts
	2	1 1/4"	Top	Openings
	4	1/2" x 3/4"	Top	Knockouts
	1	2"	Bottom	Opening
	1	1/2" x 3/4"	Bottom	Knockouts
	1	3/4" x 1"	Bottom	Knockouts
HBLWSCS6MMO	1	1 1/4"	Side	Knockouts
	3	1 1/4"	Top	Openings
	6	1/2" x 3/4"	Top	Knockouts
	2	2"	Bottom	Openings
	1	1/2" x 3/4"	Bottom	Knockouts
	1	3/4" x 1"	Bottom	Knockouts
HBLWSCS1	1	1/2" x 3/4"	Top & Bottom	Knockouts
HBLWSCS2	2	1/2" x 3/4"	Top & Bottom	Knockouts
HBLWSCS3	3	1/2" x 3/4"	Top & Bottom	Knockouts
HBLWSCS4	3	1/2" x 3/4"	Top & Bottom	Knockouts
	1	3/4" x 1"	Top & Bottom	Knockouts
HBLWSCS6	4	1/2" x 3/4"	Top & Bottom	Knockouts
	1	3/4" x 1"	Top & Bottom	Knockouts



	Page
Aluminum	122
Section 16	124



Service Poles - Aluminum Series



HBLPP10A



HBLPP10IGA



HBLPP10SAI



PPTRIM1



ATB

Hubbell offers a line of gray, ivory and satin finish extruded aluminum service poles. These attractive and durable poles effectively distribute power and telecommunications wiring from above the ceiling to workstations below. They are offered in lengths of 10' 2", 12' 2", and 15' 2", and with a variety of electrical wiring devices. Poles with three service capability have a divider to separate power and low voltage wiring.

Ordering Information

Aluminum service poles; satin finish aluminum, gray or ivory painted; Style Line® duplex receptacles; includes ceiling trim mounting plate and scuff boot.

A blank pole is also offered which does not have devices or wiring. In addition to a standard pole, which has two 20 amp duplex receptacles, an isolated ground version is available, as well as a surge suppression version. All poles, except the blank versions, are factory wired with Hubbell Style Line® receptacles. Two Style Line knockouts are also provided on the same side as the power receptacles for communication outlets.

Description	Catalog Numbers		Satin Finish Aluminum
	Gray	Ivory	
Three service; two 20A 125V duplex receptacles; one circuit. Height 10' 2" (3.10m). Height 12' 2" (3.71m). Height 15' 2" (4.62m).	HBLPP10A HBLPP12A HBLPP15A	HBLPP10AI HBLPP12AI HBLPP15AI	HBLPP10AAL HBLPP12AAL HBLPP15AAL
Three service; one orange isolated ground 20A 125V duplex receptacle; one 20A 125V duplex receptacle; two circuits; 10' 2" (3.10m).	HBLPP10IGA	HBLPP10IGAI	—
Three service; two orange isolated ground 20A 125V duplex receptacles; one isolated ground surge suppression 20A 125V duplex receptacle; one circuit; 10' 2" (3.10m).	HBLPP10SA	HBLPP10SAI	—
Three service; blank pole; divider; four device knockouts; Height 10' 2" (3.10m). Height 12' 2" (3.71m). Height 15' 2" (4.62m).	HBLPPOA HBLPPO12A HBLPPO15A	HBLPPOAI HBLPPO12AI HBLPPO15AI	HBLPPOAAL HBLPPO12AAL HBLPPO15AAL
Adjustable T-bar assembly for mounting poles in middle of ceiling tile.	ATB		
Replacement service pole trim kit (ceiling white).	PPTRIM1		

Note: Style Line communication outlets, modular jacks, and data connectors are sold separately. See pages 134-135 for data accessories.

Specifications


Material: Extruded aluminum; .05" thick (1.27mm)
Finish: gray or ivory powder paint, satin finish
Listing: UL Listed - UL File Numbers E80107 and E130297

Conductors: #12 AWG stranded copper
Receptacles: (see drawings below)

Wiring Capacity (@40% fill)	Voice Data Channel*	Power Channel**
HBLPP10A; HBLPP12A; HBLPP15A; HBLPP10IGA	15	41
HBLPP10SA; HBLPP10SAI	6	41
HBLPPOA, HBLPPO12A, HBLPPO15A (with barrier)	15	41

Notes: *Pole wiring capacity (telephone fill): Cat. 5 UTP (.250" dia.).
**#12 THHN stranded.

Dimensions

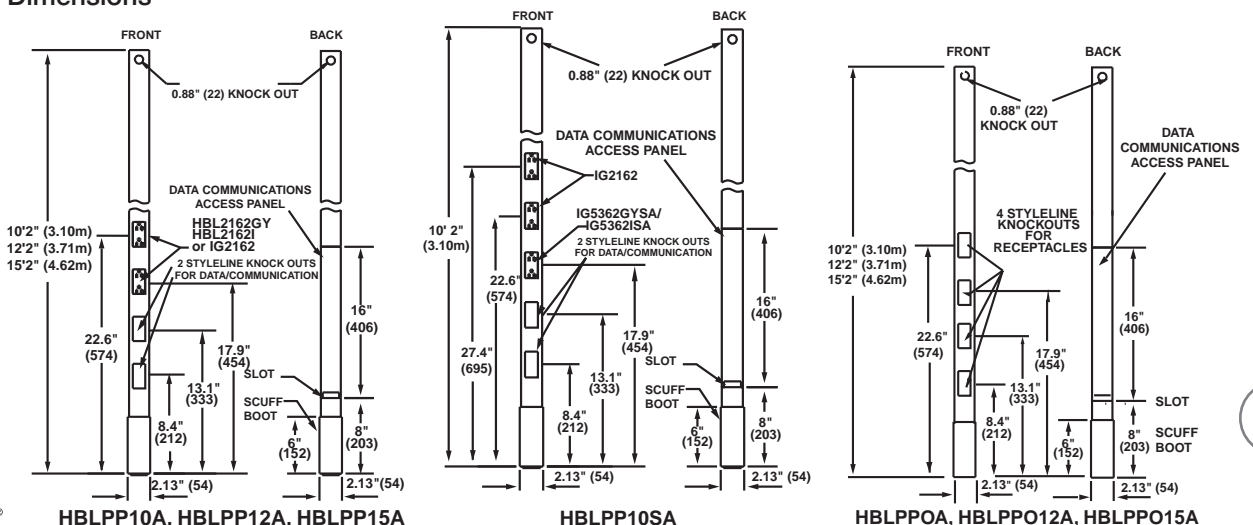

Service Poles - Aluminum Series

Custom Pole Configuration


Using the chart below, you can create a custom service pole. For configurations that require additional customization, please consult Hubbell Technical Service at (203) 882-4800.

Position	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Selections	S	P	1	0	0	2	1	1	B	B	B	X	X	X	C	I

Example: SP100211BBBXXCI

10 Feet 02 Inches, Ivory, 2) Rectangular Style Line Knockouts For Data, 3) HBL2162 Duplex Receptacles, 2 Circuits (First 2 Receptacles on Circuit #1, Remaining receptacles on Circuit #2).

Position 1 & 2: Service Pole	SP designates "Service Pole".
Position 3 & 4: Height to the nearest foot.	08-22 Feet.
Position 4 & 5: Height in inches up to 11".	00-11 Inches.
Position 16: Color	I- Ivory G- Gray W- White K- Black A- Aluminum with satin finish.
Position 7, 8, 9, 10, 11, 12, 13, 14: Starting at Position 7 Select Datacomm Knock Outs/Device Frames followed by Power Receptacle/Power Knock Out options. If the service pole is power only, select receptacle options starting at Position 7 . Empty Positions should be filled with an "X" to designate an empty field.	<p>Data Selections</p> <ul style="list-style-type: none"> 1- Rectangular Style Line® Knockout (for blank poles only). 2- ½" N.P.T. Knockout (0.875" diameter, for blank poles only). 3- ¾" N.P.T. Knockout (1.109" diameter, for blank poles only). 4- 2-Port Style Line Data Frame ISF2. 5- 3-Port Style Line Data Frame ISF3. <p>Power Selections</p> <ul style="list-style-type: none"> 6- Rectangular Style Line Knockout (for blank poles only). 7- ½" N.P.T. Knockout (0.875" diameter, for blank poles only). 8- ¾" N.P.T. Knockout (1.109" diameter, for blank poles only). A- CR5362, 20A, 125V AC, Duplex. B- HBL2162, 20A, 125V AC, Style Line Duplex. C- IG5362, 20A, 125V AC, I.G. Duplex. D- IG2162, 20A, 125V AC, I.G. Style Line Duplex. G- HBL4700, 15A, 125V AC, Twist-Lock Duplex. H- IG4700, 15A, 125V AC, I.G. Twist-Lock Duplex. I- IG2310, 20A, 125V AC, I.G. Twist-Lock Single. J- IG5361, 20A, 125V AC, I.G. Single. K- HBL5361, 20A, 125V AC, Single. L- HBL2310, 20A, 125V AC, Twist-Lock Single. M- HBL2610, 30A, 125V AC, Twist-Lock Single. N- HBL2320, 20A, 250V AC, Twist-Lock Single. O- HBL2620, 30A, 250V AC, Twist-Lock Single. Q- IG4710, 15A, 125V AC, I.G. Twist-Lock Single. R- HBL4710, 15A, 125V AC, Twist-Lock Single. S- HBL5662, 15A, 250V AC, Duplex. T- IG5662, 15A, 250V AC, I.G. Duplex. U- HBL5661, 15A, 250V AC, Single. V- IG5661, 15A, 250V AC, I.G. Single. W- HBL5462, 20A, 250V AC, Duplex.
Position 15: Power Circuits	<p>Z- No Circuits (Should only be selected when the service poles has ONLY Data and/or Power knockouts)</p> <p>A- All devices on a single circuit.</p> <p>B- 2 Circuits, First Receptacle on Circuit #1, Remaining receptacles on Circuit #2.</p> <p>C- 2 Circuits, First 2 Receptacles on Circuit #1, Remaining receptacles on Circuit #2.</p> <p>D- 2 Circuits, First 3 Receptacles on Circuit #1, Remaining receptacles on Circuit #2.</p> <p>E- 2 Circuits, First 4 Receptacles on Circuit #1, Remaining receptacles on Circuit #2.</p> <p>F- 2 Circuits, First 5 Receptacles on Circuit #1, Remaining receptacles on Circuit #2.</p> <p>G- 2 Circuits, First 6 Receptacles on Circuit #1, Remaining receptacles on Circuit #2.</p> <p>H- 2 Circuits, First 7 Receptacles on Circuit #1, Remaining receptacles on Circuit #2.</p>

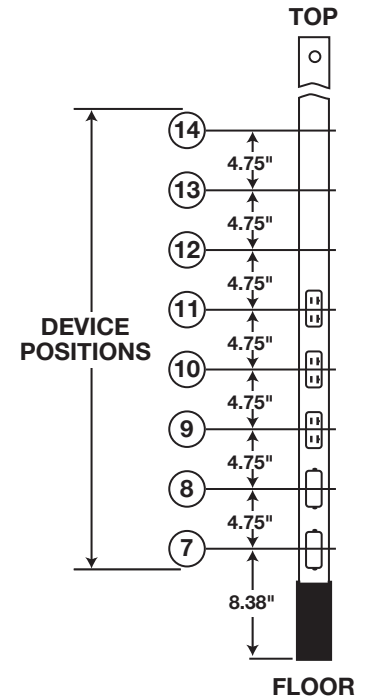

Service Poles – Section 16110 Raceways

Division 16 Specifications

PART 2: Products

2.01 Manufacturer

A. The power poles specified herein for branch circuit wiring shall be Hubbell Service Poles as manufactured by Hubbell Inc., Wiring Device-Kellems® or approved equal. Other manufacturers may be considered equal if they meet the performance requirements of this specification and have received prior written approval.

2.02 Components/Accessories

A. The hardware for mounting Service Poles in the middle of a ceiling tile shall be Hubbell adjustable T-Bar type ATB with trim plate kit type PPTRIM1.

2.03 Materials

A. STANDARD and CUSTOM ALUMINUM SERVICE POLES

1. *Standard Style Line® Duplex*

These Service Poles shall be extruded aluminum with a heavy gauge body (no less than .05 inches thick) to resist denting. These poles shall be two-channel to accommodate both power and low voltage services on the same side of the pole. Service poles shall be prewired with #12 AWG wire and equipped with two specification grade Style Line receptacles (20A, 125V). These receptacles shall be Hubbell type HBL2162GY/HBL2162I or an approved equal. The low voltage (back) channel of the service pole shall incorporate an access panel that provides a passageway to two Style Line communication knockouts located on the front of the pole.

Finish

Service Poles will include a powder paint or satin finish.
Custom poles are available in Gray, Ivory, White, Black and Satin Finish Aluminum.

Heights

Standard Service Poles shall be available in three sizes to accommodate various ceiling heights: 10 ft. (3.048m) 12 ft. (3.658m) 15 ft. (4.573m). Custom Poles shall be available in a range of sizes from 8 through 22 feet in increments of 1 inch.

10 ft. 2 in. (3.10m): Hubbell type HBLPP10A, HBLPP10AI, HBLPP10ALL.
10 ft. 2 in. (3.10m): With Surge; Hubbell Type HBLPP10SA, HBLPP10SAI, HBLPP10SALL.
10 ft. 2 in. (3.10m): Isolated Ground; Hubbell Type HBLPP10IGA, HBLPP10IGAI.
12 ft. 2 in. (3.71m): Hubbell type HBLPP12A, HBLPP12AI, HBLPP12ALL.
15 ft. 2 in. (4.62m): Hubbell type HBLPP15A, HBLPP15AI, HBLPP15ALL.

8-22 feet: Hubbell Custom Poles.

2. *Isolated Ground*

The following Service Poles contain one Hubbell isolated ground receptacle Hubbell #IG2162 and one #HBL2162GY/HBL2162I, both 20A, 125V Style Line receptacles (wired on separate circuits). Gray aluminum powder painted poles shall be Hubbell type HBLPP10IGA. Ivory pole shall be Hubbell type HBLPP10IGAI. Custom poles with a variety of receptacles may also include isolated ground type devices.

3. *Surge Suppression/Isolated Ground*

The following Service Poles contain one Hubbell #IG5362GYSA/IG5362ISA (20A, 125V surge/IG Style Line Duplex) and two #IG2162 (20A, 125V IG Style Line Duplex) receptacles. All receptacles are wired on the same circuit, therefore providing surge protection at each outlet. Gray aluminum powder painted pole shall be Hubbell type HBLPP10SA. Ivory pole shall be Hubbell type HBLPP10SAI. Custom poles with a variety of receptacle options may also include surge suppression.

4. *Blank*

The following poles are two-channel and do not include receptacles or wiring. All poles include a barrier which starts between the second and third knockout positions from the bottom of the pole. Custom poles with or without a barrier are available as well.
10 ft. 2 in. (3.10m): Hubbell type HBLPPOA, HBLPPOAI, HBLPPOAAL.
12 ft. 2 in. (3.71m): Hubbell type HBLPPO12A, HBLPPO12AI, HBLPPO12AAL.
15 ft. 2 in. (4.62m): Hubbell type HBLPPO15A, HBLPPO15AI, HBLPPO15AAL.

B. VOICE/DATA INTERFACE

All Service Poles must allow for acceptance of Hubbell Style Line communication outlets.

	Page
Receptacles	126
Switches	128
Twist-Lock®	129
Plates	130
Frames.	131
Snap Fit Data Products.	132
iSTATION™ Data Products.	134



Receptacles – Construction, Commercial and Style Line® Series



CR5252I

Construction Series - Back and Side Wired

Description	Color	Smooth Face		Finder Groove Face	
		15A 125V	20A 125V	15A 125V	20A 125V
Nylon Face	Brown	CR5252	CR5352	CR5262	CR5362
	Ivory	CR5252I	CR5352I	CR5262I	CR5362I
	Gray	CR5252GY	CR5352GY	CR5262GY	CR5362GY
	White	CR5252W	CR5352W	CR5262W	CR5362W
	Black	CR5252BK	CR5352BK	CR5262BK	CR5362BK
	Office White	CR5252OW	CR5352OW	CR5262OW	CR5362OW
	Red	CR5252R	CR5352R	CR5262R	CR5362R
	Almond	CR5252AL	CR5352AL	—	—
	Blue	—	—	—	CR5362BL



CR5252IG

Isolated Ground Nylon Face	Orange	CR5252IG	CR5352IG
	Ivory	CR5252IGI	CR5352IGI
	Gray	CR5252IGGY	CR5352IGGY
	White	CR5252IGW	CR5352IGW
	Black	CR5252IGBK	CR5352IGBK
	Office White	CR5252IGOW	CR5352IGOW
	Blue	—	CR5352IGBL

Commercial Series - Side Wired Only

Description	Color	Smooth Face		Finder Groove Face	
		15A 125V	20A 125V	15A 125V	20A 125V
Nylon Face	Brown	CR15	CR20	CRF15	CRF20
	Ivory	CR15I	CR20I	CRF15I	CRF20I
	Gray	CR15GRY	CR20GRY	CRF15GRY	CRF20GRY
	White	CR15WHI	CR20WHI	CRF15WHI	CRF20WHI
	Black	CR15BLK	CR20BLK	CRF15BLK	CRF20BLK
	Office White	CR15OW	CR20OW	CRF15OW	CRF20OW
	Almond	CR15AL	CR20AL	CRF15AL	CRF20AL



CR15I

Commercial Series - Side Wired, Open Terminals

Description	Color	Catalog Number	
		15A 125V	20A 125V
Smooth Nylon Face	Brown	CRO15	CRO20
	Ivory	CRO15I	CRO20I
	Gray	CRO15GRY	CRO20GRY
	White	CRO15WHI	CRO20WHI
	Black	—	CRO20BLK



CRF15

Style Line® Series - Back and Side Wired

Description	Color	Catalog Number	
		15A 125V	20A 125V
Smooth Nylon Face	Brown	HBL2152	HBL2162
	Ivory	HBL2152I	HBL2162I
	Gray	HBL2152GY	HBL2162GY
	White	HBL2152WA	HBL2162WA
	Black	HBL2152BK	HBL2162BK
	Office White	HBL2152OW	HBL2162OW
	Almond	HBL2152AL	HBL2162AL



HBL2152OW

Receptacles – GFCI, Surge and Isolated Ground Series

GFCI Duplex With LED - Back & Side Wired

Description	Color	Catalog Number	
		15A 125V	20A 125V
Flush Thermoplastic Face. Matching Wall Plate Included. GFCI LED.	Brown	GF15L	GF20L
	Ivory	GF15IL	GF20IL
	Gray	GF15GYL	GF20GYL
	White	GF15WL	GF20WL
	Black	GF15BKL	GF20BKL
	Office White	GF15OWL	GF20OWL
	Red	GF15RL	GF20RL
	Almond	GF15ALL	GF20ALL
	Light Almond	GF15LAL	GF20LAL



GF15IL

AutoGuard™ Self-Test GFCI Duplex With LEDs - Back & Side Wired

Description	Color	Catalog Number	
		15A 125V	20A 125V
Flush Thermoplastic Face. Matching Wall Plate Included. Two GFCI LEDs.	Brown	GFST15	GFST20
	Ivory	GFST15I	GFST20I
	Gray	GFST15GY	GFST20GY
	White	GFST15W	GFST20W
	Black	GFST15BK	GFST20BK
	Office White	GFST15OW	GFST20OW
	Red	GFST15R	GFST20R
	Almond	GFST15AL	GFST20AL
	Light Almond	GFST15LA	GFST20LA



GFST20I

Circuit Guard®, Specification Grade, Surge Suppression Duplex

Description	Color	Catalog Number	
		15A 125V	20A 125V
Surge suppression with light, 240 joules/15000A per mode.	Blue	HBL5260SA	HBL5360SA
	Ivory	HBL5260ISA	HBL5360ISA
	Office White	HBL5260OWSA	HBL5360OWSA
Surge suppression with light and alarm, 240 joules/15000A per mode.	Blue	HBL5262SA	HBL5362SA
	Ivory	HBL5262ISA	HBL5362ISA
	Gray	HBL5262GYSA	HBL5362GYSA
	White	HBL5262WSA	HBL5362WSA
	Office White	HBL5262OWSA	HBL5362OWSA
	Almond	HBL5262ALSA	HBL5362ALSA



HBL5262GYSA

Isolated Ground, Industrial Grade Duplex

Description	Color	Catalog Number	
		15A 125V	20A 125V
Heavy duty duplex receptacles.	Orange	IG5262	IG5362
	Ivory	IG5262I	IG5362I
	Red	IG5262R	IG5362R
	Gray	IG5262GY	IG5362GY
	White	—	IG5362W



IG5262

Switches – Construction, Commercial and Style Line® Series



CS12011

Construction Series Toggle, Back and Side Wired

15A, 120-277V AC

Description	Single Pole	Double Pole	Three Way	Four Way
Brown	CS1201	—	CS1203	—
Ivory	CS1201I	—	CS1203I	—
Gray	CS1201GY	—	CS1203GY	—
White	CS1201W	—	CS1203W	—
Office White	CS1201OW	—	CS1203OW	—
Almond	CS1201AL	—	CS1203AL	—

20A, 120-277V AC

Description	Single Pole	Double Pole	Three Way	Four Way
Brown	CS1221	CS1222	CS1223	CS1224
Ivory	CS1221I	CS1222I	CS1223I	CS1224I
Gray	CS1221GY	CS1222GY	CS1223GY	CS1224GY
White	CS1221W	CS1222W	CS1223W	CS1224W
Red	CS1221R	CS1222R	CS1223R	CS1224R
Black	CS1221BK	CS1222BK	CS1223BK	CS1224BK
Office White	CS1221OW	CS1222OW	CS1223OW	CS1224OW
Almond	CS1221AL	—	CS1223AL	CS1224AL



CS1221

Commercial Series Toggle, Side Wired Only

15A, 120-277V AC

Description	Single Pole	Double Pole	Three Way	Four Way
Brown	CS115	—	CS315	—
Ivory	CS115I	—	CS315I	—
Gray	CS115GY	—	CS315GY	—
White	CS115W	—	CS315W	—
Office White	CS115OW	—	CS315OW	—
Almond	CS115AL	—	CS315AL	—



CS115I

20A, 120-277V AC

Description	Single Pole	Double Pole	Three Way	Four Way
Brown	CS120	—	CS320	—
Ivory	CS120I	—	CS320I	—
Gray	CS120GY	—	CS320GY	—
White	CS120W	—	CS320W	—
Office White	CS120OW	—	CS320OW	—
Almond	CS120AL	—	CS320AL	—



CS120

Style Line® Rocker, Back & Side Wired

15A, 120-277V AC

Description	Single Pole	Double Pole	Three Way	Four Way
Brown	HBL2101	—	HBL2103	—
Ivory	HBL2101I	—	HBL2103I	—
Gray	HBL2101GY	—	HBL2103GY	—
White	HBL2101W	—	HBL2103W	—
Office White	HBL2101OW	—	HBL2103OW	—
Almond	HBL2101AL	—	HBL2103AL	—



HBL2101AL



20A, 120-277V AC

Description	Single Pole	Double Pole	Three Way	Four Way
Brown	HBL2121	HBL2122	HBL2123	HBL2124
Ivory	HBL2121I	HBL2122I	HBL2123I	HBL2124I
Gray	HBL2121GY	HBL2122GY	HBL2123GY	HBL2124GY
White	HBL2121W	HBL2122W	HBL2123W	HBL2124W
Office White	HBL2121OW	HBL2122OW	HBL2123OW	HBL2124OW
Almond	HBL2121AL	HBL2122AL	HBL2123AL	HBL2124AL

Twist-Lock® Receptacles

15 Amp Devices

2 Pole, 3 Wire Grounding




Description	 L5-15R 15A 125V	 L6-15R 15A 250V
Duplex, flush, brown RTP face	HBL4700	HBL4550
IG duplex, orange RTP face	IG4700A	IG4550A
Single, flush black nylon face	HBL4710	HBL4560
IG single, flush orange nylon face	IG4710	IG4560



HBL4700

20 Amp Devices




2 Pole, 3 Wire Grounding

Description	 L5-20R 20A 125V	 L6-20R 20A 250V	 L8-20R 20A 480V
Single, flush black nylon face	HBL2310	HBL2320	HBL2340
IG single, flush orange nylon face	IG2310	IG2320	IG2340



HBL2310




3 Pole, 4 Wire Grounding

Description	 L14-20R 20A 125/250V	 L15-20R 20A 3Ø 250V	 L16-20R 20A 3Ø 480V
Single, flush black nylon face	HBL2410	HBL2420	HBL2430
IG single, flush orange nylon face	IG2410	IG2420	—



HBL2410

4 Pole, 5 Wire Grounding




Description	 L21-20R 20A 3ØY 120/208V	 L22-20R 20A 3ØY 277/480V	 L23-20R 20A 3ØY 347/600V
Single, flush black nylon face	HBL2510	HBL2520	HBL2530
IG single, flush orange nylon face	IG2510	—	—



HBL2510

30 Amp Devices




2 Pole, 3 Wire Grounding

Description	 L5-30R 30A 125V	 L6-30R 30A 250V	 L8-30R 30A 480V
Single, flush black nylon face	HBL2610	HBL2620	HBL2640
IG single, flush orange nylon face	IG2610	IG2620	—



HBL2620




3 Pole, 4 Wire Grounding


Description	 L14-30R 30A 125/250V	 L15-30R 30A 3Ø 250V	 L16-30R 30A 3Ø 480V
Single, flush black nylon face	HBL2710	HBL2720	HBL2730
IG single, flush orange nylon face	IG2710	IG2720	—



HBL2710

4 Pole, 5 Wire Grounding

Description	 L21-30R 30A 3ØY 120/208V	 L22-30R 30A 3ØY 277/480V	 L23-30R 30A 3ØY 347/600V
Single, flush black nylon face	HBL2810	HBL2820	HBL2830
IG single, flush orange nylon face	IG2810	—	—



HBL2810

Wall and Face Plates and iSTATION™ Frames

Nylon and Metal Wall Plates



NP1AL



NP8AL



NP26AL

Description	Color	Toggle Switch Plates		Duplex Receptacle Plates		GFCI, Surge & Style Line® Receptacle Plates	
		One-Gang	Two-Gang	One-Gang	Two-Gang	One-Gang	Two-Gang
Standard, Smooth High-Impact Nylon	Almond	NP1AL	NP2AL	NP8AL	NP82AL	NP26AL	NP262AL
	Ivory	NP1I	NP2I	NP8I	NP82I	NP26I	NP262I
	White	NP1W	NP2W	NP8W	NP82W	NP26W	NP262W
	Brown	NP1	NP2	NP8	NP82	NP26	NP262
	Gray	NP1GY	NP2GY	NP8GY	NP82GY	NP26GY	NP262GY
	Office White	NP1OW	NP2OW	NP8OW	NP82OW	NP26OW	NP262OW
	Black	NP1BK	NP2BK	NP8BK	NP82BK	NP26BK	NP262BK
	Red	NP1R	NP2R	NP8R	NP82R	NP26R	NP262R
	Orange	—	—	NP8OR	NP82OR	—	—
Plated Steel	Chrome	SCH1	SCH2	SCH8	SCH82	SCH26	SCH262
	Brass	SBP1	SBP2	SBP8	SBP82	SBP26	SBP262
Stainless Steel	Smooth	SS1	SS2	SS8	SS82	SS26	SS262
	Beveled	97071	—	97101	—	—	—
Brass	Smooth	SB1	SB2	SB8	SB82	SB26	SB262
Anodized Aluminum	Smooth	SA1	SA2	SA8	SA82	—	—

IMF iSTATION™ Frames

The IMF series accepts iSTATION™ modules in 3 unit combinations for single-gang and 6 unit combinations for two-gang applications. Start by selecting a frame and then the required mix of modules. See pages 134-135 for module combinations.



Color	Catalog Number		Color	One-Gang	Two-Gang
	One-Gang	Two-Gang			
Almond	IMF1AL	IMF2AL	Black	IMF1BK	IMF2BK
Gray	IMF1GY	IMF2GY	Electric Ivory	IMF1EI	IMF2EI
Office White	IMF1OW	IMF2OW	White	IMF1W	IMF2W

IFP Face Plates

Color	One-Gang					Two-Gang		
	1-Port	2-Port	3-Port	4-Port	6-Port	6-Port	9-Port	12-Port
Almond	IFP11AL	IFP12AL	IFP13AL	IFP14AL	IFP16AL	IFP26AL	IFP29AL	IFP212AL
Gray	IFP11GY	IFP12GY	IFP13GY	IFP14GY	IFP16GY	IFP26GY	IFP29GY	IFP212GY
Office White	IFP11OW	IFP12OW	IFP13OW	IFP14OW	IFP16OW	IFP26OW	IFP29OW	IFP212OW
Black	IFP11BK	IFP12BK	IFP13BK	IFP14BK	IFP16BK	IFP26BK	IFP29BK	IFP212BK
Electric Ivory	IFP11EI	IFP12EI	IFP13EI	IFP14EI	IFP16EI	IFP26EI	IFP29EI	IFP212EI
White	IFP11W	IFP12W	IFP13W	IFP14W	IFP16W	IFP26W	IFP29W	IFP212W

SSF Stainless Steel Plates


One-Gang					Two-Gang			
1-Port	2-Port	3-Port	4-Port	6-Port	4-Port	6-Port	9-Port	12-Port
SSF11	SSF12	SSF13	SSF14	SSF16	SSF204	SSF206	SSF209	SSF212

With Label Fields

1-Port	2-Port	3-Port	4-Port	6-Port
SSFL11	SSFL12	SSFL13	SSFL14	SSFL16



Keystone Opening
Hole size for mounting
all Hubbell Jacks



Note: All SSF plates will accept Audio/Video keystone connectors and Xcelerator™ jacks.



Frames and Plates

Duplex and Style Line® Plates

Description	Color	Catalog Number
Duplex Plate with label fields (Accepts Duplex Frames)	Almond	IFP18AL
	Gray	IFP18GY
	Office White	IFP18OW
Style Line® Plate with label fields (Accepts Style Line Frames)	Almond	IFP126AL
	Gray	IFP126GY
	Office White	IFP126OW



IFP18AL



IFP126AL

Style Line® Outlet Frames, Unloaded

2-Port



3-Port



4-Port



6-Port



Color	Catalog Number			
Almond	ISF2AL	ISF3AL	ISF4AL	ISF6AL
Gray	ISF2GY	ISF3GY	ISF4GY	ISF6GY
Office White	ISF2OW	ISF3OW	ISF4OW	ISF6OW
Black	ISF2BK	ISF3BK	ISF4BK	ISF6BK
Electric Ivory	ISF2EI	ISF3EI	ISF4EI	ISF6EI
White	ISF2W	ISF3W	ISF4W	ISF6W

Style Line Outlet Frames, Loaded

15-Pin 3.5mm
Jack



15-Pin XLR



15-Pin D-sub
F/F Gender Changer



15-Pin D-sub
Screw Terminal



Color	Catalog Number			
Almond	ISF1535AL	ISFXLRAL	ISFD15AL	ISFD15STAL
Gray	ISF1535GY	ISFXLRGY	ISFD15GY	ISFD15STGY
Office White	ISF1535OW	ISFXLRW	ISFD15OW	ISFD15STOW
Black	ISF1535BK	ISFXLRBK	ISFD15BK	ISFD15STBK
Electric Ivory	ISF1535EI	ISFXLREI	ISFD15EI	ISFD15STEI
White	ISF1535W	ISFXLRW	ISFD15W	ISFD15STW

Outlet Frames

Duplex
2-Port



Duplex
4-Port



Style Line Loaded
4-Port T568B



Style Line Loaded
4-Port T568A



Color	Catalog Number			
Almond	BR106AL	Q106AL	—	—
Gray	BR106G	Q106G	—	—
Office White	BR106C	Q106O	—	—
Black	BR106B	Q106B	SL5E4B*	SL5E4A*
Electric Ivory	BR106E	Q106E	—	—
White	BR106W	Q106W	—	—

* SL5E4A and SL5E4B have 4 Category 5e jacks built into the frame.

Snap Fit Connector Fittings



SFRC110R



SFRCR



SFRCRFF



SFSV110BK



SFSVBK



SFBGY



SFFBX



SFRFGOW



SFB10

RCA Connectors

Use to distribute component and composite audio and video signals from device to device. Typical applications include TV, cable, VCR/DVD, camera, camcorder, projector, home theater, and entertainment centers.

110 Punchdown

Insulator Color	Red	White	Yellow	Blue	Green
Black Housing	SFRC110R	SFRC110W	SFRC110Y	SFRC110B	SFRC110GN

Solder Coupler Termination

Insulator Color	Black	Red	White	Yellow	Blue	Green
Office White Housing	SFRC	SFRCR	SFRCW	SFRCY	SFRCBOW	SFRCGNOW
Other Color Housing	SFRC*	SFRCR*	SFRCW*	SFRCY*	SFRCB*	SFRCGN*

Gold Pass-through, F/F Coupler

Insulator Color	Black	Red	White	Yellow	Blue	Green
Office White Housing	SFRCBKFF	SFRCRFF	SFRCWFF	SFRCYFF	SFRCBFFOW	SFRCGNFFOW
Other Color Housing	SFRCBKFF*	SFRCRFF*	SFRCWFF*	SFRCYFF*	SFRCBFF*	SFRCGNFF*

* For other housing colors, add "AL" (Almond), "BK" (Black), "EI" (Electric Ivory), "GY" (Gray) or "W" (White) to the end of the catalog number.

S-Video Connectors

Use to transmit video information over a cable by dividing the signal into two separate signals, (chrominance) for color and (luminance) for brightness. Applications include TV, cable, satellite, VCR/DVD, camera, camcorder, projector, home theater, entertainment systems, security and surveillance.

Termination	Almond	Black	Electric Ivory	Gray	Office White	White
110	SFSV110AL	SFSV110BK	SFSV110EI	SFSV110GY	SFSV110OW	SFSV110W
F/F Coupler	SFSVAL	SFSVBK	SFSVEI	SFSVGY	SFSVOW	SFSVW

BNC Connectors

Use to distribute PRO audio/video through coaxial 75 ohm signal to the work area. Applications include TV, CCTV, analog and digital CATV, VCR, HDTV satellite, security and surveillance systems.

Finish	Almond	Black	Electric Ivory	Gray	Office White	White
Nickel	SFBAL	SFBBK	SFBEI	SFBGY	SFBOW	SFBW
Gold	SFBGAL	SFBGBK	SFBGEI	SFBGGY	SFBGOW	SFBGW

F-Type Connectors

Use for distributing high quality video signal to the workstation. Requiring no soldering, these F-connectors install with a snap and provide quick, easy "screw-on" termination. Applications include TV, CCTV and CATV, home theater and entertainment systems, satellite, security and surveillance systems, VCR/DVD applications.

F-Type Coupler Bulkhead F/F

Finish	Almond	Black	Electric Ivory	Gray	Office White	White
Nickel	SFFALX	SFFBX	SFFEX	SFFGX	SFFX	SFFWX
Gold	SFFGAL	SFFGBK	SFFGEI	SFFGGY	SFFGOW	SFFGW

F-Type to RCA Bulkhead F/F

Finish	Office White	White
Gold	SFRFGOW	SFRFGW

Blank Connectors

Sold 10 pieces per package.

Color	Almond	Black	Electric Ivory	Gray	Office White	White
Housing Color	SFBAL10	SFBB10	SFBE10	SFBG10	SFB10	SFBW10

Snap Fit Connector Fittings

Gold Speaker Post Connectors and Plugs

Use for distributing audio signal throughout the home, office or to a workstation. Applications include home theater, surround sound systems, entertainment systems, and speaker connections.

Speaker Post Connectors

Ring Color	Housing Color	Catalog Number
Black	Office White	SFSPGBK
Red	Office White	SFSPGR

Speaker Post Plugs

Sold 10 pieces per package.

Color	Catalog Number
Black	SPPBK10
Red	SPPR10



SFSPGR



SPPBK10

3.5mm Stereo Jacks

Use for distributing stereo or mono audio signals to and from devices. Applications include laptop and desktop computer audio I/O output, Pro audio distribution, projectors, and IR (infrared) signal transmission.

Size	Almond	Black	Electric Ivory	Gray	Office White	White
3.5mm	SF35SJAL	SF35SJBK	SF35SJEI	SF35SJGY	SF35SJ	SF35SJW



SF35SJ

USB Connectors

Use to provide a simple and easy way to add a USB 2.0 connection to a work area. Feed-through coupler A-to-A or A-to-B format options available.

USB Connectors

Color	Format	Catalog Number
Blue	A-to-B	SFUSBABB
Red	A-to-A	SFUSBAAB



SFUSBABB

ST Keystone Fiber Adapter

Color	Almond	Black	Electric Ivory	Gray	Office White	White
	SFSTAL	SFSTBK	SFSTEI	SFSTG	SFST	SFSTW

Category 6 Jacks

The XJ6 jack supports 10GbE applications to 55 meters, Gigabit Ethernet in the backbone, and network convergence out to the work area with usable bandwidth of 500 MHz. Sold 1 per bag, carton of 25.

Color	Catalog Number	Color	Catalog Number	Color	Catalog Number
Almond	HXJ6AL	Gray	HXJ6GY	Red	HXJ6R
Black	HXJ6BK	Green	HXJ6GN	White	HXJ6W
Blue	HXJ6B	Office White	HXJ6OW	Yellow	HXJ6Y
Electric Ivory	HXJ6EI	Orange	HXJ6OR		



SFST

Category 5e Jacks

The XJ5e jack supports 10/100/1000BASE-T applications with usable bandwidth of 190 MHz in the channel. Sold 1 per bag, carton of 25.

Color	Catalog Number	Color	Catalog Number	Color	Catalog Number
Almond	HXJ5EAL	Gray	HXJ5EGY	Red	HXJ5ER
Black	HXJ5EBK	Green	HXJ5EGN	White	HXJ5EW
Blue	HXJ5EB	Office White	HXJ5EOW	Yellow	HXJ5EY
Electric Ivory	HXJ5EEI	Orange	HXJ5EOR		



HXJ6GN



HXJ5EBK

6 Position USOC Jacks

The XJU jack supports all low-speed data and voice grade applications. Sold 1 per bag, carton of 25.


Color	Catalog Number	Color	Catalog Number	Color	Catalog Number
Almond	HXJUJAL	Gray	HXJUGY	Red	HXJUR
Black	HXJUBK	Green	HXJUGN	White	HXJUW
Blue	HXJUB	Office White	HXJUOW	Yellow	HXJUJY
Electric Ivory	HXJUEI	Orange	HXJUOR		



HXJUOW

Keystone Opening

Hole size for mounting all Hubbell jacks and connectors.



Hubbell iSTATION™ Audio/Video Modules

15-Pin and 9-Pin

Hubbell's expanded line of 15-pin VGA-style connectors are supplied in various iSTATION™ module styles to accommodate the industry's growing needs for expansion. Hubbell's 9-pin high-density D-sub modules allow easy access to RS232 control and serial devices. Applications include video distribution, desktop and laptop computers, monitors, cameras and projectors, home theater and entertainment.

**15-Pin F/F
Gender Changer**
1 Unit



**15-Pin F/Screw
Terminal, SVGA**
1 Unit



**15-Pin VGA 3.5mm
Stereo Jack**
1.5 Unit



**9-Pin F/F
Gender Changer**
1 Unit



15-Pin Blank
10-pack
1 Unit



Color
Office White
Catalog No.

IM15DIN1OW*

IM15ST1OW*

IM15315OW*

IM9DIN1OW*

IMBDS1OW*

* For other colors, replace "OW" with: "AL" (Almond), "GY" (Gray), "BK" (Black), "EI" (Electric Ivory) or "W" (White).

Note: Order **IMBDS1** series blank modules with D-sub connectors for iSTATION™ applications.

**15-Pin to
6-Pin DIN Whip**
10-pack



Catalog No.

156P10

**15-Pin
Crimp On**
10-pack



15C10

**15-Pin
Screw Terminal**
10-pack



15ST10

**15-Pin
Gender Changer**
10-pack



15GC10

**DVI F/F
Gender Changer**
1.5 Unit

**COMING
SOON!**

Color
Office White
Catalog No.

IMDVI15OW*

**DVI to
15-Pin**
1.5 Unit

**COMING
SOON!**

IM15DVI15OW*

* For other colors, replace "OW" with: "AL" (Almond), "GY" (Gray), "BK" (Black), "EI" (Electric Ivory) or "W" (White).

Audio/Video Modules

Hubbell's wide offering of iSTATION™ loaded and unloaded modules is the most extensive Audio/Video solution in the structured cabling industry. Whatever the specification, application or preference, Hubbell iSTATION™ modules answers the call. Applications include Audio/video distribution devices, desktop and laptop computers, cameras and projectors, home theater and entertainment systems. All modules are 1 unit except **IMCRS15** series (1.5 unit).

**RCA Component
A/V 5 RCAs, Solder**
1.5 Unit



Color
Office White
Catalog No.

IMCRS15OW*

**RCA Component
3 RCAs, Solder**



IMCRS1OW*

**RCA Component
3 RCAs,
Feed-Thru F/F**



IMCRF1OW*

**RCA Audio
2 RCAs,
110 UTP**



IMAR1101OW*

**S-Video
2 RCAs,
110 UTP**



IMSR1101OW*

**Speaker
Post**



IMSP1OW*

**S-Video, 3.5mm
Composite
110 UTP**



Color
Office White
Catalog No.

IMSV351101OW*

**3 RCA
Component
110 UTP**



IMR1101OW*

**3 RCA
110 UTP**



IMCR1101OW*

**RCA A/V
Solder-Type**



IM3RS1OW*

**RCA A/V Gold
F/F Feed-Thru**



IM3RF1OW*

**RCA 3.5mm
Solder**



IMRSJ1OW*

* For other colors, replace "OW" with: "AL" (Almond), "GY" (Gray), "BK" (Black), "EI" (Electric Ivory) or "W" (White).

Hubbell iSTATION™ Audio/Video Modules

XLR, Speakon® and ¼" Modules












Applications include Video distribution, desktop and laptop computers, monitors, cameras, microphones and projectors, home theater and entertainment. Note: Order **IMAVB15** Series blank modules with A/V connectors for iSTATION™ applications.

	AV Blank 1.5 Unit 10-pack	XLR Screw Terminal 10-pack	XLR Solder-Type 10-pack	¼" Stereo Jack Solder-Type 10-pack	Speakon® Conn. Solder-Type 10-pack	USB Feed-Thru A-to-B 10-pack
						
Color Office White						
Catalog No.	IMAVB15OW*	XLRST10	XLR10	14S10	SC10	USB10

* For other colors, replace "OW" with: "AL" (Almond), "GY" (Gray), "BK" (Black), "EI" (Electric Ivory) or "W" (White).

Unloaded Modules


Applications include Video distribution, desktop and laptop computers, monitors, cameras and projectors, home theater and entertainment.

	Keystone 1-Port, Flat 1 Unit	Keystone 2-Port, Flat 1 Unit	Keystone 1-Port, Angled 1.5 Unit	Keystone 2-Port, Angled 1.5 Unit	SC Angled 1 Duplex 1.5 Unit	SC Angled 2 Duplex 2 Unit
						
Color	Catalog Number					
Almond	IM1K1AL	IM2K1AL	IM1KA15AL	IM2KA15AL	IM1SCA15AL	IM2SCA2AL
Gray	IM1K1GY	IM2K1GY	IM1KA15GY	IM2KA15GY	IM1SCA15GY	IM2SCA2GY
Office White	IM1K1OW	IM2K1OW	IM1KA15OW	IM2KA15OW	IM1SCA15OW	IM2SCA2OW
Black	IM1K1BK	IM2K1BK	IM1KA15BK	IM2KA15BK	IM1SCA15BK	IM2SCA2BK
Electric Ivory	IM1K1EI	IM2K1EI	IM1KA15EI	IM2KA15EI	IM1SCA15EI	IM2SCA2EI
White	IM1K1W	IM2K1W	IM1KA15W	IM2KA15W	IM1SCA15W	IM2SCA2W
	Blank 0.5 Unit	Blank 1 Unit	Blank 1.5 Unit	Keystone Recessed Angle 1-Port, 1.5 Unit	Keystone Recessed Angle 2-Port, 1.5 Unit	
						
Color	Catalog Number					
Almond	IMB05AL	IMB1AL	IMB15AL	IM11A15AL	IM21A15AL	
Gray	IMB05GY	IMB1GY	IMB15GY	IM11A15GY	IM21A15GY	
Office White	IMB05OW	IMB1OW	IMB15OW	IM11A15OW	IM21A15OW	
Black	IMB05BK	IMB1BK	IMB15BK	-	-	
Electric Ivory	IMB05EI	IMB1EI	IMB15EI	-	-	
White	IMB05W	IMB1W	IMB15W	-	-	

IMF iSTATION™ Frames

The IMF series accepts iSTATION™ modules in 3 unit combinations for one-gang and 6 unit combinations for two-gang applications. Start by selecting a frame and then the required mix of modules.

Color	Catalog Number	
	One-Gang	Two-Gang
Almond	IMF1AL	IMF2AL
Gray	IMF1GY	IMF2GY
Office White	IMF1OW	IMF2OW
Black	IMF1BK	IMF2BK
Electric Ivory	IMF1EI	IMF2EI
White	IMF1W	IMF2W



Speakon® is a registered trademark of Neutrik.

ANSI/TIA/EIA-569B: Telecommunications Pathways and Spaces

The applications below are supported by this standard. The 569B standard incorporates all previous addenda to the 569A.

569B: Surface (Perimeter) Raceway Systems

- May contain work area outlets at desired locations.
- Include the base channel, cover, fittings and outlet accessories.
- May be either single channel or multi-channel with dividers.
- Are designed to maintain 1 in. (25mm) minimum cable bend radius.
- Can be installed as baseboard, chair rail, or ceiling runs with vertical feeders.
- Support single or multiple room distribution.
- Should be sized at 40% max cable fill to accommodate future expansion.

Note: Metal raceway systems shall be properly bonded to ground per J-STD-607-A. Never combine power and data cabling within a single raceway channel.



Non-Metallic Raceway



Metal Raceway

569B: Furniture Pathways and Spaces


- Separation requirements apply for power and data cabling.
- Furniture pathways shall have a minimum cross section area of 1.5 in² (9.5 cm²).
- This specification is based on a work area cluster serving four persons with three outlet connections each.

Note: The usable cross sectional area may be reduced by bend radius limits of the installed cables.



569B: Access Floor Pathways and Spaces

- Standard access floors shall have a minimum of 6 in. (150mm) finished floor height.
- A floor height of 8 in. (200mm) is the recommended clearance for cable trays.
- The free space above any cable tray or raceway under an access floor must allow for easy removal of covers.
- Connecting hardware is prohibited below the access floor, however a consolidation point is permitted as an exception.
- Locate penetration points and floor outlets away from office traffic.
- All standards apply for separation of power and data cables.

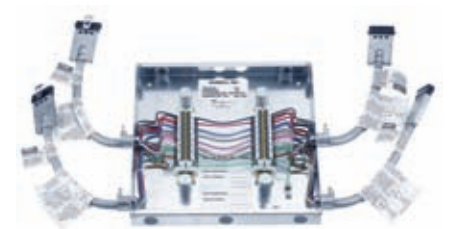

CONNEXION

569B: Poke-Thru Fittings

- A poke-thru device is used for penetration of building cabling through above-grade structural floors. Typically available in flush or raised configurations.
- Maintain fire rating of the floor after installation.
- Provide power and/or data service ports in limited capacity.

Note: Contact a Structural Engineer before penetrating load-bearing floors.



SystemOne
FRPT

ScrubShield™ 2x2
FRPT

Large Capacity
FRPT

Standard UTP Wiring Conventions

Horizontal UTP Cable and Patch Cords

- Solid copper 4-pair 24 AWG UTP is specified for distribution cabling. Stranded UTP is specified for patch cords for flexibility. Shielded cable is not commonly used in the U.S. Splices bridge taps are not permitted.
- Cable, connectors and patch cords shall be marked with the performance category.
- Always match performance categories of cables and components throughout the infrastructure.
- All cable, cords and connecting hardware shall meet performance requirements of ANSI/TIA/EIA-568-B.1 and 568-B.2. Hubbell assures this compliance with all products and cable partners.


COLOR CODING:

	white-blue/blue
	white-orange/orange
	white-green/green
	white-brown/brown

Recognized Connector and Wiring Configurations

- 8-position modular jack/plug.
- 8-position modular panel/plug.
- T568A wiring or T568B wiring options.
- Category 5e or Category 6 recommended.

Note: Be sure that the patch cord wiring matches the cable infrastructure configuration.

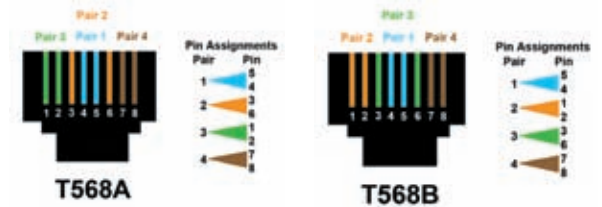

RJ45 - TIA/EIA-568 Conventions

Two wiring standards were adopted. Both configurations are based on maximum transmission performance.

8 Position / 8 Wire



T568A

- Preferred method
- Directly compatible with 2-pair voice and Token Ring systems utilizing 6-position connectors

8 Position / 8 Wire



T568B

- Optional method
- AT&T's standard
- Directly compatible with AT&T phone systems

LAN Wiring Conventions

Local Area Network standards designed to operate over UTP specify pin/pair assignments on modular connectors for various signal transmission protocols. While TIA/EIA-568A and 568B conventions support all these designations, there are some cases where the user chooses to cable only the number of pairs required to support these applications.

8 Position / 4 Wire



10/100BASE-T

- 10 Mbps Ethernet over UTP
- Uses only two pairs
- 100 Mbps Ethernet

8 Position / 4 Wire



Token Ring

- 4/16 Mbps Token Ring over copper
- Uses only two pairs

8 Position / 4 Wire



TP-PMD

- 100 Mbps FDDI over copper (pending)
- Uses only two pairs

8 Position / 8 Wire



1000BASE-T (T568A)

- 1000 Mbps Ethernet over UTP
- Uses all four pairs


Recommended UTP Installation Practices

- Use the proper strip tool for the cable jacket. Don't cut into the conductor pairs.
- Position the stripped cable jacket as close as possible to the termination point to minimize exposure of the twisted pairs.
- Maintain the natural twist of all conductor pairs as close as possible to the termination point. For Category 5e and 6 wiring, the maximum length of un-twisted pairs is 0.5". Minimum un-twisting optimizes Return Loss performance.
- Never un-coil UTP cable from a stationary spool. Permanent kinks will result from straightening, and NEXT failures may occur. Unwind the cable by rotating the spool with steady speed and tension. Also avoid scraping and kinking when feeding into conduit or raceway.
- Allow 12" of cable slack behind wall outlets for future re-termination.
- Use proper supports and spacing to minimize sag in horizontal runs. Long runs should use raceways or cable trays. Do not overload cable supports and trays.
- Avoid EMI by maximizing the separation distance from high voltage circuits, transformers, motors, etc. For shared pathways, use partitioned raceway with physical separation between power wiring and UTP.
- Do not run UTP cables over heater ducts or hot water ducts. High temperatures will degrade performance and deteriorate the cable jacket.
- Centralize TR's to equalize the horizontal cable runs on each floor. Maximum horizontal distance is 90 meters. Very short horizontal runs can increase NEXT.
- Never use staples to position cables.
- Use good cable management practices to maintain proper bend radius.
- Place long-run service loops in a large figure "8" pattern to minimize induced noise.
- For Category 5e and 6 cabling, store service loops in a figure "8" pattern to minimize cross-talk and EMI noise pick-up.
- Maintain proper bend radius inside all outlet boxes.
- For best results, use the zip cord and peel away the cable jacket.
- All grounding and bonding shall be according to J-STD-607-A.

Do's



Maintain a maximum bend radius of 4x the cable diameter (4-pair cables)



Apply cable ties loosely and at random intervals



Try to minimize the amount of jacket twisting




Avoid stretching the cable

Don'ts



Never exceed a 90 degree bend



Don't over-tighten cable ties



Don't over-twist cable, it can lead to torn jackets



Don't exceed 25 lbs. of pulling tension

Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
97071	130	BA4233	92	CRF15I	126	CS1224R	128
97101	130	BA4333	92	CRF15OW	126	CS1224W	128
14S10	135	BR106AL	54, 131	CRF15WHI	126	CS315	128
156P10	134	BR106B	131	CRF20	126	CS315AL	128
15C10	134	BR106C	81, 131	CRF20AL	126	CS315GY	128
15GC10	134	BR106E	131	CRF20BLK	126	CS315I	128
15ST10	134	BR106G	54, 131	CRF20GRY	126	CS315OW	128
3SFBB	96	BR106W	131	CRF20I	126	CS315W	128
3SFBC	96	BRS2RCA	113	CRF20OW	126	CS320	128
3SFBCBKA	96	BTPB3TF	77	CRF20WHI	126	CS320AL	128
3SFBCBRA	96	CR15	126	CRO15	126	CS320GY	128
3SFBCGYA	96	CR15AL	126	CRO15GRY	126	CS320I	128
3SFBCIA	96	CR15BLK	126	CRO15I	126	CS320OW	128
3SFBD5	96	CR15GRY	126	CRO15WHI	126	CS320W	128
3SFBIM	96	CR15I	126	CRO20	126	EXT13	116
3SFBIRP	96	CR15OW	126	CRO20BLK	126	EXT33201FO8W	102
3SFBS	96	CR15WHI	126	CRO20GRY	126	EXT33201MO8W	102
3SFBSS	96	CR20	126	CRO20I	126	EXT33215FO8W	102
3SFBTP	96	CR20AL	126	CRO20WHI	126	EXT33215MO8W	102
AFB101	102	CR20BLK	126	CS115	128	EXT332xxFF8W	102
AFB301	102	CR20GRY	126	CS115AL	128	EXT42201FO8W	102
AFB301BK	103	CR20I	126	CS115GY	128	EXT42201MO8W	102
AFB301GNT	103	CR20OW	126	CS115I	128	EXT42215FO8W	102
AFB401	102	CR20WHI	126	CS115OW	128	EXT42215MO8W	102
AFB401BK	103	CR5252	126	CS115W	128	EXT422xxFF8W	102
AFB401GNT	103	CR5252AL	126	CS120	128	FASCMPB6	81
AFB501	102	CR5252BK	126	CS120I	128	FASTSCEMPB6	81
AFB501BK	103	CR5252GY	126	CS1201AL	128	FF2BK	114
AFB501GNT	103	CR5252I	126	CS1201GY	128	FF2BRS	114
AP22	116	CR5252IG	126	CS1201I	128	FF2GY	114
AP2GY	116	CR5252IGBK	126	CS1201OW	128	FF3GY	116
AP2I	116	CR5252IGGY	126	CS1201W	128	FF3I	116
AP42	116	CR5252IGI	126	CS1203	128	FIJB332	102
ATB	122	CR5252IGOW	126	CS1203AL	128	FIJB422	102
B2414	92	CR5252IGW	126	CS1203GY	128	FR280BKA	115
B2421	93	CR5252OW	126	CS1203I	128	FR280GYA	115
B2422	93	CR5252R	126	CS1203OW	128	FR480BKA	115
B2423	93	CR5252W	126	CS1203W	128	FR480GYA	115
B2431	93	CR5262	126	CS120AL	128	FR680BKA	115
B2432	93	CR5262BK	126	CS120GY	128	FR680GYA	115
B2433	93	CR5262GY	126	CS120I	128	FR80AL	116
B2436	92	CR5262I	126	CS120OW	128	FRBR1	116
B243641	92	CR5262OW	126	CS120W	128	FRF1BK	114
B2481	97	CR5262R	126	CS1221	128	FRF1BRS	114
B2482	97	CR5262W	126	CS1221AL	128	FRF1GY	114
B2483	97	CR5352	126	CS1221BK	128	FRF3BK	114
B2506	89	CR5352AL	126	CS1221GY	128	FRF3GY	114
B2506415	89	CR5352BK	126	CS1221I	128	FRF3I	114
B2527	89	CR5352GY	126	CS1221OW	128	FRFBLA	113
B2529	89	CR5352I	126	CS1221R	128	FRFBRA	113
B2536	89	CR5352IG	126	CS1221W	128	FRFBRS2A	113
B253641	89	CR5352IGBK	126	CS1222	128	FRFGYA	113
B2537	89	CR5352IGBL	126	CS1222BK	128	FRFIA	113
B2588	97	CR5352IGGY	126	CS1222GY	128	FRP250	116
B2588275	97	CR5352IGI	126	CS1222I	128	GF15ALL	127
B4214	92	CR5352IGOW	126	CS1222OW	128	GF15BKL	127
B4233	92	CR5352IGW	126	CS1222R	128	GF15GYL	127
B423341	92	CR5352OW	126	CS1222W	128	GF15IL	127
B4314	92	CR5352R	126	CS1223	128	GF15L	127
B4333	92	CR5352W	126	CS1223AL	128	GF15LAL	127
B433361	92	CR5362	126	CS1223BK	128	GF15OWL	127
BA2421	93	CR5362BK	126	CS1223GY	128	GF15RL	127
BA2422	93	CR5362BL	126	CS1223I	128	GF15WL	127
BA2423	93	CR5362GY	126	CS1223OW	128	GF20ALL	127
BA2431	93	CR5362I	126	CS1223R	128	GF20BKL	127
BA2432	93	CR5362OW	126	CS1223W	128	GF20GYL	127
BA2433	93	CR5362R	126	CS1224	128	GF20IL	127
BA2436	92	CR5362W	126	CS1224AL	128	GF20L	127
BA2527	89	CRF15	126	CS1224BK	128	GF20LAL	127
BA2529	89	CRF15AL	126	CS1224GY	128	GF20OWL	127
BA2536	89	CRF15BLK	126	CS1224I	128	GF20RL	127
BA2537	89	CRF15GRY	126	CS1224OW	128	GF20WL	127

Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
GFST15	127	HBL20GB506GY	17	HBL2162GY	126	HBL3018AEGY	23
GFST15AL	127	HBL20GB506IV	17	HBL2162I	126	HBL3018AEIV	23
GFST15BK	127	HBL20GB512GY	17	HBL2162OW	126	HBL3027AEGY	24
GFST15GY	127	HBL20GB512IV	17	HBL2162WA	126	HBL3027AEIV	24
GFST15I	127	HBL20GB606GY	17	HBL2310	129	HBL3028GY	22
GFST15LA	127	HBL20GB606IV	17	HBL2320	129	HBL3028IV	22
GFST15OW	127	HBL20GB609GY	17	HBL2340	129	HBL3033JEGY	24
GFST15R	127	HBL20GB609IV	17	HBL2410	129	HBL3033JEIV	24
GFST15W	127	HBL20GB612GY	17	HBL2420	129	HBL3036HEGY	24
GFST20	127	HBL20GB612IV	17	HBL2430	129	HBL3036HEIV	24
GFST20AL	127	HBL20GB618GY	17	HBL24GB306GY	17	HBL3040CEGY	24
GFST20BK	127	HBL20GB618IV	17	HBL24GB306IV	17	HBL3040CEIV	24
GFST20GY	127	HBL20GBA512GY	17	HBL24GB506GY	17	HBL3043BEGY	25
GFST20I	127	HBL20GBA512IV	17	HBL24GB506IV	17	HBL3043BEIV	25
GFST20LA	127	HBL20GBA609GY	17	HBL24GB512GY	17	HBL30442GY	22
GFST20OW	127	HBL20GBA609IV	17	HBL24GB512IV	17	HBL30442IV	22
GFST20R	127	HBL20GBA612GY	17	HBL24GB606GY	17	HBL3046BEGY	25
GFST20W	127	HBL20GBA612IV	17	HBL24GB606IV	17	HBL3046BEIV	25
HBL2000B5GY	14	HBL20GBA618GY	17	HBL24GB612GY	17	HBL3046H2GY	24
HBL2000B5IV	14	HBL20GBA618IV	17	HBL24GB612IV	17	HBL3046H2IV	24
HBL2000BCAGY	14	HBL20IG306GY	17	HBL24GB618GY	17	HBL3048BEGY	25
HBL2000BCAIV	14	HBL20IG306IV	17	HBL24GB618IV	17	HBL3048RIV	25
HBL2000BCGY	14	HBL20IG512GY	17	HBL24GBA512GY	17	HBL3051LEGY	25
HBL2000BCIV	14	HBL20IG512IV	17	HBL24GBA512IV	17	HBL3051LEIV	25
HBL2000CAGY	14	HBL20IG606GY	17	HBL24GBA612GY	17	HBL3082GY	24
HBL2000CAIV	14	HBL20IG606IV	17	HBL24GBA612IV	17	HBL3086GY	23
HBL2000CGY	14	HBL2101	128	HBL24GBA618GY	17	HBL3086IV	23
HBL2000CIV	14	HBL2101AL	128	HBL24GBA618IV	17	HBL317SBK	119, viii
HBL2000TFGY	16	HBL2101GY	128	HBL2510	129	HBL317SGY	94, 103, 119, viii
HBL2000TFIV	16	HBL2101I	128	HBL2520	129	HBL317SI	119
HBL2000WC	14	HBL2101OW	128	HBL2530	129	HBL317SWA	119
HBL2000WCA	14	HBL2101W	128	HBL2610	129	HBL3200REDGY	23
HBL2001C	14, 17	HBL2103	128	HBL2620	129	HBL3200REDIV	23
HBL2003SC	14, 17	HBL2103AL	128	HBL2640	129	HBL4550	129
HBL2006GY	16, 17	HBL2103GY	128	HBL2710	129	HBL4560	129
HBL2006IV	16, 17	HBL2103I	128	HBL2720	129	HBL4700	129
HBL2009GC	16	HBL2103OW	128	HBL2730	129	HBL4710	129
HBL2010A2GY	15, 17	HBL2103W	128	HBL2810	129	HBL4710BGY	32
HBL2010A2IV	15, 17	HBL2121	128	HBL2820	129	HBL4710BIV	32
HBL2010A3GY	15, 17	HBL2121AL	128	HBL2830	129	HBL4710DFOGY	32
HBL2010A3IV	15, 17	HBL2121GY	128	HBL3000BGY	22	HBL4710DFOIV	32
HBL2010BGY	15, 17	HBL2121I	128	HBL3000BIV	22	HBL4710GY	33
HBL2010BIV	15, 17	HBL2121OW	128	HBL3000C075GY	22	HBL4710IV	33
HBL2011BRGY	15	HBL2121W	128	HBL3000C075IV	22	HBL4711DFOGY	32
HBL2011BRIV	15	HBL2122	128	HBL3000C195GY	22	HBL4711DFOIV	32
HBL2011GY	15, 17	HBL2122AL	128	HBL3000C195IV	22	HBL4711GY	32
HBL2011IV	15, 17	HBL2122GY	128	HBL3000CEGY	22	HBL4711IV	32
HBL2015BRGY	15	HBL2122I	128	HBL3000CEIV	22	HBL4712TXGY	31
HBL2015BRIV	15	HBL2122OW	128	HBL3000TFGY	24	HBL4712TXIV	31
HBL2015GY	15, 17	HBL2122W	128	HBL3000TFIV	24	HBL4714AGY	32
HBL2015IV	15, 17	HBL2123	128	HBL3000WCGY	22	HBL4714AIV	32
HBL2017BRGY	15	HBL2123AL	128	HBL3001AGY	22	HBL4715DFOGY	32
HBL2017BRIV	15	HBL2123GY	128	HBL3001GY	22	HBL4715DFOIV	32
HBL2017TC	15, 17	HBL2123I	128	HBL3003GY	22	HBL4715GY	32
HBL2018BRGY	15	HBL2123OW	128	HBL3003IV	22	HBL4715IV	32
HBL2018BRIV	15	HBL2123W	128	HBL3006EGY	24	HBL4717DFOGY	31
HBL2018CGY	15, 17	HBL2124	128	HBL3006EIV	24	HBL4717DFOIV	31
HBL2018CIV	15, 17	HBL2124AL	128	HBL3007CGY	24	HBL4717GY	31
HBL20482GY	14, 17	HBL2124GY	128	HBL3010AEGY	23	HBL4717IV	31
HBL20482IV	14, 17	HBL2124I	128	HBL3010AEIV	23	HBL4717NGY	31
HBL2048GY	14, 17	HBL2124OW	128	HBL3010BGY	23	HBL4717NIV	31
HBL2048IV	14, 17	HBL2124W	128	HBL3010BIV	23	HBL4717TCAGY	31
HBL2051HGY	16	HBL2152	126	HBL3010CGY	23	HBL4718DFOGY	31
HBL2051HIV	16	HBL2152AL	126	HBL3010CIV	23	HBL4718DFOIV	31
HBL2089EIV	16	HBL2152BK	126	HBL3011EGY	23	HBL4718GY	31
HBL2089IV	16	HBL2152GY	126	HBL3011EIV	23	HBL4718IV	31
HBL20C215GY	17	HBL2152I	126	HBL3014CGY	23	HBL4746H2GY	33
HBL20C215IV	17	HBL2152OW	126	HBL3014CIV	23	HBL4746H2IV	33
HBL20C315GY	17	HBL2152WA	126	HBL3015EGY	23	HBL47472BBBBGY	35
HBL20C315IV	17	HBL2162	126	HBL3015EIV	23	HBL47472BBBBIV	35
HBL20GB306GY	17	HBL2162AL	126	HBL3017TCEGY	23	HBL47472BBFFGY	35
HBL20GB306IV	17	HBL2162BK	126	HBL3017TCEIV	23	HBL47472BBFFIV	35



Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
HBL47472BBSSGY	35	HBL506IV	10	HBL5760IV	8	HBL67473RRRRXXGY	45
HBL47472BBSSIV	35	HBL511IV	10	HBL5780	13	HBL67473RRRRXXIV	45
HBL47472BBTTGY	35	HBL512IV	10	HBL5781	13	HBL6747AXXGY	44
HBL47472BBTTIV	35	HBL517IV	10	HBL5781A	13	HBL6747AXXIV	44
HBL47472BBXXGY	35	HBL518IV	10	HBL5782A	13	HBL6747BBBGY	44
HBL47472BBXXIV	35	HBL5260ISA	127	HBL5782C	13	HBL6747BBBIV	44
HBL47472RRXXGY	35	HBL5260OWSA	127	HBL5783IV	12	HBL6747BBFGY	44
HBL47472RRXXIV	35	HBL5260SA	127	HBL5784IV	12	HBL6747BBFIV	44
HBL4747AXGY	34	HBL5262ALSA	127	HBL5785IV	12	HBL6747BBSGY	45
HBL4747AXIV	34	HBL5262GYSA	127	HBL5786AIV	12	HBL6747BBSIV	45
HBL4747BBGY	34	HBL5262ISA	127	HBL5786IV	12	HBL6747BBTGY	45
HBL4747BBIV	34	HBL5262OWSA	127	HBL5790B	13	HBL6747BBTIV	45
HBL4747BFGY	34	HBL5262SA	127	HBL600B	13	HBL6747BXXGY	44
HBL4747BFIV	34	HBL5262WSA	127	HBL605CUT	13	HBL6747BXXIV	44
HBL4747BRGY	34	HBL5360ISA	127	HBL605K	13	HBL6747C1GY	44
HBL4747BRIV	34	HBL5360OWSA	127	HBL607CUT	13	HBL6747C1IV	44
HBL4747BSGY	35	HBL5360SA	127	HBL607K	13	HBL6747C2GY	44
HBL4747BSIV	35	HBL5362ALSA	127	HBL620BCK	16	HBL6747C2IV	44
HBL4747BTGY	35	HBL5362GYSA	127	HBL620C	16	HBL6747JXXGY	44
HBL4747BTIV	35	HBL5362ISA	127	HBL630B	25	HBL6747JXXIV	44
HBL4747BXXGY	34	HBL5362OWSA	127	HBL630BBDK	25	HBL6747RRFGY	44
HBL4747BXIV	34	HBL5362SA	127	HBL630C	25	HBL6747RRFIV	44
HBL4747C1GY	35	HBL5362WSA	127	HBL630CDK	25	HBL6747RXXGY	44
HBL4747C1IV	35	HBL5700FIV	12	HBL640B	35	HBL6747RXXIV	44
HBL4747C2GY	35	HBL5701C	11	HBL640BDK	35	HBL6750B10GY	40
HBL4747C2IV	35	HBL5703IV	12	HBL640C	35	HBL6750B10IV	40
HBL4747CVM2GY	34	HBL5709	13	HBL640CDK	35	HBL6750C075GY	40
HBL4747CVM2IV	34	HBL5709GC	13	HBL660B	45	HBL6750C075IV	40
HBL4747CVMGY	34	HBL5711BRIV	11	HBL660BDK	45	HBL6750C135GY	40
HBL4747CVMIV	34	HBL5711LHIV	11	HBL660C	45	HBL6750C135IV	40
HBL4747JXGY	34	HBL5711RHIV	11	HBL660CDK	45	HBL6750C195GY	40
HBL4747JXIV	34	HBL5715BRIV	11	HBL6710BGY	42	HBL6750C195IV	40
HBL4747RFGY	34	HBL5715IV	11	HBL6710BIV	42	HBL6750C315GY	40
HBL4747RFIV	34	HBL5717BRIV	11	HBL6710DFOGY	42	HBL6750C315IV	40
HBL4747RXGY	34	HBL5718BRIV	11	HBL6710DFOIV	42	HBL6750CGY	40
HBL4747RXIV	34	HBL5719IV	11	HBL6710GY	43	HBL6750CIV	40
HBL4750B10GY	30	HBL57242IV	8	HBL6710IV	43	HBL6750DAGY	40
HBL4750B10IV	30	HBL5731IV	9	HBL6711DFOGY	42	HBL6750GY	44, 54
HBL4750BP	30	HBL5733IV	9	HBL6711DFOIV	42	HBL6750IV	44, 54
HBL4750C075GY	30	HBL5735IV	8	HBL6711GY	42	HBL6750TFGY	43
HBL4750C075IV	30	HBL5736IV	9	HBL6711IV	42	HBL6750TFIV	43
HBL4750C135GY	30	HBL5737AIV	9	HBL6712TXGY	41	HBL6750WCGY	40
HBL4750C135IV	30	HBL5737IV	9	HBL6712TXIV	41	HBL6751A	40
HBL4750C195GY	30	HBL5738AFIV	9	HBL6714AGY	42	HBL6751DAGY	40
HBL4750C195IV	30	HBL5738AIV	9	HBL6714AIV	42	HBL6756AGY	43
HBL4750C315GY	30	HBL5738IV	9	HBL6715DFOGY	42	HBL6756AIV	43
HBL4750C315IV	30	HBL5739AABIV	9	HBL6715DFOIV	42	HBL6756GY	43
HBL4750CGY	30	HBL5739AIV	9	HBL6715GY	42	HBL6756IV	43
HBL4750CIV	30	HBL5739IV	9	HBL6715IV	42	HBL6774AGY	43
HBL4750DGY	30	HBL57442IV	7	HBL6717DFOGY	41	HBL6774AIV	43
HBL4750GY	34	HBL57443IV	7	HBL6717DFOIV	41	HBL6786GY	43
HBL4750GY	54	HBL5744IV	7	HBL6717GY	41	HBL6786IV	43
HBL4750IV	34	HBL5744S2IV	7	HBL6717IV	41	HBL702B	10
HBL4750IV	54	HBL5744S3IV	7	HBL6717NGY	41	HBL704IV	10
HBL4750TFGY	33	HBL5744SIV	7	HBL6717NIV	41	HBL706IV	10
HBL4750TFIV	33	HBL5745IV	8	HBL6717TCAGY	41	HBL711IV	10
HBL4750WCGY	30	HBL57472IV	7	HBL6718DFOGY	41	HBL712IV	10
HBL4751AC	30	HBL57473IV	7	HBL6718DFOIV	41	HBL717IV	10
HBL4751DA	30	HBL5747IV	7	HBL6718GY	41	HBL718IV	10
HBL4756AGY	33	HBL57482IV	6	HBL6718IV	41	HBL75010IV	6
HBL4756AIV	33	HBL57483IV	6	HBL6746HHHGY	43	HBL7505IV	6
HBL4756GY	33	HBL57484IV	6	HBL6746HHHIV	43	HBL750TFIV	10
HBL4756IV	33	HBL57485IV	6	HBL67473BBBBBBGY	45	HBLAFB101BK	103
HBL4774AGY	33	HBL57486IV	6	HBL67473BBBBBBIV	45	HBLAFB101GNT	103
HBL4774AIV	33	HBL5748IV	6	HBL67473BBBBBFFGY	45	HBLAFB101TCBK	103
HBL4786AGY	33	HBL5748SIV	8	HBL67473BBBBBFFIV	45	HBLAFB101TCGNT	103
HBL4786AIV	33	HBL5751AIV	8	HBL67473BBBBSSGY	45	HBLALU01	52
HBL50010IV	6	HBL5751IV	8	HBL67473BBBBSSIV	45	HBLALU09	52
HBL5005IV	6	HBL5752IV	8	HBL67473BBBBTTGY	45	HBLALU17A	52
HBL500TFIV	10	HBL5752R	8	HBL67473BBBBTTIV	45	HBLALU3800B10	50
HBL502B	10	HBL5753IV	8	HBL67473BBBBXXGY	45	HBLALU3806	50
HBL504IV	10	HBL5753R	8	HBL67473BBBBXXIV	45	HBLALU3810B	50

Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
HBLALU3810B1	50	HBLNO309SI	119	HBLTRIM1W	120	HXJUW	133
HBLALU3811	50	HBLNO309SWA	119	HBLTRIM1WBK	118	HXJUY	133
HBLALU3815	50	HBLOR306SBK	119	HBLTRIM1WGY	118	IFP11AL	130
HBLALU3817	50	HBLOR306SGY	94,103,119	HBLTRIM1WI	118	IFP11BK	130
HBLALU3817N	50	HBLOR306SI	119	HBLTRIM1WWA	118	IFP11EI	130
HBLALU3818	50	HBLOR306SWA	119	HBLTRIM2W	120	IFP11GY	130
HBLALU4800B10	51	HBLORT322SBK	119	HBLTRIM2WBK	118	IFP11OW	130
HBLALU4806	51	HBLORT322SGY	94,103,119	HBLTRIM2WGY	118	IFP11W	130
HBLALU4810B	51	HBLORT322SI	119	HBLTRIM2WI	118	IFP126AL	54, 131
HBLALU4810B2	51	HBLORT322SWA	119	HBLTRIM2WWA	118	IFP126GY	54, 131
HBLALU4811	51	HBLPA308SBK	119	HBLTRIM3W	120	IFP126OW	81, 131
HBLALU4815	51	HBLPA308SGY	94,103,119	HBLTRIM3WBK	118	IFP12AL	54, 130
HBLALU4817	51	HBLPA308SI	119	HBLTRIM3WGY	118	IFP12BK	130
HBLALU4817N	51	HBLPA308SWA	119	HBLTRIM3WI	118	IFP12EI	130
HBLALU4818	51	HBLPHA2	viii	HBLTRIM3WWA	118	IFP12GY	54, 130
HBLALUABRT	52	HBLPHA2BSS	viii	HBLTRIM4W	120	IFP12OW	81, 130
HBLALUBL	52	HBLPHA4	viii	HBLTRIM4WBK	118	IFP12W	130
HBLALUC5	50, 51	HBLPHA4BSS	viii	HBLTRIM4WGY	118	IFP13AL	54, 130
HBLALUDR	52	HBLPP10A	122	HBLTRIM4WI	118	IFP13BK	130
HBLALUE	52	HBLPP10AAL	122	HBLTRIM4WWA	118	IFP13EI	130
HBLALUF	52	HBLPP10AI	122	HBLTRIM6W	120	IFP13GY	54, 130
HBLALUG	52	HBLPP10IGA	122	HBLTRIM6WBK	118	IFP13OW	81, 130
HBLALUJ	52	HBLPP10IGAI	122	HBLTRIM6WGY	118	IFP13W	130
HBLALULPB	52	HBLPP10SA	122	HBLTRIM6WI	118	IFP14AL	54, 130
HBLALUN	52	HBLPP10SAI	122	HBLTRIM6WWA	118	IFP14BK	130
HBLALUWC	50	HBLPP12A	122	HBLWCS2MBD	120	IFP14EI	130
HBLALUWC	51	HBLPP12AAL	122	HBLWCS1	118, 120	IFP14GY	54, 130
HBLAM303SBK	119	HBLPP12AI	122	HBLWCS1MBD	118, 120	IFP14OW	81, 130
HBLAM303SGY	94,103,119	HBLPP15A	122	HBLWCS2	118, 120	IFP14W	130
HBLAM303SGY	119	HBLPP15AAL	122	HBLWCS2MBD	118, 120	IFP16AL	54, 130
HBLAM303SI	119	HBLPP15AI	122	HBLWCS2MMO	118, 120	IFP16BK	130
HBLAM303SWA	119	HBLPPO12A	122	HBLWCS3	118, 120	IFP16EI	130
HBLAMP313SBK	119	HBLPPO12AAL	122	HBLWCS3MBD	118, 120	IFP16GY	54, 130
HBLAMP313SGY	94,103,119	HBLPPO12AI	122	HBLWCS3MMO	118, 120	IFP16OW	81, 130
HBLAMP313SI	119	HBLPPO15A	122	HBLWCS4	118, 120	IFP16W	130
HBLAMP313SWA	119	HBLPPO15AAL	122	HBLWCS4MBD	118, 120	IFP18AL	54, 131
HBLBL300SBK	119,viii	HBLPPO15AI	122	HBLWCS4MMO	118, 120	IFP18GY	54, 131
HBLBL300SGY	94,103,119,viii	HBLPPOA	122	HBLWCS6	118, 120	IFP18OW	81, 131
HBLBL300SI	119	HBLPPOAAL	122	HBLWCS6MBD	118, 120	IFP212AL	130
HBLBL300SWA	119	HBLPPOAI	122	HBLWCS6MMO	118, 120	IFP212BK	130
HBLCON2	viii	HBLSCSBMBD	118	HXJ5EAL	55, 133	IFP212EI	130
HBLCON3	viii	HBLSCSBW	118	HXJ5EB	133	IFP212GY	130
HBLCCUBPD	vi	HBLSHA2	viii	HXJ5EBK	133	IFP212OW	81, 130
HBLCCUBPDW	vi	HBLSHA2BSS	viii	HXJ5EEI	133	IFP212W	130
HBLCFB301BASE	94	HBLSI305SBK	119	HXJ5EGN	133	IFP26AL	130
HBLCFB401BASE	94	HBLSI305SGY	94,103,119	HXJ5EGY	133	IFP26BK	130
HBLCFB401CB	94	HBLSI305SI	119	HXJ5EOR	133	IFP26EI	130
HBLCFB501BASE	94	HBLSI305SWA	119	HXJ5EOW	81, 133	IFP26GY	130
HBLDE301SBK	119,viii	HBLSI315SBK	119	HXJ5ER	133	IFP26OW	81, 130
HBLDE301SGY	94,103,119,viii	HBLSI315SGY	94,103,119	HXJ5EW	133	IFP26W	130
HBLDE301SI	119	HBLSI315SI	119	HXJ5EY	133	IFP29AL	130
HBLDE301SWA	119	HBLSI315SWA	119	HXJ6AL	55	IFP29BK	130
HBLGWEP	16, 25	HBLST302SBK	119,viii	HXJ6AL	133	IFP29EI	130
HBLIMFSBK	119,viii	HBLST302SGY	94,103,119,viii	HXJ6B	133	IFP29GY	130
HBLIMFSGY	94,103,119,viii	HBLST302SI	119	HXJ6BK	133	IFP29OW	81, 130
HBLIMFSI	119	HBLST302SWA	119	HXJ6EI	133	IFP29W	130
HBLIMFSWA	119	HBLTCGNT	103	HXJ6GN	133	IG2310	129
HBLIWEP	13, 16, 25	HBLTCGNTBK	103	HXJ6GY	133	IG2320	129
HBLKR314SBK	119	HBLTCGNTBKSW	94	HXJ6OR	133	IG2340	129
HBLKR314SGY	94,103,119	HBLTCGNTSW	94	HXJ6OW	81, 133	IG2410	129
HBLKR314SI	119	HBLTL318BK	119	HXJ6R	133	IG2420	129
HBLKR314SWA	119	HBLTL318GY	94,103,119,viii	HXJ6W	133	IG2510	129
HBLLT309SBK	119	HBLTL318I	119	HXJ6Y	133	IG2610	129
HBLLT309SGY	94,103,119	HBLTL318WA	119	HXJUAL	55, 133	IG2620	129
HBLLT309SI	119	HBLTL319SBK	119,viii	HXJUB	133	IG2710	129
HBLLT309SWA	119	HBLTL319SGY	94,103,119,viii	HXJUBK	133	IG2720	129
HBLMAR2	viii	HBLTL319SI	119	HXJUEI	133	IG2810	129
HBLMAR3	viii	HBLTL319SWA	119	HXJUGN	133	IG4550A	129
HBLMIR2	viii	HBLTO310SBK	119,viii	HXJUGY	133	IG4560	129
HBLMIR4	viii	HBLTO310SGY	94,103,119,viii	HXJUOR	133	IG4700A	129
HBLNO309SBK	119	HBLTO310SI	119	HXJUOW	81, 133	IG4710	129
HBLNO309SGY	94,103,119	HBLTO310SWA	119	HXJUR	133	IG5262	127



Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
IG5262GY	127	IMB15W	135	ISFXLRAL	131	NP1R	130
IG5262I	127	IMB1AL	55, 135	ISFXLRBK	131	NP1W	130
IG5262R	127	IMB1BK	135	ISFXLREI	131	NP2	130
IG5362	127	IMB1EI	135	ISFXLRGY	131	NP26	130
IG5362GY	127	IMB1GY	55, 135	ISFXLROW	131	NP262	130
IG5362I	127	IMB1OW	135	ISFXLRW	131	NP262AL	130
IG5362R	127	IMB1W	135	KP1	81	NP262BK	130
IG5362W	127	IMBDS1OW	134	KP14	81	NP262GY	130
IM15315OW	134	IMCR1101OW	134	KP14AL	54	NP262I	130
IM15DIN1OW	134	IMCRF1OW	134	KP14GY	54	NP262OW	130
IM15DVI15OW	134	IMCRS15OW	134	KP1AL	54	NP262R	130
IM15ST1OW	134	IMCRS1OW	134	KP1GY	54	NP262W	130
IM11A15AL	55, 135	IMDVI15OW	134	KP2	81	NP26AL	130
IM11A15GY	55, 135	IMF1AL	55, 130, 135	KP212	81	NP26BK	130
IM11A15OW	135	IMF1BK	130, 135	KP212AL	54	NP26GY	130
IM1K1AL	55, 135	IMF1EI	130, 135	KP212GY	54	NP26I	130
IM1K1BK	135	IMF1GY	55, 130, 135	KP2140	81	NP26OW	130
IM1K1EI	135	IMF1OW	81, 130, 135	KP2140AL	54	NP26R	130
IM1K1GY	55, 135	IMF1W	130, 135	KP2140GY	54	NP26W	130
IM1K1OW	135	IMF2AL	55, 130, 135	KP2162	81	NP2AL	130
IM1K1W	135	IMF2BK	130, 135	KP2162AL	54	NP2BK	130
IM1KA15AL	55, 135	IMF2EI	130, 135	KP2162GY	54	NP2GY	130
IM1KA15BK	135	IMF2GY	55, 130, 135	KP2163	81	NP2I	130
IM1KA15EI	135	IMF2OW	81, 130, 135	KP2163AL	54	NP2OW	130
IM1KA15GY	55, 135	IMF2W	130, 135	KP2163GY	54	NP2R	130
IM1KA15OW	135	IMR1101OW	134	KP24	81	NP2W	130
IM1KA15W	135	IMRSJ1OW	134	KP26	81	NP8	130
IM1SCA15AL	55, 135	IMSP1OW	134	KP262	81	NP82	130
IM1SCA15BK	135	IMSR1101OW	134	KP26AL	54	NP82AL	130
IM1SCA15EI	135	IMSV351101OW	134	KP26GY	54	NP82BK	130
IM1SCA15GY	55, 135	ISF1535AL	131	KP7	81	NP82GY	130
IM1SCA15OW	135	ISF1535BK	131	KP720	81	NP82I	130
IM1SCA15W	135	ISF1535EI	131	KP720AL	54	NP82OR	130
IM2IA15AL	55, 135	ISF1535GY	131	KP720GY	54	NP82OW	130
IM2IA15GY	55, 135	ISF1535OW	131	KP7AL	54	NP82R	130
IM2IA15OW	135	ISF1535W	131	KP7GY	54	NP82W	130
IM2K1AL	55, 135	ISF2AL	54, 131	KP8	81	NP8AL	130
IM2K1BK	135	ISF2BK	131	KP82	81	NP8BK	130
IM2K1EI	135	ISF2EI	131	KP8AL	54	NP8GY	130
IM2K1GY	55	ISF2GY	54, 131	KP8GY	54	NP8I	130
IM2K1I	135	ISF2OW	81, 131	KPIMBZAL	54	NP8OR	130
IM2K1OW	135	ISF2W	131	KPIMBZGY	54	NP8OW	130
IM2K1W	135	ISF3AL	54, 131	KPIMBZOW	81	NP8R	130
IM2KA15AL	55	ISF3BK	131	LCFBCA	95	NP8W	130
IM2KA15AL	135	ISF3EI	131	LCFBCALC	95	PB2B10	74
IM2KA15BK	135	ISF3GY	54, 131	LCFBCALT	95	PB2B5	74
IM2KA15EI	135	ISF3OW	81, 131	LCFBCALTC	95	PB2C10	74
IM2KA15GY	55, 135	ISF3W	131	LCFBCBKA	95	PB2C5	74
IM2KA15OW	135	ISF4AL	54, 131	LCFBCBKC	95	PB2CACF	75
IM2KA15W	135	ISF4BK	131	LCFBCBKT	95	PB2IND2G	74
IM2SCA2AL	55, 135	ISF4EI	131	LCFBCBKTC	95	PB2SPL10	74
IM2SCA2BK	135	ISF4GY	54, 131	LCFBCBRA	95	PB2SPL5	74
IM2SCA2EI	135	ISF4OW	81, 131	LCFBCBRSC	95	PB2WC	74
IM2SCA2GY	55, 135	ISF4W	131	LCFBCBRST	95	PB3BC10	76
IM2SCA2OW	135	ISF6AL	54, 131	LCFBCBRSTC	95	PB3BC5	76
IM2SCA2W	135	ISF6BK	131	LCFBCGYA	95	PB3CACF	77
IM3RF1OW	134	ISF6EI	131	LCFBCGYC	95	PB3ECA	75, 77
IM3RS1OW	134	ISF6GY	54, 131	LCFBCGYT	95	PB3EE	76
IM9DIN1OW	134	ISF6OW	81, 131	LCFBCGYTC	95	PB3EEBCA	74, 76
IMAR1101OW	134	ISF6W	131	LCFBCIA	95	PB3FCIB	76
IMAVB15OW	135	ISFD15AL	131	LCFBIM	95	PB3FCIB2G	76
IMB05AL	55, 135	ISFD15BK	131	LCFBP14	95	PB3FCIB3G	76
IMB05BK	135	ISFD15EI	131	LCFBP26	95	PB3FE	77
IMB05EI	135	ISFD15GY	131	LCFBP720	95	PB3FEBCA	74, 77
IMB05GY	55, 135	ISFD15OW	131	LCFBP8	95	PB3IE	76
IMB05OW	135	ISFD15STAL	131	LCFBSSA	95	PB3IEBCA	74, 76
IMB05W	135	ISFD15STBK	131	NP1	130	PB3IND	76
IMB15AL	55, 135	ISFD15STEI	131	NP1AL	130	PB3IND2G	76
IMB15BK	135	ISFD15STGY	131	NP1BK	130	PB3REDA	75, 77
IMB15EI	135	ISFD15STOW	131	NP1GY	130	PB3SC	75, 77
IMB15GY	55, 135	ISFD15STW	131	NP1I	130	PB3SPCA	75, 77
IMB15OW	135	ISFD15W	131	NP1OW	130	PB3SS	75, 77



Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
PB3TCBCA	75, 77	PL1SC	69, 80	PT205130	80	PW2FE	73
PB3TRBC	77	PL1SS	69, 80	PT205212	80	PW2FEBC	73
PB3WC	76	PL1TC	69, 80	PT205215	80	PW2IE	73
PDB12D	66, 68, 72, 80	PL1TCBC	69, 80	PT206106	80	PW2IEBC	73
PDB12LF	66, 68, 72, 80	PLP1CACF	67, 69	PT206112	80	PW2RED	73
PDB12LP	66, 68, 72, 80	PLP1CACF	80	PT206118	80	PW2SC	73
PDB12S	68, 72, 80	PP1ABC5	66	PT206124	80	PW2SS	73
PDB12TGD	66, 68, 72, 80	PP1ABC7	66	PT206136	80	PW2TC	73
PDB12TGLV	66, 68, 72	PP1BC5	66	PT206206	80	PW2TCBC	73
PDB1DIV	72	PP1BC7	66	PT206212	80	Q106AL	54, 131
PDB2DIV	72	PP1EC	67	PT206218	80	Q106B	131
PDCS332	102	PP1EE	67	PT206224	80	Q106E	131
PDCS42222	102	PP1EEBC	67	PT27A	115	Q106G	54, 131
PDCS42231	102	PP1FE	67	PT2FIT	114	Q106O	81, 131
PFB1	88	PP1FEBC	67	PT2X2BL	112	Q106W	131
PFBA1A	88	PP1IE	67	PT2X2BRS	112	S1CFCAL	87, 111
PFBCBKA	88	PP1IEBC	67	PT2X2BRS3	112	S1CFCBL	87, 111
PFBCBRA	88	PP1SC	67	PT2X2CBL	112	S1CFCBRS	87, 111
PFBCGYA	88	PP1SS	67	PT2X2CBRS	112	S1CFCGY	87, 111
PFBCIA	88	PP1TC	67	PT2X2CGY	112	S1CFCL	87, 111
PFBP1	88	PP1TCBC	67	PT2X2FIT	112	S1DIV1	87
PFBR826BLA	90	PPTRIM1	122	PT2X2GY	112	S1PFB	87
PFBR826BRA	90	PS3BC10	78	PT2X2IGBL	112	S1PT3IMAL	109
PFBR826GYA	90	PS3BC5	78	PT2X2IGBRS	112	S1PT3IMBL	109
PFBR826IA	90	PS3CACF	79	PT2X2IGBRS3	112	S1PT3IMBRS	109
PFBRAC	91	PS3EC	79	PT2X2IGGY	112	S1PT3IMGY	109
PFBRCLA	113	PS3EE	78	PT2X2SFBL	112	S1PT4X4AL	109
PFBRCBRA	113	PS3EEBC	78	PT2X2SFBR3	112	S1PT4X4BL	109
PFBRCGYA	113	PS3FCIB	78	PT2X2SFBR3	112	S1PT4X4BRS	109
PFBRCIA	113	PS3FCIB2G	78	PT2X2SFGY	112	S1PT4X4FIT	111
PFBRFBL1	90	PS3FCIB3G	78	PT71SD	114	S1PT4X4GY	109
PFBRFBL2	90	PS3FE	79	PT73FFSDGY	114	S1PTAL	109
PFBRFBL3	90	PS3FEBC	79	PT73FFSDI	114	S1PTAVFIT	111
PFBRFBR1	90	PS3IE	78	PT73SD	113	S1PTBL	109
PFBRFBR2	90	PS3IEBC	78	PT73SD	114	S1PTBRS	109
PFBRFBR3	90	PS3IND	78	PT7FFSDGY	114	S1PTFIT	111
PFBRFGY1	90	PS3RED	79	PT7FFSDI	114	S1PTGY	109
PFBRFGY2	90	PS3SC	79	PT7FSD	113	S1SP	87, 110
PFBRFGY3	90	PS3SPC	79	PT7FSDBLA	113	S1SP3IM	87, 110
PFBRF1	90	PS3SS	79	PT7FSDBRA	113	S1SP4IM	87, 110
PFBRF2	90	PS3TCBC	79	PT7FSDBRS2A	113	S1SP4X4	87, 110
PFBRF3	90	PS3WC	78	PT7FSDBRS3A	113	S1SP4X4PA	87, 110
PFBRFRA	90	PT12CA	65	PT7FSDGYA	113	S1SP4X4SYS	87, 110
PFBRG1	90, 91	PT12DBA	64	PT7FSDIA	113	S1SPEXT1	87, 110
PFBRG2	90, 91	PT12LFB	64	PT7IGFSDBRSA	113	S1SPEXT2	87, 110
PFBRG3	90, 91	PT12LPB	64	PT7IGFSDGYA	113	S1SPEXT3	87, 110
PFBRMC	90	PT12SBA	64	PT7IGFSDIA	113	S1SPFFAL	87, 110
PFBT1A	88	PT12TGB	64	PT7XC	115, 116	S1SPFFBL	87, 110
PFBYA1	88	PT153112P	80	PW1ABC5	70	S1SPFFBRS	87, 110
PHPS1AL	54	PT155112	80	PW1ABC7	70	S1SPFFGY	87, 110
PHPS1G	54	PT155112P	80	PW1BC5	70	S1SPMAX	87, 110
PHPS2AL	54	PT155115	80	PW1BC7	70	S1SPORT	87, 110
PHPS2G	54	PT155130	80	PW1CA	71	S1SPTL	87, 110
PHPS3AL	54	PT155212	80	PW1DBA	70	S1SPTRAC	87, 110
PHPS4AL	54	PT156112	80	PW1EC	71	S1TFCAL	87, 111
PHPS5AL	54	PT156118	80	PW1EE	71	S1TFCBL	87, 111
PHPS6AL	54	PT156124	80	PW1FE	71	S1TFCBRS	87, 111
PJS126AL	54	PT156212	80	PW1IE	71	S1TFCGY	87, 111
PJS126G	54	PT1ABC5	64	PW1LFB	70	S1TFCL	87, 111
PJS226G	54	PT1ABC7	64	PW1LPB	70	S2425	91, 92, 93, 97
PL1ABC5	68	PT1BC5	64	PW1SBA	70	S2525	88, 89, 97
PL1ABC7	68	PT1BC7	64	PW1SC	71	S2625	91, 92, 93, 97
PL1BC5	68	PT1EC	65	PW1TC	71	S2725	88, 89, 97
PL1BC7	68	PT1EE	65	PW1TGB	70	S2825	91, 92, 93, 97
PL1EC	69, 80	PT1FE	65	PW2ABC5	72	S2925	88, 89, 97
PL1EE	69, 80	PT1IE	65	PW2ABC7	72	S3079	89
PL1EEBC	69, 80	PT1SC	65	PW2BC5	72	S3082	88, 89, 97
PL1FE	69, 80	PT1TC	65	PW2BC7	72	S3083	92, 93
PL1FEBC	69, 80	PT203112P	80	PW2CACF	73	S3084	92, 93
PL1IE	69, 80	PT205112	80	PW2EC	73	S3085	92, 93
PL1IEBC	69, 80	PT205112P	80	PW2EE	73	S3182	89
PL1MC	80	PT205115	80	PW2EEBC	73	S3325	88, 89, 97



Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
S3425	92, 93, 97	SCH8	130	SFRCRFFGY	55	SP7AL	54
S3525	88, 89, 97	SCH82	130	SFRCW	132	SP7G	54
S3625	91, 92, 93, 97	SF2525	88, 89, 97	SFRCWFF	132	SP82AL	54
S3725	88, 89, 97	SF2725	88, 89, 97	SFRCWFFAL	55	SP82G	54
S3813	91, 92, 93, 97	SF2925	88, 89, 97	SFRCWFFGY	55	SP83AL	54
S3825	91, 92, 93, 97	SF35SJ	133	SFRCY	132	SP8AL	54
S3826	91, 92, 93, 97	SF35SJAL	55, 133	SFRCYFF	132	SP8G	54
S3925	88, 89, 97	SF35SJBK	133	SFRCYFFAL	55	SPLITTER332	102
S5016	88	SF35SJEI	133	SFRCYFFGY	55	SPLITTER422	102
S5017G	91	SF35SJGY	55, 133	SFRFGOW	132	SPPBK10	133
SA1	130	SF35SJW	133	SFRFGW	132	SPPR10	133
SA2	130	SF3925	88, 89, 97	SFSPGBK	55, 133	SS1	130
SA2425	91, 92, 93, 97	SF39253A	88	SFSPGR	55, 133	SS2	130
SA2525	88, 89, 97	SFB10	81, 132	SFST	81, 133	SS2309BBKA	115
SA2625	91, 92, 93, 97	SFBAL	55, 132	SFSTAL	133	SS2309BGYA	115
SA2725	88, 89, 97	SFBAL10	55, 132	SFSTBK	133	SS2309DBKA	115
SA2925	88, 89, 97	SFBB10	132	SFSTEI	133	SS2309DGYA	115
SA3083	91, 92, 93	SFBBK	132	SFSTG	133	SS2309F1BKA	115
SA3083W	97	SFBE10	132	SFSTW	133	SS2309F1GYA	115
SA3084	91, 92, 93	SFBEI	132	SFSV110AL	55, 132	SS2309FBKA	115
SA3084W	97	SFBG10	55, 132	SFSV110BK	81, 132	SS2309FGYA	115
SA3085	91, 92, 93	SFBGAL	132	SFSV110EI	132	SS2309SBKA	115
SA3085W	97	SFBGBK	132	SFSV110GY	55, 132	SS2309SGYA	115
SA3182	89, 97	SFBGEI	132	SFSV110OW	132	SS2309SLBKA	115
SA3625	91, 92, 93, 97	SFBGGY	132	SFSV110W	132	SS2309SLGYA	115
SA3725	88, 89, 97	SFBGOW	132	SFSVAL	55, 132	SS2309TBKA	115
SA3813	91, 92, 93, 97	SFBGW	132	SFSVBK	132	SS2309TGYA	115
SA3825	91, 92, 93, 97	SFBGY	55, 132	SFSVEI	132	SS26	130
SA3826	91, 92, 93, 97	SFBOW	81, 132	SFSVGY	55, 132	SS262	130
SA3925	88, 89, 97	SFBW	132	SFSVOW	132	SS309B	116
SA5016	88	SFBW10	132	SFSVW	132	SS309BF	116
SA5017G	91	SFFALX	55, 132	SFUSBAAB	133	SS309D	116
SA8	130	SFFBX	132	SFUSBABB	133	SS309DS	116
SA82	130	SFFEX	132	SL5E4A	131	SS309S	116
SB1	130	SFFGAL	55, 132	SL5E4B	131	SS309SF	116
SB2	130	SFFGBK	132	SP14AL	54	SS309T	116
SB26	130	SFFGEI	132	SP14BAL	54	SS8	130
SB262	130	SFFGGY	55, 132	SP14BG	54	SS82	130
SB3083	91, 92, 93	SFFGOW	132	SP14G	54	SSF11	130
SB3083W	97	SFFGW	132	SP18AL	54	SSF12	130
SB3084	91, 92, 93	SFFGX	55, 132	SP18G	54	SSF13	130
SB3084W	97	SFFWX	132	SP1AL	54	SSF14	130
SB3085	91, 92, 93	SFFX	81, 132	SP1G	54	SSF16	130
SB3085W	97	SFRC	132	SP24AL	54	SSF204	130
SB8	130	SFRC110B	132	SP24BAL	54	SSF209	130
SB82	130	SFRC110GN	132	SP24BG	54	SSF206	130
SBP1	130	SFRC110R	55, 81, 132	SP24G	54	SSF212	130
SBP2	130	SFRC110W	55, 132	SP28AL	54	SSFL11	130
SBP26	130	SFRC110Y	55, 132	SP28G	54	SSFL12	130
SBP262	130	SFRCBFFOW	132	SP2AL	54	SSFL13	130
SBP8	130	SFRCBKFF	132	SP2G	54	SSFL14	130
SBP82	130	SFRCBOW	132	SP34AL	54	SSFL16	130
SC10	135	SFRCGNFFOW	132	SP34BAL	54	USB10	135
SCH1	130	SFRCGNOW	132	SP3AL	54	XLR10	135
SCH2	130	SFRRCR	132	SP4AL	54	XLRST10	135
SCH26	130	SFRCRFF	132	SP5AL	54		
SCH262	130	SFRCRFFAL	55	SP6AL	54		





WIRING SYSTEMS
Wiring Device-Kellems
Premise Wiring

Hubbell Wiring Device-Kellems
Hubbell Incorporated (Delaware)
185 Plains Road • Milford, CT 06461-2420
(203) 882-4800 • Fax (800) 255-1031
Internet site: www.hubbell-wiring.com

Hubbell Premise Wiring
Hubbell Incorporated (Delaware)
14 Lord's Hill Road • Stonington, CT 06378-0901
(860) 535-8326 • (800) 626-0005 • Fax (860) 535-8328
Internet site: www.hubbell-premise.com

Hubbell Canada LP
870 Brock Road South • Pickering, Ontario L1W 1Z8
(800) 263-4622 • (905) 839-1138 • Fax (905) 839-9108
Internet site: www.hubbellonline.com

Hubbell De Mexico, S.A. de C.V.
Ave. Coyoacan No. 1051 • Col. Del Valle C.P. 03100 Mexico D. F.
(01 55) 91 51 99 99 • Fax (01 55) 91 51 99 88
Internet site: www.hubbell.com.mx