



FCC TEST REPORT
For
SHENZHEN UNIVERSAL ELECTRON TECHNOLOGY CO., LTD
USB HUB

Model No. : UE-U035

Prepared for : SHENZHEN UNIVERSAL ELECTRON TECHNOLOGY CO., LTD
Address : Floor 5, Building A, Wentao Industrial Park, Tangtou, Shiyan, Shenzhen,
China.

Prepared By : Shenzhen Certification Technology Service Co., Ltd.

Report Number : STE120822139
Date of Test : August 21-22, 2012
Date of Report : August 22, 2012

TABLE OF CONTENTS

Description	Page
Test Report Declaration	3
1. SUMMARY OF STANDARDS AND RESULTS	4
1.1. Description of Standards and Results.....	4
2. GENERAL INFORMATION	5
2.1. Description of Device (EUT)	5
2.2. Tested Supporting System Details.....	6
2.3. Block Diagram of connection between EUT and simulators	6
2.4. Test Facility	7
2.5. Measurement Uncertainty	7
3. POWER LINE CONDUCTED EMISSION TEST.....	8
3.1. Test Equipment.....	8
3.2. Block Diagram of Test Setup	8
3.3. Power Line Conducted Emission Test Limits	8
3.4. Configuration of EUT on Test.....	9
3.5. Operating Condition of EUT	9
3.6. Test Procedure	9
3.7. Conducted Disturbance at Mains Terminals Test Results.....	9
4. RADIATED EMISSION TEST	12
4.1. Test Equipment.....	12
4.2. Block Diagram of Test Setup	12
4.3. Radiated Emission Limit	13
4.4. EUT Configuration on Test	13
4.5. Operating Condition of EUT	14
4.6. Test Procedure	14
4.7. Radiated Disturbance Test Results.....	15
5. PHOTOGRAPH.....	18
5.1. Photos of Radiated Emission Test (In Anechoic Chamber).....	18
5.2. Photos of Power Line Conducted Emission Test	19
6. PHOTOS OF THE EUT	20

TEST REPORT VERIFICATION

Applicant : SHENZHEN UNIVERSAL ELECTRON TECHNOLOGY CO., LTD
Manufacturer : SHENZHEN UNIVERSAL ELECTRON TECHNOLOGY CO., LTD
EUT Description : USB HUB
(A) Model No. : UE-U035
(B) Trademark : N/A
(C) Serial No. : N/A
(D) Power Supply : DC 5V
(E) Test Voltage : DC 5V From PC AC 120V/60Hz

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart B Class B 2011, ANSI C63.4-2003

The device described above is tested by Shenzhen Certification Technology Service Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Certification Technology Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Certification Technology Service Co., Ltd.

Date of Test : August 21-22, 2012 Report of date: August 22, 2012

Prepared by : Nina Wang
Nina Wang / Assistant

Reviewer by : Simple
Simple Guan / Assistant Manager



1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Power Line Conducted Emission Test	FCC Part 15: 2011 ANSI C63.4: 2003	Class B	PASS
Radiated Emission Test	FCC Part 15: 2011 ANSI C63.4: 2003	Class B	PASS



2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description : USB HUB

Model Number : UE-U035

Trademark : N/A

Applicant : SHENZHEN UNIVERSAL ELECTRON TECHNOLOGY CO., LTD
Address : Floor 5, Building A, Wentao Industrial Park, Tangtou, Shiyan,
Shenzhen, China.

Manufacturer : SHENZHEN UNIVERSAL ELECTRON TECHNOLOGY CO., LTD
Address : Floor 5, Building A, Wentao Industrial Park, Tangtou, Shiyan,
Shenzhen, China.


Sample Type : Series production

2.2. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1.	Personal Computer	ACER	ASPIRE M1830	PTSF90C00305005CAC3000
2.	Monitor	ACER	G205HV	SNID:10306738385
3.	USB Keyboard	ACER	SK-9625	KBUSB1580500037E0100
4.	USB Mouse	ACER	MS.11200.014	M-UAY-ACR2
5.	Printer	HP	HP1020	CNCJ410726
6.	USB Flash Disk	N/A	N/A	N/A

Signal Cable Description of the above Support Units					
No.	Port Name	Cable	Length	Shielded (Yes or No)	Detachable (Yes or No)
1	N/A	N/A	N/A	N/A	N/A

2.3. Block Diagram of connection between EUT and simulators

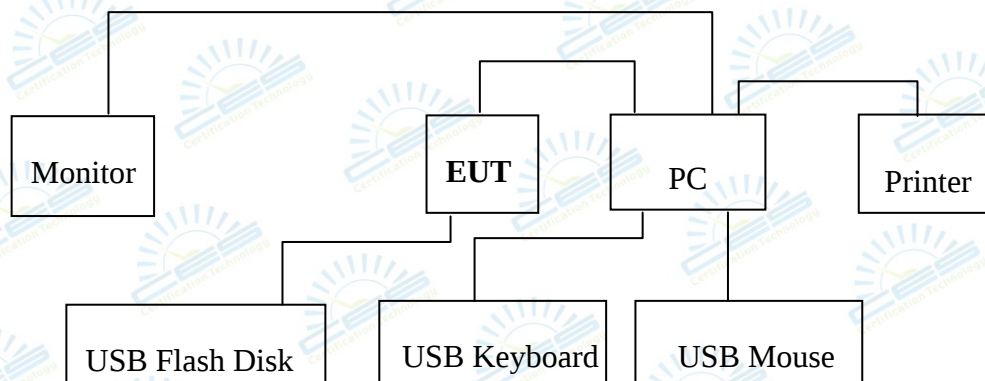

※ EUT: USB HUB

2.4. Test Facility

JAN 13, 2012 File on Federal Communication Commission
Registration Number:197647

October 11, 2011 Certificated by IC
Registration Number: 8528B

August 4, 2010 Certificated by CNAS
Registration Number: L4656

NOV. 17, 2008 Accredited by SGS
Registration Number: SWL-017

NOV. 18, 2008 Accredited by NEMKO
Registration Number: 17025

2.5. Measurement Uncertainty

(95% confidence levels, k=2)


Test Item	Uncertainty
Uncertainty for Conduction emission test	2.50dB
Uncertainty for Radiation Emission test	3.04 dB (Distance: 3m Polarize: V)
	3.02 dB (Distance: 3m Polarize: H)
Uncertainty for Radiation Emission test (1GHz-18GHz)	3.56 dB (Distance: 3m Polarize: V)
	3.84 dB (Distance: 3m Polarize: H)
Uncertainty for test site temperature and humidity	0.6°C
	3%

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	100843	Oct. 17, 11	1 Year
2.	L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	Oct. 17, 11	1 Year
3.	L.I.S.N.#2	Kyoritsu	KNW-242C	8-1920-1	Oct. 17, 11	1 Year
4.	Terminator	Hubersuhner	50Ω	No. 1	Oct. 17, 11	1 Year
5.	RF Cable	Schwarzbeck	9111505/200	5995-12-161-6890#	Apr 17, 12	1/2 Year
6.	Coaxial Switch	Schwarzbeck	CX-210	N/A	Apr 17, 12	1/2 Year
7.	Pulse Limiter	Schwarzbeck	VTSD9516F	9618	Oct. 17, 11	1 Year

3.2. Block Diagram of Test Setup

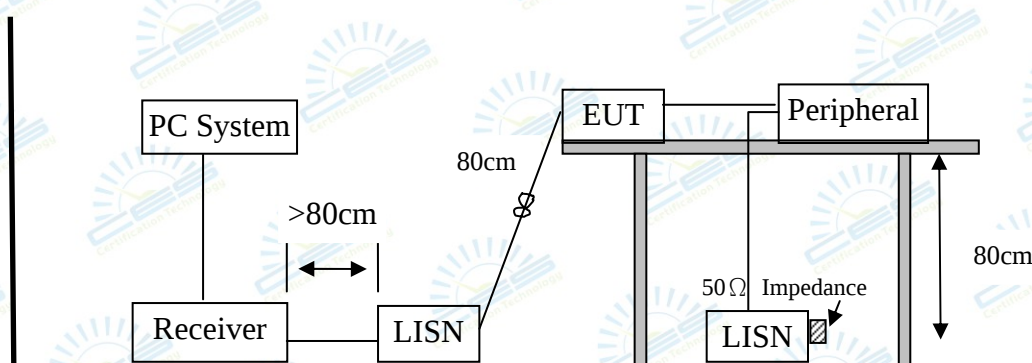

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. Emission level=Read level+LISN factor-Preamplifier factor+Cable loss

2* Decreasing linearly with logarithm of frequency.

3. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

Support Equipments : As Tested Supporting System Detail, in Section 2.2.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipment.

3.5.3. Let the EUT work in test mode (Data Transmitting) and measure it.

3.6. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N. #2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4-2003 on conducted Emission test.

The bandwidth of test receiver (R&S TEST RECEIVER ESCI) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked. The test result are reported on Section 3.7.

3.7. Conducted Disturbance at Mains Terminals Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

The EUT with the following test mode was tested and read QP values and average values, the test results are listed in next pages.

Temperature: 25°C Humidity: 55%


The details of test mode is as follows :

No.	Test Mode
1	Data Transmitting

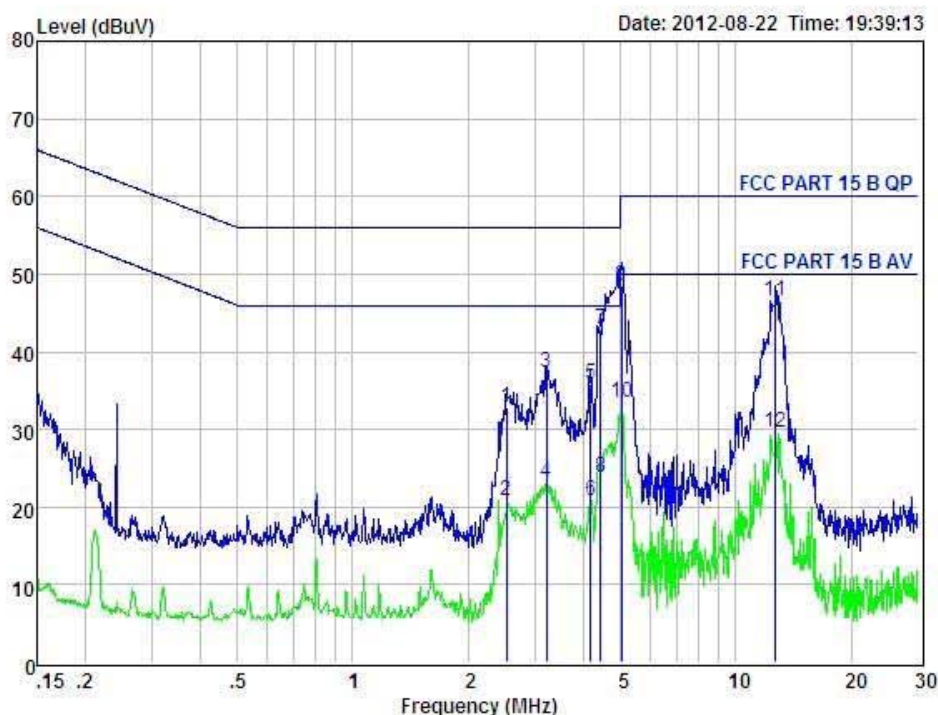

Condition : FCC PART 15 B QP POL: LINE
 EUT : USB HUB
 Model No : UE-U035
 Test Mode : Data Transmitting
 Power : DC 5V From PC AC 120V/60Hz
 Test Engineer: Nina
 Remark :

Item	Freq MHz	Read dBuV	LISN Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2.527	23.02	0.06	-9.70	0.11	32.89	56.00	-23.11	QP
2	2.527	11.02	0.06	-9.70	0.11	20.89	46.00	-25.11	Average
3	3.207	27.34	0.07	-9.69	0.12	37.22	56.00	-18.78	QP
4	3.207	13.34	0.07	-9.69	0.12	23.22	46.00	-22.78	Average
5	4.180	25.96	0.08	-9.69	0.12	35.85	56.00	-20.15	QP
6	4.180	10.96	0.08	-9.69	0.12	20.85	46.00	-25.15	Average
7	4.430	32.98	0.09	-9.68	0.12	42.87	56.00	-13.13	QP
8	4.430	13.98	0.09	-9.68	0.12	23.87	46.00	-22.13	Average
9	5.031	38.64	0.10	-9.68	0.12	48.54	60.00	-11.46	QP
10	5.031	23.64	0.10	-9.68	0.12	33.54	50.00	-16.46	Average
11	12.716	36.61	0.25	-9.44	0.22	46.52	60.00	-13.48	QP
12	12.716	19.61	0.25	-9.44	0.22	29.52	50.00	-20.48	Average

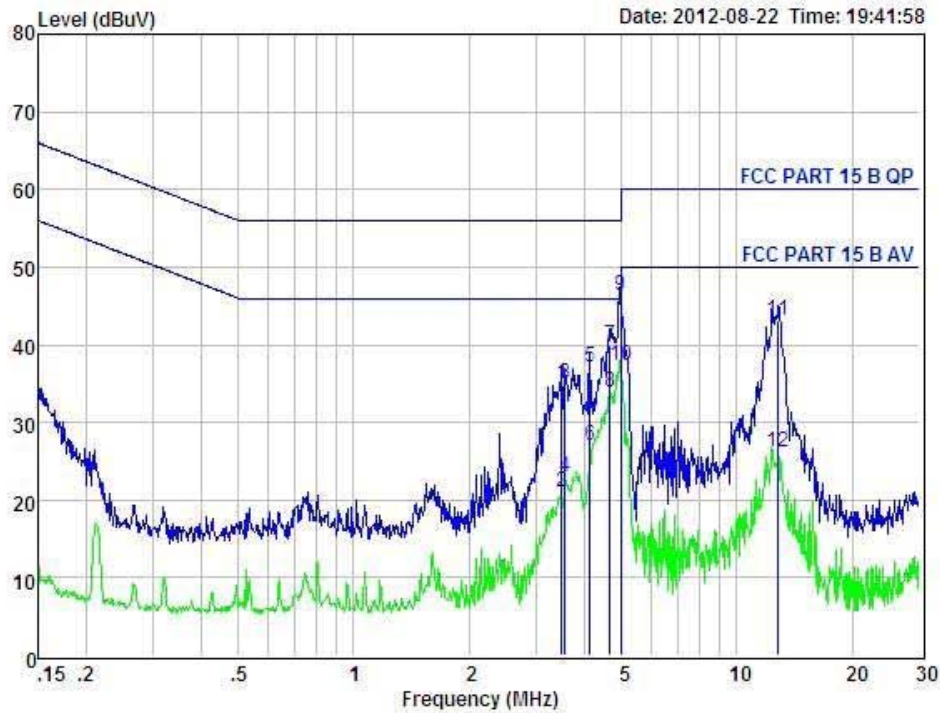

Condition : FCC PART 15 B QP POL: NEUTRAL
 EUT : USB HUB
 Model No : UE-U035
 Test Mode : Data Transmitting
 Power : DC 5V From PC AC 120V/60Hz
 Test Engineer: Nina
 Remark :

Item	Freq MHz	Read dBuV	LISN Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	3.491	25.11	0.08	-9.69	0.12	35.00	56.00	-21.00	QP
2	3.491	11.11	0.08	-9.69	0.12	21.00	46.00	-25.00	Average
3	3.565	25.07	0.08	-9.69	0.12	34.96	56.00	-21.04	QP
4	3.565	13.07	0.08	-9.69	0.12	22.96	46.00	-23.04	Average
5	4.136	27.11	0.08	-9.69	0.12	37.00	56.00	-19.00	QP
6	4.136	17.11	0.08	-9.69	0.12	27.00	46.00	-19.00	Average
7	4.672	30.08	0.09	-9.68	0.12	39.97	56.00	-16.03	QP
8	4.672	24.08	0.09	-9.68	0.12	33.97	46.00	-12.03	Average
9	4.978	36.33	0.10	-9.68	0.12	46.23	56.00	-9.77	QP
10	4.978	27.33	0.10	-9.68	0.12	37.23	46.00	-8.77	Average
11	12.852	33.22	0.23	-9.44	0.22	43.11	60.00	-16.89	QP
12	12.852	16.22	0.23	-9.44	0.22	26.11	50.00	-23.89	Average

4. RADIATED EMISSION TEST

4.1. Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	Rohde&Schwarz	ESCI	101165	Oct. 17, 11	1 Year
2	Amplifier	Schwarzbeck	BBV9743	9743-019	Oct. 17, 11	1 Year
3	Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	Feb.12, 12	1 Year
4	RF Cable	Schwarzbeck	AK9515E	95891-2m	Oct. 17, 11	1 Year
5	RF Cable	Schwarzbeck	AK9515E	95891-11m	Oct. 17, 11	1 Year
6	RF Cable	Schwarzbeck	AK9515E	95891-0.5m	Oct. 17, 11	1 Year

For frequency range 1GHz~5GHz (At Semi Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	Oct. 17, 11	1 Year
2	Horn Antenna	EMCO	BBV9743	9743-019	Oct. 17, 11	1 Year
3	Amplifier	Schwarzbeck	SCHWARZBEC K	N/A	Oct. 17, 11	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	Oct. 17, 11	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX102	271471/4	Oct. 17, 11	1 Year
6	RF Cable	Hubersuhner	SUCOFLEX102	29086/2	Oct. 17, 11	1 Year

4.2. Block Diagram of Test Setup

4.2.1. In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

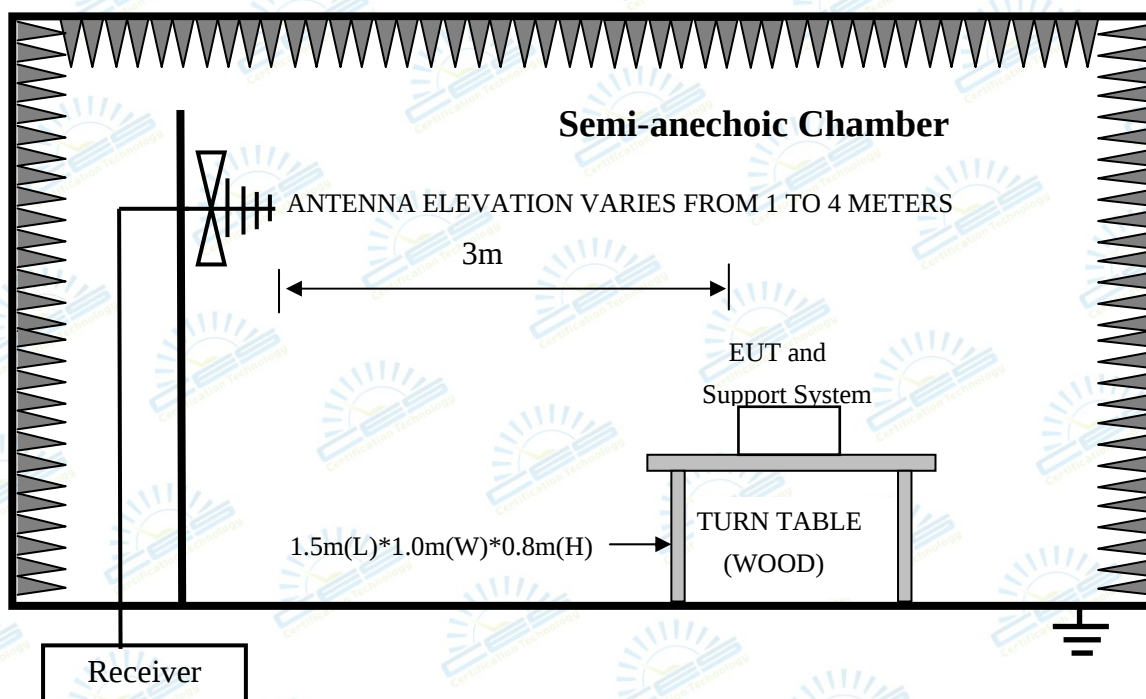

4.2.2. In Semi Anechoic Chamber (3m) Test Setup Diagram for 1-5GHz

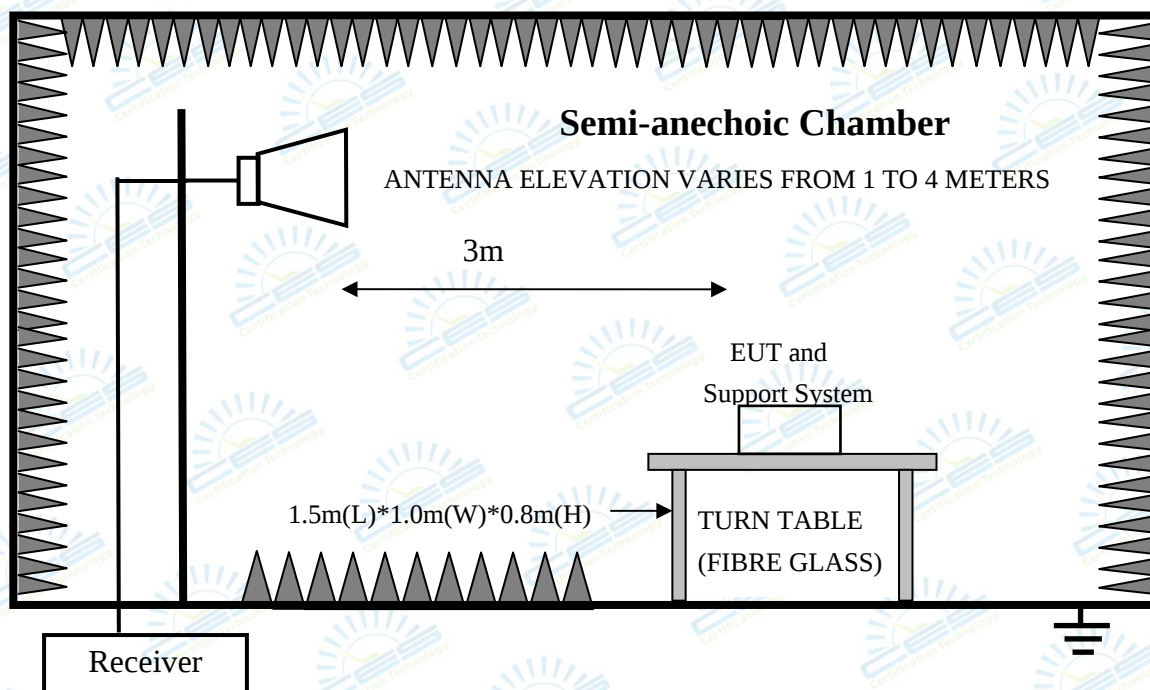

4.3. Radiated Emission Limit

Frequency MHz	Distance (Meters)	Field Strengths Limits dB(μV)/m
30 ~ 88	3	40.0
88 ~ 216	3	43.5
216 ~ 960	3	46.0
960 ~ 1000	3	54.0
1000 ~ 5000	3	74(Peak) 54(Average)

Remark: (1) Emission level = Read level+Antenna Factor-Preamp Factor +Cable Loss

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

4.4.1. Support Equipments : As Tested Supporting System Detail, in Section 2.2.

4.5. Operating Condition of EUT

4.5.1. Setup the EUT as shown in Section 4.2.

4.5.2. Turn on the power of all equipment.

4.5.3. Let the EUT work in test mode (Data Transmitting) and test it.

4.6. Test Procedure

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4-2003 on Radiated Emission test.

The bandwidth setting on the test receiver (ROHDE&SCHWARZ TEST RECEIVER ESCI) is 120 kHz.

The resolution bandwidth of the Agilent Spectrum Analyzer E4446A was set at 1MHz. (For above 1GHz)

The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values.

The frequency range from 1GHz to 5GHz was checked with peak and average detector, measurement distance is 3m in 3m chamber.

Finally, selected operating situations at Anechoic Chamber measurement, all the test results are listed in section 4.7.

4.7. Radiated Disturbance Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

For frequency range 30MHz~1000MHz

The EUT with the following test mode was tested and read QP values and average values, the test results are listed in next pages.


Temperature: 25°C Humidity: 55%

The details of test mode is as follows :

No.	Test Mode
1	Data Transmitting


For frequency range 1GHz~5GHz

The highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. So the frequency rang 1GHz-5GHz radiation test not applicable.

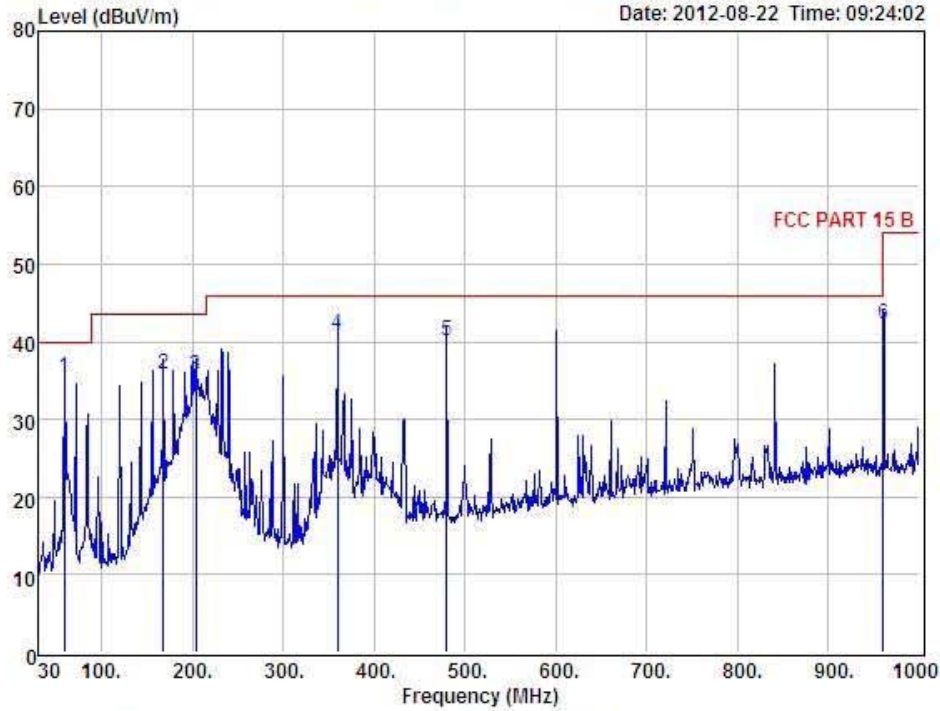

Condition : FCC PART 15 B 3m POL: HORIZONTAL
 EUT : USB HUB
 Model No : UE-U035
 Test Mode : Data Transmitting
 Power : DC 5V From PC AC 120V/60Hz
 Test Engineer : Nina
 Remark :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	59.10	49.81	12.75	27.87	0.65	35.34	40.00	-4.66	QP
2	167.74	48.11	13.37	26.92	1.23	35.79	43.50	-7.71	QP
3	203.63	51.31	9.97	26.99	1.42	35.71	43.50	-7.79	QP
4	359.80	51.91	14.03	27.30	2.25	40.89	46.00	-5.11	QP
5	480.08	48.46	16.25	27.56	2.89	40.04	46.00	-5.96	QP
6	960.23	43.67	22.17	27.61	3.92	42.15	54.00	-11.85	QP


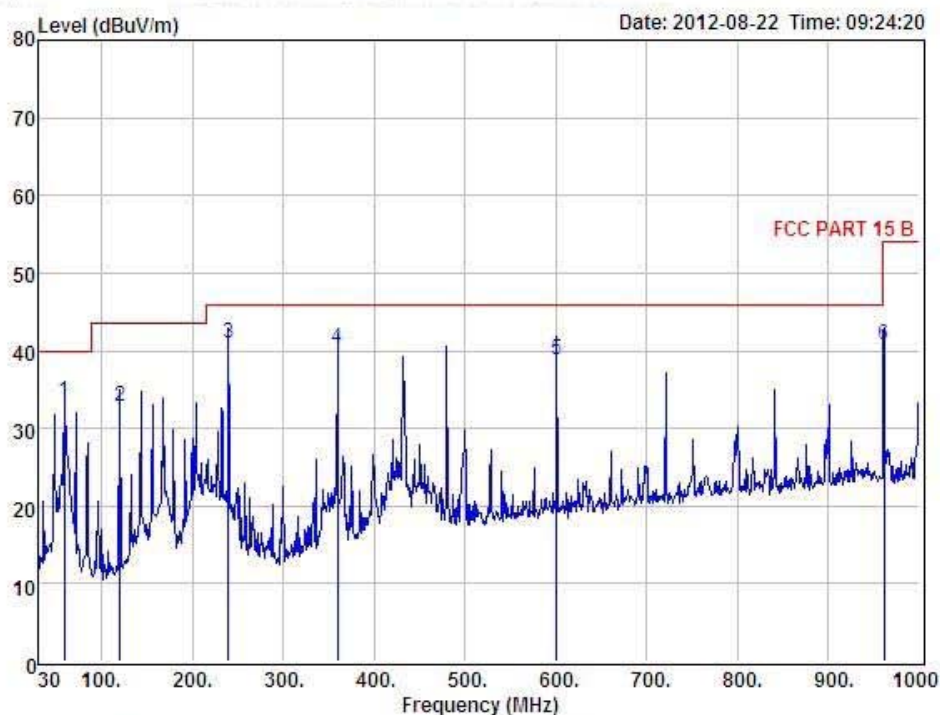


Condition : FCC PART 15 B 3m POL: VERTICAL
 EUT : USB HUB
 Model No : UE-U035
 Test Mode : Data Transmitting
 Power : DC 5V From PC AC 120V/60Hz
 Test Engineer : Nina
 Remark :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	59.10	48.03	12.75	27.87	0.65	33.56	40.00	-6.44	QP
2	120.21	46.53	12.24	26.88	0.97	32.86	43.50	-10.64	QP
3	239.52	54.96	11.45	27.09	1.61	40.93	46.00	-5.07	QP
4	359.80	51.38	14.03	27.30	2.25	40.36	46.00	-5.64	QP
5	600.36	45.03	18.32	27.82	3.20	38.73	46.00	-7.27	QP
6	961.20	42.34	22.17	27.61	3.92	40.82	54.00	-13.18	QP

5. PHOTOGRAPH

5.1.Photos of Radiated Emission Test (In Anechoic Chamber)

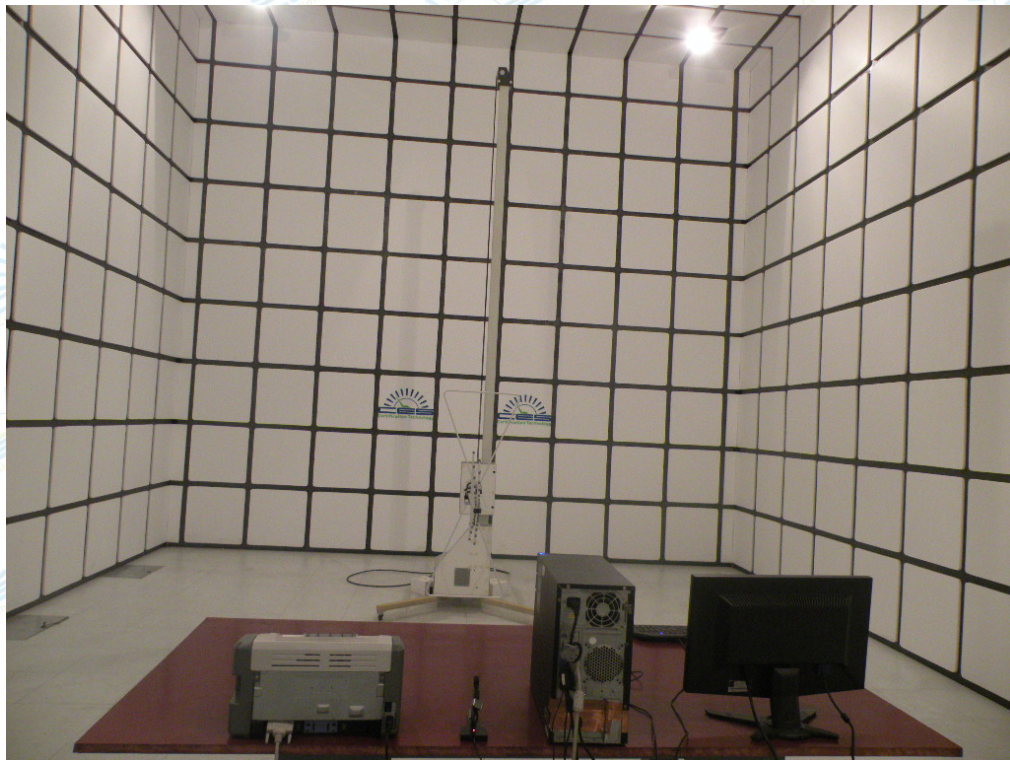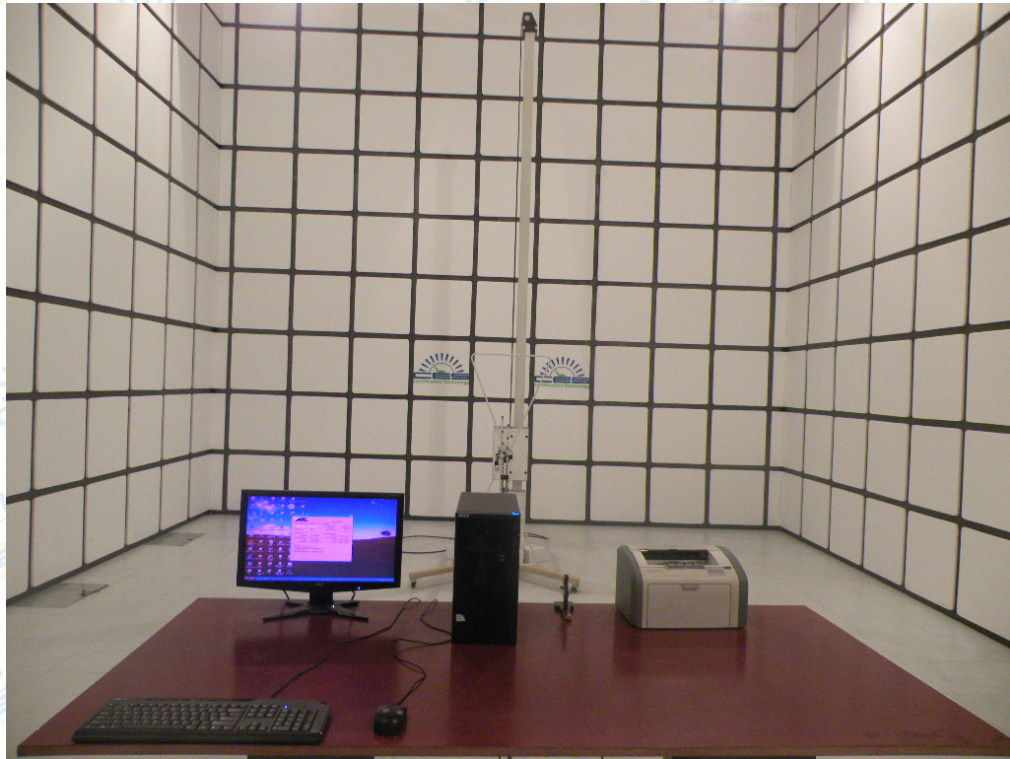

5.2.Photos of Power Line Conducted Emission Test



6. PHOTOS OF THE EUT



Front View



Rear View




Top View




Bottom View




Left View

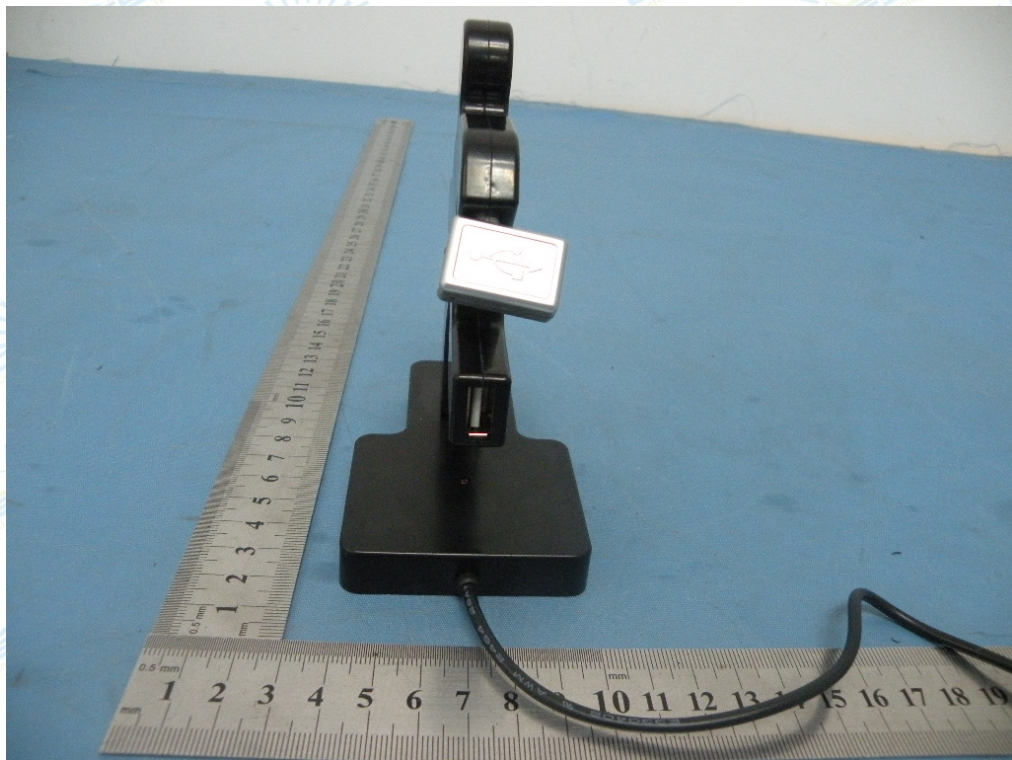

Right View

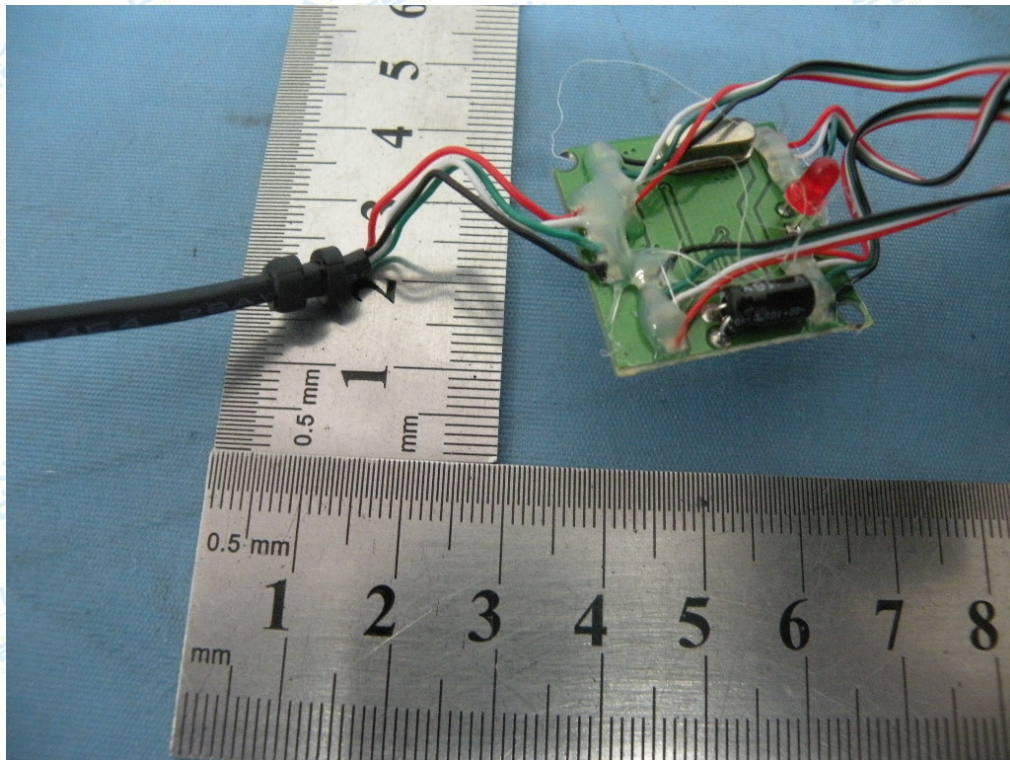

Inside view

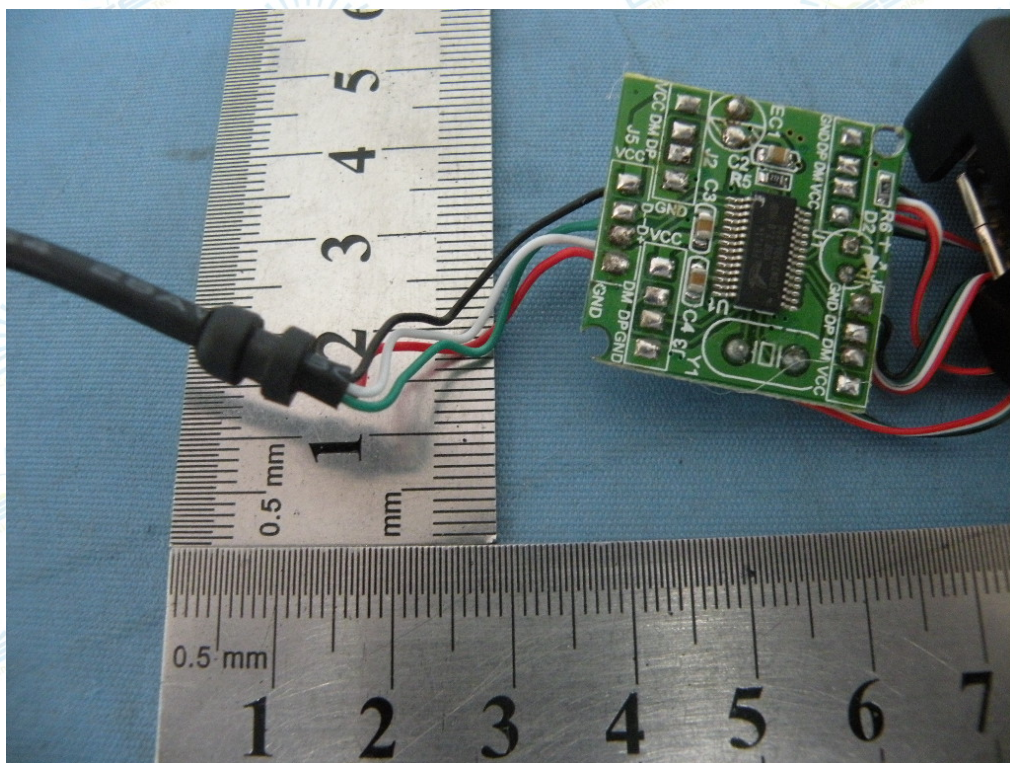

Inside view

-----THE END OF REPORT-----