

**DTT901**



## **DIGITAL TV TUNER**

*Converter Box with Analog Pass-Through*

---

### ***Clear Digital Picture***

Say goodbye to "fuzzy" analog channels... your old TV has never looked better!

### ***On Screen Program Information***

Find out what's on TV at the touch of a button.

### ***More Programs***

See new and different TV programs on "sub-channels" available from many digital TV stations.

### ***Easy Remote Control***

For command of the Zenith Digital TV Tuner and many other brands of TVs.

### ***Simple Connection to TV***

Using the supplied RF cable for easy hookup.

### ***Parental Control***

Manage access to TV programs with V-Chip technology.

### ***Advanced Closed Captioning***

Access closed captions using the CC button on the remote control or through the simple menu, choose fonts, sizes, colors and more for digital closed captions.

### ***Analog Pass-Through***

Continue to receive analog signals with your TV's tuner without a splitter.

### ***Energy Efficient***

EnergyStar rated.



zenith   
DIGITIZE THE EXPERIENCE.™

# DIGITAL TV TUNER

## Converter Box

# DTT901

### FEATURES

Broadcasting System	ATSC
Audio	Dolby Digital 2ch Downmix
Video	480i
Aspect Ratio	4 Modes
Channel Add/Erase/Skip	•
Channel Auto Search	•
Closed Captioning	•
Parental Control	•
Favorite Channel	•
Flash Back	•
Program Guide	Current/Next (When Available)

### MENUS

Language	English/Spanish/French
Initial Language	English

### REAR PANEL INPUTS/OUTPUTS

Composite Video Out	1
Analog L/R Audio Out	1
Terrestrial RF Input	1
RF Module Output	1

### SUPPLIED ACCESSORIES

Remote Control Type	Universal
A/V Cable (RCA Type)	1
RF Cable (RCA Type)	1
User Manual	English/Spanish
Quick Setup Guide	English/Spanish
Battery (AAA)	1

### SPECIAL FEATURES

Closed Caption On/Off	•
-----------------------	---

### SPECIAL FEATURES (CONTINUED)

Auto Power Off	•
Parental Lock	•
Channel Add/Delete	•

### POWER

Consumption (Typical)	< 8W
Stand-by Consumption	< 1W
Energy Star Compliant	•

### SPECIFICATIONS

Dimensions (W x H x D)	8.5" x 1.8" x 6.4"
Dimensions w/Packaging (W x H x D)	12.8" x 2.9" x 9.9"
Weight	1.65 lbs
Weight In Package	3.21 lbs.
UPC	719192173408
Limited Warranty	1 Year Parts/90 Days Labor

### ANALOG PASS-THROUGH FEATURE

Federal law requires that all "full-power" television stations must end analog broadcasts after February 17, 2009, but this does not include "low-power" TV stations, such as:

- "low-power" or "community" stations of very restricted range (LPTV),
- "Class A" stations, and
- "translator" or "booster" stations.


These stations may continue to broadcast in analog after the February 17, 2009, digital conversion deadline for full-power television stations.

This Zenith converter box (Model DTT901) has a feature called "Analog Pass-Through", which allows your analog TV to continue to tune the analog low-power stations.

- To receive analog stations, turn off the box; the analog signal will "pass-through" the box to be tuned in the TV.
- To enjoy the digital stations, tune them through the converter box as explained in this operating guide.

NOTE: Online resources with low-power TV information include: [www.dtvtransition.org/lowpower](http://www.dtvtransition.org/lowpower), <https://www.dtv2009.gov/lowpower/>, and [www.dtv.gov](http://www.dtv.gov). For a map and list of low-power stations by state, please visit [www.ntia.doc.gov/dtvcoupon/LPTVmap.html](http://www.ntia.doc.gov/dtvcoupon/LPTVmap.html)

### REMOTE

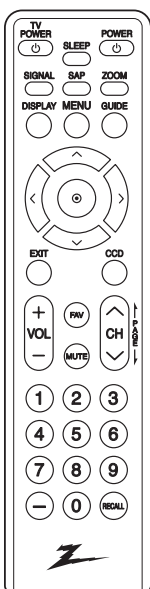

### REAR AUDIO/VIDEO INPUTS/OUTPUTS

