


INFORMATION SHEET

Solar Bonding Washer Installation Instructions

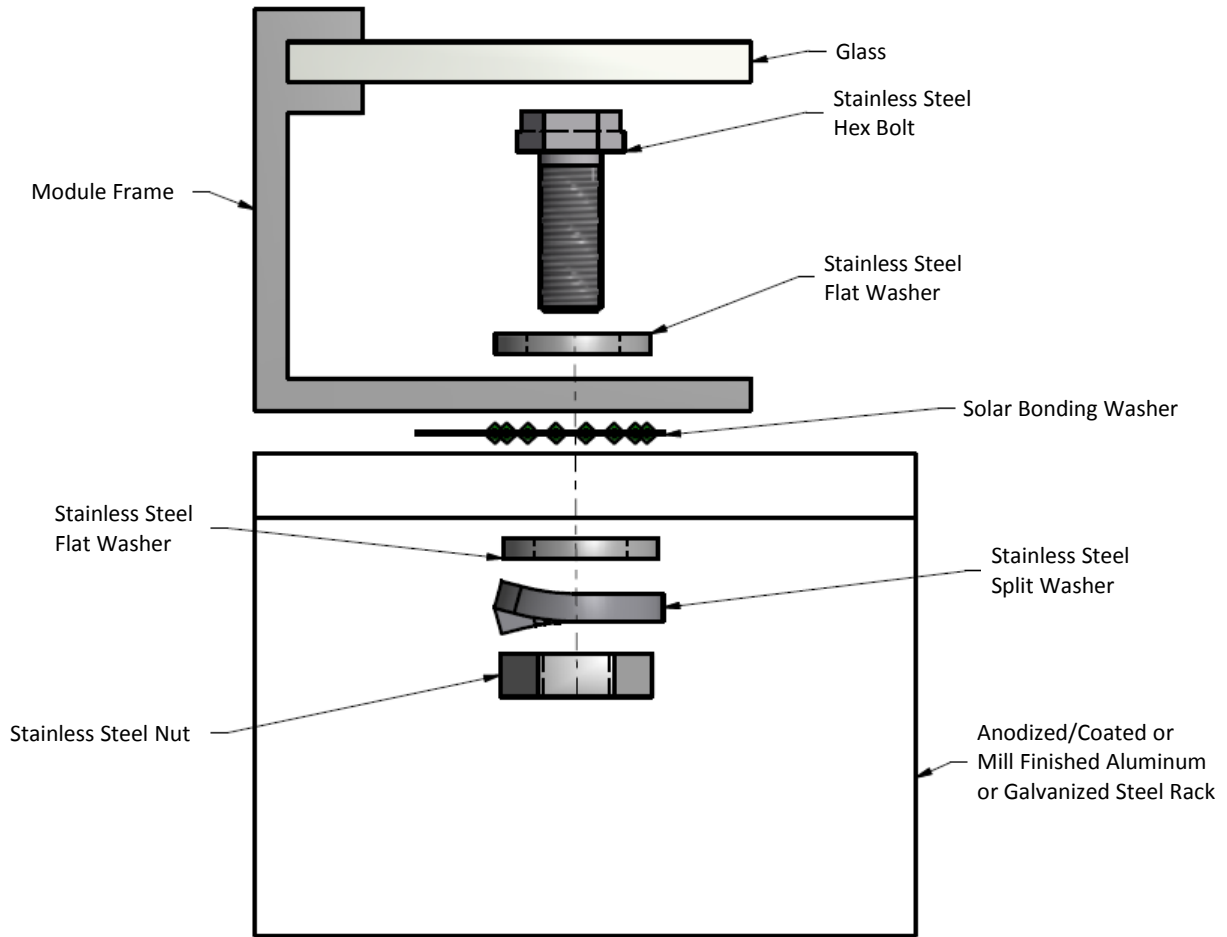

- 1) Inspect each module frame used with Solar Bonding Washer to ensure that the bottom mounting surface of the frame is flat
- 2) Install Solar Bonding Washer per diagram
- 3) Refer to table below for applicable hardware and torque:

Catalog Number	Fits Mounting Hardware	Torque (in-lbs)
SBW-14	1/4" (M6)	72
SBW-516	5/16" (M8)	132
SBW-38	3/8" (M10)	228

IMPORTANT NOTES:

- UL 467 listed; UL 2703 recognized
- Solar Bonding Washer can be used to bond flat surface anodized/coated or mill finish aluminum or galvanized steel (G90 min)
- The acceptable material thickness is a minimum of 0.062 inches to 0.250 inches (1.57mm to 6.35mm)
- Solar Bonding Washer is designed for SINGLE USE ONLY and functionally will not be guaranteed if reused
- Do not use a module with a frame that prevents the Solar Bonding Washer's contact points from embedding fully
- All installations shall be in accordance with NEC requirements in the USA and with CSA C22.1 in Canada