


KNOCKOUTS							
SYMBOL	A	B	C	D	E	F	G
IN	.50	.75	1.00	1.25	1.50	2.00	2.50
MM	13	19	25	32	38	51	64

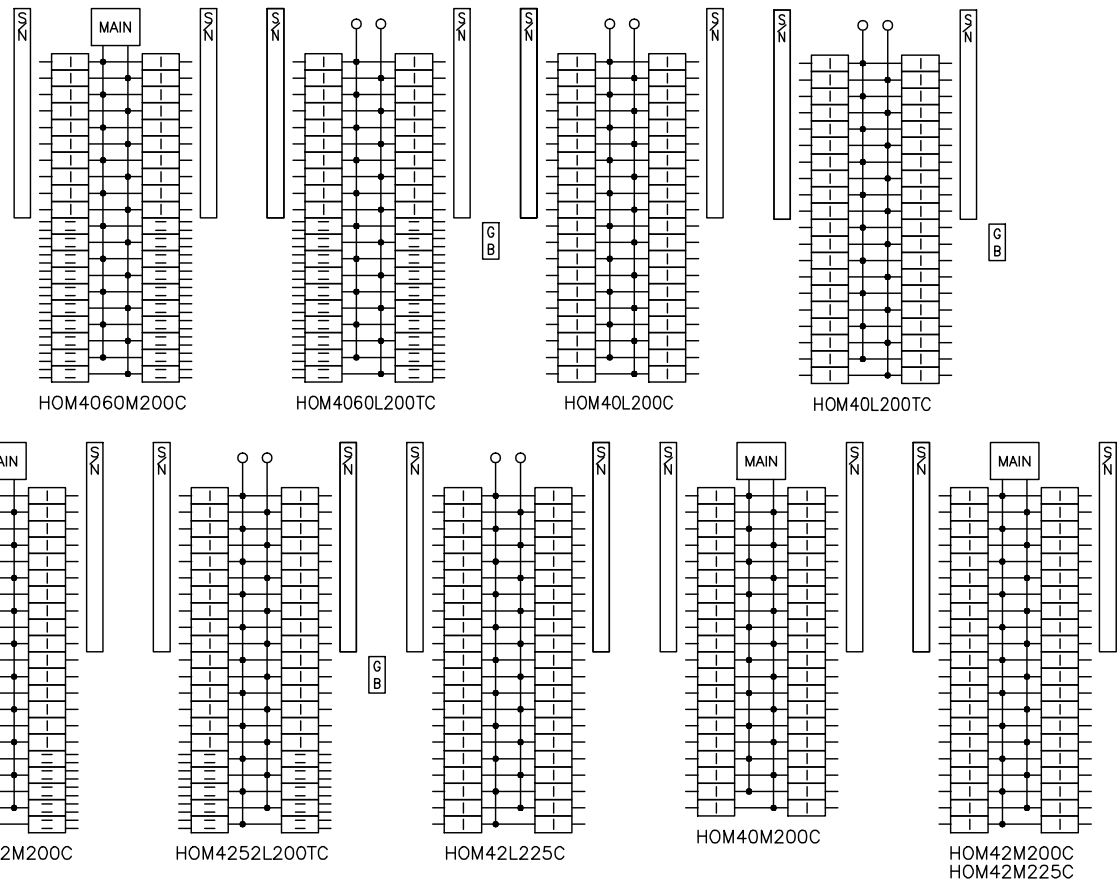

CATALOG NUMBER	MAXIMUM SYSTEM VOLTAGE	MAINS AMPERE RATING	SPACES	MAXIMUM NUMBER OF SINGLE POLE CIRCUITS	MAIN WIRE SIZE AWG AL/CU	
HOM40L200C	120/240VAC 1Ø 3W	200	40	40	#4-250	
HOM40L200TC		200	40	40		
HOM42L225C		225	42	42		
HOM40M200C		200	40	40		
HOM42M200C		200	42	42		
HOM42M225C		225	42	42		
HOM4060L200TC		200	40	60		
HOM4060M200C		200	40	60		
HOM4252L200TC		200	42	52		
HOM4252M200C		200	42	52		

DUAL DIMENSIONS: INCHES
MILLIMETERS

NOTES:
FINISH - GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPHATIZED STEEL.
UL LISTED - FILE E-6294
NEUTRALS - INSULATED GROUNDABLE.

HOMELINE LOAD CENTERS
GENERAL PURPOSE NEMA TYPE 1 ENCLOSURE
INDOOR

Schneider Electric

DWG# 1846
NO.