

Idea 3G Smartphone

User Manual

LEGAL INFORMATION

Copyright © 2011 ZTE CORPORATION.

All rights reserved.

No part of this publication may be quoted, reproduced, translated or used in any form or by any means, electronic or mechanical, including photocopying and microfilm, without the prior written permission of ZTE Corporation.

The manual is published by ZTE Corporation. We reserve the right to make modifications on print errors or update specifications without prior notice. Every effort has been made in the preparation of this manual to ensure accuracy of the contents, but all statements, information, and recommendations in this manual do not constitute a warranty of any kind, expressed or implied.

Version No.: R1.0

Edition Time : 201101

Manual No. : 079584503945

Contents

For Your Safety	12
General Safety	12
Radio Frequency (RF) Exposure	13
General Statement on RF Energy	13
Specific Absorption Rate (SAR)	13
Body Worn Operation	14
Limiting Exposure to Radio Frequency (RF) Fields..	14
Regulatory Information	15
Distraction	15
Driving	15
Operating Machinery	16
Product Handling	16
General Statement on Handling and Use.....	16
Small Children	17
Demagnetization	17
Electrostatic Discharge (ESD).....	17
Antenna	18
Normal Use Position.....	18
Air Bags.....	19
Seizures/ Blackouts	19
Repetitive Motion Injuries	19
Emergency Calls	20
Loud Noise	20
Phone Heating.....	20
Electrical Safety	20

Accessories.....	20
Connection to a Car	21
Faulty and Damaged Products	21
Interference	21
General Statement on Interface.....	21
Pacemakers	22
Hearing Aids	22
Medical Devices.....	22
Hospitals	22
Aircraft.....	23
Interference in Cars	23
Explosive Environments	23
Petrol Stations and Explosive Atmospheres.....	23
Blasting Caps and Areas	24
Getting Started	25
Overview	25
Keys Explained.....	26
Starting up	27
Installing the SIM/microSD Card and Battery	27
Removing the Battery and SIM/microSD Card	29
Charging the Battery	30
Switching Your Phone On/Off	31
Setting Up Your Phone for the First Time	31
Switching to Sleep Mode	32
Waking Up Your Phone	32
Getting Around Idea 3G Smrtphone.....	33

Touch Control	33
Home Screen	33
Status and Notification Icons	36
Applications and Settings Preview	37
Phone Calls	43
How to Make Calls	43
Calling from the Dialer	43
Calling from Your Contacts	44
Calling from Your Call History	44
Calling from a Text Message	44
Using Speed Dial	45
Making Emergency Calls	45
Making International Calls	45
How to Receive Calls	46
Answering a Call	46
Rejecting a Call	46
Muting a Call	46
Putting a Call on Hold	47
Turning the Speakerphone On/Off	47
Ending a Call	47
Adjusting Your Call Settings	47
Contacts	49
Importing and Exporting Contacts	49
Import Contacts from the SIM Card or Export to the Card	49

Import Contacts from the microSD Card or Export to the Card	50
Creating a Contact	50
Adding a Contact to Favorites	50
Searching for a Contact.....	51
Editing a Contact	51
Deleting a Contact.....	51
Creating a New Group.....	52
Entering Text.....	53
Android Keyboard.....	53
XT9 Text Input.....	54
Entering Text through Handwriting.....	57
Entering Text via On-screen Keyboard	58
Entering Numbers and Symbols.....	58
Choosing Touch Input Settings	58
Android Keyboard Settings	58
XT9 Text Input	59
Messaging	60
Sending an SMS	60
Sending an MMS.....	60
Managing Messages and Their 'Threads'	62
Reply to a Message	62
Delete a Message Thread or a Message.....	62
Message Settings	63

Email	65
Creating an Email account.....	65
Composing and sending an Email	66
Replying to or Forwarding an Email.....	67
Email Settings.....	67
Getting Connected to the Internet	69
Adding a New GPRS/EDGE/3G Connection.....	69
Turning on Wi-Fi	70
Connecting to a Wi-Fi Network	71
Checking the Wi-Fi Network Status	71
Using the Phone as a Modem	71
Enabling the Phone as a Modem	72
Disabling the Modem Function.....	73
Using the Phone as a Wi-Fi Hotspot.....	73
Enabling the Wi-Fi Hotspot.....	74
Disabling the Wi-Fi Hotspot.....	74
Browsing the Internet	75
Browsing Options.....	75
Opening Links in Web Pages	76
Downloading Apps from the Web	77
Using Bookmarks.....	77
Edit a Bookmark	77
Delete a Bookmark.....	78
Browser Settings.....	78
Bluetooth ®	80

Turning Bluetooth on/off	80
Making Your Phone Visible	80
Change Your Phone's Name.....	81
Hook up with Another Bluetooth Device.....	81
Making the Most of Multimedia.....	82
Taking Pictures with Your Camera.....	82
Adjusting Camera Settings	82
Shooting Video with Your Camcorder	82
Adjusting Your Video Settings	83
Listening to Your FM Radio.....	83
Playing Your Music.....	84
Creating Playlists	85
Managing Playlists	86
Setting a Song as Ringtone	86
Playing Your Videos	86
Opening Your Gallery.....	87
Making Memorable Memos	88
Using Your Google™ Applications	90
Gmail	90
Using Google Calendar	91
Using Google Talk.....	91
Opening Google Talk	91
Adding a New Friend	91
Changing Your Online Status	92
Starting a Chat.....	92

Places	92
Latitude	93
Sorting out Your Phone Settings	94
Setting Time and Date	94
Changing Display Settings.....	94
Adjusting Screen Brightness	94
Adjusting Screen-timeout	95
Switching Screen Orientation Automatically.....	95
Showing Animation when Opening/Closing Windows	95
Sound Settings.....	96
Choosing Your Ringtone	96
Setting the Default Notification Ringtone.....	96
Switching Your Phone to Silent Mode	96
Switching to Vibrate.....	97
Flipping to Turn off Ringtone	97
‘Haptic’ (touch) Keypad Feedback	98
Adjusting Volume	98
Turning on Touch Tones	98
Turning on Selection Tones	99
Turning on Screen Lock Sound.....	99
Language Settings	99
Mobile Network Services	99
Getting Data Services while Roaming.....	99
Enabling Data Services	100
Enabling Always-on Data Services	100




Switching Network Modes.....	100
Switching Networks.....	101
Setting Access Point Names.....	101
Security Settings	101
Protecting Your Phone with a Screen Unlock Pattern	102
Protecting Your Phone with a PIN or Password	104
Disabling Screen Unlock Security.....	105
Protecting Your SIM with a PIN	105
Setting up Credential Storage.....	106
Managing Your Memory Card	107
Checking Memory Card Space	107
Unmounting Your Memory Card	107
Formatting Your Memory Card	108
Managing Phone Memory	108
Privacy: Reset to Factory Settings	108
Managing Applications and Their Settings	109
Viewing Your Phone's Applications	109
Allowing Installation of Non-market Applications ...	109
How to Install an Application.....	109
Removing an Application	110
Moving an Application to or from the Memory Card	110
Managing Other Settings.....	111
Search Settings.....	111
Voice Interaction	112

Other Applications.....	113
Alarms.....	113
Idea Mall	113
Facebook	114
Opening Facebook.....	114
Twitter	114
Opening Twitter.....	114
Docs To Go.....	114
Note Pad.....	114
Calculator.....	115
Global Time.....	115
Idea Power.....	115
Task Manager.....	115
Stopwatch	116
Specifications	117
Declaration of RoHS Compliance.....	118
Disposal of Your Old Appliance	119
EC DECLARATION OF CONFORMITY.....	120
Warranty Card.....	122

For Your Safety

General Safety

	Don't make or receive handheld calls while driving. And never text while driving.		Don't use at petrol stations.
	Keep your phone at least 15mm away from your ear or body while making calls.		Your phone may produce a bright or flashing light.
	Small parts may cause a choking.		Don't dispose of your phone in fire.
	Your phone can produce a loud sound.		Avoid contact with anything magnetic.
	Keep away from pacemakers and other electronic medical devices.		Avoid extreme temperatures.
	Switch off when asked to in hospitals and medical facilities.		Avoid contact with liquids. Keep your phone dry.
	Switch off when told to in aircrafts and airports.		Don't take your phone apart.

	Switch off when near explosive materials or liquids.		Only use approved accessories.
	Don't rely on your phone for emergency communications.		

Radio Frequency (RF) Exposure

General Statement on RF Energy

Your phone contains a transmitter and a receiver. When it is ON, it receives and transmits RF energy. When you communicate with your phone, the system handling your call controls the power level at which your phone transmits.

Specific Absorption Rate (SAR)

Your mobile device is a radio transmitter and receiver. It is designed not to exceed the limits for exposure to radio waves recommended by international guidelines. These guidelines were developed by the independent scientific organization ICNIRP and include safety margins designed to assure the protection of all persons, regardless of age and health.

The guidelines use a unit of measurement known as Specific Absorption Rate, or SAR. The SAR limit for mobile devices is 2 W/kg and the highest SAR value for this device when tested at the ear was 1.35 W/kg*. As mobile devices offer a range of functions, they can be used in other positions, such

as on the body as described in this user guide**.

As SAR is measured utilizing the device's highest transmitting power, the actual SAR of this device while operating is typically below that indicated above. This is due to automatic changes to the power level of the device to ensure it only uses the minimum power required to communicate with the network.

* The tests are carried out in accordance with EN 50360; EN 62209-1; IEC 62209-2.

** Please see body worn operation.

Body Worn Operation

Important safety information regarding radio frequency radiation (RF) exposure:

To ensure compliance with RF exposure guidelines the phone must be used with a minimum of 15 mm separation from the body.

Failure to observe these instructions could result in your RF exposure exceeding the relevant guideline limits.

Limiting Exposure to Radio Frequency (RF) Fields

For individuals concerned about limiting their exposure to RF fields, the World Health Organization (WHO) provides the following advice:

Precautionary measures: Present scientific information does not indicate the need for any special precautions for the use of mobile phones. If individuals are concerned, they might choose to limit their own or their children's RF exposure by limiting the length of calls, or using 'hands-free' devices to keep mobile phones away from the head and body.

Further information on this subject can be obtained from the WHO home page <http://www.who.int/peh-emf> (WHO Fact sheet 193: June 2000).

Regulatory Information

The following approvals and notices apply in specific regions as noted.

Please find the section Declaration of RoHS Compliance and CE DOC in the end of this manual.

Distraction

Driving

Full attention must be given to driving at all times in order to reduce the risk of an accident. Using a phone while driving (even with a hands free kit) can cause distraction and lead to an accident. You must comply with local laws and regulations restricting the use of wireless devices while driving.

Operating Machinery

Full attention must be given to operating the machinery in order to reduce the risk of an accident.

Product Handling

General Statement on Handling and Use

You alone are responsible for how you use your phone and any consequences of its use.

You must always switch off your phone wherever the use of a phone is prohibited. Use of your phone is subject to safety measures designed to protect users and their environment.

- Always treat your phone and its accessories with care and keep it in a clean and dust-free place.
- Do not expose your phone or its accessories to open flames or lit tobacco products.
- Do not expose your phone or its accessories to liquid, moisture or high humidity.
- Do not drop, throw or try to bend your phone or its accessories.
- Do not use harsh chemicals, cleaning solvents, or aerosols to clean the device or its accessories.
- Do not paint your phone or its accessories.

- Do not attempt to disassemble your phone or its accessories, only authorized personnel can do so.
- Do not expose your phone or its accessories to extreme temperatures, minimum - [5] and maximum + [50] degrees Celsius.
- Please check local regulations for disposal of electronic products.
- Do not carry your phone in your back pocket as it could break when you sit down.

Small Children

Do not leave your phone and its accessories within the reach of small children or allow them to play with it.

They could hurt themselves or others, or could accidentally damage the phone.

Your phone contains small parts with sharp edges that may cause an injury or may become detached and create a choking hazard.


Demagnetization

To avoid the risk of demagnetization, do not allow electronic devices or magnetic media close to your phone for a long time.

Electrostatic Discharge (ESD)

Do not touch the SIM card's metal connectors.


Antenna




Do not touch the antenna unnecessarily.

Normal Use Position

When placing or receiving a phone call, hold your phone to your ear, with the bottom towards your mouth.



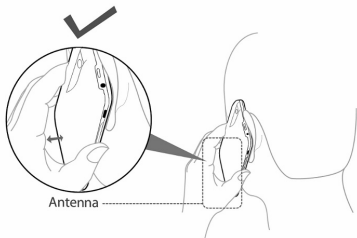

Air Bags

Do not place a phone in the area over an air bag or in the air bag deployment area.

Store the phone safely before driving your vehicle.

Seizures/ Blackouts

The phone can produce a bright or flashing light.

Repetitive Motion Injuries

To minimize the risk of RSI when texting or playing games with your phone:

- Do not grip the phone too tightly.
- Press the buttons lightly.

- Use the special features which are designed to minimize the times of pressing buttons, such as Message Templates and Predictive Text.
- Take lots of breaks to stretch and relax.

Emergency Calls

This phone, like any wireless phone, operates using radio signals, which cannot guarantee connection in all conditions. Therefore, you must never rely solely on any wireless phone for emergency communications.

Loud Noise

This phone is capable of producing loud noises, which may damage your hearing. Turn down the volume before using headphones, Bluetooth stereo headsets or other audio devices.

Phone Heating

Your phone may become warm during charging and during normal use.

Electrical Safety

Accessories

Use only approved accessories.

Do not connect with incompatible products or accessories.

Take care not to touch or allow metal objects, such as coins or key rings, to contact or short-circuit in the battery terminals.

Connection to a Car

Seek professional advice when connecting a phone interface to the vehicle electrical system.

Faulty and Damaged Products

Do not attempt to disassemble the phone or its accessory.

Only qualified personnel can service or repair the phone or its accessory.

If your phone or its accessory has been submerged in water, punctured, or subjected to a severe fall, do not use it until you have taken it to be checked at an authorized service centre.

Interference

General Statement on Interface

Care must be taken when using the phone in close proximity to personal medical devices, such as pacemakers and hearing aids.

Pacemakers

Pacemaker manufacturers recommend that a minimum separation of 15 cm be maintained between a mobile phone and a pacemaker to avoid potential interference with the pacemaker. To achieve this, use the phone on the opposite ear to your pacemaker and do not carry it in a breast pocket.

Hearing Aids

People with hearing aids or other cochlear implants may experience interfering noises when using wireless devices or when one is nearby.

The level of interference will depend on the type of hearing device and the distance from the interference source, increasing the separation between them may reduce the interference. You may also consult your hearing aid manufacturer to discuss alternatives.

Medical Devices

Please consult your doctor and the device manufacturer to determine if operation of your phone may interfere with the operation of your medical device.

Hospitals

Switch off your wireless device when requested to do so in hospitals, clinics or health care facilities. These requests are designed to prevent possible interference with sensitive

medical equipment.

Aircraft

Switch off your wireless device whenever you are instructed to do so by airport or airline staff.

Consult the airline staff about the use of wireless devices on board the aircraft. If your device offers a 'flight mode', this must be enabled prior to boarding an aircraft.

Interference in Cars

Please note that because of possible interference to electronic equipment, some vehicle manufacturers forbid the use of mobile phones in their vehicles unless a hands-free kit with an external antenna is included in the installation.

Explosive Environments

Petrol Stations and Explosive Atmospheres

In locations with potentially explosive atmospheres, obey all posted signs to turn off wireless devices such as your phone or other radio equipment.


Areas with potentially explosive atmospheres include fuelling areas, below decks on boats, fuel or chemical transfer or storage facilities, areas where the air contains chemicals or particles, such as grain, dust, or metal powders.


Blasting Caps and Areas

Power off your mobile phone or wireless device when in a blasting area or in areas posted power off “two-way radios” or “electronic devices” to avoid interfering with blasting operations.

Getting Started

Overview

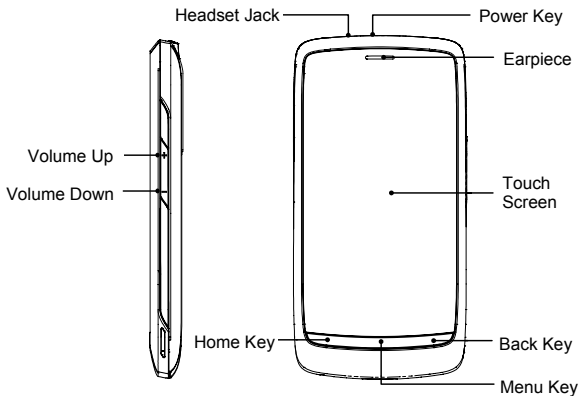

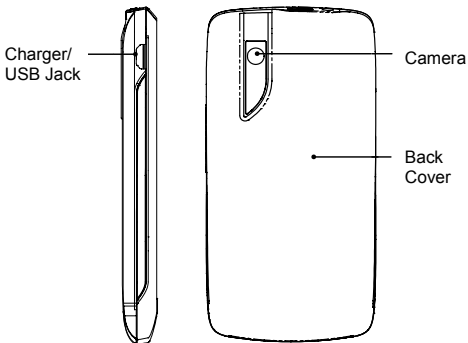

Keys Explained

Key	Function
Power Key	<ul style="list-style-type: none"> • Hold to select phone modes: Silent, Vibration, Airplane or Power off. • Press to switch your phone to Sleep mode. • Press to wake up your phone.
Home Key	<ul style="list-style-type: none"> • Press to return to the Home Screen from any application or screen. • Hold to see recently used applications.


Key	Function
Menu Key	Press to get the options on the current screen.
Back Key	Press to go to the previous screen.
Volume Keys	<ul style="list-style-type: none">• Press Volume Up Key to turn the volume up.• Press Volume Down Key to turn the volume down.

Starting up


Installing the SIM/microSD Card and Battery

Switch off your phone before installing or replacing the battery, SIM, or memory card.


1. Remove the back cover.




2. Hold the SIM with the cut corner oriented as shown and slip it into the card holder.




3. Open the microSD card holder, hold your microSD card by the cut corner end and slide it in.

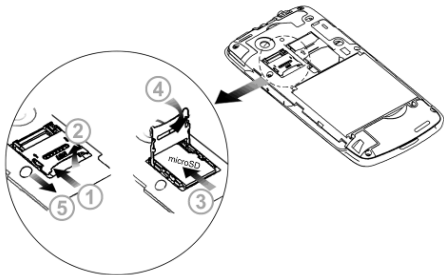


microSD logo  is a trade mark of the SD Card Association.

4. Insert the battery by aligning the gold contacts on the battery with the gold contacts in the battery compartment. Gently push down on the battery until it clicks into place.



5. Press the cover gently back into place until you hear a click.



Removing the Battery and SIM/microSD Card


1. Make sure that your mobile phone is off.
2. Remove the back cover.

3. Lift the battery up and out.
4. Slide the SIM out.
5. Open the microSD card holder. Sliding the microSD card down gently and remove it.

Charging the Battery

When you first get your new phone you'll need to charge the battery like this...

1. Connect the adapter to the charger jack.
Ensure that the adapter is inserted with the correct orientation. Do not force the connector into the charger jack.
2. Connect the charger to a standard AC wall outlet.





3. Disconnect the charger when the battery is fully charged.

how much charge have you got?

If the battery is low, there will be a pop-up message on the screen and the indicator light will be red. As you charge your phone, the indicator light will change according to the battery level:

Indicator color	Battery level
Red	Less than 5% of the total battery level
Green	More than 90% of the total battery level

If the phone is on, you'll see this charging icon  appear on the status bar. As soon as charging is completed, this icon  appears on the status bar.

Switching Your Phone On/Off

1. Make sure the SIM is in your device and the battery is charged.
2. Hold **Power Key** to switch on your phone.
3. To switch it off, hold **Power Key** to get the phone options. Select **Power off**, and then tap **OK**.

Setting Up Your Phone for the First Time

When you first power on your Idea 3G Smartphone after you purchase it or reset it to factory settings (see *Sorting out Your Phone Settings – Privacy: Reset to Factory Settings*), you need to do some settings before using it.

1. Tap **Change language** to change the language you want to use, if needed.
2. Tap the Android robot on the screen.
3. Tap **Skip** to skip the tutorial, or tap **Begin** to continue.

In the tutorial, learn how to use the onscreen keyboard and how to set up your Idea 3G Smartphone with a Google account.


4. **Create** a Google Account or **Sign in** your account.
You can also tap **Skip** to set up an account later.
5. Configure the Google location options and tap **Next**.
6. Configure the date and time options, and tap **Next**.

Switching to Sleep Mode

To save battery power, Sleep Mode suspends your device to a low-power-consumption state while the display is off. Your device also goes into Sleep Mode by itself when the display is automatically turned off after a certain period of time, which you can set in **Settings > Display > Screen timeout**.

Press **Power Key** to switch to Sleep Mode.

Waking Up Your Phone

1. Press **Power Key** to activate your screen display.
2. Drag the  icon to the right.

NOTE: If you have set an unlock pattern, PIN or password for your phone (see *Sorting out Your Phone Settings – Security Settings*) you'll need to draw the pattern or enter the PIN/password to unlock your screen.

Getting Around Idea 3G Smartphone

Touch Control

You can use finger gestures to control your phone. The controls on your touch screen change dynamically depending on the tasks you're performing.

1. Tap the buttons, icons, or applications to select items or to open applications.
2. Keep your finger on an item to see the available options.
3. Flick the screen to scroll up, down, left or right.
4. Point, drag and drop to move particular items across the screen.
5. Pinch with two fingers, or double-tap the screen, to zoom in/out on a web page or an image.

NOTE: You can view the phone screen in portrait or landscape orientation simply by holding it upright or turning it on its side.

Home Screen

You choose what is shown on your Home Screen. Just add or remove stuff to make it your own.

Status & Notifications

Wallpaper
You can add or
remove items here.


Dots

Tap to enter the
extended screen.

Tap to open the dialer.

Applications

Tap to open the main menu.



Tap to open the web
browser.

Extended Home Screen

The Home Screen extends beyond the screen width, giving you loads more space to add more stuff. Simply slide your finger to the left or right, or tap the dots on the bottom corners of the screen, to see the extended Home Screen.

Choosing Your Wallpaper

1. Tap **Home Key** to return to the Home Screen.
2. Tap **Menu Key** and select **Wallpaper**.
3. Select the wallpaper you want to use from **Gallery**, **Live wallpapers**, or **Wallpapers**.
4. Tap **Save** or **Set wallpaper**.



Adding Things to Your Home Screen


1. Tap **Home Key** to return to the Home Screen.
2. Slide left or right to find an extended Home Screen where there is space to add an item.
3. Tap **Menu Key** and select **Add**.

You can also tap and hold the blank area of the Home Screen to get the **Add to Home screen** menu.

4. Select a category and the item you want to add to the Home Screen.





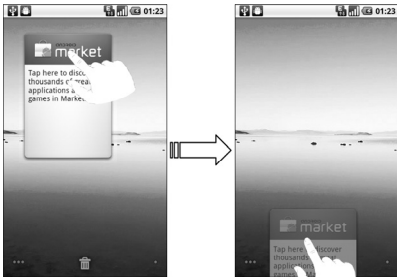


























Removing Things from Your Home Screen















1. Tap **Home Key** to return to the Home Screen.
2. Tap and hold the item you want to delete until the  icon appears on the screen.
3. Drag the item to .



Status and Notification Icons

Your handset will tell you exactly what's going on by showing you simple icons. Here's what they mean.

	GPRS connected		No signal
	GPRS in use		Signal strength
	EDGE connected		Roaming
	EDGE in use		Phone speaker off
	3G connected		Phone microphone off
	3G in use		No SIM installed
	USB connected		GPS connecting
	Battery very low		GPS connected
	Battery low		Connected to a Wi-Fi network
	Battery partially drained		Alarm set
	Battery full		Wired microphone headset
	Battery charging		Bluetooth on
			
	Vibrate mode		Speaker on
	Airplane mode		Problem with SMS/MMS delivery
	New mail		New instant message

	New SMS/MMS/ voicemail		Upcoming event
	New Gmail message		Song is playing
	Missed call		Downloading data
	Call in progress		Content downloaded and installed successfully
	Call on hold		Sending data
	Call forwarding		USB tethering is on
	More (not displayed) notifications		Portable Wi-Fi hotspot is on


Using the Notification Panel

Flick the status bar downwards to open the Notification Panel, where you can see your calendar events, new messages, and current settings – such as call forwarding or call status. From here you can also open new messages, reminders, etc.

TIPS: You can also open the Notification Panel by tapping **Menu Key > Notifications** from the Home Screen.

Applications and Settings Preview

Programs Preview

Your Idea 3G Smartphone has lots of functions. Tap  to see the following.

Applications	Benefit
Alarm	Set alarms.
Browser	Browse the Internet.
Calculator	Do basic calculation.
Calendar	Schedule appointments and events.
Call log	View the calls you made, received, and missed.
Camcorder	Shoot video clips.
Camera	Take some great pictures.
Contacts	Keep contact details of friends and colleagues.
Dialer	Dial a number.
Docs To Go	View your documents.
Email	Send and receive Emails.
Filer	Manage files on your microSD card.
FMRadio	Search, listen to and save radio channels.
Gallery	Manage multimedia files.
Global Time	Check the local time around the world.
Gmail	Access your Gmail account and check your Gmail on your mobile phone.

Applications	Benefit
Google Search	Search for information online or on your phone.
Latitude	See your friends' locations and share yours with them via Google Maps Latitude.
Maps	Track your current location, view real-time traffic, and receive detailed directions to your destination.
Market	Access useful applications and fun games to download.
Messages	Open the Messages screen, where you can send and receive SMS and MMS messages.
Music	Browse your audio files and listen to them.
Navigation	Find your way with Google Maps Navigation.
News & Weather	Check out the latest news and weather forecast.
Note pad	Create text notes.
Places	Find restaurants, ATMs, and other businesses or attractions near you.
Settings	Adjust phone settings.
SIM Toolkit	Only appears on the screen if your SIM provides this function. Please contact your service provider for more information.

Applications	Benefit
Sound Recorder	Capture audio clips.
Stopwatch	Measure exactly how long it takes to do something.
Talk	Use Google Talk.
Task Manager	Manage all the programs running on your phone.
Videos	Browse and watch video files.
Voice Search	Use your voice to search, control, and communicate.
YouTube	Watch YouTube videos and upload your own.

Check Your Settings

To change or view your phone's settings, tap **Home Key** >



> **Settings**.

Or From the Home Screen tap **Menu Key** > **Settings**.

Wireless & networks	Configure and manage wireless connections, such as Wi-Fi, Bluetooth [®] , mobile networks, mobile data connection sharing, and Virtual Private Networks. You can also select Airplane mode from here.
---------------------	---

Call settings	Set up fixed dialing numbers, voicemail, speed dial, call barring, call forwarding, call waiting, caller ID, and cell broadcast, etc.
Sound	Set sound settings, such as ringtones and notifications.
Display	Set display settings, such as screen brightness.
Location & security	Set up screen locks or SIM lock, or manage the phone's credential storage. You can also select the sources to use when determining locations from My Location .
Applications	Manage your apps and the installation of new ones.
Accounts & sync	Manage your accounts and configure synchronization settings.
Privacy	Configure privacy settings, such as back-up settings, and personal data.
SD card & phone storage	Check available memory on the external card and the internal phone storage.
Search	Set the search options.
Language & keyboard	Set the system language and region, plus text input options.

Voice input & output	Set up voice recognition and text-to-speech options.
Accessibility	Choose accessibility options after you have installed accessibility-related applications.
Date & time	Set the date, time, time zone, and date/time format.
About phone	View phone status, battery use, legal information, and tutorial on how to use your phone. You can also check for system updates.

Open Recently-used Applications

1. Hold **Home Key** from any screen until the following recently used applications screen appears.





2. Tap the application you want to open.

Phone Calls



How to Make Calls

There are many ways to make a call with your Idea 3G Smartphone. And they're all easy to do.

Calling from the Dialer



1. Tap **Home Key** >  > **Dialer** or  on the Home Screen.
2. Enter the phone number or the contact name you want to call with the on-screen phone keypad.








If you make a mistake, tap  to erase a wrong entry, or hold this key to clear all digits. Your phone automatically lists the matching contacts. You can tap  to hide the keypad and to see if there are more matching numbers or contacts.

3. Tap .

Calling from Your Contacts



1. Tap **Home Key** >  > **Contacts**.
2. Slide your finger to scroll the contacts list and tap the contact you want to call.
You can search for a contact by tapping **Menu Key** > **Search**.
3. Tap .

Calling from Your Call History

1. Open the call log in one of the following ways.
 - Tap **Home Key** >  > **Call log**.
 - Tap **Home Key** >  > **Dialer** > .
 - Tap **Home Key** >  > **Contacts** > **Call log**.
2. Tap  next to the number you want to call.

Calling from a Text Message

If a text message contains a phone number that you want to call, you can make the call while viewing the text message.


1. Tap **Home Key** >  > **Messages** and tap the conversation and then the message that contains the phone number you want to call..
2. Tap the number.
3. Tap .

Using Speed Dial


Press and hold 1 - 9 key from the dialer to call the corresponding speed dial number.

The number key 1 is reserved to speed dial your voicemail.

Assigning a speed dial key:


1. Tap **Menu Key > Settings > Call settings > Speed dial** from the Home Screen.
2. Tap a speed dial key.
3. Enter a phone number or tap  to select one from the contact list.
4. Tap **OK**.

Making Emergency Calls

1. Enter the emergency number for your location from the dialer.
2. Tap .

TIPS: It's possible to dial emergency numbers when your SIM is not inserted. Please call your service provider to find out more information. For instance, what emergency numbers are supported.

Making International Calls

1. Hold  from the dialer to enter '+'.
2. Enter the full phone number.


For example: +49-123-12345678 in the following format:
+ country code / area code / phone number.


3. Tap .

Whether you can make international calls depends on network status and/or your tariff. Please call your service provider to find out more.

How to Receive Calls

Answering a Call

Drag  to the right to answer the call.




Rejecting a Call



Drag  to the left to reject the call.


Muting a Call

During a call, you can mute your microphone so that the person you are speaking to cannot hear you, but you can still hear them:


Tap **Mute** to turn your microphone off. The mute icon  will appear on the status bar. To turn your microphone back on, tap **Mute** again.

Putting a Call on Hold


During a call, you can put it on hold by tapping . The  icon will appear on the screen.

TIPS: If you accept an incoming call while you're on another call, the first call automatically goes on hold. Just tap  to switch between the two callers.

Turning the Speakerphone On/Off

Tap **Speaker** during a call to turn the speakerphone on. This icon  will appear in the status bar. Tap **Speaker** again to turn off the speakerphone.

Ending a Call

Tap  to finish a call.

Adjusting Your Call Settings

From the Home Screen, you can open the call settings menu by going from **Menu Key > Settings > Call settings**.

Fixed dialing numbers	Restrict outgoing calls to a fixed set of numbers. To do this you must know your SIM's PIN2 code.
Voicemail service	Select a voicemail service provider.


Voicemail settings	Specify a voicemail number.		
Speed dial	Set speed dialing keys and numbers.		
GSM/WCDMA call settings	Call forwarding	Forward your incoming calls to a different number. And choose when to forward: Always forward; Forward when busy; Forward when unanswered, or Forward when unreachable.	
	Additional settings	Caller ID	Choose whether people you call can see your number.
		Call waiting	See new incoming calls while you're on another call.
Call barring settings	Forbid certain types of calls.		
Cell broadcast settings	Set cell broadcast channel and language.		

Contacts

You can save contacts to your phone memory or your SIM. More information can be saved on the phone memory for a contact than on the SIM. For instance, postal addresses, pictures, nicknames, websites, etc.

To go your contacts, tap **Home Key** >  > **Contacts**.

There are four tabs on the Contacts Screen: **Call log**, **Contacts**, **Favorites**, and **Groups**.

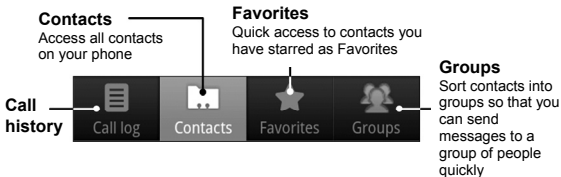

Importing and Exporting Contacts

You can import/export contacts from/to your SIM card (or microSD card).

Import Contacts from the SIM Card or Export to the Card

1. Tap **Menu Key** > **Import/Export** from the Contacts Screen.

2. Choose to import or export contacts. Your handset will automatically read the contacts.
3. Select the contacts you want to import/export. Or, just tap **Menu Key > Select all**.
4. Tap **Done**.

Import Contacts from the microSD Card or Export to the Card

1. Tap **Menu Key > Import/Export** from the Contacts Screen.
2. Choose to import or export contacts. If you want to import contacts from the microSD card, you should have vCard files saved in the microSD card. If there's more than one vCard file, you need to select the vCard file and tap **OK**.

Creating a Contact

1. Tap **Menu Key > New contact** from the Contacts Screen.
2. Select where you want to save your contact.
3. Enter their name and phone number(s), email addresses, chat addresses, postal addresses, etc.
4. Tap **Done** to save the contact.

Adding a Contact to Favorites

1. Tap and hold from the Contacts Screen the contact you want

to add to **Favorites**.

2. Tap **Add to favorites** from the shortcut menu.

TIPS: You can also tap a contact and then tap  next to the contact's name to add it to **Favorites**.

Searching for a Contact

1. Tap **Menu Key > Search** from the Contacts Screen.
2. Input the contact name you want to search for.

The contacts matched will be listed.

Editing a Contact

1. Tap the contact you want to edit from the Contacts Screen.
2. Press **Menu Key > Edit contact**.
3. Edit the contact and tap **Done**.

TIPS: You can also edit a contact by holding it in the Contacts Screen and selecting **Edit contact** from the pop-up shortcut menu.

Deleting a Contact

1. Tap and hold the contact you want to delete from the Contacts Screen.
2. Tap **Delete contact** from the pop-up shortcut menu.

3. Tap **OK**.

TIPS: You can also delete contacts by tapping **Menu Key > Delete contacts** from the Contacts Screen. Select the contacts you want and tap **Done**.

Creating a New Group

1. Tap **Groups** from the Contacts Screen.

2. Tap **Menu Key > New Group**.

3. Enter the group name and tap **OK**.

4. Tap the group in the group list and tap **Menu Key > Add**.

5. Select the contacts as the group members and tap **Done**.

To send messages to the group members, you can hold a group in the group list and tap **Send SMS by group** from the pop-up shortcut menu.

Entering Text

When you enter a field that needs text or numbers, a keyboard automatically appears on the screen. Hold the input box and select **Input method** from the pop-up menu to change input method.

Android Keyboard

The Android Keyboard provides a layout similar to a desktop computer keyboard. Turn the phone sideways and the keyboard will change from portrait to landscape.

To use the landscape keyboard, just tick the **Auto-rotate screen** check box in **Settings > Display**. (The landscape QWERTY keyboard is not supported in all applications.)

Tap to switch between uppercase and lowercase. Tap twice to lock uppercase input.



Tap to delete text before the cursor.

Tap to select digits and symbols.

Tap or hold to input emoticons.

Tap to Google's networked voice input.

XT9 Text Input

XT9 Text Input can speed up text input by replacing the letter tapping/typing motion of input with a tracing gesture where you move your finger from letter to letter without lifting the finger until you reach the end of the word.

You can select to use one of the three layouts (Keyboard, Reduced keyboard, Phone keypad) of XT9 Text Input Keyboard.

- Keyboard

Tap to switch between uppercase and lowercase. Tap twice to lock on uppercase.



Delete text before the cursor.

Tap to select digits and symbols.

Tap or hold to input emoticons.


Move your finger from letter to letter to trace a word without lifting the finger until you reach the end of the word.

The trace feature is also available in the Reduced keyboard layout and Phone keypad layout.

Move your finger on the letters without lifting it up.



- Reduced keyboard

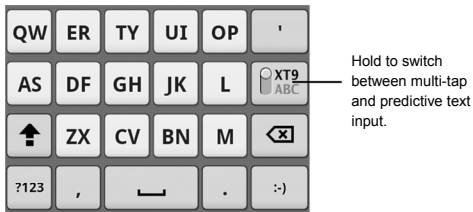

- Phone keypad



Hold to switch between multi-tap and predictive text input.

Using the toolbar

Tap to open the toolbar.

Tap to access the settings menu.



Tap to switch the keyboard layouts. Hold until a shortcut menu pops up, then select a keyboard layout.

Tips for using XT9 Tracing Input:


- Ignore double letters – XT9 Text Input will figure those out for you automatically.
- Lift your finger at the end of the word. A space is added automatically when you begin to trace the next word.


Entering Text through Handwriting

1. Switch to handwriting input mode by tapping the handwriting symbol on the XT9 Toolbar.



2. When the handwriting input screen appears, write the letters of your word one letter at a time, until your word is complete.

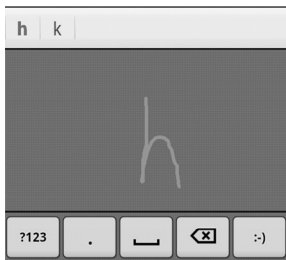




3. When you are finished with the word, tap the correct word in the selection list, or tap .

TIPS: Flick horizontally across the handwriting area on the screen to delete one letter left of the cursor.

Entering Text via On-screen Keyboard

1. Enter a field that needs text or numbers.
2. Tap or hold the letters on the keyboard to enter your text.

Entering Numbers and Symbols

1. Enter a field that needs text or numbers.
2. Tap    to open the symbol panel.
3. Select the numbers and symbols.

Choosing Touch Input Settings

Choose the touch input settings by tapping **Menu Key > Settings > Language & keyboard** from Home Screen.

In the **Text settings** section, you can choose the settings for Android keyboard and XT9.

Android Keyboard Settings

You can tick the check boxes to enable


- Vibration on keypress
- Sound on keypress
- Auto-capitalization of the first letter in each sentence.

You can also select multiple input languages, or set voice input option.


XT9 Text Input

- **Languages and settings:** Select input languages. Tap a language to set up keyboard layout, word suggestion settings, key input settings, and trace input settings.
- **Preferences:** Set up keypress vibration, keypress sound, auto-capitalization, and auto-punctuation.
- **About:** View the XT9 version information.


Messaging

Your SMS (text message) and MMS (multimedia messaging service) files are located in **Messages** (**Home Key** >  > **Messages**).

When you receive a new message, you can open it from the Notification Panel, or from the Messages Screen. Simply tap on the new message to read it.

Your phone will tell you when message(s) arrive by showing this icon  in the status bar.

Sending an SMS

1. Tap **Home Key** >  > **Messages**.
2. Tap **New message**.
3. Tap the **To** field and enter the recipient's number, or tap **Menu Key** > **People** to select recipients from **Contacts**.
TIPS: You can also enter the first letters of the recipient's name to display a list of matching names stored in **Contacts**, and then select their name from the list.
4. Tap **Type to compose** and type your message.
5. Tap **Send** to send your text.

Sending an MMS

1. Tap **Home Key** >  > **Messages**.
2. Tap **New message**.

3. Enter the recipient's number and, if necessary, message text, just like you do with a text message.
4. Tap **Menu Key > Add subject** to enter the subject of your MMS.
5. Tap **Menu Key > Attach** if you want to add an attachment to your MMS.

Pictures: Select a picture to add to your MMS.

Capture picture: Take a photo to attach to your MMS.

Videos: Select a video clip to attach to your MMS.

Capture video: Shoot a video clip and attach to your MMS.

Audio: Select an audio file to attach to your MMS.

Record audio: Record an audio file to attach to your MMS.

Slideshow: Edit a slideshow to attach to your MMS.

6. When you've finished, tap **Send**.

NOTE: Add an attachment to text message and it will be converted into an MMS automatically. Likewise if you remove all attachments from an MMS, it'll automatically become a text message.

Managing Messages and Their 'Threads'

SMS and MMS messages sent to and received from the same number are grouped into one message thread in the Messages Screen. Tap the message thread and you can see the conversation you have had with someone (similar to a chat program). Message threads are sorted by the time when you received them, with the latest one on the top.

Reply to a Message

1. Tap the message thread you want to reply to from the Messages Screen.
2. Tap **Type to compose** and type your message.
3. Tap **Send**.

Delete a Message Thread or a Message

1. Tap **Menu Key > Delete threads** from the Messages Screen.
2. Select the threads you want to delete. If you want to delete all threads, tap **All**.
3. Tap **Delete**.
4. Tap **Delete** again to confirm.

NOTE: To delete one message in a message thread, hold the message and select **Delete message** from the pop-up menu.

Message Settings

To configure your message settings, tap **Menu Key > Settings** from the Messages Screen.

Storage settings:

- **Delete old messages:** Select to delete old messages when your storage limits are reached.
- **Text message limit:** Set the maximum number of text messages allowed in a single thread.
- **Multimedia message limit:** Set the maximum number of multimedia messages allowed in a single thread.

Text message (SMS) settings:

- **Delivery reports:** Request a delivery report for every text message you send.
- **Manage SIM card messages:** Manage the messages saved in your SIM card.
- **SMS validity:** Set the validity time limit for outgoing text messages.
- **SMS priority:** Set the priority of outgoing messages.
- **Service Center:** Enables you to view and edit the service center number.

Multimedia message (MMS) settings:

- **Delivery reports:** Request a delivery report for every MMS message you send.

- **Read reports:** Request a read report for every MMS message you send.
- **Auto-retrieve:** Automatically retrieve MMS messages.
- **Roaming auto-retrieve:** Automatically retrieve MMS messages when you're roaming.
- **MMS validity:** Set the validity time limit for outgoing multimedia messages.
- **MMS creation mode:** Select MMS creation restrictions. An MMS created under restricted mode is more likely to be displayed properly on other devices than those created under free mode.

Notification settings:


- **Notifications:** Show message notifications in the status bar.
- **Select ringtone:** Choose a ringtone for your incoming messages.
- **Vibrate:** Make your phone vibrate when a new message arrives.

Signature settings:

- **Edit signature:** Edit your signature, which can be added automatically to outgoing messages.
- **Add signature:** Add the signature to all outgoing messages.

NOTE: Tap **Menu Key > Restore default settings** to change all the message settings back to the original.

Email

Tap **Home Key** >  > **Email**. You can enter the Email Screen to setup your Email account and exchange Emails.

Creating an Email account

1. Enter your Email address and password. Then tap **Next** when you enter the Email Screen for the first time.
2. Select the type of your account, edit the incoming server settings, and then tap **Next** or **Next [Check]**.

After you press **Next [Check]**, your phone will check the incoming server settings. If you are notified that setup could not be finished, you might need to correct some settings to finish it. If there is any problem, please contact your mobile service provider and Email service provider.

3. Edit the outgoing server settings and tap **Next** or **Next [Check]**.

After you press **Next [Check]**, your phone will check the outgoing server settings.

NOTE: Your Idea 3G Smartphone knows the client settings for lots of Email service providers. If the Email service you use is from those providers, the phone will automatically check the incoming and outgoing settings after you enter your Email account and password.

4. Set the Email checking frequency, select whether to use this account by default or be notified when Email arrives, and then tap **Next**.
5. Give your account a name and set a name displayed on outgoing messages, and then tap **Done**.

Your phone will show the inbox of the Email account and start to download Email messages.

Composing and sending an Email

After creating an Email account, you can compose and send Email messages.

1. Tap **Menu Key > Compose** from the Email Screen.
2. Tap **To** field if needed, and enter the recipient's address. When you enter the address, the matching addresses saved in your Contacts will be displayed. You can tap the recipient from the list.
TIP: You can also tap **Menu Key > Add Cc/Bcc** to add recipients.
3. Enter the subject and the content of your Email. If necessary, change the email priority.
Tap **Menu Key > Add attachment** to add files to the Email.
4. Tap **Send**.

Replying to or Forwarding an Email

1. Open the Email you want to reply to or forward from Email Screen.
2. Tap **Reply** or **Menu Key > Forward** to reply to/forward the Email.

You can also tap **Reply all** to reply to all recipients of the Email.

3. Enter the contents/recipients of your Email.
4. Tap **Send**.

Email Settings

Tap the account you want to set from the Email Screen and tap **Menu Key > Account settings**. You can get the Email settings.

General settings

- **Account name:** Set your account name.
- **Your name:** Set the name displayed on outgoing message.
- **Email address:** View and change your Email address.
- **Use signature:** Select to use signature.
- **Signature:** Set your signature.
- **Email check frequency:** Choose how often you want the phone to automatically check for Emails.

- **Power-saving mode:** Enable the automatic adjustment of email check frequency when the battery is low.
- **Default account:** Select the check box to send email from this account by default.
- **Sync deleted message:** Delete an Email on the phone and the Email will be deleted on the server, too.

Notification settings

- **Email notifications:** Select to be notified in the status bar when Email arrives.
- **Select ringtone:** Select the notification ringtone for incoming Emails.
- **Vibrate:** Make the phone vibrate when Emails arrive.


Server settings

- **Incoming settings:** Set the incoming server settings.
- **Outgoing settings:** Set the outgoing server settings.

Getting Connected to the Internet

Your phone's impressive networking capabilities allow you to access the Internet or your corporate network with ease.


You can use default connection settings to connect to the web via your mobile network (GPRS/EDGE/3G), or Wi-Fi.

The GPRS/EDGE/3G connection can be enabled/disabled manually. Just select  > **Settings** > **Wireless & networks** > **Mobile networks** from the Home Screen and tick or clear the **Data enabled** check box.

Adding a New GPRS/EDGE/3G Connection

To get connected via GPRS/EDGE/3G you need a data plan with your service provider. Also if the GPRS/EDGE/3G settings are not pre-configured on your phone, please contact your provider to get the following information. Changing the settings without talking to your service provider could stop your phone from working.

- Access Point Name (APN).
- Your user name and password if needed.
- Server IP and the port number if the network uses a proxy server.

1. Tap **Home Key** >  > **Settings** > **Wireless & networks** > **Mobile networks** > **GSM/UMTS Options** > **Access Point Names**.
2. Tap **Menu Key** > **New APN**.
3. Tap **Name** to enter your APN name (it can be whatever you like).
4. Tap **APN** to enter the APN you want to add.
5. Tap **Proxy** and **Port** to enter the Server IP and port if the network uses a proxy server.
6. Tap and enter **Username** and **Password**. (If there's no user name or password, leave them blank.)
7. If needed, tap and enter **APN type**.
8. Tap **Menu Key** > **Save** to complete.

TIPS: To set the APN to default settings, tap **Menu Key** > **Reset to default**.

Turning on Wi-Fi

Wi-Fi provides wireless Internet access over distances of up to 300 feet (100 meters).

1. Tap **Home Key** >  > **Settings** > **Wireless & networks**.
2. Tick the **Wi-Fi** box to turn it on.

Connecting to a Wi-Fi Network


1. Tap **Home Key** >  > **Settings** > **Wireless & networks** > **Wi-Fi settings**.


The Wi-Fi network names and security settings (open or secured) that your phone has detected are shown in the **Wi-Fi networks** section.

2. Tap a network to connect to it.

If the network is secured, you'll need to enter a password.

Checking the Wi-Fi Network Status

You can check the Wi-Fi network by looking at the  icon in the status bar.

Or tap **Home Key** >  > **Settings** > **Wireless & networks** > **Wi-Fi settings**. Next, tap the wireless network that the phone is currently connected to. You can check the network status from the pop-up window.

Using the Phone as a Modem

You can access the Internet on your PC via your phone as a modem. Note the function may result in data charges from your mobile phone carrier. Please contact them for detail.

Enabling the Phone as a Modem

TIP:

- Make sure that USB storage is turned off before enabling the modem function. You can flick down the notification panel and tap **Turn off USB storage > Turn off USB storage**.
 - The PC accesses the Internet via the phone's mobile network. Therefore, set up the GPRS/EDGE/3G connection correctly before you try to use the phone as a modem.
1. When you connect your phone to your PC with the provided USB cable for the first time, a window will pop up and prompt you to install the driver.
 2. Double click the executable file (.exe) in the window and follow the prompt to finish the driver installation.
NOTE: If the window doesn't pop up automatically for some reason, please open the new CD-ROM drive on your PC manually and find the executable file to run it.
 3. Tap on the phone **Home Key > Menu Key > Settings > Wireless & networks > Tethering & portable hotspot** and tick the **USB tethering** check box. A new network connection will be created on your PC.
 4. Go to **Control Panel > Network** on your PC to enable the new network connection.

Now you can launch the Internet browser on your PC and start surfing.

Disabling the Modem Function

Tap **Home Key > Menu Key > Settings > Wireless & networks > Tethering & portable hotspot** and clear the **USB tethering** check box.

You can also just pull out the USB cable.

Using the Phone as a Wi-Fi Hotspot

You can use the phone as a portable WLAN router, providing Wi-Fi connection for one or multiple PC or other devices. The function need data connection on a mobile network and may result in data charges.

TIP:

- The PC accesses the Internet via the phone's mobile network. Therefore, set up the GPRS/EDGE/3G connection correctly before you try to use the phone as a Wi-Fi hotspot.
- When the portable Wi-Fi hotspot function is enabled, you cannot access the internet with any application on your phone via its Wi-Fi connection.
- At most 6 devices are allowed to connect to your phone simultaneously.

Enabling the Wi-Fi Hotspot

1. Tap **Home Key > Menu Key > Settings > Wireless & networks > Tethering & portable hotspot** and tick the **Portable Wi-Fi hotspot** check box.
2. Tap **Portable Wi-Fi hotspot settings > Configure Wi-Fi hotspot**.
3. Change the name of the hotspot and its security setting, if necessary.

The default hotspot is set as an open one. You can tap **Open** and choose **WPA/WPA2 PSK** to set up a password. The password must have at least 8 characters.


4. Tap **Save**. Now you can find the hotspot on other devices and connect to it.

Disabling the Wi-Fi Hotspot



Tap **Home Key > Menu Key > Settings > Wireless & networks > Tethering & portable hotspot** and clear the **Portable Wi-Fi hotspot** check box.

Browsing the Internet

You can use your phone to get on the Internet. Your phone automatically creates an GPRS, EDGE, or 3G connection while you browse web pages.


Tap **Home Key** >  > **Browser**.

There are different ways to open web pages:

- Tap the address bar to enter the website you want to browse. Then tap **Go**.
- Tap  beside the address bar or tap **Menu Key** > **Bookmarks**. Select a bookmark to open.
- Tap  beside the address bar or tap **Menu Key** > **Bookmarks**. Choose an item from the **Most visited** tab or **History** tab.

Browsing Options

- **Refresh:** **Menu Key** > **Refresh**.
- **Go to the next page:** **Menu Key** > **More** > **Forward**.
- **Add the page to Bookmarks:** **Menu Key** > **More** > **Add bookmark**.
- **Search:** **Menu Key** > **More** > **Find on page** and enter the search item.

- **Copy: Menu Key > More > Select text** and slide your finger on the page to select the text you want to copy. Your phone automatically copies the selected text to the clipboard.
- **Share pages: Menu Key > More > Share page** to send a page by Bluetooth, Email, Gmail or Messages.
- **Downloads/page info: Menu Key > More > Downloads/ Page info.**
- **Landscape browser: Menu Key > More > Settings.** Tick the **Landscape-only display** box and rotate your phone sideways to view the landscape browser screen.
- **Open new browser window: Menu Key > New window.** Then tap the address bar to enter the website you want to browse.
- **Switch browser windows:** If you have more than one browser windows opened, you can switch between these windows by tapping **Menu Key > Windows**. Then tap the page you want to browse. You can also tap  to close a window.

Opening Links in Web Pages


When the web page has a link to another site, either tap the link to open the page, or hold on the link to open the shortcut menu, giving you these options:

- **Open**
- **Open in new window**
- **Bookmark link**
- **Save link**
- **Share link** (by Bluetooth, Email, Gmail, or Messages)
- **Copy link URL**

Downloading Apps from the Web


If a web page has link to an application you'd like to download, just hold on the link and select **Save link**. The application will be saved to your microSD card.

Using Bookmarks

To bookmark a web page, open it and tap  or **Menu Key > Bookmarks**. Then tap **Add** or **Add bookmark**. Give the bookmark a name and tap **OK**.


TIPS: You can press **Menu Key > List view/Thumbnail view** to change how you view bookmarks on your phone screen.

Edit a Bookmark

1. Open a Browser window.
2. Tap  or **Menu Key > Bookmarks**.
3. Select an item you want to edit and hold on it until the shortcut menu pops up.

4. Select **Edit bookmark**.
5. Edit the name or location, and then tap **OK** to save it.

Delete a Bookmark

1. Open a Browser window.
2. Tap  or **Menu Key > Bookmarks**.
3. Select an item you want to delete and hold on it until the shortcut menu pops up.
4. Select **Delete bookmark** and tap **Continue** to confirm.

Browser Settings

You can set the browser text size, home page etc. by tapping **Menu Key > More > Settings** from a browser window.

Page content settings

- Text size
- Default zoom
- Open pages in overview
- Text encoding
- Block pop-up windows
- Load images.
- Auto-fit pages
- Landscape-only display
- Enable JavaScript
- Enable plug-ins

- Open in background
- Set home page

Privacy settings

- **Clear cache:** Delete all cached page contents.
- **Clear history:** Clear the browser navigation history.
- **Accept cookies:** Allow websites to use cookies.
- **Clear all cookie data:** Clear the browser cookies – deleting all history data.
- **Remember form data:** Remember the data you type in forms for later use.
- **Clear form data:** Clear all the saved form data.
- **Enable location:** Allow sites to request access to your location.
- **Clear location access:** Clear location access.

Security settings

- **Remember passwords:** Save usernames and passwords for web sites.
- **Clear passwords:** Clear saved passwords.
- **Show security warnings:** Warn if there's a problem with a site's security.

Advanced settings


- **Website settings:** View advanced settings for individual websites. (Only available for some websites.)
- **Reset to default:** Clear all browser data and reset all settings to default.

Bluetooth®

Bluetooth® is a short-range wireless communication technology. Phones or other devices with Bluetooth capabilities can exchange information wirelessly within a distance of about 10 meters. The Bluetooth devices must be paired before the communication is performed.

Turning Bluetooth on/off


Tap **Home Key** >  > **Settings** > **Wireless & networks** and tap the check box by **Bluetooth**.

When Bluetooth is on, the  icon will appear in the status bar. If you want to turn Bluetooth off, just clear the **Bluetooth** check box.

NOTE: If you switch off your phone while Bluetooth is turned on, when you switch on the phone again, Bluetooth will turn on automatically.


Making Your Phone Visible

In order to work with other phones or devices that have Bluetooth, you need to make your phone 'visible' to them.

1. Tap **Home Key** >  > **Settings** > **Wireless & networks** > **Bluetooth settings**.
2. Tick the **Bluetooth** check box if it isn't already ticked.
3. Tick the **Discoverable** box to make your device visible.


Change Your Phone's Name

When your phone is visible to other Bluetooth devices it will be seen by its name, and you can make that anything you want – like ‘Dave’s Idea 3G Smartphone’.

1. Tap **Home Key** >  > **Settings** > **Wireless & networks** > **Bluetooth settings**.
2. Select the **Bluetooth** box if it is not already ticked.
3. Tap **Device name**.
4. Enter the name and tap **OK**.

Hook up with Another Bluetooth Device


You can pair your phone with another device that has Bluetooth capabilities. Once you do this, the two devices can exchange information with Bluetooth turned on but do not need to be visible to each other.


1. Tap **Home Key** >  > **Settings** > **Wireless & networks** > **Bluetooth settings**.
2. Tap **Scan for devices**. Your phone will show all visible Bluetooth devices (in range) in its **Bluetooth devices**.
3. Select the device you want to pair with.
4. If required, enter your PIN and tap **OK**.

If a PIN is required, the same PIN should be entered on the other device.


Making the Most of Multimedia


Taking Pictures with Your Camera

Your phone has a 3.2 megapixel camera. Open it by tapping **Home Key** >  > **Camera**.

Aim the camera at the subject and then tap  to take a shot. To view it, just tap the picture in the right corner of the screen. Or select **Menu Key** > **Gallery** to view all your pictures.



Adjusting Camera Settings

From the Camera Screen tap  to set up focus mode, exposure, picture size/quality, color effect, ISO, anti-banding, saturation, contrast, sharpness, and camera reset.




Tap  to enable or disable saving of pictures' locations.

Tap  to change white balance.

Tap **Zoom** to zoom in or out.


TIP: To change quickly from camera to camcorder or vice versa, use the switch  icon. Use the  bar to adjust the brightness.


Shooting Video with Your Camcorder

Open the camcorder by tapping **Home Key** >  > **Camcorder**. Then select  to start shooting, and  to stop. Select the picture in the right corner of the screen to

view the video you've just shot. Or tap **Menu Key > Gallery** to see all your video clips.

Adjusting Your Video Settings



From the Camcorder Screen, tap  to adjust color effect, video quality, video/audio encoder, video duration, and camcorder reset.





Tap  to change white balance setting.

Tap **High/Low/MMS/YouTube**/ to change video quality, video/audio encoder, and video duration together based on the purpose of the video.


Listening to Your FM Radio


With the FM Radio, you can search for radio channels, listen to them, and save them on your phone. Note that the quality of the radio broadcast depends on the coverage of the radio station in your area. The wired headset that comes with your phone works as an antenna, so always connect the headset when using the radio. When you receive an incoming call while listening to the radio, the radio will be turned off.

To tune in, plug your headset into your phone. Tap **Home Key >**  **> FMRadio**. This  icon will pop up in the status bar.

Tap  or  to scan for available FM channels. If you need to fine tune the radio's reception, tap **Menu Key > Adjust**. Tap  /  change the frequency by +/-0.1 MHz.


Once you get the best reception of a channel, hold the frequency shown until a red box appears on the screen, and then drag it into the box to save, as shown in the next diagram.

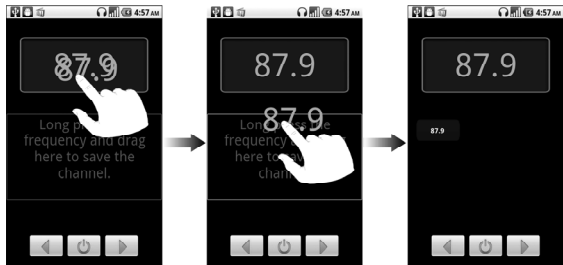


- Press **Volume Keys** to adjust the volume.
- Tap **Menu Key > Sleep** to set the FM radio sleep timer.
- Tap  to switch off the radio.

Playing Your Music

You can play digital audio files from your phone's memory card in **Music**.

1. Tap **Home Key >  > Music** to open the Music Screen.
2. Select **Artists/Albums/Songs/Playlists** to see the songs you want to play.
3. Tap a song from the list to start playing.

4. Adjust the volume with **Volume Keys**.

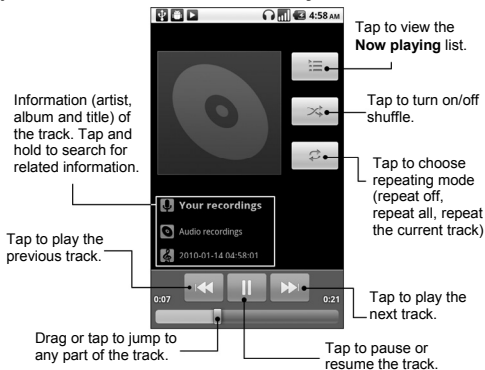

Creating Playlists

Playlists help you organize your music files:

1. Select a music file you want to add to a new playlist.
2. Tap and hold on the file until a shortcut menu pops up.
3. Tap **Add to playlist**.
4. Tap **New**.
5. Type the playlist name and tap **Save**.

Managing Playlists

1. From the Music Screen tap **Playlists** to see them all.
2. Hold on the playlist you want to play or edit until a shortcut menu pops up.
3. Tap **Play**, **Delete** or **Rename**.

Adding a Song to a Playlist


1. Open **Music** and find the song you need under **Artists**, **Albums**, **Songs**, or **Playlists**.
2. Hold on the song until a shortcut menu pops up.
3. Select **Add to playlist**.
4. Select a playlist.

Setting a Song as Ringtone


1. Open the folder where the song is.
2. Hold on the song until a shortcut menu pops up.
3. Select **Use as phone ringtone**.

TIPS: You can also set a song as ringtone when you are playing it by tapping **Menu Key** > **Use as ringtone**.

Playing Your Videos


To play a video file, tap **Home Key** >  > **Videos**. This will open the Videos Screen and show the video files saved to your memory card.

Tap a video file and the video player will open. Tap on the screen and the control bar will appear as below. So now you can play, pause, fast forward, etc.

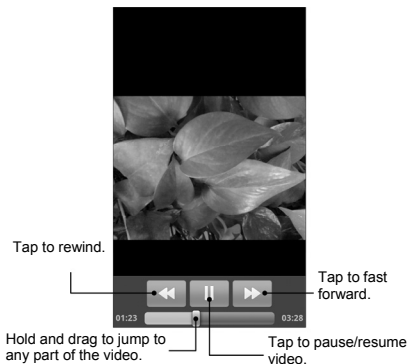



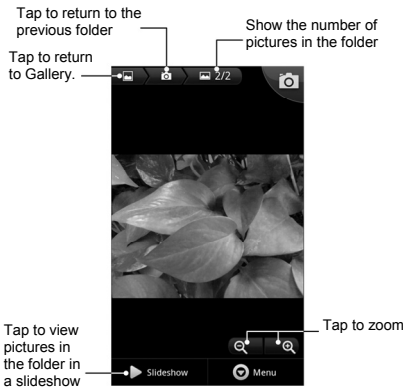

Opening Your Gallery

Gallery helps you view pictures and play videos. You can also do some basic editing of your pictures – such as setting them as wallpaper or contact icons, and sharing with friends.




Making Memorable Memos

Sound Recorder enables you to record your voice memos. You need a microSD card to use it.

1. Tap **Home Key** >  > **Sound Recorder**.
2. Make sure your mouth is near the phone's microphone.
3. Tap  to start recording.
4. Tap  to stop recording.
5. Tap  to play back the voice recording.

6. Tap **OK** to save the voice recording, or tap **Discard** to delete the recording.

TIPS: You can find your recordings in **Home Key** >  > **Music** > **Playlists** > **My recordings**. If you want to set an audio clip as ringtone, hold the recording and select **Use as phone ringtone** from the pop-up shortcut menu.

Note: Please transfer all your downloaded applications to memory card for better processing speed and to optimize internal memory space.

Using Your Google™ Applications


Signing in to your Google Account lets you synchronize Gmail, Calendar, and Contacts between your phone and the web. And if you don't have an account, you can easily create one.

1. Tap a Google application that need a Google account, such as **Market**.
2. Read the instructions and select **Next**.
3. If you've got a Google account, tap **Sign in**. Enter your user name and password. Then tap **Sign in**. (Or tap **Create** if you don't have a Google account.)

Gmail

Gmail is a web-based email service that's configured when you sign in to your Google account. Depending on your synchronization settings, the Gmail on your phone can be automatically synchronized with your Gmail account on the web.


This is how you create and send a Gmail:

1. Open **Gmail** by tapping **Home Key** >  > **Gmail**.
2. Press **Menu Key** > **Compose**.
3. Enter the email address of the person you're contacting in the '**To**' field. If you're sending the email to several people, separate the email addresses with a comma. You can add

as many recipients as you want.

4. Enter the email subject, and then write your email.
5. Tap **Menu Key** > **Send**.


Using Google Calendar

Tap **Home Key** >  > **Calendar** to use Google Calendar, Google's time management application. You can use the calendar to schedule appointments, including meetings and other events. Your appointments will be displayed on the screen as are scheduled. You can also synchronize appointments to your Google account, which enables you to manage your schedule online on your PC.

Using Google Talk

Google Talk is Google's instant messaging program, which enables you to communicate with other people who also use it.

Opening Google Talk

Tap **Home Key** >  > **Talk**.

Adding a New Friend

You can only add people who have a Google Account.

1. In the Friends list, press **Menu Key** > **Add friend**.
2. Enter the Google Talk instant messaging ID or Google email address of the friend you want to add.

Your friend will receive an invitation from Google. Press **Menu Key > More > Invites** to see pending invitation.

Changing Your Online Status



1. Tap the online status icon beside your status message, and then select the status you want on the menu.
2. Tap the status message box and then enter your status message using the on-screen keyboard.

Starting a Chat

1. Tap a friend in the Friends list.
2. Chat with your friend by entering text in the message box.
3. Tap **Send**.

Places

Google Places helps you find all kinds of businesses near you.

1. Tap **Home Key** >  > **Settings** > **Location & security** and tick the **Use GPS satellites** or **Use wireless networks** check box.
2. Tap **Home Key** >  > **Places**. Wait while you are being located. Your location, when found, is shown at the bottom of the screen.
3. Select a business category and the information of that type of business near you will be displayed.

You can also use the **Find places** search box on the top to find the business you need.


Note: Tap **Add** to add new business categories.

4. Tap a result you are interested in and check out the details and reviews about that place. You can also see the place on Google Maps, find out how to get there, or give that business a call.

Latitude

Google's Latitude service is a social tool for sharing your location information with selected friends.

Tap **Home Key** >  > **Latitude** to enable Latitude service.

Each time you launch Maps application, your location will be determined using GPS or the phone network, and your Latitude status will be updated. You can tap **Menu Key** > **Latitude** in Maps or **Home Key** >  > **Latitude** to see your status as well as that of your selected friends.

In Latitude, tap **Menu Key** to refresh friends status, see them on Maps, add new friends, or change privacy settings.

You can also turn off Latitude service by tapping **Sign out of Latitude** in Privacy settings of **Latitude**.

Sorting out Your Phone Settings

Setting Time and Date

1. Tap **Home Key > Menu Key > Settings > Date & time**.
2. Clear the **Automatic** tick box if you want to set the time and date by yourself.
3. Tap **Set date**. Adjust the date, and tap **Set** to save it.
4. Tap **Select time zone** and tap where you are in the world.
5. Tap **Set time**. Adjust the time, and tap **Set** to save it.
6. Tap the tick box behind **Use 24-hour format** if you want to change the time format.
7. Tap **Select date format** to select the one you prefer.

Changing Display Settings

By tapping **Home Key > Menu Key > Settings > Display**, you can adjust the display settings as you like – changing **Auto-rotate screen**, **Animation**, **Brightness**, and **Screen timeout**.

Adjusting Screen Brightness

1. Select **Brightness** from the display settings.
2. Tick the **Automatic brightness** box and your phone can adjust the screen brightness automatically. Clear the tick box to adjust the screen brightness manually.

3. Tap **OK**.

Adjusting Screen-timeout

When not in use, your phone will turn the screen off after a set length of time. If that time is too long or short, you can adjust it.

1. Tap **Screen timeout** from the display settings.
2. Select your preferred time from the list.

Switching Screen Orientation Automatically

You can select to switch your screen orientation to landscape or portrait automatically when rotating your phone. Simply tick the **Auto-rotate screen** box from the display settings.

If you want to disable this function, just clear the **Auto-rotate screen** check box.

Showing Animation when Opening/Closing Windows

1. Tap **Animation** in the display settings.
2. Select the animation type you like.

When you want to disable this function, select **No animations**.

Sound Settings

By tapping **Home Key > Menu Key > Settings > Sound**, you can adjust the sound settings, such as ringtones and alerts.

Choosing Your Ringtone


1. Tap **Phone ringtone** in sound settings.
2. Select the ringtone you want to use from the pop-up list.
3. Tap **OK** to save.



Setting the Default Notification Ringtone

1. Select **Notification ringtone** from the **Sound** settings.
2. Scroll through the ringtone list and select one as the default notification ringtone.
3. Tap **OK** to save.


Switching Your Phone to Silent Mode

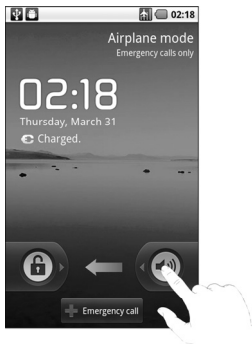1. In the **Sound** settings tick the **Silent mode** box.
2. You can also switch to **Silent mode** by holding the **Volume Key (down)** or – if the screen is locked – by dragging the **Sound off** bar to the left, as shown below.



By default, vibration is enabled in silent mode, and the icon  appears in the status bar. If vibration is disabled, the silent icon  will appear in the status bar.

Switching to Vibrate

In **Sound settings** tap **Vibrate** and choose the condition for vibration. If your phone is already in **Silent mode**, the vibration icon  will appear in the status bar when vibration is enabled.

Flipping to Turn off Ringtone

In **Sound settings** tick the **Turn off phone ring** box. Then you can flip your phone over to mute the ringtone when there is an incoming call.

‘Haptic’ (touch) Keypad Feedback

If you'd like your phone to vibrate in response to your keypresses or certain UI interactions, then you need to turn on the **haptic feedback**.

1. Tap **Home Key** >  > **Settings** > **Sound**.
2. Tick the **Haptic feedback** box.

Adjusting Volume

1. Make sure your phone isn't in **Silent mode**.
2. Tap **Volume** from **Sound** settings.
3. Adjust the ringtone volume, media volume, and alarm volume and tap **OK** to save.

TIPS: You can adjust the media volume when a media application is in use by pressing the **Volume Keys**. If no media application is active, press the keys to adjust ringtone volume. And if you'd like to adjust the notification volume together with the ringer volume, tick the **Use incoming call volume for notifications** box.

Turning on Touch Tones

To make your phone play tones whenever you use the dial pad, tick the **Audible touch tones** box in **Sound**.

Turning on Selection Tones


Tick the **Audible selection** box in **Sound**. Your phone will play a sound when you touch the screen to make a selection.

Turning on Screen Lock Sound

Tick the **Screen lock sounds** box in **Sound** settings. When you lock or unlock the screen, sound will be played as a notification.

Language Settings


You can change the language of your phone's operating system in two simple steps.

1. Tap **Home Key** >  > **Settings** > **Language & keyboard** > **Select language**.
2. Select a language from the list given.

Mobile Network Services


Both GSM and WCDMA are supported by your phone. You can configure the network settings according to the phone service you use.

Getting Data Services while Roaming


1. Tap **Home Key** >  > **Settings** > **Wireless & networks** > **Mobile networks**.
2. Tick the **Data roaming** box.

IMPORTANT: Data roaming may incur significant roaming charges.

Enabling Data Services

1. Tap **Home Key** >  > **Settings** > **Wireless & networks** > **Mobile networks**.
2. Tick the **Data enabled** box to enable data services over the mobile network. To disable data services, just clear the tick box.

Enabling Always-on Data Services


1. Tap **Home Key** >  > **Settings** > **Wireless & networks** > **Mobile networks**.
2. Tick the **Enable always-on mobile data** box to allow applications to update data automatically.

IMPORTANT: When this option is enabled, more data traffic will be generated for automatic updates of applications data. And your phone will consume more power.

Switching Network Modes


1. Tap **Home Key** >  > **Settings** > **Wireless & networks** > **Mobile networks** > **Network Mode**.
2. Select one of the following: **GSM/WCDMA auto**, **WCDMA only**, or **GSM only**.

Switching Networks

1. Tap **Home Key** >  > **Settings** > **Wireless & networks** > **Mobile Networks** > **GSM/UMTS Options** > **Network operators**. The phone automatically searches for all available networks.
2. Tap a network to register manually, or tap **Select automatically**.

Setting Access Point Names

To connect to the Internet you can use the default Access Point Names (APN). And if you want to add a new APN, please contact your service provider to find out more.


1. Tap **Home Key** >  > **Settings** > **Wireless & networks** > **Mobile networks** > **GSM/UMTS Options** > **Access Point Names**.
2. Tap **Menu Key** > **New APN**.
3. Set the necessary parameters. (See how to add a GPRS/3G/EDGE connection on page 69.)
4. Tap **Menu Key** > **Save**.


Security Settings

Here's how to protect your phone and SIM from unauthorized use.

Protecting Your Phone with a Screen Unlock Pattern

Creating Your Screen Unlock Pattern

1. Tap **Home Key** >  > **Settings** > **Location & security** > **Set up screen lock** > **Pattern**.
2. Read the instructions and tap **Next**.
3. Watch the example pattern and tap **Next**.
4. With a finger, draw your own pattern and tap **Continue**.



5. Draw the pattern again and tap **Confirm**.
6. Press **Power Key** to lock the screen.

TIPS: You can also clear the **Use visible pattern** box in the Location & security screen if you don't want your screen

unlock pattern to display as you draw it on the screen.

Unlocking the Screen with Your Pattern

1. Press the **Power Key**.
2. Draw the pattern you set to unlock the screen.



If you make a mistake, your phone will ask you to try again.

Forgot your screen unlock pattern?


If you've forgotten your screen unlock pattern, you have up to five attempts to unlock your phone. If the pattern has been drawn incorrectly five times, you can enter your Google account user name and password to unlock your phone.

IMPORTANT: You must sign in or create a Google account on your phone before using the following method to reset the lock pattern.


1. Draw the unlock pattern on the screen.
2. After the fifth attempt, you're prompted to try again in 30 seconds. Then tap **OK**.
Note: If the display turns off, press the **Power Key** to turn the display on.
3. Tap **Forgot pattern?** on the bottom right of the screen.
4. Enter your Google account user name and password, and then tap **Sign in**.
5. You will be asked to draw a new unlock pattern. If you do not need an unlock pattern, tap **Cancel**.

Protecting Your Phone with a PIN or Password

Creating a PIN or Password


1. Tap **Home Key** >  > **Settings** > **Location & security** > **Set up screen lock**.
2. Tap **PIN** or **Password**.
3. Enter the numeric PIN or any password you like, and tap **Continue**.
4. Enter it again and tap **OK** to confirm.

Unlocking the Screen with Your PIN or Password

1. Press **Power Key** to wake up the phone.
2. Drag the  icon to the right.
3. Enter the PIN or password you set.
4. Tap **OK**.


Disabling Screen Unlock Security

If you have created an unlock pattern, PIN or password, you can disable it.

1. Tap **Home Key** >  > **Settings** > **Location & security** > **Change screen lock**.
2. Draw the screen unlock pattern or enter your PIN/password you have created.
3. Tap **None**.


Protecting Your SIM with a PIN

Every SIM card comes with a PIN. The initial PIN is provided by your service provider. It's best to lock your SIM as soon as you can.

1. Tap **Home Key** >  > **Settings** > **Location & security** > **Set up SIM/USIM card lock**.
2. Tick the **Lock SIM/USIM card** check box.
3. Enter the PIN you've been given and tap **OK**.

Changing Your SIM PIN

You can change the PIN you've been given to one easier for you to remember and harder for others to guess.

1. Tap **Home Key** >  > **Settings** > **Location & security** > **Set up SIM/USIM card lock**.
2. Make sure you already tick the **Lock SIM/USIM card** check box.
3. Tap **Change SIM/USIM PIN**.
4. Enter the old PIN and tap **OK**.
5. Enter your new PIN and tap **OK**.
6. Enter the new PIN again and tap **OK**.


Restoring a Locked SIM Card

Put all your confidential passwords in a safe place for future use. If you enter the wrong SIM PIN more times than allowed, your SIM card will be locked and you cannot access the mobile phone network. Contact your operator for a PIN Unlock Key (PUK) to restore the SIM card.

Setting up Credential Storage

This lets you select applications to access secure certificates and other credentials.

Enabling Secure Credentials


1. Tap **Home Key** >  > **Settings** > **Location & security**.
2. Tap **Set password** and create a password for the

credential storage.

3. Tick the **Use secure credentials** box.

TIPS: You can also install encrypted certificates from your microSD card by tapping **Install from SD card**.

Deleting Secure Credentials

1. Tap **Home Key** >  > **Settings** > **Location & security**.
2. Tap **Clear storage** to clear credentials.

Managing Your Memory Card

Checking Memory Card Space


Tap **Home Key** >  > **Settings** > **SD card & phone storage**.

You can view the space information from **Total space/ Available space** in **SD card** section.

Unmounting Your Memory Card

Unmounting makes your memory card unavailable to the phone's operating system, and ready for removal or replacement.


1. Tap **Home Key** >  > **Settings** > **SD card & phone storage**.
2. Tap **Unmount SD card**.

The  icon will appear in the status bar. You can tap **Mount SD card** to mount the memory card again.

Formatting Your Memory Card

1. Unmount your memory card (as above).
2. Tap **Format SD card**.
3. Tap **Format SD card** to confirm.
4. Tap **Erase everything**.

Managing Phone Memory

1. Tap **Home Key** >  > **Settings** > **SD card & phone storage**.
2. Scroll down to view the **Available space** in the **Internal phone storage** section.


Privacy: Reset to Factory Settings

1. **Home Key** >  > **Settings** > **Privacy**.
2. **Factory data reset**.
3. **Reset phone**.
4. **Erase everything**.

WARNING: All your personal information and downloaded applications on your phone will be erased after the resetting.

Managing Applications and Their Settings

Viewing Your Phone's Applications


Tap **Home Key** >  > **Settings** > **Applications** > **Manage applications**.

You can check the running applications or view the applications installed on your phone and memory card.


Allowing Installation of Non-market Applications

1. Tap **Home Key** >  > **Settings** > **Applications**.
2. Tick the **Unknown sources** box.

How to Install an Application


You can install an application from the Android Market (**Home Key** >  > **Market**) by selecting the item you want to download and tapping **Install**.

You can also install a non-Marketing application if you have allowed the installation of it. Make sure that you select an application developed for your device and processor type before installing it.

1. Tap **Home Key** >  > **Files**, and open the folder where the application you want to install is.

2. Tap the application to start installation.
3. Read the installation instructions that come with the application and follow it to complete the setup.

Removing an Application


1. Tap **Home Key** >  > **Settings** > **Applications** > **Manage applications**.
2. Select the application you want to delete.
3. Tap **Uninstall** and **OK** to confirm.

TIPS: Market applications can also be removed by going to the **Downloads** page in **Market**, selecting the unwanted application, and tapping **Uninstall**.

Moving an Application to or from the Memory Card

You can move the applications downloaded or installed on your phone to the memory card when the phone memory is full. You can also move applications to your phone if the memory card is getting full.


NOTE: Not all applications can be move to your phone or memory card.

1. Tap **Home Key** >  > **Settings** > **Applications** > **Manage applications**.
2. Tap the application you want to move on the **Downloaded** tab.

3. Tap **Move to phone** or **Move to SD card**.

Managing Other Settings

Search Settings

You can manage search settings and search history by tapping **Home Key** >  > **Settings** > **Search**.

Google Search Settings

- **Show web suggestions:** Tick the check box to allow Google to show you search suggestions while you enter the keywords.
- **Use My Location:** Tick the check box to allow Google to access your location data.
- **Search history:** Show search history as you type keywords in the Google search box.
- **Manage search history:** Open the browser to manage your search history.

Searchable Items


When you search for an item on your phone, only the searchable items will be looked for.

Tap **Home Key** >  > **Settings** > **Search** > **Searchable items**.

Clear Search Shortcuts

Clear shortcuts to the recently used search keywords.


Voice Interaction

You can set the text-to-speech and voice recognition options by tapping **Home Key** >  > **Settings** > **Voice input & output**.


NOTE: You need to download voice data in order to use the text-to-speech function. Just tap **Install voice data** in **Text-to-speech settings**.

Other Applications

Alarms

1. Tap **Home Key** >  > **Alarm**.
2. Tap the default alarm set to configure it. Or, to create a new alarm, tap **Menu Key** > **Add alarm**.
3. Tick the **Turn on alarm** box and set up **Name**, **Time**, **Repeat**, **Snooze**, **Duration**, **Vibrate**, **Ringtone**, **Volume**, **Volume crescendo**, and **Delay**.

Idea Mall

Tap Home Key >  > Idea Mall

Idea Mall is Idea's App Store with thousands of apps and games, both free and paid. The store is a one stop shop for sports update, weather forecast, breaking news or latest online game. You can now have access to a new, enriched experience of mobile entertainment, gaming, services and information.

Troubleshooting – Unable to open Idea Mall

Go to Settings->Wireless Networks-Mobile Network-APN Settings, change the APN from default to Ideafresh.

Facebook

A social networking application to help you communicate more efficiently with your family, friends and coworkers


Opening Facebook

Tap **Home Key** >  > **Facebook**

Twitter

A social networking application to instantly connect to whats important to you. Follow your friends, experts, favorite celebrities, and breaking news

Opening Twitter

Tap **Home Key** >  > **Twitter**

Docs To Go

A handy application suite that'll open Word, Excel, Powerpoint, or PDF files.

Read the on-screen instructions for detailed information.

Note Pad


Note pad is for your memos. Tap **Menu Key** to add or delete them. Hold an existing note to edit, delete it or change its title.

Calculator

Tap **Home Key** >  > **Calculator**.

TIPS: Tap **Menu Key** > **Advanced panel** to use scientific calculation.

Global Time

Tap **Home Key** >  > **Global Time**. Tap **Menu Key** > **Show time zone** to see what time it is in the world's major cities.

Idea Power

Tap **Home Key** >  > **Idea Power**


Idea Power enables you to use Idea VAS services like cricket, games,news,ringtones etc .Insert your SIM in the phone first and select Idea Power

Task Manager

Go to **Task Manager** to view or stop applications.

Tap a task in the **Task** tab to switch to its screen, abort it, or see its detail. Tap **Resource** to view real-time allocation of system resources.

Stopwatch

1. Tap **Home Key** >  > **Stopwatch**.
2. Tap **Start** to start timing, **Pause** to pause time, and **Resume** to continue.
3. **Reset** will take the stopwatch back to 00:00.0.

Specifications

Dimensions		Approx. 114 mm × 56.5 mm × 11.8 mm
Weight		Approx. 130g (with battery)
Bearer		GSM/WCDMA support
Main display dimension, resolution		3.5 inches 800*480
Back Camera	Sensor type	CMOS
	Still image capture resolution	3.2M Pixels with auto focus
Internal memory		ROM: 512MB, RAM: 256MB
Removable memory card		Support microSD card, max. capacity 32 GB
Battery	Capacity	1250mAh
	Standby time	Approx. 165 hours (subject to network status)
	Voice talk time	Approx. 240 min (subject to network status)
WAP browser version		WAP2.0

Declaration of RoHS Compliance

To minimize the environmental impacts and take more responsibilities to the earth we live on, this document shall serve as a formal declaration that the Idea 3G Smartphone manufactured by ZTE CORPORATION is in compliance with the Directive 2002/95/EC of the European Parliament - RoHS (Restriction of Hazardous Substances) with respect to the following substances:

1. Lead (Pb)
2. Mercury (Hg)
3. Cadmium (Cd)
4. Hexavalent Chromium (Cr (VI))
5. Polybrominated biphenyls (PBBs)
6. Polybrominated diphenyl ethers (PBDEs)

The Idea 3G Smartphone manufactured by ZTE CORPORATION, meets the requirements of EU 2002/95/EC.

Disposal of Your Old Appliance



1. When this crossed-out wheeled bin symbol is attached to a product, it means the product is covered by the European Directive 2002/96/EC.
2. All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
3. The correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health.

For this product's recycling information based on WEEE directive, please send an e-mail to weee@zte.com.cn

EC DECLARATION OF CONFORMITY

C € 1588 !

It is hereby declared that following designated product:

Product Type: WCDMA/GSM (GPRS) Dual-Mode
Digital Mobile Phone

Model No: ZTE-BLADE

Complies with the essential protection requirements of the Radio and Telecommunication Terminal Equipment Directive (EC Directive 1999/5/EC) and the Electromagnetic Compatibility Directive (2004/108/EC)

This declaration applies to all specimens manufactured identical to the samples submitted for testing/evaluation.

Assessment of compliance of the product with the requirements relating to the Radio and Telecommunication Terminal Equipment Directive (EC Directive 1999/5/EC) was performed by American TCB (Notified Body No.1588), based on the following standards:

Safety	EN 60950-1:2006
EMC	EN 301 489-1 V1.8.1; EN 301 489-7 V1.3.1; EN 301 489-17 V1.3.2; EN 301 489-19 V1.2.1; EN 301 489-24 V1.4.1; EN 55013:2001+A2:2006 EN 55020:2007;

Radio	EN 301 511 V9.0.2; EN 301 908-1 V3.2.1; EN 301 908-2 V3.2.1; EN 300 328 V1.7.1;
Health	EN 50360:2001; EN 62209-1:2006; IEC 62209-2:2010; EN 50332-1:2001; EN 50332-2:2003

This declaration is the responsibility of the manufacturer:

ZTE Corporation

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,
Nanshan District, Shenzhen, Guangdong, 518057,
P.R.China


Authorised person signing for the company:

Xu Feng Quality Director Of ZTE Corporation

Name in block letters & position in the company

Shenzhen, 21st July 2010

Place & date



Legally valid signature

Warranty Card

The warranty is valid only if the registration card is duly filled in, stamped and signed by supplier/dealer.

Name of customers	
Address/Phone	
Product model and type	
IMEI / ESN / SN	
Invoice Number	
Date of purchase	

Dealer Signature and Stamp

Limited Warranty Statement

This Limited Warranty is subject to the following terms and conditions:

1. This warranty of the Product extends for a period of 12 months for the Host unit, 6 months for Battery and Charger, and 3 months for Earphone commencing from the date of purchase.
2. The defective unit along with the sales invoice must be brought or sent to the Authorized Service Centre, during normal working hours, by end customer at his own expense.
3. Any defect arising due to misuse of the unit, damages due to liquid ingress, or physical abuse, or normal wear and tear will not be covered by this warranty. Plastic components like front & back cover plus rubber

component like key pads, antenna will not be treated under warranty coverage.

4. The Limited Warranty is void if the unit is tampered with, altered or repaired by unauthorized persons.
5. The Limited Warranty is void if the serial number of the unit is deleted, defaced or altered rendering it difficult to identify the instrument.
6. This Limited Warranty does not include user manuals or any third party software, settings, content, data or links, whether included/downloaded/inserted in the Product, whether included during installment, assembly, shipping or at any other time in the delivery chain or otherwise and in any way acquired by you.
7. There are no customer serviceable parts inside the unit and hence the same should not be opened by the user or any person other than the authorized service personnel. The warranty is void if the warranty seal on the unit is broken.
8. Damages caused to the unit, by accidents, lightning or any other acts of God are not covered by this warranty. This Limited Warranty does not apply if the Product has been exposed to moisture, to dampness or to extreme thermal or environmental conditions or to rapid changes in such conditions, to corrosion, to oxidation, to spillage of food or liquid or to influence from chemical products.
9. Whether defective items or components are to be replaced or repaired shall be left to the sole discretion of Supplier, (put

the Supplier's name). In case of replacement of a part, the defective part removed from the unit becomes the property of ZTE Technologies Co. Ltd ('ZTE').

10. This Limited Warranty is your sole and exclusive remedy against ZTE and ZTE's sole and exclusive liability in respect of defects in your Product. However, this Limited Warranty shall neither exclude nor limit any of your legal (statutory) rights under the applicable national laws or any of your rights against the seller of the Product.
11. This Limited Warranty replaces all other ZTE warranties and liabilities, whether oral, written, (non-mandatory) statutory, contractual, in tort or otherwise, including, without limitation, and where permitted by applicable law, any implied conditions, warranties or other terms as to satisfactory quality or fitness for purpose. To the extent permitted by applicable law(s) ZTE does not assume any liability for loss of or damage to or corruption of data, for any loss of profit, loss of use of Products or functionality, loss of business, loss of contracts, loss of revenues or loss of anticipated savings, increased costs or expenses or for any indirect loss or damage, consequential loss or damage or special loss or damage. To the extent permitted by applicable law, ZTE's liability shall be limited to the purchase value of the Product. The above limitations shall not apply to death or personal injury resulting from ZTE's proven negligence.

Region	Circle	City	Name	Address	Pincode
Central	Gujarat	Ahmedabad	Adonis Electronics Pvt.Ltd	10/B, Harishchandra Park, Opp. Roopal Park, Nr. PRERNA School, Nr. Ankur Circle, LIC Road, Naranpura, Ahmedabad	380013
Central	Gujarat	Navragpura	The Mobile Care	B/1, Samrat Complex, Choice Restaurant Lane, Near Swastik Cross Road, CG.Road, Navrangpura, Ahmedabad	380009
Central	Gujarat	Bhavnagar	Adonis Electronics Pvt.Ltd.	B/14, Ruturaj Complex, Opposite AV School Ground, Crescent Road, Bhavnagar.	364001
Central	Gujarat	Mehsana	OM CARE	b/55krishna shopping centre,mehsana	384001
Central	Gujarat	Himmatnagar	NAVKAR MOBILE AND XEROX	DG/5 DURGA COMPLEX, HIMATNAGAR	383001
Central	Gujarat	Jamnagar	A. S. COMPUTERS	107,CROSS ROAD COMPLEX, OPP. DKV COLLEGE	361008

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
079/32942148	mch.baroda@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Haresh Pathak	9925200106	mch.baroda@adonis.co.in
7930028232	themobilecare@gmail.com	10.00AM / 06:30PM, Sunday Closed	Haresh Pathak	9925200106	mch.baroda@adonis.co.in
01278-2522523	bhavnagar.service@adonis.co.in	09.30 AM / 06:30PM, Sunday Closed	Haresh Pathak	9925200106	mch.baroda@adonis.co.in
0276-22240601	omcare@yahoo.com	09:30AM / 06:30PM, Sunday Closed	haresh pathak	9925200106	mch.baroda@adonis.co.in
	buntyshah_shah@yahoo.com	09:30AM / 06:30PM, Sunday Closed	haresh pathak	9925200106	mch.baroda@adonis.co.in
	amrut_as@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Haresh Pathak	9925200106	mch.baroda@adonis.co.in

Region	Circle	City	Name	Address	Pincode
Central	Gujarat	Rajkot	Aum Tele Service	AUM TELESERVICE,KALA NDI COMPLEX,NEAR AMRAAPALI FATAK,CHUDASAMA PLOT MASIN ROAD,RAJKOT	360001
Central	Gujarat	Godhra	Pavan Mobile Shop	Panjra Pole RD, Dhankawad, Godhra	389001
Central	Gujarat	Surat	Adonis Electronics Pvt.Ltd.	7/,8 & 9A, Mirambika Complex , Nr. Civil Hospital, Near Interwood Showroom, Opposite Gandhibaug,Chowk, Surat.	395004
Central	Gujarat	Baroda	Adonis Electronics Pvt.Ltd.	Plot No.3, Ground Floor, Bhavanipura Society, Opposite Bhavanipura Garba Ground, Near Jain Mandir, delux chardasta Nizampura, Baroda,Delux	390002
Central	Gujarat	Vapi	Balaji Sales & Services	Shop No:10, Bhagyalakshmi Complex, Opposite A1 Furniture, Kopralli Road, Gunjan GIDC Vapi.	396195

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
	aum_tvs@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Haresh Pathak	9925200106	mch_baroda@adonis.co.in
	pavanmobile29@yahoo.com	10.00 AM / 06.00 PM, Sunday Closed	Haresh Pathak	9925200106	mch_baroda@adonis.co.in
2612465633	KALPESH_bodar040@gmail.com	09:00AM / 06:00PM, Sunday Closed	Haresh Pathak	9925200106	mch_baroda@adonis.co.in
0265-3253267	mch_baroda@adonis.co.in	09:00AM / 06:30PM, Sunday Closed	Haresh Pathak	9925200106	mch_baroda@adonis.co.in
0260-3295757	bsns.vapi@gmail.com	10.00AM / 06:00PM, Sunday Closed	Haresh Pathak	9925200106	mch_baroda@adonis.co.in

Region	Circle	City	Name	Address	Pincode
Central	Gujarat	Valsad	M/S Rajwadi Electronics	M.G ROAD, VALSAD,	396001
Central	Gujarat	Dabhoi	M/S HITARTH MOBILE	LAL BAZER, DABHOI	391110
Central	Gujarat	Navsari	BHARAT TELECOM	SHREE CHAMBER, NANI PANDYA KHADKI, CHANDNI CHOWK, OPP HARI COLLECTION, NAVSARI	396445
Central	Gujarat	Anand	Mahalaxmi mobile	Aryasamaj shopping complex, Gopal chokdi, Anand	388001
Central	Madhya Pradesh	Ujjain	Abhishek Enterprises	110, CENTRAL KOTWALI ROAD UJJAIN	456001
Central	Madhya Pradesh	Balaghat	MAYA COMMUNICATION	Opp. Digamber jain mandir, subhash chowke, main road, balaghat	481001
Central	Madhya Pradesh	Betul	SHRI DADAJI MOBILE SERVICE	OPP. KHANDELWAL GENERAL STORES, BETULGANJ, BETUL	460001

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
	rajwadi@yahoo.com	11:00AM / 05:00PM, Sunday Closed	Haresh Pathak	9925200106	mch_baroda@adonis.co.in
	hitarchmobile@yahoo.co.in	09:00AM / 06:00PM, Sunday Closed	Haresh Pathak	9925200106	mch_baroda@adonis.co.in
	bharat_telecom77@yahoo.com	09:00AM / 09:00PM, Sunday Closed	Haresh Pathak	9925200106	mch_baroda@adonis.co.in
	<a href="mailto:<jnikki5500@gmail.com>"><jnikki5500@gmail.com>	09:30AM / 06:30PM, Sunday Closed	Haresh Pathak	9925200106	mch_baroda@adonis.co.in
7342553031	rhythmpalaceujjain@gmail.com	09:30AM / 06:30PM, Sunday Closed	Dharmendra jain	9300050503	mch_indore@adonis.co.in
0763-2241108	mayacommunication108@gmail.com	10:00AM / 07:00PM, Sunday Closed	Dharmendra jain	9300050503	mch_indore@adonis.co.in
9302744313	kapoorandsons@yahoo.in	10:00AM / 07:00PM, Sunday Closed	Dharmendra jain	9300050503	mch_indore@adonis.co.in

Region	Circle	City	Name	Address	Pincode
Central	Madhya Pradesh	Bhopal	Adonis Electronics Pvt.Ltd.	HIG/1, Old subhash ng,	462023
Central	Madhya Pradesh	Dewas	Taj Electronics	4, New Market, Main Road	455001
Central	Madhya Pradesh	Gwalior	Adonis Electronics Pvt.Ltd.	D/4, Basant Vihar	474001
Central	Madhya Pradesh	Indore	Adonis Electronics Pvt.Ltd.	Qasis Building, 1st Floor, 20/22, Yeshwant Niwas Road	452003
Central	Madhya Pradesh	Jabalpur	Adonis Electronics Pvt.Ltd.	1381,Nr Sai Sadan Girls Hostel,Napier Town	482001
Central	Madhya Pradesh	Sagar	Samay Drishti	Gour murti, Teen batti square, parkota hills, Sagar	470002

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
0755-3240900	bhopal.mobileservice@adonis.co.in , bhopal.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Dharmendra jain	9300050503	mch.indore@adonis.co.in
0727-240406	tajdws@gmail.com	09:30AM / 06:30PM, Sunday Closed	Dharmendra jain	9300050503	mch.indore@adonis.co.in
0751-3240900	gwalior.mobileservice@adonis.co.in , gwalior.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Dharmendra jain	9300050503	mch.indore@adonis.co.in
0731-3249000	indore.mobileservice@adonis.co.in ; indoremobile.service@gmail.com	09:30AM / 06:30PM, Sunday Closed	Dharmendra jain	9300050503	mch.indore@adonis.co.in
0761-3240900	jabalpur.mobileservice@adonis.co.in , jabalpur.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Dharmendra jain	9300050503	mch.indore@adonis.co.in
0758-2243977	agrawal_shsh@yahoo.com , samaydrishti123@gmail.com	09:30AM / 06:00PM, Sunday Closed	Dharmendra jain	9300050503	mch.indore@adonis.co.in

Region	Circle	City	Name	Address	Pincode
Central	Madhya Pradesh	Agar Malwa	Gopi Printers	Madhavganj, Agar Malwa	465441
Central	Madhya Pradesh	Mandsor	Sky link mobiles	16,Opium Godown Rd,Nai Abadi	458001
Central	Madhya Pradesh	Guna	M/S Raj Mobiles Shop	Khan Market, Sadar Bazar, Guna	473001
Central	Rajasthan	Behror	New JMD Mobile	NEAR BUS STAND, BEHROR	301701
Central	Rajasthan	Bansur	Ramsingh Brothers	NARAYANPUR ROAD,NEAR BUS STAND,THE BANSUR ALWAR 301402	301402
Central	Rajasthan	Hanumangarh	ARSHIT ENTERPRISES	SHOP NO 3, UNDER RAILWAY OVERBRIDGE, SRIGANGANAGAR ROAD, HANUMANGARH JUNCTION, JODHPUR	335512

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
0736-2258398	pankajkothari90@yahoo.com ; vyotienterprizes@gmail.com	09:30AM / 06:00PM, Sunday Closed	Dharmendra jain	9300050503	mch.indore@adonis.co.in
0742-2408401	112.gaurav@gmail.com , gauravmittal12002@yahoo.com	09:30AM / 06:00PM, Sunday Closed	Dharmendra jain	9300050503	mch.indore@adonis.co.in
0754-2404478	raj180000@yahoo.in	10:00AM / 07:00PM, Sunday Closed	Dharmendra jain	9300050503	mch.indore@adonis.co.in
	newjmdpuran@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
	rmwbansur@gmail.com	09:30AM / 06:30PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
	mittalanil@ymail.com	09:00AM / 06:00PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in

Region	Circle	City	Name	Address	Pincode
Central	Rajasthan	Ajmer	Bunty Electricals	House no.480a ,Near Sbbj Bank, Opp. Center Academy School, Lohagarh Road, Sastri Nagar, Ajmer	305001
Central	Rajasthan	Alwar	Nice Electronics	C/O Jeevan Rekha Hospital, Vijay Mandir Rd, Opp Dhashara Ground, Jail Ka Chauraha	301001
Central	Rajasthan	Bharatpur	M/s Raj Mobile	Heeradash , Opp. Bus Stand , Bharatpur	321001
Central	Rajasthan	Bhilwara	siddharth trading company	behind dharam kantha , opp vishal mega mart , pur rd, bhilwara	311001
Central	Rajasthan	Bikaner	Krishna Computers	Station Road	334001
Central	Rajasthan	Chittorgarh	M/s Geetanjali telecom pvt ltd	61,kidwai Nagar Nr/meera BED Colllege CHITORGARH	312001
Central	Rajasthan	Churu	Lucky Mobile Gallery	Phankha Road , Near Marda School, Churu	300100

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
0145-2632548	ajmer_mobile@gmail.com	09:30AM / 06:30PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
0144-2731176	alwar_servicecenter@gmail.com	09:00AM / 06:00PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
	raj26380@yahoo.com	09:00AM / 06:00PM, Tuesday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
01482-242329	navkarmobile@rediffmail.com	10:00AM / 07:00PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
0151-2527565	krishnacomputers2002@gmail.com	09:00AM / 06:00PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
01472-512260	geetanjalienterprises.in@rediffmail.com / rockstarrohit23@gmail.com	09:00AM / 06:00PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
	tejkarangahlot@yahoo.in	09:00AM / 06:00PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in

Region	Circle	City	Name	Address	Pincode
Central	Rajasthan	Ganganagar	Gera telecom	41, D Block, Near vakilo wali diggi, Sriganganagar	335001
Central	Rajasthan	Gangapur	Vicky Mobile Point	JAIN KATLA, KACHHARI ROAD, GANGAPURCITY	322201
Central	Rajasthan	Jaipur	Adonis Electronics Pvt.Ltd.	A5, Yudhister Marg, C Scheme, Jaipur	302005
Central	Rajasthan	Jaipur	AASHIRVAAD ENTERPRISES	F27, RAMESH MARG, C/SCHEME,	302005
Central	Rajasthan	Jhunjhunu	Saini Electronics	opp.traffic police station,old bus stand	333001
Central	Rajasthan	Jodhpur	Adonis Electronics Pvt.Ltd.	Gulab Singh Building, First Floor, 11Th chopsani Road, Jodhpur	342001
Central	Rajasthan	Karauli	Ghungharu Enterprises	Nr. Roadways Bus Stand, Gahlot Niktan, Karauli	322241
Central	Rajasthan	Kota	M/s Shiv Shakti Electronics	Shop No S-3-B, IInd Floor , Deep shree parisar, Infront of HDFC Bank, Near Fly over,	324007

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
	gera_000sanjay@yahoo.co.in	09:00AM / 06:00PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
	rahuljan59@rediffmail.com	09:30AM / 06:30PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
0141-4048685 / 4048684	mch.jaipur@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
	tp.aashirvaad@gmail.com	09:30AM / 06:30PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
	jhunjhunuservicecenter@gmail.com	09:30AM / 06:30PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
0291-2622366 / 2633449	mch.jaipur@adonis.co.in , rajeev99gehlot@gmail.com	09:00AM / 06:00PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
	tp.karauli@gmail.com	09:30AM / 06:30PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
	abulhamidmansuri@gmail.com	09:30AM / 06:30PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in

Region	Circle	City	Name	Address	Pincode
Central	Rajasthan	Pali	M/s Mansi Mobile	2nd floor, mudont mention,suraj pole	306401
Central	Rajasthan	Simalwara	Yash Mobile Parlar	Nr. Kendriya Bank, Main Road, Samalwara, Dist/Dungarpur Rajasthan	314403
Central	Rajasthan	Tonk	M/s New Delhi Care centre	Opp. UCO Bank, Jawahar Bazar, Tonk	304001
Central	Rajasthan	Udaipur	M/s Vinayak Communication	Shop No.34,1st Floor,Vinayak Complex/B,Durga Nursery,Main Road,Udaypur	313001
Central	Rajasthan	SINGHPUR	ANIL MOBILE POINT	BUS STAND, SINGHPUR, THE KAPASAN, DISTRICT - CHITTORGARH	312207
East	Assam	Agartala	Sarala Electronics	Melarmath,H.G.B.Road,Agartala,Tripura(w).	799001
East	Assam	Guwahati	Adonis Electronics Pvt.Ltd.	Adonis Electronics Pvt. Ltd., Opp. Manikya Apartment, 39, Bhaskar Nagar, Near Aunty's Shop,R.G. Baruah Road	781021

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
0293-206036	dineshparihariya@live.com \ pali.mansi@gmail.com	09:00AM / 06:00PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
	dhawal_shah10@yahoo.com	10:00AM / 07:00PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
	laxman_tonk10@yahoo.in	09:00AM / 06:00PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
0294-2416086	bharat.khathuria@gmail.com	09:00AM / 06:00PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
	anil.bhootra@yahoo.com	09:00AM / 06:00PM, Sunday Closed	Chandrakant	9829188006	mch.jaipur@adonis.co.in
	surajitde09@gmail.com	09:30AM / 06:30PM, Sunday Closed	Damodar Sharma	9706038227	mch.guwahati@adonis.co.in
03612413158	mch.guwahati@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Damodar Sharma	9706038227	mch.guwahati@adonis.co.in

Region	Circle	City	Name	Address	Pincode
East	Assam	Jorhat	Adonis Electronics Pvt.Ltd.	Adonis Electronics Pvt. Ltd, 1st Floor / Jorhat Press Building/Choladhara Tiniali/ A. T. Road/Jorhat	785001
East	Assam	Dimapur	Real Deal	Real Deal,H.P.S. Haji Park , Dimapur , Nagaland	797112
East	Assam	Dibrugarh	Hello Hai mobile	hello hai mobile , nr.to krishna complex , ground floor dibrugarh	786001
East	Assam	Silchar	Mobile City	Mobile City, Tarapur moszid complex, ist floor, silchar, Assam	788003
East	Assam	NAOGAON	GANDHI CYCLE AND MUSICAL CORNER	DHAKAPATTI, NAOGAON, AASAM	782001
East	Bihar	Arrah	M/S Shayama International	Lakh no/1,Near Sone canal Office, Ara, Bojpur	802301
East	Bihar	Bhagalpur	M.S. Electronics	Super Market/ Patel Babu Road/ Bhagalpur	812002

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
03672309008	bratati.c@rediffmail.com , 'biswait.raikhowa@rediffmail.com	09:30AM / 06:30PM, Sunday Closed	Damodar Sharma	9706038227	mch.guwahati@adonis.co.in
03862229380	realdealcorner@gmail.com	09:30AM / 06:30PM, Sunday Closed	Damodar Sharma	9706038227	mch.guwahati@adonis.co.in
9954599930	hellohimobile@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Damodar Sharma	9706038227	mch.guwahati@adonis.co.in
9435600407	cool.hussain123@rediffmail.com , 'hussainiaskar039@gmail.com	09:30AM / 06:30PM, Sunday Closed	Damodar Sharma	9706038227	mch.guwahati@adonis.co.in
	singh_ngg@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Damodar Sharma	9706038227	mch.guwahati@adonis.co.in
	shyamainternational2000@gmail.com	09:30AM / 06:30PM, Sunday Closed	Sanjay Kar	7488295334	mch.patna@adonis.co.in
	tp.bhagalpuradonis@gmail.com	09:30AM / 06:30PM, Sunday Closed	Sanjay Kar	7488295334	mch.patna@adonis.co.in

Region	Circle	City	Name	Address	Pincode
East	Bihar	Muzaffarpur	Adonis Electronics Pvt.Ltd.	Near St. Mary'S School, Beside Tvs Chakkar Chowk, Post Office Hpo Muzaffarpur, Ps Kazi Mohammadpur, Muzaffapur	842001
East	Bihar	Patna	Adonis Electronics Pvt.Ltd.	Satyshree, Boring Patilputra Road, Patna	800013
East	Chattisgarh	Ambikapur	M/S Chhabra Electronics	Devi Ganj Road, Opp. Union Bank, Ambikapur	497001
East	Chattisgarh	Raipur	Adonis Electronics Pvt.Ltd.	Bhamra House,Plot No/26/975,Noorani chowk ,Rajatalab,Raipur	492004
East	Chattisgarh	Bilaspur	Vasu Mobile Repair	M/s. Vasu Mobile Repair, Maha Maya Complex, Opp Shaym Talkies,Bilaspur,Chhattisgarh	495001
East	Chattisgarh	Korba	Adonis Electronics Pvt.Ltd.	c/44,commercial complex,t,p nagar	495677
East	Chattisgarh	Bhilai	Bharti Enterprises	Sector 6 , 'c' market near /supala bhilai	490006

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
	bsimuzaffarpur23@rediffmail.com	09:30AM / 06:30PM, Sunday Closed	Sanjay Kar	7488295334	mch.patna@adonis.co.in
	mch.patna@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Sanjay Kar	7488295334	mch.patna@adonis.co.in
07774-222316	harjinderschabra@gmail.com	10:30AM / 07:00PM, Sunday Closed	Shakir Ahmed Shah	9977504907	mch.raipur@adonis.co.in
0771-4074325, 26	mch.raipur@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Shakir Ahmed Shah	9977504907	mch.raipur@adonis.co.in
0775-2411605	lalumobile@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Shakir Ahmed Shah	9977504907	mch.raipur@adonis.co.in
07759-245857	premangsu.onda@gmail.com	09:30AM / 06:30PM, Tuesday Closed	Shakir Ahmed Shah	9977504907	mch.raipur@adonis.co.in
0788-2221878	bhartienterpriseesgp@gmail.com	09:30AM / 06:30PM, Wednesday Closed	Shakir Ahmed Shah	9977504907	mch.raipur@adonis.co.in

Region	Circle	City	Name	Address	Pincode
East	Jharkhand	Dhanbad	Tanya Services	Rey Talkies , Bank More, Dhanbad	826001
East	Jharkhand	Jamshedpur	Prasad Electronics	H No. 293, Lane No. 10, Kasidih, Jamshedpur	831001
East	Jharkhand	Ranchi	Adonis Electronics Pvt.Ltd.	101 A, Old Ag Colony, Kadru, Ranchi	834002
East	Kolkata	Kolkata	Adonis Electronics Pvt.Ltd.	70 Beckbagan Row; 1st Floor; Park Circus; Kolkata	700017
East	Kolkata	Barrackpur	SYSTEMS & SERVICES	6/2 RASAMAY BISWAS ROAD, TALPUKUR, BARRACKPORE	700123
East	Kolkata	Behrampur	Parjas Entertainment Pvt.Ltd.	78/1/Saranamyee Road, 1st Floor, Behind Of Swaranmayee Muncipal Market Complex, Beharampur, Murshidabad	742101
East	Kolkata	Malda	Excel Services	Nh 34,Rath Bari,Panta Polly, Opp Chamaka Hotel, Malda	732101
East	Kolkata	Siliguri	Adonis Electronics Pvt.Ltd.	87/Raja Ram Mohan Roy Road Bylane, Opp Dolly Distributors , Hakimpara, Siliguri	734401

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
9308149980	tanya.services@gmail.com	09:30AM / 06:30PM, Sunday Closed	Sanjay Kar	7488295334	mch.patna@adonis.co.in
0657-2442216,	prasadelectronics@reddiffmail.com	09:30AM / 06:30PM, Sunday Closed	Sanjay Kar	7488295334	mch.patna@adonis.co.in
0651-2341049	ranchi.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Sanjay Kar	7488295334	mch.patna@adonis.co.in
9230424247	mch.kolkatta@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Pinaki Mukharjee	9163326307	mch.kolkatta@adonis.co.in
9230529653	sysser2001@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Pinaki Mukharjee	9163326307	mch.kolkatta@adonis.co.in
03482-320691	parjasent@gmail.com	09:30AM / 06:30PM, Sunday Closed	Pinaki Mukharjee	9163326307	mch.kolkatta@adonis.co.in
03512-257537	excel.service@reddiffmail.com	09:30AM / 06:30PM, Sunday Closed	Pinaki Mukharjee	9163326307	mch.kolkatta@adonis.co.in
9163326323	service.siliguri@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Pinaki Mukharjee	9163326307	mch.kolkatta@adonis.co.in

Region	Circle	City	Name	Address	Pincode
East	Kolkata	Durgapur	Silica service	12, Kabiguru Sarani, City Center, Durgapur	713216
East	Kolkata	Howrah	Air Voice	274 Bellilious Road ,Near maidan (Christian para Maszid Goli)	711101
East	Kolkata	Krishna Nagar	MOBILE GHAR	INDIRA GANDHI MUNICIPAL COMMERCIAL COMPLEX, ROOM NO/21,KRISHNANAGAR, NADIA	741101
East	Kolkata	Serampore	HI CARE	AGNISHA APPARTMENT 19,MUKHERJEE PARA LANE P.O.:SERAMPORE DT:HOOGHLY	712201
East	Kolkata	Bankura	JOYGURU ENTERPRISE	NATUNGANJ, DURGAMIDIR, BANKURA, WEST BENGAL,	722101
East	Kolkata	Burdwan	A.R INFOTECH	380,SEALDANGA,BID HANPALLY, GHOSH PARA,BURDWAN	713103
East	Kolkata	Baruipur	Aryan Network Solution	Kalpukur Road, Baruipur,Kolkata/144	700144

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
9233305799	dgp_silica@rediffmail.com	09:30AM / 06:30PM, Sunday Closed	Pinaki Mukharjee	9163326307	mch.kolkatta@adonis.co.in
9143400707	howrah.airvoice@gmail.com	09:30AM / 06:30PM, Sunday Closed	Pinaki Mukharjee	9163326307	mch.kolkatta@adonis.co.in
9851191234	satinath.haldere@yahoo.co.in	09:30AM / 06:30PM, Sunday Closed	Pinaki Mukharjee	9163326307	mch.kolkatta@adonis.co.in
9231396184	hi.care@rediffmail.com	09:30AM / 06:30PM, Sunday Closed	Pinaki Mukharjee	9163326307	mch.kolkatta@adonis.co.in
9233672140	goutam.kr@rediffmail.com	09:30AM / 06:30PM, Sunday Closed	Pinaki Mukharjee	9163326307	mch.kolkatta@adonis.co.in
9333218904	arinfotech.bwn@gmail.com	09:30AM / 06:30PM, Sunday Closed	Pinaki Mukharjee	9163326307	mch.kolkatta@adonis.co.in
9230616191	abhijit.marik007@yahoo.co.in	09:30AM / 06:30PM, Sunday Closed	Pinaki Mukharjee	9163326307	mch.kolkatta@adonis.co.in

Region	Circle	City	Name	Address	Pincode
East	Orrisa	Balasore	Adonis Electronics Pvt.Ltd.	Plot No 194/980, Opp. old SBI, Near Neelam Motors, Shrikanthpur, Balasore	756001
East	Orrisa	Bhubaneswar	Adonis Electronics Pvt.Ltd.	10, Satya Nagar, Bhubaneshwar	751007
East	Orrisa	Bhadrak	M/S BABAMANI STORE (Now for all)	BY PASS ,DIST/BHADRAK, P/O/BHADRAK,	756100
East	Orrisa	Rourkela	OM Tele service	Bisra Road, Infront of Radhika Agency, Rourkela ,ROURKELA /769001	769012
East	Orrisa	Jagatsinghpur	Channel Partner	MARKET COMPLEX, MAIN ROAD, RAHAMA, JAGATSINGHPUR ,J AGATSINGHPUR /754103	754103
East	Orrisa	Kendrapara	Bajarangi Services	NEAR BUSSTAND, LUCKY MOBILE STORE, KENDRAPARA,ODISHA ,KENDRAPARA /754211	754211
East	Orrisa	Cuttack	M/S CHANNEL 4	CHANNEL 4,BESIDE KEDARSON,SINGH PLAZA,DULMUNDAI, CUTTACK,753001	753001

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
6782329442	balasore.mobileservice@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Bitun Khan	9337333330	mch.bhubaneswar@adonis.co.in
6743203233	mch.bhubaneswar@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Bitun Khan	9337333330	mch.bhubaneswar@adonis.co.in
	babamanistore@gmail.com	09:30AM / 06:30PM, Sunday Closed	Bitun Khan	9337333330	mch.bhubaneswar@adonis.co.in
	ommtelegroup969@gmail.com	09:30AM / 06:00PM, Sunday Closed	Bitun Khan	9337333330	mch.bhubaneswar@adonis.co.in
	rmohanty92@gmail.com	09:30AM / 06:00PM, Sunday Closed	Bitun Khan	9337333330	mch.bhubaneswar@adonis.co.in
	Bajarangi.services@gmail.com	09:30AM / 06:00PM, Sunday Closed	Bitun Khan	9337333330	mch.bhubaneswar@adonis.co.in
6712326797	channel4.ctc@gmail.com	09:30AM / 06:00PM, Sunday Closed	Bitun Khan	9337333330	mch.bhubaneswar@adonis.co.in

Region	Circle	City	Name	Address	Pincode
East	Orrisa	Behrampur	Adonis Electronics Pvt.Ltd.	Plot No 375/1, 1st Line,Gandhi Nagar ,BEHRAMPUR /760001	760001
East	Orrisa	Puri	M/S. SHREE JAGANNATH TELESYSTEMS	SANTI APARTMENT , GROUND FLOOR, PURI ,PURI /752002	752002
East	Orrisa	Angul	M/S FLOWERS	150, KALINGA MARKET, ANGUL ,ANGUL /759122	759122
East	Orrisa	Sambalpur	Adonis Electronics Pvt.Ltd.	VSS MARG, NEAR RANI LODGE, SAMBALPUR 768001	768001
North	Haryana	Kurukstra	Shree Communication	1085/10 Kachcha Gher Near Municipal Committee	136118
North	Haryana	Yamuna Nagar	Teleword	FIRST FLOOR,NEAR RAM GADIYA DHARMSHALA OPP.GULATI SWEET'S BHATIA NAGAR	135001
North	Haryana	Gurgaon	Adonis Electronics Pvt.Ltd.	plot no /170 bhim nagar chowk new railway road.	122001

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
6802221574	behrampur.mobilservice@adonis.co.in	09:30AM / 06:00PM, Sunday Closed	Bitun Khan	9337333330	mch.bhubane.shwar@adonis.co.in
	motopuri@gmail.com	09:30AM / 06:00PM, Sunday Closed	Bitun Khan	9337333330	mch.bhubane.shwar@adonis.co.in
	activeorissa@hotmail.com	09:30AM / 06:00PM, Sunday Closed	Bitun Khan	9337333330	mch.bhubane.shwar@adonis.co.in
6633295442	sambalpur.mobilservice@adonis.co.in	09:30AM / 06:00PM, Sunday Closed	Bitun Khan	9337333330	mch.bhubane.shwar@adonis.co.in
	pinku9100@gmail.com	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
	teleworld.yam@gmail.com	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
0124-4202835	excellentservice@rediffmail.com , gurgaon.service@gmail.com	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in

Region	Circle	City	Name	Address	Pincode
North	Haryana	Ambala	Adonis Electronics Pvt.Ltd.	1101/1, Behind S.D.Public School, Near TCI Office, Ambala Cantt., Haryana / 133001	133001
North	Haryana	Karnal	Adonis Electronics Pvt.Ltd.	Adonis Customer Relation Center, Plot No.27, Sector No/3, HSIDC, Nr Namaste Chowk, Karnal	132001
North	Haryana	Panipat	M/s Luxmi telecom	Shop no 2,1090 Ram Gopal Estate,Bishan Swaroop colony ,Panipat/132103	132103
North	Haryana	Palwal	M/S GARG MOBILE POINT	NEW COLONY ROAD OPP.ICICI BANK ,Palwal,Faridabad	121102
North	Haryana	Rohtak	Adonis Electronics Pvt.Ltd.	Shop No/07, Near Soham Mandir	124001
North	Haryana	Sonipat	Luxmi Telecom	107,1st Floor,PP Tower,Near Subhash Chowk	131001
North	Haryana	Jind	M/s.Dev Mobile	Housing Board Road , Shiv Colony ,Nr.Bus stand, jind	126102
North	Haryana	Hissar	M/s. Shree Balaji Communications	Near neelam Cinema, Parijat Chowk , Hissar	125001

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
0171-4006270	ambala_service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
0184/2220525 / 2220725 / 3293794,	mch.karnal@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
0180-4015598	karambir_saagar@gmail.com	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
	sunil.garg83@gmail.com	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
01262-250335	rohtak_service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
	luxmitelcom61@gmail.com	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
	devmobile_jind@rediffmail.com	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
	shribalaji_com@rediffmail.com	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in

Region	Circle	City	Name	Address	Pincode
North	Haryana	Bhadhurgarh	M/s Baba Communication C/o GAJNAYAK MOBILE	SHOP NO (G1)SHYAM JI COMPLEX	124507
North	Haryana	Rewari	Vicky Mobile Repair Center	Nr. Old tehsil and old thana, Rewari	123401
North	Haryana	Bhiwani	M/S Rakhi Communication	SHOP NO 5 OLD BUS STAND WALI GALI NEW BAZAR BHIWANI	127021
North	Haryana	Faridabad	Adonis Electronics Pvt.Ltd.	H.No.5/G/55 NIT ,Near vaid Electronics Faridabad	121001
North	Haryana	Kaithal	M/s SHRI GANESH TELECOM	LATKA STREET,SHASTRI MARKET,NEAR TOPPIYAN WALA GURUDAWAR OPP SAHIL TAILOR KAITHAL	136034
North	Himachal Pradesh	Shimla	Adonis Electronics Pvt.Ltd.	2nd Floor, Hari Om Bhawan, Circular Road	171001

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
01276-220081	sumit9918@yahoo.in	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
	vocky_mobile999@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
	bhoopsngh47@gmail.com	09:30AM / 06:00PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
0129-4050637	faridabad.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
	varun_sgcp@yahoo.co.in	09:30AM / 06:30PM, Sunday Closed	Sunil Harish	9355226007	mch.karnal@adonis.co.in
0177/2655136	ashokshimla123@gmail.com , shimla.service@adonis.co.in , shimla.mobile.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Pradeep Mishra	9646135813	mch_chandigarh@adonis.co.in

Region	Circle	City	Name	Address	Pincode
North	Himachal Pradesh	Srinagar	M/s.Irfan Trading Corporation	1st floor ,Habib Trade Centre,Sarai Bala,Shrinagar	190001
North	J & K	Jammu	Adonis Electronics Pvt.Ltd.	14, JDA Colony,behind shakuntala theatre Jammu	180001
North	Punjab	Amritsar	Adonis Electronics Pvt.Ltd.	152, City Centre, Behind Azad Hotel, Near Bus Stand, Amritsar / 143001	143001
North	Punjab	Bathinda	Adonis Electronics Pvt.Ltd.	Back side gole market,	151001
North	Punjab	Chandigarh	Adonis Electronics Pvt.Ltd.	Sco 85,1st Floor Ekta Market , Nr.Police Post , burail sec/45,c, chandigarh	160045
North	Punjab	Hoshiarpur	Adonis Electronics Pvt.Ltd.	177R, model town opp gurudwara kalgidhar, nr punjab gramin bank	146001
North	Punjab	Ludhiana	Adonis Electronics Pvt.Ltd.	3761/1 , basement of bindra complex, jwadhird, model town ext.nr.trikona park	141001

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
	imran_majid7@gmail.com	09:30AM / 06:30PM, Sunday Closed	Pradeep Mishra	9646135813	mch.chandigarh@adonis.co.in
191/2562258	Jammu.mobileservice@gmail.com , naveen.hans12@gmail.com	09:30AM / 06:30PM, Sunday Closed	Pradeep Mishra	9646135813	mch.chandigarh@adonis.co.in
0183-2530349	amritsar_service@adonis.co.in , amritsar.mobileservice@adonis.co.in ,	09:30AM / 06:30PM, Sunday Closed	Ashwani Verma	9646135827	mch.ludhiana@adonis.co.in
0164-5012075	bhatinda.mobileservice@gmail.com	09:30AM / 06:30PM, Sunday Closed	Ashwani Verma	9646135827	mch.ludhiana@adonis.co.in
0172/5067133	chandigarh_service@adonis.co.in , dpk_deepika_5@gmail.com	09:30AM / 06:30PM, Sunday Closed	Pradeep Mishra	9646135813	mch.chandigarh@adonis.co.in
01882-245508	hoshiarpur_service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Ashwani Verma	9646135827	mch.ludhiana@adonis.co.in
9988881759	priyanka_dogra88@gmail.com & ludhiana.mobileservice@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Ashwani Verma	9646135827	mch.ludhiana@adonis.co.in

Region	Circle	City	Name	Address	Pincode
North	Punjab	Pathankot	M/s Ganpati mobile world	sh no/23,dhangu road.	145001
North	Punjab	Patiala	Adonis Electronics Pvt.Ltd.	SCF/21,sst shoping complex	147001
North	Punjab	Jalandhar	Adonis Electronics Pvt.Ltd.	163, Ranjit Nagar, Ground Floor Behind International Hotel, Jalandhar - 144 001	144001
South	Andhra Pradesh	Kakinada	maha Lakkshmi Cell Point&Electronics	D.NO.27/4/12/1, Temple Street,Beside Old Kazana Jewellers,Kakinada.	533002
South	Andhra Pradesh	Vijayawada	Adonis Electronics Pvt.Ltd.	Saptagiri College Road, Vijayawada	520002
South	Andhra Pradesh	Srikakulam	Sri Jayakshmi Enterprises	D.No. 11-5-40/1A, Near Union Bank, Kalinga Road, Srikakulam	532001
South	Andhra Pradesh	Visakhapatnam	NOOKAMBIKA ELECTRONICS	D.No.49/14/16/2.Lilitha Nagar,Near Sankarmattam raod,VISAKHAPATNAM	530016
South	Andhra Pradesh	Ongole	Sri deepika cell plaza	Jyothi plaza,Kurnool road, Ongole	523002

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
9217839000	ganpatimobileworld@rediffmail.com , ganpatimobileworld@gmail.com	09:30AM / 06:30PM, Sunday Closed	Ashwani Verma	9646135827	mchludhiana@adonis.co.in
0175-2370315	patiala.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Ashwani Verma	9646135827	mchludhiana@adonis.co.in
0181-5061534	jalandhar_mobileservice@gmail.com , ritbhagat@gmail.com	09:30AM - 06:30PM, Sunday Closed	Ashwani Verma	9646135827	mchludhiana@adonis.co.in
	mahalaxmi_suresh@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Chanti Babu	9395530888	mch.vijayawada@adonis.co.in
0866-6536040	mch.vijayawada@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chanti Babu	9395530888	mch.vijayawada@adonis.co.in
	srijayalakshmi sklm@gmail.com	09:30AM / 06:30PM, Sunday Closed	Chanti Babu	9395530888	mch.vijayawada@adonis.co.in
	nanieddy1432@gmail.com	09:30AM / 06:30PM, Sunday Closed	Chanti Babu	9395530888	mch.vijayawada@adonis.co.in
	srinivasnalluri@yahoo.co.in	09:30AM / 06:30PM, Sunday Closed	Chanti Babu	9395530888	mch.vijayawada@adonis.co.in

Region	Circle	City	Name	Address	Pincode
South	Andhra Pradesh	Guntur	M/S.V.D. Technologies	D.no:6/6/48, First floor,6/1, Arundelpet, Guntur	522002
South	Andhra Pradesh	Rajahmundry	M/S. Sri Ratnam Electronics	D/No.29-33-52, Nr.Devi Chowk, Alluri Sitaramaraju, Junction, Opp. Krishna Denta Cure, Rajahmundry	533101
South	Andhra Pradesh	Nalgonda	M/S.Naga Venkateswara Agencies.	OPP.N.G.College, C/O.Subham Mobiles,HYD Road,NALGONDA	508001
South	Andhra Pradesh	Tadepalligudem	M/S CELL COMMUNICATION & FIRE EQUIPMENT	D.No.3/1/48,Shop No.2, N.V.Raju shopping Complex,K.N.Road,TA DEPALLI GUDEM	534101
South	Andhra Pradesh	Godavari Khani	Balaji Services	Indira Lodge lane, Godavarikhani, Lakshmi Nagar, GodavariKhani	505209
South	Andhra Pradesh	Hyderabad	Adonis Electronics Pvt.Ltd.	Bala, 5/9/77, Chapel Road, Near Stanley Girls High School, Abids, Hyderabad	500001
South	Andhra Pradesh	Suryapet	M/s Sri Lakshmi Mobiles	Shop No. 12, PSR Centre, Near Teja Movi Max, Suryapet, PIN: 508213, Nalgonda (Dst.,)	508213
South	Andhra Pradesh	Karimnagar	Maniharsha Mobiles	Dno : 2/9/56, Vegetable Market, Makrampura, Karimangar	505001

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
	vdtechnologies@rediffmail.com	09:30AM / 06:30PM, Sunday Closed	Chanti Babu	9395530888	mch.vijayawada@adonis.co.in
	rajahmundrymobiles@gmail.com	09:30AM / 06:30PM, Sunday Closed	Chanti Babu	9395530888	mch.vijayawada@adonis.co.in
	ksr_kolanu@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Chanti Babu	9395530888	mch.vijayawada@adonis.co.in
	srisurya_2009@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Chanti Babu	9395530888	mch.vijayawada@adonis.co.in
9849262806	balajiservices_2006@yahoo.co.in	09:30AM / 06:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
9700350919/64541753	mch.hyderabad@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
9989075920	suryapetonida@gmail.com	09:30AM / 06:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
9052782828	maniharshamobiles@gmail.com	09:30AM / 06:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in

Region	Circle	City	Name	Address	Pincode
South	Andhra Pradesh	Kurnool	Swapna Communications	Shop No : 38, Bhoopal Complex, Park Road, Kurnool	518001
South	Andhra Pradesh	Mahabubnagar	Karthikeya Wireless Solution	2/2/2/E/E1,Opp Modern High school, Mahabub Nagar	509001
South	Andhra Pradesh	Nellore	DIGITRONICS	house no.16/2/82, beside raghava cine complex , pogathota , nellore	524001
South	Andhra Pradesh	Nellore	Lakshmi Telicom	Kanakamahal road, beside babu icecream, Nellore	524001
South	Andhra Pradesh	Tirupati	RAGHU MOBILES CLINIC	#10/14/548/A2, V V MAHAL ROAD, TIRUPATHI / 517501	517501
South	Andhra Pradesh	Warrangal	M/s.Mercury Electronics	Nirmala mahal,Shop No.10,JPN road, Warangal / 506002	506002
South	Andhra Pradesh	Secundrabad	Sai Mobiles	Shop.No/29,1 st Complex,Hardy Complex,M.G..Road	500003
South	Andhra Pradesh	Mancheriyal	M/s RAJU COMMUNICATIONS	Shop No. 5,6, Mamatha super bazaar complex Opp: RTC Bustand, Mancheriyal/504208, Adilabad Dst	504208

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
9247847715	kurnool.tp@gmail.com	09:30AM / 06:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
9849412435	kunchamsreedhar@gmail.com	09:30AM / 06:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
924691666	ramdigi@gmail.com	09:30AM / 06:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
	Lakshmitelico@yahoo.co.in	09:30AM / 06:30PM, Sunday Closed	Chanti Babu	9395530888	mch.vijayawada@adonis.co.in
9395525559	raghunath.avva@gmail.com	09:30AM / 06:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
9963931565	mercurydeven@gmail.com	09:30AM / 06:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
9032347665	raju_jogi1@yahoo.co.in	09:30AM / 06:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
9000896216	vennala.g@gmail.com	09:30AM / 06:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in

Region	Circle	City	Name	Address	Pincode
South	Andhra Pradesh	Nirmal / Adilabad	Kushal Mobiles	M/s.Kushal Mobiles, New Narayan Reddy Market, Nirmal/504106, Adilabad Dist.	504106
South	Andhra Pradesh	Anantapur	M/s.Teja enterprises	Shop no. 35, police welfare complex , anapur	515001
South	Andhra Pradesh	Produtur	M/S .Sai Varun Mobile Park	Pavan Complex, Opp: Nikhil Nursing Home, Holmespet, Proddatur/ 516230.	516230
South	Andhra Pradesh	Khammam	M/S.VENKAT RAMANA ELECTRONICS	#9/3/137, Vinodha talkies road, Khammam, Pin/507001	507001
South	Andhra Pradesh	Nizamabad	M/S.SS Communication	#6/23/674/3&4, Goutham Nagar, Nizamabad/503002 Ph:9392165577	503002
South	Andhra Pradesh	Nandyal	M/S .VAMSI CELL POINT	A/47, BALAJI COMPLEX, NANDYAL – 518501, PH: 9885596227	518501
South	Andhra Pradesh	Hindupur	M/S Reyaz Cell Care	Door No 2/3/27, Room No. 9,Dasa Plaza,Ambedkar Circle, Penukonda Road, Ph:9390045982	515201
South	Andhra Pradesh	Viziaanagaram	M/s. Lakshmi Narasimha Cell Communication	Shop No. 6, Vasu Complex, Near Ganta Sthabam Cebtere, Vizianagaram, Pin/ 535003	535003

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
9885540143	kushal_mobiles@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
9848104402	ideasudha@gmail.com	09:30AM / 06:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
9704766767	venulaxmi_008@yahoo.com	09:00AM / 05:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
9849441236	venkataramanae.414@gmail.com	09:00AM / 05:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
9392165577	sscom_79@yahoo.com	09:00AM / 05:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
9885596227	vamsicell@gmail.com	09:00AM / 05:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
9390045932	riyazcellcare@gmail.com	09:00AM / 05:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
	kspvizianagar@yahoo.in	09:00AM / 05:30PM, Sunday Closed	Chanti Babu	9395530888	mch.vijayawada@adonis.co.in

Region	Circle	City	Name	Address	Pincode
South	Andhra Pradesh	Bhimavaram	M/s I MOBILES	#116/2/183, Opp: Annapurna theater, P.P.Road, Bhimavaram, Pin: 534201.	534201
South	Andhra Pradesh	Zaheerabad	M/s RENUKA TECHNOLOGIES	, #123/2 Main road, Allipur, Zaheerabad, Pin: 502220, Medak Dst	502220
South	Andhra Pradesh	Gadwal	M/s R R MOBILES	Rajumarg Street, Opp: Vijaya mess, Gadwal-509125, Mhaboobnagar (Dst.,)	509125
South	Andhra Pradesh	Eluru	TP - SAKETH EXECELENT MOBILES-VIJAY WADA	#7-A-9-91/2, Sri rama complax, 1st flore opp:butter fly home needs,one town main bazar, elur, Pin: 534001.	534201
South	Karnataka	Gulbarga	Sri Lakshmi Electronics	"Shivkedar",Plot No.8,3rd Cross,KUBA Plot,GULBARGA - 585102	585012
South	Karnataka	Shimoga	M/S Aditya Customer Care	"Chinnu" 2nd Cross, Durgigudi, Shimoga	577201
South	Karnataka	Davangere	M/s Shivu Electronics	Door No.692/1, Near Shivappa Circle,1st Cross,K.T.J.Nagar,Davangere -577002.	577002
South	Karnataka	Bijapur	Mobile Solutions	First Floor,Opp Ram mandir,Ram Mandir Road, Bijapur,Karnataka	586101

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
	imobilesbvrm@gmail.com	09:00AM / 05:30PM, Sunday Closed	Chanti Babu	9395530888	mch.vijayawada@adonis.co.in
9392611423	sairam@gmail.com	09:00AM / 05:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
8121215053	rmobilesgadwal@gmail.com	09:00AM / 05:30PM, Sunday Closed	Krishna Reddy	9866998085	mch.hyderabad@adonis.co.in
	sakethemobilecommunications@gmail.com	09:00AM / 05:30PM, Sunday Closed	Chanti Babu	9395530888	mch.vijayawada@adonis.co.in
	vhjagirdar@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
08182/401886	adityacustomercare@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
08192 - 231456	shivuonida@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
	mobilesolutionsbjp@gmail.com	09:00AM / 05:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in

Region	Circle	City	Name	Address	Pincode
South	Karnataka	Bangalore	Adonis Electronics Pvt.Ltd.	No 488,5th A Main,11th Cross,WOC,2nd Stage,Mahalaxmipura m,Rajaji nagar ,Bangalore	560086
South	Karnataka	Bangalore Indiranagar	DHARSHINI ELECTRONICS	No 770, 1st cross, 1st stage, Indira nagar, Bangalore	560038
South	Karnataka	Bangalore Basavangudi	Adonis Electronics Pvt.Ltd.	40, Khazi Street, Basavangudi, Near Southend Circle, Bangalore / 560 004	560004
South	Karnataka	Mysore CRC	M/S.Siv Service	MIG/47,1st Stage,Kuvempu nagar,Mysore	570023
South	Karnataka	Kolar	S.L.V.Mobiles	# 20 , Municipal Complex , Opp Head Post Office ,Gowripet , Kolar	563101
South	Karnataka	Belgaum	Sri sai services	Renuka Complex No2903,First Floor,Khade Bazar,Belgaum/590002	590002
South	Karnataka	Hubli	Adonis Electronics Pvt.Ltd.	ONIDA CUSTOMER RELATION CENTRE.PLOT NO :104,A/74/B OLD BADAMI NAGAR,NR SUDHA APARTMENT KESHWAPUR HUBLI/580023	580023

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
080 - 23195539	mch.bangalore@adonis.co.in , james.anthonyzte@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
080 - 32969993	darshini_onida@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
080 - 32022673	suhas.bv88@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
0821/4266179 / 2463437	mysore.mobileservice@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
	jeeva_ara@yahoo.co.in	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
0831 - 2469139	belgaum.mobile01@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
0836 - 2288712	hubli.mobileservice@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in

Region	Circle	City	Name	Address	Pincode
South	Karnataka	Raichur	Cell Care	C/o Adil's Shop , Netaji Road , Raichur	584101
South	Karnataka	Mangalore	M/s Wipras	#3/30/2418, Seller floor, Prathibha eye clinic building, Opp Mangala Hospital, Kadri Road, Mangalore	575003
South	Karnataka	Udupi	ROYAL ELECTRONICS	Sapthagiri Kalikambanagar, Ambalpadi Post, National Highway/17, Udupi	576103
South	Karnataka	Hassan	RR Mobiles	Sri Maruti Krupa ,Old post office Road ,Hassan / 573201	573201
South	Karnataka	Bellary	Sujyothi Eterprises	# DOOR NO.18/11, RAMNILAYAM, BHRA HM SHASTRI COMPOUND, GANDHI NAGAR, BELLARY/580313,	580313
South	Kerala	Tirur	CREATIVE SERVICES	20/245, THOTTIYIL BUILDING, BEHIND COURT, TIRUR, MALAPPURAM , KERALA	676101
South	Kerala	PATHANAMTHITTA	KAIRALI COMMUNICATI N	CENTRAL JUNCTION, PATHANAMTHITTA, KERALA, PIN-689645	689645

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
08532/250250	adils.shop@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
0824 - 2216324 / 2216445	wiprascrman@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
0820 - 2532810 / 2532830	srikanth.udupi@gmail.com , sachinbarkur@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
	shreetronics@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
	ilqoudadvq@gmail.com	09:30AM / 06:30PM, Sunday Closed	Venkatesh Babu	9886865282	mch.bangalore@adonis.co.in
	creativeservicestirur@gmail.com	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in
	kairalicommunication@yahoo.co.in	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch.cochin@adonis.co.in

Region	Circle	City	Name	Address	Pincode
South	Kerala	Pattambi	Phoenix Communication	ROOM NO:22/31, ROYAL ARCADE, PERINTHALMANNA ROAD, MELE PATTAMBI	679306
South	Kerala	Alleppy	Emmanuel Electronics	SOUPARNA",NO 27/45,Palace Ward,	688001
South	Kerala	Calicut	Smile N' Care	Muthappan Complex,Pattery Bus Stop, P.O. Kuthiravattom,Mavoor Road/Calicut	673016
South	Kerala	Kannur	Ashwin Electronics	Chettipeedika, Pallikunnu Post Office, Kannur	670004
South	Kerala	Kollam	Aryans Wave	Lal Bhavan / Opposiate Manorama / Kadappakada/ Kollam	691008
South	Kerala	Kottayam	Video Care	No. 655,Ozees Bhavan,Puthupalli Road,Muttambalam Post Office,Kanjikuzhi,Kottayam	686004
South	Kerala	Palakkad	R.R. ELECTRONICS	14/464(4),Supreme Towers,Opp. Kunnathurmedu Post Office , Palakkad /678 013	678 013

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
	agkalesh@yahoo.com	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in
0477-3203162 , 2237065	alleppy.crc@adonis.co.in	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch.cochin@adonis.co.in
0495-2740 858 / 2743 502	calicut.crc@adonis.co.in	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in
0497-2766 581 / 2711733	kannur.crc@adonis.co.in	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in
0474-2765 721 / 2743 701	kollam.crc@adonis.co.in	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch.cochin@adonis.co.in
0481-2575 446 / 2575 336	kottayam.crc@adonis.co.in	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch.cochin@adonis.co.in
0491-2510727	palakkad.crc@adonis.co.in	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in

Region	Circle	City	Name	Address	Pincode
South	Kerala	Trichur	Technocraft	TC 29/287." OOLIAMPURATH HOUSE " VELLATT LANE. THIRUVAMBADI (P.O) , NEAR CATHOLIC SYRIAN BANK STATATIONARY/PRI NTING DIVISION. TRICHUR -1	680001
South	Kerala	Trivandrum	The Window	Tc 28/943 (43/1259),Kalpalathika ,Kpc Building,Punnapuram Road,Kaithamukku,Triv andrum	695023
South	Kerala	Kasargode	Speed care	Kaban Shoppe Arcade ,Nayaks road ,Kasargode	671121
South	Kerala	Ravipuram	Angel Techno Services Pvt. Ltd.	Tharkandam Estate, D / Block, Kurusapally Road, Ravipuram, Cochin	682015
South	Kerala	Edapal	Yem Ess Mobile	Pattambi Road,Edapal.	679576
South	Kerala	THALASSERY	Telstra Mobile Service	JUBILEE ROAD THALASSERY	670101

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
0487-3249666,2337667,3296725	trichur.crc@adonis.co.in	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in
0471-2465 426 / 2462 924	trivandrum.crc@adonis.co.in	09:00AM / 05:30PM, Sunday Closed	Kevin (Temporery Handaling)	8086398230	mch.cochin@adonis.co.in
04994-224619	kasargode.crc@adonis.co.in	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in
0484-2358111	angel@angeltchno.com	09:00AM / 05:30PM, Sunday Closed	Kevin (Temporery Handaling)	8086398230	mch.cochin@adonis.co.in
	yemess@gmail.com	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in
	smarttelecomhpd@gmail.com	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in

Region	Circle	City	Name	Address	Pincode
South	Kerala	Vadagara	Sun Electronics	Near JTS ,Opp Lalith collections , Viliyapally Road ,Nut Street po ,Vadakkara	673104
South	Kerala	Kattappana	Ajay Electronics	T.B. Junction,Near Service Co/Operative Bank,Kattappana	685515
South	Kerala	Kalpetta	A2Z MOBILES	Chungam Jn, Kalpetta , Wayanad District, Pin/ 673121	673121
South	Kerala	KANHANGAD	NASS COMMUNICATIO N	Nr.Dhanalakshmi tex, Opp. Bus Stand, Kenhangad, Kasadgod	671315
South	Kerala	OCHIRA	CELL WORLD MOBILE SHOPPE	PREMERE JN NEAR NORTH GRAMIN BANK OCHIRAPIN/690526	690526
South	Kerala	PAYYANNUR	POPULAR TIMES & MOBILES	PERUMBA NEAR KAIRALI HOTEL PAYYANNUR	670610
South	Kerala	Thodupuzha	Orbit Times & Mobiles	Saro Plast Building, Idukki Road , Thodupuzha	685584
South	Kerala	Irinjalakuda	Johns Service	Nr. Geojit financial service, tana , irinjalakuda	680121

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
	sunbadagara@gmail.com	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in
04868-250124	kajayelectronics@yahoo.com	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch.cochin@adonis.co.in
	a2zshajii@gmail.com	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in
0467-2203001	nass.kanhangad@yahoo.in	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in
0476-2693111	anshadcellworld@gmail.com	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch.cochin@adonis.co.in
	popularonida@gmail.com	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in
	saijomorbit@yahoo.com	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch.cochin@adonis.co.in
	johnsons123@rediffmail.com	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch.cochin@adonis.co.in

Region	Circle	City	Name	Address	Pincode
South	Kerala	Cherthala	XPRESS SOLUTIONS	ROOM NO:147/N BEHIND DEVI TEMPLE SKY LINETOWER SHOPPIN COMPLEX CHERTHALA/688524	688524
South	Kerala	BALARAMAPURAM	SBS MOBILES	SHOP NO.10 & 21, HOUSING BOARD COMPLEX ,BALARA MPURAM	695501
South	Kerala	ALUVA	SAFE LINK	KAJA SHOPPING CENTER, R.S ROAD, ALUVA	683101
South	Kerala	HARIPAD	SMART MOBILE	LAKSHMI BUILDING , THEKKENDDA ,N H 47, OPP.IOC PUMPHARIPAD	690514
South	Kerala	MANJERY	CAMBUS MOBILE	VENGARA COMPLEX ,NEW BUS STAND, MANJERY	676121
South	Kerala	Thiruvalla	PHONE PALACE	Kodiyattu Building,TK Road,Thiruvalla,pin:68 9101	689101
South	Kerala	angamali	STAR MOBILES	KALOORKARAN TOWER,OPP.JOY ALUKAS, ANGAMALY	683572
South	Tamilnadu	Salem	Bala Electronics	Shop No 12, ARRS Multiplex Complex, Meyyanur Bye Pass Road, Salem 636 004	636 004

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
	xpresssolutionctla@gmail.com	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch_cochin@adonis.co.in
	sbsmobiles@gmail.com	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch_cochin@adonis.co.in
	safelink.link@gmail.com	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch_cochin@adonis.co.in
	smarttelecomhpd@gmail.com	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch_cochin@adonis.co.in
	faisalncbritco@gmail.com	09:00AM / 05:30PM, Sunday Closed	Krishna Das	9567854850	mch.calicut@adonis.co.in
	phonepalace@yahoo.com	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch_cochin@adonis.co.in
	anjacob2001@gmail.com	09:00AM / 05:30PM, Sunday Closed	Kevin (Temperory Handaling)	8086398230	mch_cochin@adonis.co.in
0427 2449525	gbalamurali23@gmail.com	09:30AM / 06:00PM, Sunday Closed	Chandradevan	9941345736	mch_chennai@adonis.co.in

Region	Circle	City	Name	Address	Pincode
South	Tamilnadu	Karur	Pradeepa Electronics	6/39 Sengundha Puram, 2nd Cross Street, Karur	639 002
South	Tamilnadu	Chennai	Adonis Electronics Pvt.Ltd.	Onida House/18/4Th Laneoff.Nungambakka m High Roadnear Cainstitutenungambak kam , chennai	600034
South	Tamilnadu	Chennai / Adyar	Adonis Electronics Pvt.Ltd.	11/1/MG Road, Near Airtel Office, Shahstri Nagar, Adyar, Chennai	600020
South	Tamilnadu	Chennai / Annanagar	M/S. Sree Srinivasa Service	2109/3, 13th Main Road, Anna Nagar West, Chennai 40	600040
South	Tamilnadu	Chennai / Tambaram	Adonis Electronics Pvt.Ltd.	Old No 106/New No 912 A, Gst Road, Tambaram Sanitorium, Chennai	600047
South	Tamilnadu	Chennai / Ayanawaram	M/S. Sakthi Network	No.1 VP Colony South Road, Ayanavaram, Chennai/ 600023	600023
South	Tamilnadu	Chennai / Valasarawakam	Venus Electronics	No 10, 5th Cross Streets, Brindhavan Nagar, Valasarawakam, Chennai	600087

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
9367155287	praveen.onida@gmail.com	09:30AM / 06:00PM, Sunday Closed	Chandradevan	9941345736	mch_chennai@adonis.co.in
044 28330220	mch_chennai@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch_chennai@adonis.co.in
044/24525067 / 24525068	service.adyar@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch_chennai@adonis.co.in
044/32973243/32973244	chennai.crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch_chennai@adonis.co.in
044/22413337/22410557	service.tambaram@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch_chennai@adonis.co.in
044 26442099 / 26448878	shakthioutsource.adonis@gmail.com ; ayanavaram.crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch_chennai@adonis.co.in
044 24865500	onidaravi@valasara.crc@gmail.com	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch_chennai@adonis.co.in

Region	Circle	City	Name	Address	Pincode
South	Tamilnadu	Cuddalore	M/S.Guru Service	Devi Building, Ground Floor, 88E Lawrence Road, Cuddalore	607002
South	Tamilnadu	Pondicherry	Sree Vigneshwar Electroncis	No. 159, Shankar liam., Eswaran Koil Street, Pondicherry	605001
South	Tamilnadu	Vellore	V.K.S. Electronics	46,Arcot Road,Vellore	632004
South	Tamilnadu	Kanchipuram	Adonis Electronics Pvt.Ltd.	M/s Sree Srinivasa Service, No. 80/7, Vilakkadi Koil Street,Opp. To PMS Salammal Chatiram,Kanchipuram	631501
South	Tamilnadu	Coimbatore	Adonis Electronics Pvt.Ltd.	10 B K R Nagar, Sathy Road, Coimbatore	641012
South	Tamilnadu	Erode	S.J.Electronics	35,Annamalaigounder Nagar,Gandhiji Street No2,Veerappanchatram,Erode	638004
South	Tamilnadu	Tiruppur	M/S.Jayam Troniks	N.No 10,Oi.No 13 Bharathi St,Valipalayam,Tirupur	641601
South	Tamilnadu	Nagercoil	Varsha Enterprises	No 30/654, Trivandrum Road, Near BSNL Exange, Vadaserri, Nagercoil	629001

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
04142 / 324566 / 236677	cuddalore_crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in
0413 / 2342467/ 2348856 / 2222368	pondicherry_crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in
0416 / 2235946/ 2235964/ 4203946	vellore_crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in
044/67270964	chennai_crc@adonis.co.in , chennaicrc@gmail.com	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in
0422 / 252 7314 / 3258032	coimbatore_mobileservice@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in
0424 / 222 7211 / 222 7201	erode_crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in
0421 / 223 4526 / 223 0407	tiruppur_crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in
04652 274362 / 274363.	nagercoil_crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in

Region	Circle	City	Name	Address	Pincode
South	Tamilnadu	Tirunelveli	Kalyan electronics	66A/8/1,Ground Floor,Babuji Nagar,Madurai Road,Tirunelveli	627001
South	Tamilnadu	Madurai	M/S. Gaurdian Electronics	DOOR NO 14/10, PANAGAL 2ND STREET, SHENOY NAGER, MADURAI	625 020
South	Tamilnadu	Trichy	M/s.WINTRONICS	NO: 14,RAJARATHINAM PILLAI STREET,OPP:ARUNA THEATRE, WORAIYUR,TRICHY	623003
South	Tamilnadu	Thanjavur	SRI SAKTHI ELECTRONICS	24 A, MALAIYERI AMMAN ILLAM , 7th CROSS,ARULANANDA NAGAR , ROHINI HOSPITAL BACKSIDE , TANJAVUR	613007
South	Tamilnadu	Chennai / Padi	JVC Electronics	7/11, Solambedu Road, Thirumullaivoil, Chennai / 600 062	600 050
South	Tamilnadu	Dindugal	M/S Sundar Electronics	No. 20 , 53 Nehruji Nagar 3rd Street, Dindigul	624 001
Up	UP (E)	Allahabad	Adonis Electronics Pvt.Ltd.	60,B/2 Sardar Patel Marg, Thornhill Road Civil Line, Allahabad	211001

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
0462-2331731/ 2331831/ 2331901	tirunelveli.crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in
0452-3259062 / 2533033	sesakkipandi@gmail.com	09:30AM / 06:00PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in
0431-2770433	trichyadonis@gmail.com	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in
04362 271719	gsaravananonida@gmail.com m.thanjavur.crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in
044-42872895	ambattur.crc@adonis.co.in	09:00AM / 05:30PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in
0452 3293496 / 2433747	dindigul.crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Chandradevan	9941345736	mch.chennai@adonis.co.in
0532/2260768	allahabad.vice@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mch.lucknow@adonis.co.in

Region	Circle	City	Name	Address	Pincode
Up	UP (E)	Gorakhpur	Adonis Electronics Pvt.Ltd.	85 D, Civil Line, Park Road, Gorakhpur	273001
Up	UP (E)	Varanasi	Adonis Electronics Pvt.Ltd.	D 63/13 A ,Mahmoorganj,Near Police Chowkivaranasi	221010
Up	UP (E)	Faizabad	Adonis Electronics Pvt.Ltd.	H. No. 5/4/61/2A ,Amaniganj., Bh New Wave Academy, Ayodhya Road, Faizabad	224001
Up	UP (E)	Jhansi	Unicom Mobile	Basement city center, (Near Danik jagran press) Jeevan Shah Jhansi	284001
Up	UP (E)	Ballia	M/S G S SALES	45, GOLA WARD NO/9, NEAR SHISH MAHAL CINEMA JAPLIN GANJ BALLIA	277001
Up	UP (E)	Kanpur	Adonis Electronics Pvt.Ltd.	107/263 nehru nagar , (brahm nagar chauraha) Kanpur	208012
Up	UP (E)	Bahraich	Balaji Electronics	HOSPITAL ROAD KANOON GOPURA ,SHANTI MARKET	271801
Up	UP (E)	Lucknow	Adonis Electronics Pvt.Ltd.	B/38, Sector/ P, Aliganj, Lucknow	226020

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
0551/2346126	gkp.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mch.lucknow@adonis.co.in
0542/ 2227704	deep.chand@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mch.lucknow@adonis.co.in
05278/241314	faizabad_service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mch.lucknow@adonis.co.in
9935071630 / 9235193723/ 05102333223	jhansi_mobiles@rediffmail.com	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mch.lucknow@adonis.co.in
9807892737	gssalesballia@sifymail.com	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mch.lucknow@adonis.co.in
0512/3047110	manju_gupta92@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mch.lucknow@adonis.co.in
525/2237366 /9335554089/ 9807267817	balaji_bahraich@gmail.com	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mch.lucknow@adonis.co.in
0522/ 2323306/23357 64	mch.lucknow@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mch.lucknow@adonis.co.in

Region	Circle	City	Name	Address	Pincode
Up	UP (E)	Etawah	Modern Computer World	11 A Commercial Complex, Pakka Talab Etawah	206001
Up	UP (E)	SONEBHADRA	M/S MAA JANKI ENTERPRISES	NEAR NOKIA CARE MAIN MARKET , ANPARA, SONEBHADRA	231225
Up	UP (E)	lakhimpur	durga enter prises	Aira road near Auranga bad churaha, Lakhimpur	262701
Up	UP (E)	Barabanki	M/S SKY MOBILES	SHOP NO/3, 1ST FLOOR, MUGAL DARBAR MARKET STATION ROAD, BARABANKI	225001
Up	UP (E)	Balrampur	M/S JHA PCO & MOBILE CENTER	SHOP NO/2, BALRAMPUR CHINI MILLS MAIN GATE, BALRAMPUR	271201
Up	UP (E)	Akbarpur	M/S SHANTI MOBILE SHOP	9 B, NIC MARKET AKBARPUR , AMBEDKAR NAGAR	224122
Up	UP (E)	Sultanpur	M/S NEW CHINA CARE	D/7 , SUPER MARKET SULTANPUR	228001
Up	UP (E)	Pratapgarch	M/S RAJEEV ELECTRONICS	79/ CHILBILA CHURAHA, PRATAPGARCH	230403

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
9219668829	atulmishra_etawah@yahoo.com	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mchlucknow@adonis.co.in
8874480130	maajankienterprises.anpara@gmail.com	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mchlucknow@adonis.co.in
9415574382 / 9696693712	sklalwani123@yahoo.co.in	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mchlucknow@adonis.co.in
9839174378 /	imranahmad_dso@rediffmail.com	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mchlucknow@adonis.co.in
9125236006 / 9935848498	ihapcoblp@gmail.com	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mchlucknow@adonis.co.in
9838587463 / 9794102648	kumaramit_1390@yahoo.in	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mchlucknow@adonis.co.in
9125246963 /9889880274	mani2235@gmail.com	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mchlucknow@adonis.co.in
9044001625	rajeevchilbila@gmail.com	09:30AM / 06:30PM, Sunday Closed	Kamlesh	9598068418	mchlucknow@adonis.co.in

Region	Circle	City	Name	Address	Pincode
Up	UP (W)	Muzaffernagar	Computer Help Line	2 Upper story, Hasnain Market, Ansari Road, Muzaffarnagar.	251001
Up	UP (W)	Agra	Adonis Electronics Pvt.Ltd.	17 Dwarikapuram by pass road Agra	282001
Up	UP (W)	Aligarh	Adonis Electronics Pvt.Ltd.	476 vishupuri, near sumunglam nursing home, Ramghat road, Aligarh.	202001
Up	UP (W)	Kasganj	Electa Vision	Biram Gate , Kasganj, East Up	207123
Up	UP (W)	Mathura	R.K Services	Hotel Athitya Palace, Sankh Adda, Mathura	281005
Up	UP (W)	Firozabad	Dayal Computers & Mobile Shop	Infront of SRK digree collage kotla road Firozabad	283203
Up	UP (W)	Hathras	Pankaj Electricals	Navipur Chauraha sadabad gate	281308
Up	UP (W)	Dehradun	Adonis Electronics Pvt.Ltd.	11/ Mohini Road, Near Water Tank, Dehradun	248001

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
1312433063	chlzn@gmail.com	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabadi@adonis.co.in
0562-4058189	agra.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabadi@adonis.co.in
571-3205995	aligarh.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabadi@adonis.co.in
	electradeepu@gmail.com	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabadi@adonis.co.in
	imran.tpmathura@gmail.com	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabadi@adonis.co.in
	atulporwalfzb@gmail.com	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabadi@adonis.co.in
	pankajsharmahts@gmail.com	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabadi@adonis.co.in
	rajesh.dabral@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabadi@adonis.co.in

Region	Circle	City	Name	Address	Pincode
Up	UP (W)	Haldwani	Adonis Electronics Pvt.Ltd.	8/267/3 Pant Colony Mukhani kaladhungi road	263139
Up	UP (W)	Ghaziabad	Adonis Electronics Pvt.Ltd.	R/11/16 Raj nagar, Ghaziabad	201001
Up	UP (W)	Noida	Adonis Electronics Pvt.Ltd.	Baishoya Complex Ground Floor Sec/15,Noida	201301
Up	UP (W)	Bareilly	Adonis Electronics Pvt.Ltd.	35/V/04 B Rampur Garden, Opp Dhanvantari Tomer Hospital,Civil Line, Bareilly	243004
Up	UP (W)	Bijnore	Ujjwal Telecom	First Floor Ajaj Ali Hall Near Roadways Busstand.Bijnore	246701
Up	UP (W)	Meerut	Adonis Electronics Pvt.Ltd.	115/ Naya Bazar/ Opp Mateshwari Mandir, Sadar, Meerut	250001
Up	UP (W)	Moradabad	Reliable Infosys	Bhoora Crossing Opp Do Kuan Wali Masjid Moradabad	244001
Up	UP (W)	Saharanpur	Pal Communication	Shop no.17 , Mahavir Complex ,Nr. Hathi gate high court rd, Saharanpur	247001

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
5946254969	haldwani.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabad@adonis.co.in
9910686809	ghaziabad.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabad@adonis.co.in
0120-3229094	noida.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabad@adonis.co.in
9319782889	bareilly.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabad@adonis.co.in
9359352224	pratushq1@gmail.com	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabad@adonis.co.in
1213254424	meerut.service@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabad@adonis.co.in
9219755555	reliableinfosys.mbd@gmail.com	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabad@adonis.co.in
8126799889	palcommunicationre@yahoo.co.in	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch.ghaziabad@adonis.co.in

Region	Circle	City	Name	Address	Pincode
Up	UP (W)	Bulandshahar	FM Telecom	Shop number.19,Navyug Market,Opposite Roadways Busstand ,Satha Road,Bulandshahr.	203001
Up	Delhi	Nangloi	BHAGWATI TELECOM	A42, VEER BAZAR ROAD, AMAR COLONEY, NANGLOI, DELHI/110041	110041
Up	Delhi	Delhi	Adonis Electronics Pvt.Ltd.	A/19/ B/1 Mohan Co/Op Industrial Estate, Opp Ntpc, Mathura Road, Badarpur, New Delhi	110044
Up	Delhi	Delhi	Adonis Electronics Pvt.Ltd.	55/ Patparganj Industrial Area, Behind Mgf Motors , Delhi/92	110092
Up	Delhi	Delhi	Adonis Electronics Pvt.Ltd.	A/33, New Krishna Park, Near Janakpuri West Metro Station, New Delhi	110018
Up	Delhi	Delhi	Kanica Electronics	M/3, 1st Floor, Vishal Market Complex, West Mukherjee Nahgar,Dhaka Chowk, New Delhi	110009
West	Mumbai	Dadar	MONEY ENTERPRISES	A/2,Ground floor, Karishma bldg. plot no.185, naigaio cross road madhadas pasta road behind Kohinoor TV showroom Dadar east Mumbai (400014)	400014

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
9359230111	fmtelecomm@yahoo.com fmtelecomm@gmail.com	09:30AM / 06:30PM, Sunday Closed	Udayveer Singh	9311139565	mch_ghaziabad@adonis.co.in
07503411411 /0971671811	bhagwatitelec om1999@yahoo.in	09:30AM / 06:30PM, Sunday Closed	Anil Bazaz		mch_delhi@adonis.co.in
011-26944824	delhisouth.mobilservice@gmail.com	09:30AM / 06:30PM, Sunday Closed	Anil Bazaz	9811836764	mch_delhi@adonis.co.in
011-65656241	east.delhi@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Anil Bazaz	9811836764	mch_delhi@adonis.co.in
011-32023823	delhiwest.mobilservice@gmail.com	09:30AM / 06:30PM, Sunday Closed	Anil Bazaz	9811836764	mch_delhi@adonis.co.in
011-27455617	delhinorth_crc@gmail.com	09:30AM / 06:30PM, Sunday Closed	Anil Bazaz	9811836764	mch_delhi@adonis.co.in
022-20588888	nagesganji@gmail.com	09:30AM / 06:30PM, Sunday Closed	Arvind Mishra	9819292824	mch_mumbai@adonis.co.in

Region	Circle	City	Name	Address	Pincode
West	Mumbai	Andheri	Adonis Electronics Pvt.Ltd.	Adonis Electronics Pvt. Ltd, Onida House II, Mahal Industrial Estate, Off Mahakali Caves Road, Andheri East	400093
West	Mumbai	Vashi	Marshal Services	E7/01/02, sect /1 , Nr ,Opp Apana Bazar, Vashi	400076
West	Mumbai	Vasai	S.G.Infotech	A/1,ASHOK VAN,VASANT KARISHMA COMPLEX, AMBADI ROAD,60FT CROSS ROAD,VASAI/WEST	401301
West	Mumbai	Kalyan	Technocraft Technology	4, Mahek Plaza, Kala Talav, Kalyan (West)	421301
West	Mumbai	Pen	Reliable mobile care center	Shop no.16 sudarshan co/oppretive socity beside BSNL office opp. LIC office taluka pen dist Raigad	402107
West	Mumbai	Nasik	Electronics Media	Shop/ FJ/39, Thakkar Bazar, New CBS,Nasik	422001
West	RoM	Jalna	Sanskriti Mobiles & Enterprises	Udan Complex,Shop No- 33, Jalna	431203

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
022-26878136/37	mch.mumbai@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Arvind Mishra	9819292824	mch.mumbai@adonis.co.in
022-27827503	vashicrc@gmail.com	09:30AM / 06:30PM, Friday Closed	Arvind Mishra	9819292824	mch.mumbai@adonis.co.in
9503022828	tp.vasai@gmail.com	09:30am to 06:30pm, Sunday closed	Arvind Mishra	9819292824	mch.mumbai@adonis.co.in
9323082885	technocraft.mumbai@gmail.com	09:30am to 06:30pm, Sunday closed	Arvind Mishra	9819292824	mch.mumbai@adonis.co.in
9270786706	rafiqtadvi786@gmail.com	09:30am to 06:30pm, Sunday closed	Arvind Mishra	9819292824	mch.mumbai@adonis.co.in
9028007984	media.service_nsk@gmail.com	09:30AM / 06:30PM, Sunday Closed	Arvind Mishra	9819292824	mch.mumbai@adonis.co.in
9326109688	umesh.p@gmail.com	09:30AM / 06:30PM, Sunday Closed	Arvind Mishra	9819292824	mch.mumbai@adonis.co.in

Region	Circle	City	Name	Address	Pincode
West	RoM	Ambajogai	M/s.Digital Valley	M/s.Digital Valley , 3 ground floor , dindayal bhawan, prashant nagar,Ambajogi, dist/bee	431517
West	RoM	Jalgaon	Ekhankar Mobile Shop	G/21 GROUND FLOOR GOLANI MARKET JALGAON MAHARASHTRA 425001	425001
West	RoM	Dhule	M/S Hrishiyog Mobiles	Plot No13 A "kulsuwamini" Donday Col.Datta Mandir,Devpur, Dhule.	424005
West	RoM	Malegaon	SKY SYSTEM AND SOLUTIONS	GHODEWALA COMPUND, OLD AGRA ROAD, OPP.RAMESH PETROL PUMP,	423203
West	RoM	Nanded	Adonis Electronics Pvt.Ltd.	Adonis electronics pvt.ltd 30, gargi nivas opp.iti Vishava nagar near Ruby Hospital Nanded	431602
West	RoM	Madgaon	Agnelo Electronics	Shop No 15 & 16 Paramount Shopping complex, Near Roary Church, Behind Apollo ,Pharmacy, Navelim,Madgaon,Goa 403707	403707
West	RoM	Panaji	Adonis Electronics Pvt.Ltd.	1 & 4 / Caritas Complex, Opp SBI Regional Office, St. Inez, Panaji Goa	403001

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
9175200004	sham_panhale@gmail.com	09:30AM / 06:30PM, Sunday Closed	Arvind Mishra	9819292824	mch.mumbai@adonis.co.in
9423768625	raj_9860677402@yahoo.com	10:00AM / 07:00PM, Sunday Closed	Arvind Mishra	9819292824	mch.mumbai@adonis.co.in
0256-2274529	hhrishikesh.yeole007@gmail.com	09:30AM / 06:30PM, Sunday Closed	Arvind Mishra	9819292824	mch.mumbai@adonis.co.in
9823592143	skysolutions@yahoo.in	10:00AM / 07:00PM, Sunday Closed	Arvind Mishra	9819292824	mch.mumbai@adonis.co.in
02462-252142	adil.khan@gmail.com	10:00AM / 07:00PM, Sunday Closed	Arvind Mishra	9819292824	mch.mumbai@adonis.co.in
	rakshatelecom@gmail.com	09:00AM / 06:00PM, Sunday Closed	Priti Saha	9373605529	mch.pune@adonis.co.in
	agneloelectronics@rediffmail.com	09:30AM / 06:30PM, Sunday Closed	Priti Saha	9373605529	mch.pune@adonis.co.in

Region	Circle	City	Name	Address	Pincode
West	RoM	Ponda	Raksha Telecom	G21 AKASH DARSHAN APPTS BEHIND CANARA BANK PONDA GOA	403401
West	RoM	Pune	M/S New Friends Electronics	Guru Kripa App.47,Mukund nagar,opp Sujay Gardan,Sop no :2.	411040
West	RoM	Kothurd	SAI ELECTRONICS	6/2/3 Godawari Apartment/ Behind Nisarg Hotel, Opp. Padale Palace/ Erاندawane, Pune	411004
West	RoM	PCMC	New Om Sai Service	Sai Chowk behind Ashvini Hospital,Vijay Plaza Shop No.1 Pimpri. pune -17	400019
West	RoM	Ahmednagar	Adonis Electronics Pvt.Ltd.	Onida Service Centre ,KALANAGAR CHOWK SAPPKAL HOSPITAL ROAD,BHINGARDIVE MALA SAVEDI ,AHMEDNAG AR	414001
West	RoM	Ratnagiri	Adonis Electronics Pvt.Ltd.	Onida Cust Relation Center, Zadgaon , Sherenaka, Near Reliance web world express , Ratnagiri	415612
West	RoM	Sangli	Adonis Electronics Pvt.Ltd.	1/14/ Rajwada Colony, Near Patwardhan High School, Sangli	416416

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
08322222736	ulhas.naik@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Priti Saha	9373605529	mch.pune@adonis.co.in
020-40084077	punenew.crc@gmail.com	09:30AM / 06:30PM, Sunday Closed	Priti Saha	9373605529	mch.pune@adonis.co.in
020-25461876	kothrud.crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Priti Saha	9373605529	mch.pune@adonis.co.in
	janardhan.mulik@gmail.com	09:30AM / 06:30PM, Sunday Closed	Priti Saha	9373605529	mch.pune@adonis.co.in
0241-2322660	ahmad.shaikh75@gmail.com	09:30AM / 06:30PM, Sunday Closed	Priti Saha	9373605529	mch.pune@adonis.co.in
02352-271683	ratnagiri.stores@gmail.com	09:30AM / 06:30PM, Sunday Closed	Priti Saha	9373605529	mch.pune@adonis.co.in
0233-2381642	sangli.crc@adonis.co.in , pramodchgl@gmail.com	09:30AM / 06:30PM, Sunday Closed	Priti Saha	9373605529	mch.pune@adonis.co.in

Region	Circle	City	Name	Address	Pincode
West	RoM	Kolhapur	Omkar Mobile Shoppe	Omkar Mobile shoppe,646 e,shahupuri,pendharkar,complex,nr.youth bank, venus corner	416002
West	RoM	Solapur	Vijayalakshmi Mobile Shoppy	105.55/56,Bhavani Peth,Chatla sari center,Solapur/ 413002	413007
West	RoM	Baramati	Diside Telecom	A/P Pride Complex,Kacheri Road Baramati Tel/Baramati Dist/Pun 413102,	413102
West	RoM	Chandrapur	Adonis Electronics Pvt.Ltd.	Opp. Gadegone sohitkar hos. , C/o kotharwal building , Vivek nagar, mul road.	442401
West	RoM	Nagpur	Electro Services	Electro Services, Plot No.205, Chhatrapati Society, Bh Pragati Hall , Near Wazalwar Driving School,Chhatrapati Nagar Square, Nagpur	440015
West	RoM	Akola	M/s.Mobile Touch	13,Padiya complex tower chowk station rd, akola	444001
West	RoM	Amravati	Tulsi Mobile	Khandelwal Complex, Suderlal Square , Cmp , Amravati.	444602

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
-2316419101	tp.kolhapur09@gmail.com	09:30AM / 06:30PM, Sunday Closed	Priti Saha	9373605529	mch.pune@adonis.co.in
	vyankateshshriqiri@gmail.com	09:30AM / 06:30PM, Sunday Closed	Priti Saha	9373605529	mch.pune@adonis.co.in
02112-25090	disidetelecom@gmail.com	09:30AM / 06:30PM, Sunday Closed	Priti Saha	9373605529	mch.pune@adonis.co.in
07172-277166	chandrapur.crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Shakir Ahmed Shah	9977504907	mch.raipur@adonis.co.in
0712-2252366	southnagpur.crc@adonis.co.in	09:30AM / 06:30PM, Sunday Closed	Shakir Ahmed Shah	9977504907	mch.raipur@adonis.co.in
9370053353	om.jaswani@yahoo.co.in	11:00AM / 07:00PM, Sunday Closed	Shakir Ahmed Shah	9977504907	mch.raipur@adonis.co.in
0721-2550178	tulsi.mobile@gmail.com	09:30AM / 06:30PM, Sunday Closed	Shakir Ahmed Shah	9977504907	mch.raipur@adonis.co.in

Region	Circle	City	Name	Address	Pincode
West	RoM	Yavatmal	Genuine Mobiles	Swastik Chowk Godhani Road, Yavatmal	445001

Customer Care: Idea Subscribers dial 12345 for assistance on Idea 3G Smartphone.

Landline No.	E/Mail	Working Hrs	Mch Name	Contact number	Email Id
9860600643	lionaydas300@gmail.com	10:00AM / 07:00PM, Sunday Closed	Shakir Ahmed Shah	9977504907	mch.raipur@adonis.co.in