


# Spectrum Analyzers Datasheet

## RSA5000 Series

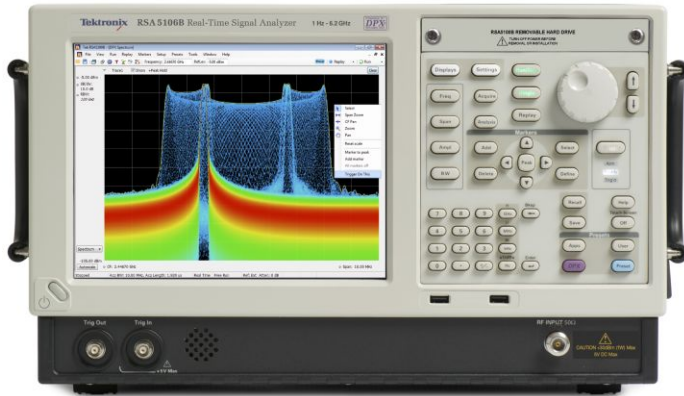

The RSA5000 Series Real Time Signal Analyzers replace conventional instruments, offering the measurement confidence and functionality you demand for everyday tasks. The RSA5000 Series offers industry-leading real time specifications and includes best minimum signal duration for 100% probability of intercept and best real time dynamic range. With the RSA5000 Series instruments, you get the functionality of a high-performance spectrum analyzer, wideband vector signal analyzer, and the unique trigger-capture-analyze capability of a real-time spectrum analyzer – all in a single package.

### Key performance specifications

- +17 dBm 3rd order intercept at 2 GHz
- $\pm 0.3$  dB absolute amplitude accuracy to 3 GHz
- Displayed average noise level: -142 dBm/Hz at 26.5 GHz, -157 dBm/Hz at 2 GHz and -150 dBm/Hz at 10 kHz
- Internal Preamp available: DANL of -156 dBm/Hz at 26.5 GHz, -167 dBm/Hz at 2 GHz
- Phase noise: -113 dBc/Hz at 1 GHz and -134 dBc/Hz at 10 MHz carrier frequency, 10 kHz offset
- High-speed sweeps with high resolution and low noise: 1 GHz sweeps at 10 kHz RBW in <1 second
- Real time spurious free dynamic range of 80 dB with HD options

### Key features

- Reduce Time-to-Fault and increase design confidence with Real-time Signal Processing
  - Up to 3,125,000 spectrums per second, enables 100% probability of intercept for signals of 0.434  $\mu$ s
  - Swept DPX spectrum enables unprecedented signal discovery over full frequency range
  - Advanced DPX including swept DPX, gap-free DPX spectrograms, and DPX zero span with real-time amplitude, frequency, or phase
- Triggers zero in on the Problem
  - DPX density™ trigger on single occurrences as brief as 0.434  $\mu$ s in frequency domain and distinguish between continuous signals vs infrequent events
  - Advanced time-qualified, runt, and frequency-edge triggers act on complex signals as brief as 20 ns
- Capture the widest and deepest signals
  - 25, 40, 85, 125, or 165 MHz acquisition bandwidths
  - Spurious-free dynamic range of 80 dB over the entire acquisition bandwidth with HD options
  - Acquire more than 5 seconds at 165 MHz bandwidth
- Wideband preselection filter provides image free measurements in entire analysis bandwidth up to 165 MHz
- More standard analysis than you expect in an everyday tool
  - Measurements including channel power, ACLR, CCDF, OBW/EBW, spur search, EMI detectors
  - Amplitude, frequency, phase vs. time, DPX spectrum, and spectrograms
  - Correlated multi-domain displays

- Performance options for best real time and dynamic range and analysis options offer added value
  - High dynamic range options offer unmatched 80 dBc spurious-free analysis in the widest acquisition bandwidth
  - High performance DPX offers industry-leading minimum signal duration for 100% probability of intercept
  - Optional software applications to add dedicated measurements for specific applications and standards
  - AM/FM/PM modulation and audio measurements (Opt. 10)
  - Phase noise and jitter (Opt. 11)
  - Automated settling time measurements (frequency and phase) (Opt. 12)
  - More than 30 pulse measurements, acquisition of more than 200,000 pulses possible for post analysis and cumulative statistics. (Opt. 20)
  - General purpose modulation analysis of more than 20 modulation types (Opt. 21)
  - Simple and complete APCO Project 25 transmitter compliance testing and analysis for Phase 1 (C4FM) and Phase 2 (TDMA) (Opt. 26)
  - WLAN analysis for 802.11 a/b/g/j/p, 802.11n, and 802.11ac (Opts. 23, 24, 25)
  - Noise figure and gain measurements (Opt. 14)
  - Bluetooth® Analysis (Opt. 27 and Opt. 31)
  - Manual and automatic measurement mapping plus signal strength function provides audio tone and visual indication of received signal strength (Opt. MAP)
  - LTE™ FDD and TDD Base Station (eNB) Transmitter RF measurements (Opt. 28)
  - Signal Classification and Survey
  - EMC/EMI pre-compliance and troubleshooting (Opt. 32)

## Applications

- Wideband radar and pulsed RF signals
- Frequency agile communications
- Broadband satellite and microwave backhaul links
- Education
- Long Term Evolution (LTE), Cellular
- EMC/EMI pre-compliance and troubleshooting


## High performance spectrum and vector signal analysis, and much more

The RSA5000 Series replaces conventional high-performance signal analyzers, offering the measurement confidence and functionality you demand for everyday tasks. A +17 dBm TOI and -157 dBm/Hz DANL at 2 GHz gives you the dynamic range you expect for challenging spectrum analysis measurements. All analysis is fully preselected and image free. You never have to compromise between dynamic range and analysis bandwidth by 'switching out the preselector'.

A complete toolset of power and signal statistics measurements are standard, including Channel Power, ACLR, CCDF, Occupied Bandwidth, AM/FM/PM, and Spurious measurements. Available Phase Noise and General Purpose Modulation Analysis measurements round out the expected set of high-performance analysis tools.

But, just being an excellent mid-range signal analyzer is not sufficient to meet the demands of today's hopping, transient signals.

The RSA5000 Series will help you to easily discover design issues that other signal analyzers may miss. The revolutionary DPX® spectrum display offers an intuitive live color view of signal transients changing over time in the frequency domain, giving you immediate confidence in the stability of your design, or instantly displaying a fault when it occurs. Once a problem is discovered with DPX®, the RSA5000 Series spectrum analyzers can be set to trigger on the event, capture a contiguous time record of changing RF events, and perform time-correlated analysis in all domains. You get the functionality of a high-performance spectrum analyzer, wideband vector signal analyzer, and the unique trigger-capture-analyze capability of a real-time spectrum analyzer - all in a single package.

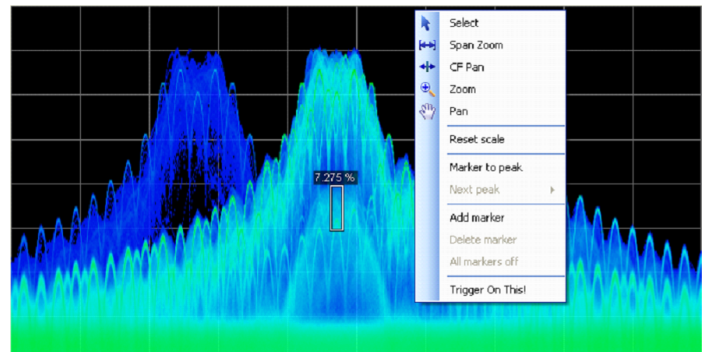

Revolutionary DPX® spectrum display reveals transient signal behavior that helps you discover instability, glitches, and interference. Here, three distinct signals can be seen. Two high-level signals of different frequency-of-occurrence are seen in light and dark blue, and a third signal beneath the center signal can also be discerned. The DPX Density™ trigger allows the user to acquire signals for analysis only when this third signal is present. Trigger On This™ has been activated, and a density measurement box is automatically opened, measuring a signal density 7.275%. Any signal density greater than the measured value will cause a trigger event.

## Discover

The patented DPX<sup>®</sup> spectrum processing engine brings live analysis of transient events to spectrum analyzers. Performing up to 3,125,000 frequency transforms per second, transients of a minimum event duration of 0.434  $\mu$ s in length are displayed in the frequency domain. This is orders of magnitude faster than swept analysis techniques. Events can be color coded by rate of occurrence onto a bitmapped display, providing unparalleled insight into transient signal behavior. The DPX spectrum processor can be swept over the entire frequency range of the instrument, enabling broadband transient capture previously unavailable in any spectrum analyzer. In applications that require only spectral information, DPX provides gap-free spectral recording, replay, and analysis of up to 60,000 spectral traces. Spectrum recording resolution is variable from 125  $\mu$ s to 6400 s per line.

## Trigger


Tektronix has a long history of innovative triggering capability, and the RSA Series spectrum analyzers lead the industry in triggered signal analysis. The RSA5000 Series provides unique triggers essential for troubleshooting modern digitally implemented RF systems, including time-qualified power, runt, density, frequency, and frequency mask triggers.

Time qualification can be applied to any internal trigger source, enabling capture of 'the short pulse' or 'the long pulse' in a pulse train, or, when applied to the Frequency Mask Trigger, only triggering when a frequency domain event lasts for a specified time. Runt triggers capture troublesome infrequent pulses that either turn on or turn off to an incorrect level, greatly reducing time to fault.

DPX Density<sup>™</sup> Trigger works on the measured frequency of occurrence or density of the DPX display. The unique Trigger On This<sup>™</sup> function allows the user to simply point at the signal of interest on the DPX display, and a trigger level is automatically set to trigger slightly below the measured density level. You can capture low-level signals in the presence of high-level signals at the click of a button.

The Frequency Mask Trigger (FMT) is easily configured to monitor all changes in frequency occupancy within the acquisition bandwidth.

A Power Trigger working in the time domain can be armed to monitor for a user-set power threshold. Resolution bandwidths may be used with the power trigger for band limiting and noise reduction. Two external triggers are available for synchronization to test system events.

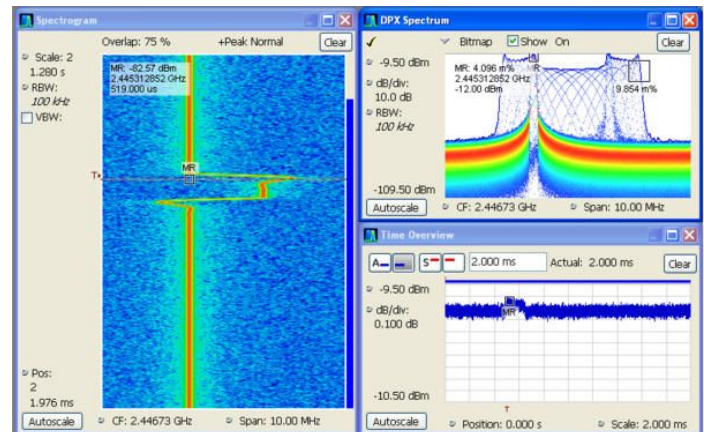

Trigger and Capture: The DPX Density<sup>™</sup> Trigger monitors for changes in the frequency domain, and captures any violations into memory. The spectrogram display (left panel) shows frequency and amplitude changing over time. By selecting the point in time in the spectrogram where the spectrum violation triggered the DPX Density<sup>™</sup> Trigger, the frequency domain view (right panel) automatically updates to show the detailed spectrum view at that precise moment in time.

## Capture

Real-time capture of small signals in the presence of large signals is enabled with greater than 70 dB SFDR in all acquisition bandwidths, even up to 165 MHz (Opt. B16x). The dynamic range of the wideband acquisition system can be improved to an unmatched 80 dB with the B85HD, B125HD, and B16xHD options. Capture once - make multiple measurements without recapturing. All signals in an acquisition bandwidth are recorded into the RSA5000 Series deep memory. Record lengths vary depending upon the selected acquisition bandwidth - up to 5.36 seconds at 165 MHz, 343.5 seconds at 1 MHz, or 6.1 hours at 10 kHz bandwidth with Memory Extension (Opt. 53). Acquisitions of up to 2 GB in length can be stored in MATLAB<sup>™</sup> Level 5 format for offline analysis.

Most spectrum analyzers use narrowband tunable band pass filters, often YIG tuned filters (YTF) to serve as a preselector. These filters provide image rejection and improve spurious performance in swept applications by limiting the number of signals present at the first mixing stage. YTF's are narrow band devices by nature and are usually limited to bandwidths less than 50 MHz. These analyzers bypass the input filter when performing wideband analysis, leaving them susceptible to image responses when operating in modes where wideband analysis is required such as for real time signal analysis.

Unlike spectrum analyzers with YTF's, Tektronix Real Time Signal Analyzers use a wideband image-free architecture guaranteeing that signals at frequencies outside of the band to which the instrument is tuned don't create spurious or image responses. This image-free response is achieved with a series of input filters designed such that all image responses are suppressed. The input filters are overlapped by greater than the widest acquisition bandwidth, ensuring that full-bandwidth acquisitions are always available. This series of filters serves the purpose of the preselector used by other spectrum analyzers, but has the benefit of always being on while still providing the image-free response in all instrument bandwidth settings and at all frequencies.

## Analyze

The RSA5000 Series offers analysis capabilities that advance productivity for engineers working on components or in RF system design, integration, and performance verification, or operations engineers working in networks, or spectrum management. In addition to spectrum analysis, spectrograms display both frequency and amplitude changes over time. Time-correlated measurements can be made across the frequency, phase, amplitude, and modulation domains. This is ideal for signal analysis that includes frequency hopping, pulse characteristics, modulation switching, settling time, bandwidth changes, and intermittent signals.

The measurement capabilities of the RSA5000 Series and available options and software packages are summarized in the following section.


### Measurement functions

| Standard measurements                            | Description                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Spectrum analyzer measurements                   | Channel power, Adjacent channel power, Multicarrier adjacent channel power/leakage ratio, Spectrum emissions mask, Occupied bandwidth, xdB down, dBm/Hz marker, dBc/Hz marker                                                                                                                              |
| Real time measurements                           | DPX Spectrum with density measurements, DPX Spectrogram with spectrums vs. time, Zero-Span DPX with up to 50,000 updates/sec                                                                                                                                                                               |
| Time domain and statistical measurements         | RF IQ vs Time, Power vs Time, Frequency vs Time, Phase vs Time, CCDF, Peak-to-Average Ratio                                                                                                                                                                                                                |
| Spur search measurement                          | Up to 20 frequency ranges, user-selected detectors (Peak, Average, QP), filters (RBW, CISPR, MIL), and VBW in each range. Linear or log frequency scale. Measurements and violations in absolute power or relative to a carrier. Up to 999 violations identified in tabular form for export in .CSV format |
| Analog modulation analysis measurement functions | % amplitude modulation (+, -, total) frequency modulation ( $\pm$ Peak, +Peak, -Peak, RMS, Peak-Peak/2, frequency error) phase modulation ( $\pm$ Peak, RMS, +Peak, -Peak)                                                                                                                                 |
| DPX density measurement                          | Measures % signal density at any location on the DPX spectrum display and triggers on specified signal density                                                                                                                                                                                             |


| Measurement options                                  | Description                                                                                                                                                                                                                                                                                             |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AM/FM/PM modulation and audio measurements (Opt. 10) | carrier power, frequency error, modulation frequency, modulation parameters ( $\pm$ Peak, Peak-Peak/2, RMS), SINAD, modulation distortion, S/N, THD, TNHD                                                                                                                                               |
| Phase noise and jitter measurements (Opt. 11)        | 10 Hz to 1 GHz frequency offset range, log frequency scale traces - 2: $\pm$ Peak trace, average trace, trace smoothing, and averaging                                                                                                                                                                  |
| Settling Time (Frequency and Phase) (Opt. 12)        | Measured frequency, Settling time from last settled frequency, Settling time from last settled phase, Settling time from trigger. Automatic or manual reference frequency selection. User-adjustable measurement bandwidth, averaging, and smoothing. Pass/Fail mask testing with 3 user-settable zones |

| Measurement options                                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Noise Figure and Gain measurements (Opt. 14)                   | Measurement displays of noise figure, gain, Y-factor, noise temperature, and tabular results. Single-frequency metering and swept-trace results are available. Support for industry-standard noise sources. Measures amplifiers and other non-frequency converting devices plus fixed local-oscillator up and down converters. Performs mask testing to user-defined limits. Built in uncertainty calculator.                                                                                                                                                                                                                                                                                                                                           |
| Advanced pulse measurements suite (Opt. 20)                    | Pulse-Ogram™ waterfall display of multiple segmented captures, with amplitude vs time and spectrum of each pulse. Pulse frequency, Delta Frequency, Average on power, Peak power, Average transmitted power, Pulse width, Rise time, Fall time, Repetition interval (seconds), Repetition interval (Hz), Duty factor (%), Duty factor (ratio), Ripple (dB), Ripple (%), Droop (dB), Droop (%), Overshoot (dB), Overshoot (%), Pulse- Ref Pulse frequency difference, Pulse- Ref Pulse phase difference, Pulse- Pulse frequency difference, Pulse- Pulse phase difference, RMS frequency error, Max frequency error, RMS phase error, Max phase error, Frequency deviation, Phase deviation, Impulse response (dB), Impulse response (time), Time stamp. |
| General Purpose Digital Modulation Analysis (Opt. 21)          | Error vector magnitude (EVM) (RMS, Peak, EVM vs time), Modulation error ratio (MER), Magnitude error (RMS, Peak, Mag error vs time), Phase error (RMS, Peak, Phase error vs time), Origin offset, Frequency error, Gain imbalance, Quadrature error, Rho, Constellation, Symbol table                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Flexible OFDM Analysis (Opt. 22)                               | OFDM analysis for WLAN 802.11a/g and WiMAX 802.16-2004                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| WLAN 802.11a/b/g/p measurement application (Opt. 23)           | All of the RF transmitter measurements as defined in the IEEE standard, as well as a wide range of additional measurements including Carrier Frequency error, Symbol Timing error, Average/peak burst power, IQ Origin Offset, RMS/Peak EVM, and analysis displays, such as EVM and Phase/Magnitude Error vs. time/frequency or vs. symbols/ subcarriers, as well as packet header decoded information and symbol table.                                                                                                                                                                                                                                                                                                                                |
| WLAN 802.11n measurement application (Opt. 24)                 | Option 24 requires option 23.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| WLAN 802.11ac measurement application (Opt. 25)                | Option 25 requires option 24.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| APCO P25 compliance testing and analysis application (Opt. 26) | Complete set of push-button TIA-102 standard-based transmitter measurements with pass/fail results including ACPR, transmitter power and encoder attack times, transmitter throughput delay, frequency deviation, modulation fidelity, symbol rate accuracy, and transient frequency behavior, as well as HCPM transmitter logical channel peak ACPR, off slot power, power envelope and time alignment.                                                                                                                                                                                                                                                                                                                                                |


| Measurement options                                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bluetooth Basic LE TX SIG measurements (Opt. 27)     | Presets for transmitter measurements defined by Bluetooth SIG for Basic Rate and Bluetooth Low Energy. Results also include Pass/Fail information. Application also provides packet header field decoding and can automatically detect the standard, including Enhanced Data Rate.                                                                                                                                                                                   |
| Bluetooth 5 measurements (Opt. 31)                   | Bluetooth SIG measurements for Bluetooth Low Energy version 5. Results also include Pass/Fail information. Application also provides Packet Header Field Decoding of LE Data Packets. Option 31 requires option 27.                                                                                                                                                                                                                                                  |
| LTE Downlink RF measurements (Opt. 28)               | Presets for Cell ID, ACLR, SEM, Channel Power and TDD Toff Power. Supports TDD and FDD frame format and all base stations defined by 3GPP TS version 12.5. Results include Pass/Fail information. Real-Time settings make the ACLR and the SEM measurements fast, if the connected instrument has enough bandwidth.                                                                                                                                                  |
| Mapping and signal strength (Opt. MAP)               | Both manual and automatic drive test are supported by built-in mapping software. Commercial off-the-shelf 3rd party GPS receiver supported via USB or Bluetooth® connection. Supports MapInfo format and scanned version maps. Also supports exporting to popular Google Earth and MapInfo map format for post analysis. Signal strength measurement provides both a visual indicator and audible tone of signal strength.                                           |
| RSAPu Analysis Software                              | W-CDMA, HSPA, HSDPA, GSM/EDGE, CDMA2000 1x, CDMA2000 1xEV-DO, RFID, Phase noise, Jitter, IEEE 802.11 a/b/g/n WLAN, IEEE 802.15.4 OQPSK (Zigbee), Audio analysis                                                                                                                                                                                                                                                                                                      |
| Signal Classification                                | The signal classification application enables expert systems guidance to aid the user in classifying signals. It provides graphical tools that allow you to quickly create a spectral region of interest, enabling you to classify and sort signals efficiently.                                                                                                                                                                                                     |
| EMC/EMI Pre-compliance and troubleshooting (Opt. 32) | This option supports many predefined limit lines. It also adds a wizard for easy setup of recommended antennas, LISN, and other EMC accessories with a one-button push. When using the new EMC-EMI display, you can accelerate the test by applying the time consuming quasi peak only on failures. This display also provides a push-button ambient measurement. The Inspect tool lets you measure frequencies of interest locally, removing the need for scanning. |

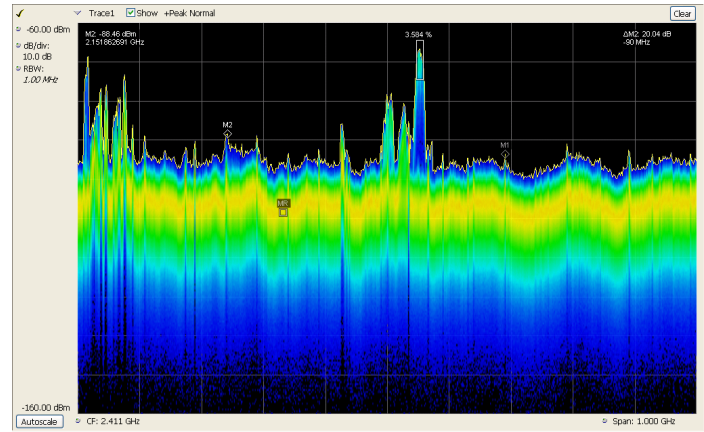


Swept DPX can capture low-probability events across spans greater than the real time bandwidth. Here, a 1 GHz sweep views the activity from 1.9 GHz to 2.9 GHz from an off-air antenna. Number signals in the 1.9 GHz cell band are seen, and significant activity in the 2.4 GHz ISM band is apparent. The density measurement both has been used on the largest signal near the center, displaying approximately 3.5% occupancy.

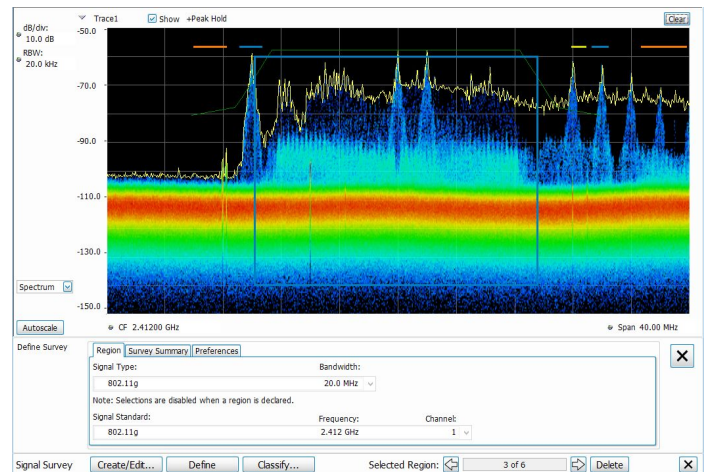

In this illustration, a single region has been selected. Since we have declared this to be an 802.11g signal, the spectrum mask for the 802.11g signal is shown overlaid in the region. The signal is a close match to the spectrum mask. However we can see some interferences with some likely Bluetooth signals in the ISM band.

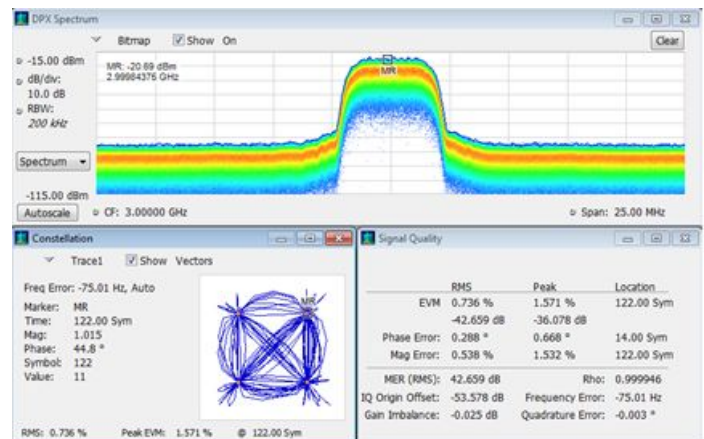


Time-correlated views in multiple domains provide a new level of insight into design problems not possible with conventional analyzers. Here, modulation quality and the constellation measurements are combined with the continuous monitoring of the DPX® spectrum display.

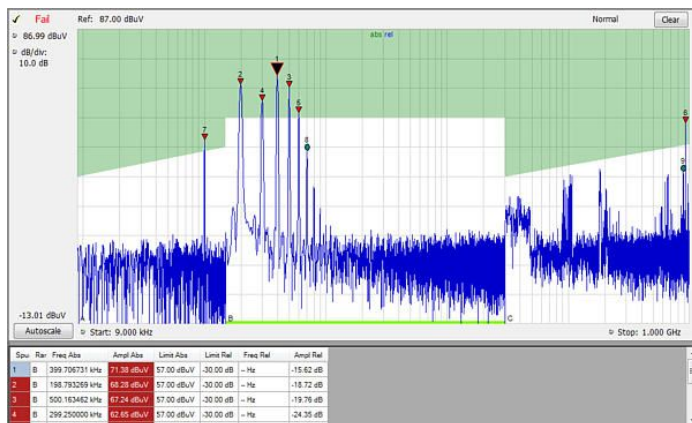


Spurious Search - Up to 20 noncontiguous frequency regions can be defined, each with their own resolution bandwidth, video bandwidth, detector (peak, average, quasi-peak), and limit ranges. Test results can be exported in .CSV format to external programs, with up to 999 violations reported. Spectrum results are available in linear or log scale.


The EMC pre-compliance solution can be added with option 32. It supports many predefined limit lines. It also adds a wizard for easy setup of recommended antennas, LISN, and other EMC accessories with a one-button push. When using the new EMC-EMI display, you can accelerate the test by applying the time consuming quasi peak only on failures. This display also provides a push-button ambient measurement. The Inspect tool lets you measure frequencies of interest locally, removing the need for scanning.

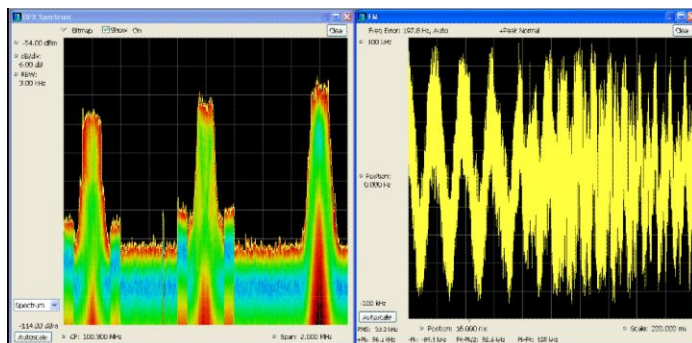


Audio monitoring and modulation measurements simultaneously can make spectrum management an easier, faster task. Here, the DPX spectrum display shows a live spectrum of the signal of interest and simultaneously provides demodulated audio to the internal instrument loudspeaker. FM deviation measurements are seen in the right side of the display for the same signal.

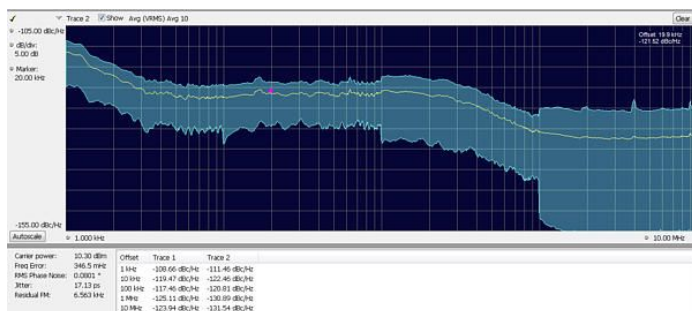


Phase noise and jitter measurements (Opt. 11) on the RSA5000 Series may reduce the cost of your measurements by reducing the need for a dedicated phase noise tester. Outstanding phase noise across the operating range provides margin for many applications. Here, phase noise on a 13 MHz carrier is measured at -119 dBc/Hz at 10 kHz offset. The instrument phase noise of < -134 dBc/Hz at this frequency provides ample measurement margin for the task.

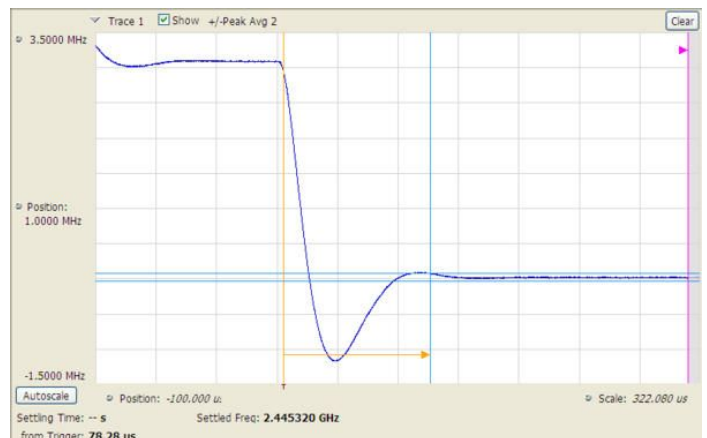


Settling time measurements (Opt. 12) are easy and automated. The user can select measurement bandwidth, tolerance bands, reference frequency (auto or manual), and establish up to 3 tolerance bands vs. time for Pass/Fail testing. Settling time may be referenced to external or internal trigger, and from the last settled frequency or phase. In the illustration, frequency settling time for a hopped oscillator is measured from an external trigger point from the device under test.

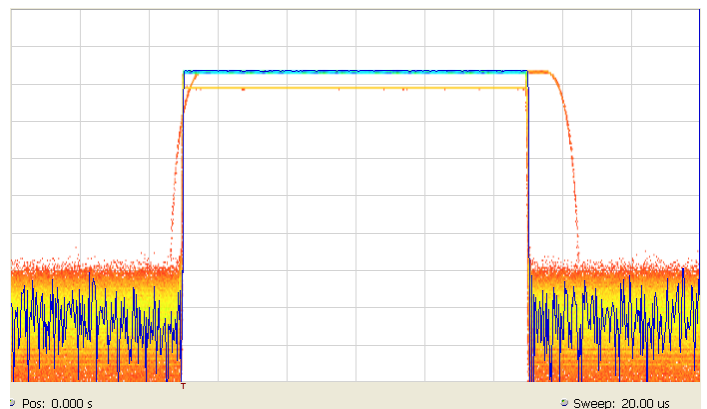


DPX Zero-span produces real-time analysis in amplitude, frequency, or phase vs. time. Up to 50,000 waveforms per second are processed. DPX Zero-span ensures that all time-domain anomalies are immediately found, reducing time-to-fault. Here, three distinct pulse shapes are captured in zero-span amplitude vs. time. Two of the three waveforms occur only once in 10,000 pulses, but all are displayed with DPX.

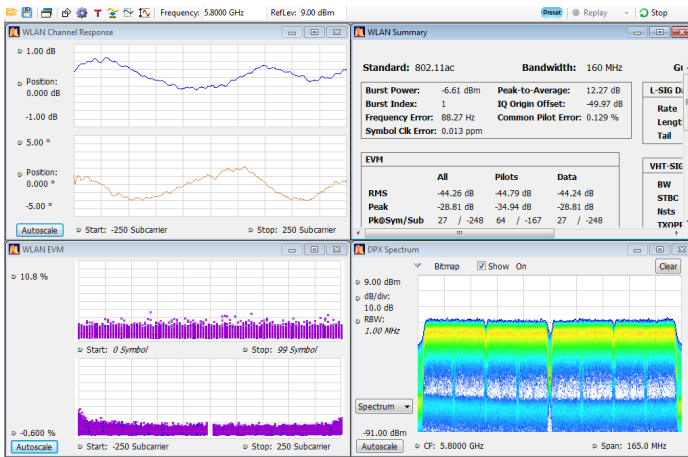


Analysis options for 802.11 standards are available. Here, an 802.11ac 160 MHz bandwidth signal is analyzed, with displays of EVM vs. subcarrier number, channel response vs subcarrier with a summary of WLAN measurements, and the DPX spectrum of the analyzed signal. An EVM of -44.26 dB and other signal measurements are seen in the summary panel.

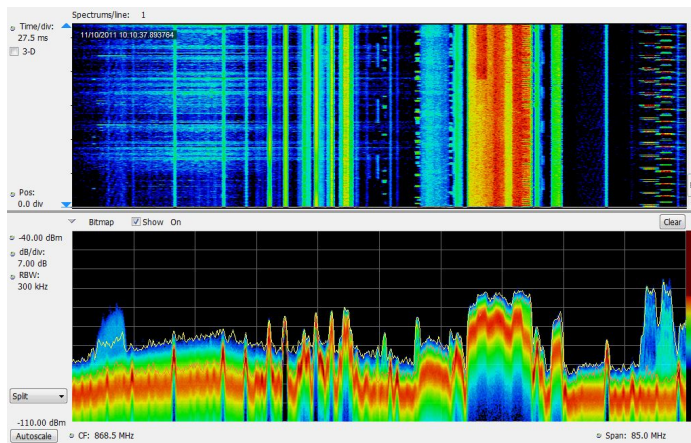


DPX Spectrograms provide gap-free spectral monitoring for up to days at a time. 60,000 traces can be recorded and reviewed, with resolution per line adjustable from 125  $\mu$ s to 6400 s.

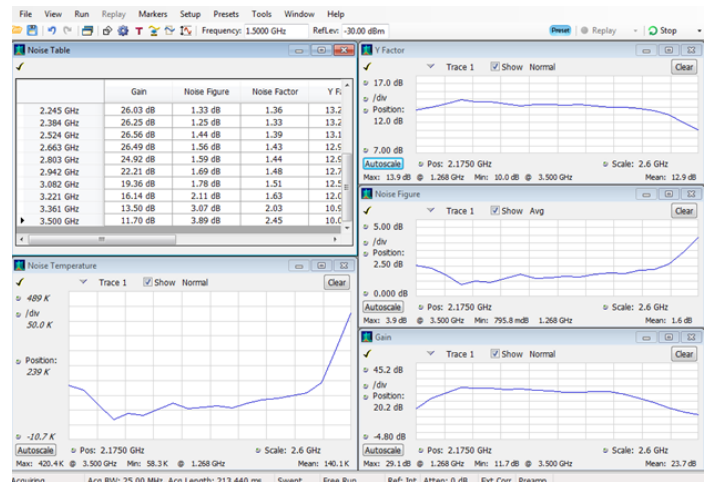


Noise Figure and Gain measurements (Option 14) help you to quickly and easily measure your device using the RTSA and a noise source. This image shows the measurement summary table with graphs of noise temperature, gain, noise figure and Y-factor.

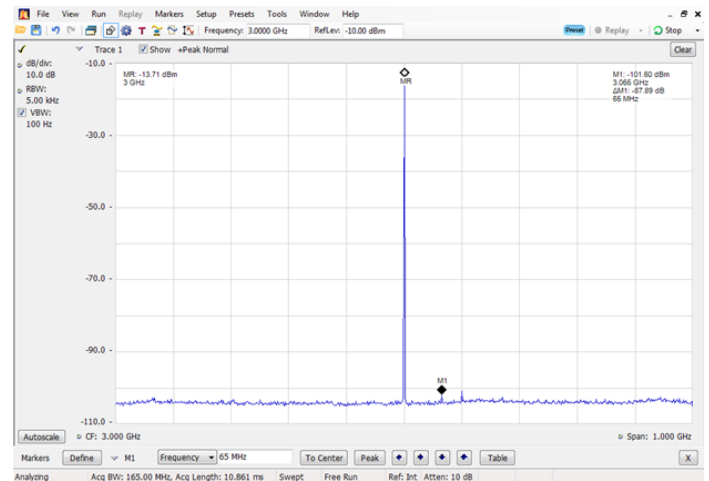


The wide-bandwidth, high dynamic range options (B85HD, B125HD, and B16xHD) offer unmatched real time spectrum analysis dynamic range. Two 16-bit, 200 MS/sec digitizers are interleaved, resulting in 400 MS/sec acquisitions with a typical spurious free dynamic range of -80 dBc, up to 10 dB better than other commercially available instruments. Here, a signal at 3 GHz is measured at -13.71 dBm, with the largest spurious signal from the digitizer -87.89 dB below the carrier.

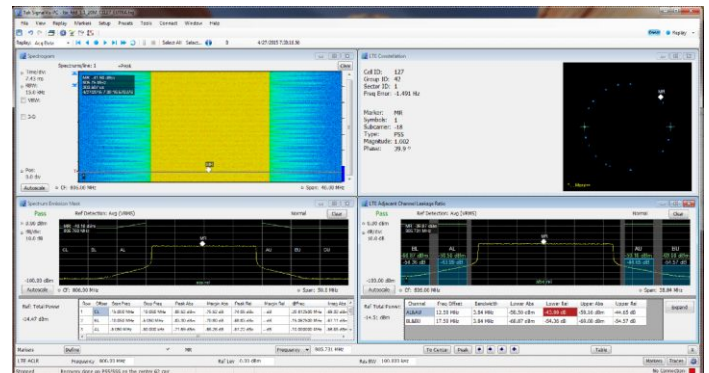

Fast validation of LTE base station transmitter with push button preset, and pass/fail information

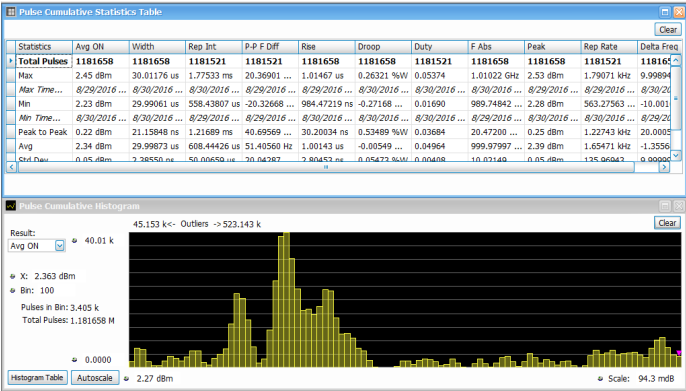

Cumulative statistics provides timestamps for Min, Max values as well as Peak to Peak, Average and Standard deviation over multiple acquisitions, further extending the analysis. Histogram shows you outliers on the right and left

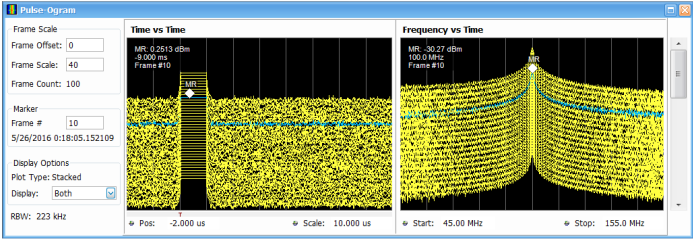

Pulse-Ogram displays a waterfall of multiple segmented captures, with correlated amplitude vs time and spectrum of each pulse. Can be used with an external trigger to show target range and speed

## Specifications

All specifications are guaranteed unless noted otherwise. All specifications apply to all models unless noted otherwise.

### Model overview

|                                                       | RSA5103B                                                                                                                                                                                                             | RSA5106B       | RSA5115B      | RSA5126B        |
|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------------|-----------------|
| Frequency range                                       | 1 Hz - 3 GHz                                                                                                                                                                                                         | 1 Hz - 6.2 GHz | 1 Hz - 15 GHz | 1 Hz - 26.5 GHz |
| Real-time acquisition bandwidth                       | 25 MHz, 40 MHz, 85 MHz, 125 MHz, 165 MHz                                                                                                                                                                             |                |               |                 |
| Minimum Event Duration for 100% POI at 100% amplitude | 2.7 $\mu$ s at 165 MHz BW (0.434 $\mu$ s, Opt. 300)<br>2.8 $\mu$ s at 85 MHz BW (0.551 $\mu$ s, Opt. 300)<br>3.0 $\mu$ s at 40 MHz BW (0.79 $\mu$ s, Opt. 300)<br>3.2 $\mu$ s at 25 MHz BW (0.915 $\mu$ s, Opt. 300) |                |               |                 |
| SFDR (typical)                                        | >75 dBc (25/40 MHz)<br>>73 dBc (85/165 MHz)<br>$\geq$ 80 dBc (Opts. B85HD, B125HD, B16xHD)                                                                                                                           |                |               |                 |
| Trigger modes                                         | Free run, Triggered, FastFrame                                                                                                                                                                                       |                |               |                 |
| Trigger types                                         | Power, Frequency mask, Frequency edge, DPX density, Runt, Time qualified                                                                                                                                             |                |               |                 |

### Frequency related

| Reference frequency | Specification                                   | Standard               | Option PFR             | Conditions                        |
|---------------------|-------------------------------------------------|------------------------|------------------------|-----------------------------------|
|                     | Initial accuracy at cal                         | $\pm 1 \times 10^{-6}$ | $\pm 1 \times 10^{-7}$ | After 10 minute warm-up           |
|                     | Aging per day                                   | $1 \times 10^{-8}$     | $1 \times 10^{-9}$     | After 30 days of operation        |
|                     | First year aging (typical)                      | $1 \times 10^{-6}$     | $7.5 \times 10^{-8}$   | After 1 year of operation         |
|                     | Aging per 10 years                              |                        | $3 \times 10^{-7}$     | After 10 years of operation       |
|                     | Temperature drift                               | $2 \times 10^{-6}$     | $1 \times 10^{-7}$     | From 5 to 40 °C                   |
|                     | Cumulative error (temperature + aging, typical) | $3 \times 10^{-6}$     | $4 \times 10^{-7}$     | Within 10 years after calibration |

Reference output level >0 dBm (internal or external reference selected), +4 dBm, typical

External reference input frequency Every 1 MHz from 1 to 100 MHz plus 1.2288 MHz, 4.8 MHz, and 19.6608 MHz.  
External input must be within  $\pm 1 \times 10^{-6}$  (Std),  $\pm 3 \times 10^{-7}$  (Opt PFR) to stated input

External reference input frequency requirements Spurious level on input must be < -80 dBc within 100 kHz offset to avoid on-screen spurs

Spurious < -80 dBc within 100 kHz offset

Input level range -10 dBm to +6 dBm

Center frequency setting resolution 0.1 Hz

Frequency marker readout accuracy  $\pm(\text{RE} \times \text{MF} + 0.001 \times \text{Span} + 2)$  Hz  
(RE = Reference frequency error)  
(MF = Marker frequency (Hz))

Span accuracy  $\pm 0.3\%$  of span (Auto mode)

## Trigger related

|                             |                                                                        |
|-----------------------------|------------------------------------------------------------------------|
| Trigger event source        | RF input, Trigger 1 (front panel), Trigger 2 (rear panel), Gated, Line |
| Trigger setting             | Trigger position settable from 1 to 99% of total acquisition length    |
| Trigger combinatorial logic | Trigger 1 AND trigger 2 / gate may be defined as a trigger event       |
| Trigger actions             | Save acquisition and/or save picture on trigger                        |

## Power level trigger

|                                                  |                                                                         |
|--------------------------------------------------|-------------------------------------------------------------------------|
| Level range                                      | 0 dB to –100 dB from reference level                                    |
| Accuracy                                         | For trigger levels >30 dB above noise floor, 10% to 90% of signal level |
| Level ≥ –50 dB from reference level              | ±0.5 dB                                                                 |
| From < –50 dB to –70 dB from reference level     | ±1.5 dB                                                                 |
| Trigger bandwidth range                          | At maximum acquisition bandwidth                                        |
| Standard (Opt. B25)                              | 4 kHz to 10 MHz + wide open                                             |
| Opt. B40                                         | 4 kHz to 20 MHz + wide open                                             |
| Opt. B85/B16x                                    | 11 kHz to 40 MHz + wide open                                            |
| Trigger position timing uncertainty              |                                                                         |
| 25/40 MHz acquisition BW, 20 MHz trigger BW      | Uncertainty = ±15 ns                                                    |
| 25/40 MHz acquisition BW, Max Trigger BW         | Uncertainty = ±12 ns                                                    |
| 85/125/165 MHz acquisition BW, 60 MHz Trigger BW | Uncertainty = ±5 ns                                                     |
| 85/125/165 MHz acquisition BW, Max Trigger BW    | Uncertainty = ±4 ns                                                     |
| Trigger re-arm time, minimum (fast frame on)     |                                                                         |
| 10 MHz acquisition BW                            | ≤25 μs                                                                  |
| 40 MHz acquisition BW                            | ≤10 μs                                                                  |
| 85/125 MHz acquisition BW                        | ≤5 μs                                                                   |
| 165 MHz acquisition BW                           | ≤5 μs                                                                   |
| Minimum event duration                           |                                                                         |
| 25 MHz acquisition BW                            | 25 ns                                                                   |
| 40 MHz acquisition BW                            | 25 ns                                                                   |
| 85/125 MHz acquisition BW                        | 6.2 ns                                                                  |
| 165 MHz acquisition BW                           | 6.2 ns                                                                  |

**External trigger 1**

|                                     |                                                          |
|-------------------------------------|----------------------------------------------------------|
| Level range                         | -2.5 V to +2.5 V                                         |
| Level setting resolution            | 0.01 V                                                   |
| Trigger position timing uncertainty | 50 $\Omega$ input impedance                              |
| >20 MHz to 40 MHz acquisition BW:   | $\pm 20$ ns                                              |
| >40 MHz to 80 MHz acquisition BW:   | $\pm 13.5$ ns                                            |
| >80 MHz to 165 MHz acquisition BW:  | $\pm 11$ ns                                              |
| Input impedance                     | Selectable 50 $\Omega$ /5 k $\Omega$ impedance (nominal) |

**External trigger 2**

|                      |                         |
|----------------------|-------------------------|
| Threshold voltage    | Fixed, TTL              |
| Input impedance      | 10 k $\Omega$ (nominal) |
| Trigger state select | High, Low               |

**Trigger output**

|         |                      |
|---------|----------------------|
| Voltage | Output current <1 mA |
| High    | >2.0 V               |
| Low     | <0.4 V               |

**Frequency mask trigger**

|                                       |                                                                                                                                                                                    |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mask shape                            | User defined                                                                                                                                                                       |
| Mask point horizontal resolution      | <0.12% of span                                                                                                                                                                     |
| Level range                           | 0 dB to -80 dB from reference level                                                                                                                                                |
| Level accuracy <sup>1</sup>           |                                                                                                                                                                                    |
| 0 to -50 dB from reference level      | $\pm$ (Channel response + 1.0 dB)                                                                                                                                                  |
| -50 dB to -70 dB from reference level | $\pm$ (Channel response + 2.5 dB)                                                                                                                                                  |
| Span range                            | 100 Hz to 25 MHz (Opt. B25)<br>100 Hz to 40 MHz (Opt. B40)<br>100 Hz to 85 MHz (Opt. B85, B85HD)<br>100 Hz to 125 MHz (Opt. B125, B125HD)<br>100 Hz to 165 MHz (Opt. B16x, B16xHD) |

<sup>1</sup> For masks >30 dB above noise floor.

Frequency mask trigger

|                              |                        |
|------------------------------|------------------------|
| Trigger position uncertainty |                        |
| Span = 25 MHz (Opt. B25)     | ±13 µs (RBW ≥ 300 kHz) |
|                              | ±7 µs (Opt. 09)        |
| Span = 40 MHz (Opt. B40)     | ±13 µs (RBW ≥ 300 kHz) |
|                              | ±6 µs (Opt. 09)        |
| Span = 85 MHz (Opt. B85)     | ±10 µs (RBW ≥ 1 MHz)   |
|                              | ±3 µs (Opt. 09)        |
| Span = 165 MHz (Opt. B16x)   | ±9 µs (RBW ≥ 1 MHz)    |
|                              | ±3 µs (Opt. 09)        |

---

## Frequency mask trigger

Minimum signal duration for 100% probability of trigger at 100% amplitude

| Frequency-Mask and DPX signal processing |           |                     |                 | Minimum signal duration, 100% probability of intercept, Frequency-Mask and DPX density trigger ( $\mu\text{s}$ ) <sup>2</sup> |       |                |       |
|------------------------------------------|-----------|---------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------|-------|----------------|-------|
| Span (MHz)                               | RBW (kHz) | FFT Length (points) | Spectrums / sec | Standard                                                                                                                      |       | Opt. 09        |       |
|                                          |           |                     |                 | Full amplitude                                                                                                                | -3 dB | Full amplitude | -3 dB |
| 165 MHz                                  | 20000     | 1024                | 390,625         | 15.5                                                                                                                          | 15.4  | 2.7            | 2.6   |
|                                          | 10000     | 1024                | 390,625         | 15.6                                                                                                                          | 15.4  | 2.8            | 2.6   |
|                                          | 1000      | 1024                | 390,625         | 17.8                                                                                                                          | 15.7  | 5.0            | 2.9   |
|                                          | 300       | 2048                | 195,313         | 23.4                                                                                                                          | 16.3  | 13.1           | 6.1   |
|                                          | 100       | 8192                | 48,828          | 44.5                                                                                                                          | 23.4  | 44.5           | 23.4  |
|                                          | 30        | 32768               | 12,207          | 161.9                                                                                                                         | 91.7  | 161.9          | 91.7  |
|                                          | 25        | 32768               | 12,207          | 178.0                                                                                                                         | 93.6  | 178.0          | 93.6  |
| 125 MHz                                  | 10000     | 1024                | 390,625         | 15.6                                                                                                                          | 15.4  | 2.8            | 2.6   |
|                                          | 1000      | 1024                | 390,625         | 17.8                                                                                                                          | 15.7  | 5.0            | 2.9   |
|                                          | 500       | 1024                | 390,625         | 20.2                                                                                                                          | 15.9  | 7.4            | 3.1   |
|                                          | 300       | 2048                | 195,313         | 23.4                                                                                                                          | 16.3  | 13.1           | 6.1   |
|                                          | 100       | 4096                | 97,656          | 44.5                                                                                                                          | 23.4  | 34.2           | 13.2  |
|                                          | 30        | 16384               | 24,414          | 120.9                                                                                                                         | 50.7  | 120.9          | 50.7  |
|                                          | 20        | 32768               | 24,414          | 201.9                                                                                                                         | 96.5  | 201.9          | 96.5  |
| 85 MHz                                   | 10000     | 1024                | 390,625         | 15.6                                                                                                                          | 15.4  | 2.8            | 2.6   |
|                                          | 1000      | 1024                | 390,625         | 17.8                                                                                                                          | 15.7  | 5.0            | 2.9   |
|                                          | 500       | 1024                | 390,625         | 20.2                                                                                                                          | 15.9  | 7.4            | 3.1   |
|                                          | 300       | 1024                | 390,625         | 23.4                                                                                                                          | 16.3  | 10.6           | 3.5   |
|                                          | 100       | 4096                | 97,656          | 44.5                                                                                                                          | 23.4  | 34.2           | 13.2  |
|                                          | 30        | 16384               | 24,414          | 121.0                                                                                                                         | 50.7  | 121.0          | 50.7  |
|                                          | 20        | 16384               | 24,414          | 161.0                                                                                                                         | 55.6  | 161.0          | 55.6  |
| 40 MHz                                   | 5000      | 1024                | 390,625         | 15.8                                                                                                                          | 15.4  | 3.0            | 2.6   |
|                                          | 1000      | 1024                | 390,625         | 17.8                                                                                                                          | 15.7  | 5.0            | 2.9   |
|                                          | 300       | 1024                | 390,625         | 23.3                                                                                                                          | 16.3  | 10.5           | 3.5   |
|                                          | 100       | 2048                | 195,313         | 39.4                                                                                                                          | 18.3  | 29.1           | 8.1   |
|                                          | 30        | 4096                | 97,656          | 90.4                                                                                                                          | 21.8  | 90.4           | 21.8  |
|                                          | 20        | 8192                | 48,828          | 140.7                                                                                                                         | 36.3  | 140.7          | 36.3  |
|                                          | 10        | 16384               | 24,414          | 281.3                                                                                                                         | 72.6  | 281.3          | 72.6  |
| 25 MHz                                   | 3800      | 1024                | 390,625         | 16.0                                                                                                                          | 15.4  | 3.2            | 2.6   |
|                                          | 1000      | 1024                | 390,625         | 17.7                                                                                                                          | 15.7  | 4.9            | 2.9   |
|                                          | 300       | 1024                | 390,625         | 23.4                                                                                                                          | 16.3  | 10.6           | 3.5   |
|                                          | 200       | 1024                | 390,625         | 27.4                                                                                                                          | 16.8  | 14.6           | 4.1   |

<sup>2</sup> Values displayed by the instrument may differ by 0.1 $\mu\text{s}$

# Frequency mask trigger

| Frequency-Mask and DPX signal processing (Option 300 with Option 09) |           |                     |                 |                        | Minimum signal duration, 100% probability of intercept, Frequency-Mask and DPX density trigger ( $\mu$ s) <sup>3</sup> |       |
|----------------------------------------------------------------------|-----------|---------------------|-----------------|------------------------|------------------------------------------------------------------------------------------------------------------------|-------|
| Span (MHz)                                                           | RBW (kHz) | FFT Length (points) | Spectrums / sec |                        | Option 300 + Option 09                                                                                                 |       |
|                                                                      |           |                     | Standard        | Option 300 + Option 09 | Full amplitude                                                                                                         | -3 dB |
| 165 MHz                                                              | 20000     | 1024                | 390,625         | 3,125,000              | 0.434                                                                                                                  | 0.334 |
|                                                                      | 10000     | 1024                | 390,625         | 3,125,000              | 0.557                                                                                                                  | 0.349 |
|                                                                      | 1000      | 1024                | 390,625         | 3,125,000              | 2.7                                                                                                                    | 0.662 |
|                                                                      | 300       | 2048                | 195,313         | 195,313                | 13.1                                                                                                                   | 6.1   |
|                                                                      | 100       | 8192                | 48,828          | 48,828                 | 44.5                                                                                                                   | 23.4  |
|                                                                      | 30        | 32768               | 12,207          | 12,207                 | 161.9                                                                                                                  | 91.7  |
|                                                                      | 25        | 32768               | 12,207          | 12,207                 | 178.0                                                                                                                  | 93.6  |
| 125 MHz                                                              | 10000     | 1024                | 390,625         | 3,125,000              | 0.551                                                                                                                  | 0.348 |
|                                                                      | 1000      | 1024                | 390,625         | 3,125,000              | 2.7                                                                                                                    | 0.662 |
|                                                                      | 500       | 1024                | 390,625         | 3,125,000              | 5.1                                                                                                                    | 1.2   |
|                                                                      | 300       | 2048                | 195,313         | 195,313                | 13.1                                                                                                                   | 6.1   |
|                                                                      | 100       | 4096                | 97,656          | 97,656                 | 44.5                                                                                                                   | 13.2  |
|                                                                      | 30        | 16384               | 24,414          | 24,414                 | 120.9                                                                                                                  | 50.7  |
|                                                                      | 20        | 32768               | 24,414          | 24,414                 | 201.9                                                                                                                  | 96.5  |
| 85 MHz                                                               | 10000     | 1024                | 390,625         | 3,125,000              | 0.55                                                                                                                   | 0.348 |
|                                                                      | 1000      | 1024                | 390,625         | 3,125,000              | 2.7                                                                                                                    | 0.662 |
|                                                                      | 500       | 1024                | 390,625         | 3,125,000              | 5.1                                                                                                                    | 1.2   |
|                                                                      | 300       | 1024                | 390,625         | 3,125,000              | 8.3                                                                                                                    | 1.9   |
|                                                                      | 100       | 4096                | 97,656          | 97,656                 | 34.2                                                                                                                   | 13.2  |
|                                                                      | 30        | 16384               | 24,414          | 24,414                 | 121.0                                                                                                                  | 50.7  |
|                                                                      | 20        | 16384               | 24,414          | 24,414                 | 161.0                                                                                                                  | 55.6  |
| 40 MHz                                                               | 5000      | 1024                | 390,625         | 3,125,000              | 0.79                                                                                                                   | 0.377 |
|                                                                      | 1000      | 1024                | 390,625         | 3,125,000              | 2.7                                                                                                                    | 0.663 |
|                                                                      | 300       | 1024                | 390,625         | 3,125,000              | 8.3                                                                                                                    | 1.9   |
|                                                                      | 100       | 2048                | 195,313         | 195,313                | 29.1                                                                                                                   | 8.1   |
|                                                                      | 30        | 4096                | 97,656          | 97,656                 | 90.4                                                                                                                   | 21.8  |
|                                                                      | 20        | 8192                | 48,828          | 48,828                 | 140.7                                                                                                                  | 36.3  |
|                                                                      | 10        | 16384               | 24,414          | 24,414                 | 281.3                                                                                                                  | 72.6  |
| 25 MHz                                                               | 3800      | 1024                | 390,625         | 3,125,000              | 0.915                                                                                                                  | 0.392 |
|                                                                      | 1000      | 1024                | 390,625         | 3,125,000              | 2.7                                                                                                                    | 0.664 |
|                                                                      | 300       | 1024                | 390,625         | 3,125,000              | 8.3                                                                                                                    | 1.9   |
|                                                                      | 200       | 1024                | 390,625         | 3,125,000              | 12.3                                                                                                                   | 2.8   |

<sup>3</sup> Values displayed by the instrument may differ by 0.1 $\mu$ s

## Advanced triggers

### DPX density trigger

|                                                         |                                                                                     |
|---------------------------------------------------------|-------------------------------------------------------------------------------------|
| Density range                                           | 0 to 100% density                                                                   |
| Horizontal range                                        | 0.25 Hz to 25 MHz (Opt. B25)                                                        |
|                                                         | 0.25 Hz to 40 MHz (Opt. B40)                                                        |
|                                                         | 0.25 Hz to 85 MHz (Opt. B85, B85HD)                                                 |
|                                                         | 0.25 Hz to 125 MHz (Opt. B125, B125HD)                                              |
|                                                         | 0.25 Hz to 165 MHz (Opt. B16x, B16xHD)                                              |
| Minimum signal duration for 100% probability of trigger | See minimum signal duration for 100% probability of trigger at 100% amplitude table |

### Frequency edge trigger

|                        |                                                                     |
|------------------------|---------------------------------------------------------------------|
| Range                  | $\pm(\frac{1}{2} \times (\text{ACQ BW or TDBW if TDBW is active}))$ |
| Minimum event duration | 6.2 ns (ACQ BW = 165 MHz, no TDBW, Opt. 16x)                        |
|                        | 6.2 ns (ACQ BW = 85 MHz, no TDBW, Opt. B85)                         |
|                        | 25 ns (ACQ BW = 40 MHz, no TDBW, Opt. B40)                          |
|                        | 25 ns (ACQ BW = 25 MHz, no TDBW, Opt. B25)                          |
| Timing uncertainty     | Same as power trigger position timing uncertainty                   |

### Runt trigger

|                                                                                    |                                                             |
|------------------------------------------------------------------------------------|-------------------------------------------------------------|
| Runt definitions                                                                   | Positive, Negative                                          |
| Accuracy (for trigger levels >30 dB above noise floor, 10% to 90% of signal level) | $\pm 0.5$ dB (level $\geq -50$ dB from reference level)     |
|                                                                                    | $\pm 1.5$ dB (from < -50 dB to -70 dB from reference level) |

### Time qualified triggering

|                                |                                                                                                                |
|--------------------------------|----------------------------------------------------------------------------------------------------------------|
| Trigger types and source       | Time qualification may be applied to: Level, Frequency mask, DPX Density, Runt, Frequency edge, Ext. 1, Ext. 2 |
| Time qualification range       | T1: 0 to 10 seconds                                                                                            |
|                                | T2: 0 to 10 seconds                                                                                            |
| Time qualification definitions | Shorter than T1                                                                                                |
|                                | Longer than T1                                                                                                 |
|                                | Longer than T1 AND shorter than T2                                                                             |
|                                | Shorter than T1 OR longer than T2                                                                              |

### Holdoff trigger

|       |                 |
|-------|-----------------|
| Range | 0 to 10 seconds |
|-------|-----------------|

## Acquisition related

**A/D converter** 200 MS/s, 16 bit (Option B25, B40, B85, B16x); 400 MS/s, 14 bit (Option B85, B16x); 200 MS/s and 400 MS/s, 16 bit (Opt B85HD, B125HD, B16xHD)

**Acquisition memory size** 1 GB (4 GB, opt. 53)

**Minimum acquisition length** 64 samples

**Acquisition length setting resolution** 1 sample

**Fast frame acquisition mode<sup>4</sup>** Up to 1 Million records can be stored in a single acquisition (for pulse measurements and spectrogram analysis (with option 53))

| Memory depth (time) and minimum time domain resolution | Acq. BW (max span) | Sample rate (for I and Q) | Record length (Std.) | Record length (Opt. 53) | Time resolution |
|--------------------------------------------------------|--------------------|---------------------------|----------------------|-------------------------|-----------------|
|                                                        | 165 MHz            | 200 MS/s                  | 1.34 s               | 5.37 s                  | 5 ns            |
|                                                        | 85 MHz             | 200 MS/s                  | 1.34 s               | 5.37 s                  | 5 ns            |
|                                                        | 80 MHz             | 100 MS/s                  | 2.68 s               | 10.74 s                 | 10 ns           |
|                                                        | 40 MHz             | 50 MS/s                   | 4.77 s               | 19.09 s                 | 20 ns           |
|                                                        | 25 MHz             | 50 MS/s                   | 4.77 s               | 19.09 s                 | 20 ns           |
|                                                        | 20 MHz             | 25 MS/s                   | 4.77 s               | 38.18 s                 | 20 ns           |
|                                                        | 10 MHz             | 12.5 MS/s                 | 19.09 s              | 76.35 s                 | 80 ns           |
|                                                        | 5 MHz              | 6.25 MS/s                 | 38.18 s              | 152.71 s                | 160 ns          |
|                                                        | 2 MHz <sup>5</sup> | 3.125 MS/s                | 42.9 s               | 171.8 s                 | 320 ns          |
|                                                        | 1 MHz              | 1.563 MS/s                | 85.9 s               | 343.6 s                 | 640 ns          |
|                                                        | 500 kHz            | 781.25 kS/s               | 171.8 s              | 687.2 s                 | 1.28 µs         |
|                                                        | 200 kHz            | 390.625 kS/s              | 343.6 s              | 1374.4 s                | 2.56 µs         |
|                                                        | 100 kHz            | 195.313 kS/s              | 687.2 s              | 2748.8 s                | 5.12 µs         |
|                                                        | 50 kHz             | 97.656 kS/s               | 1374.4 s             | 5497.6 s                | 10.24 µs        |
|                                                        | 20 kHz             | 48.828 kS/s               | 2748.8 s             | 10955.1 s               | 20.48 µs        |
|                                                        | 10 kHz             | 24.414 kS/s               | 5497.6 s             | 21990.2 s               | 40.96 µs        |
|                                                        | 5 kHz              | 12.207 kS/s               | 10955.1 s            | 43980.5 s               | 81.92 µs        |
|                                                        | 2 kHz              | 3.052 kS/s                | 43980.4 s            | 175921.8 s              | 328 µs          |
|                                                        | 1 kHz              | 1.526 kS/s                | 87960.8 s            | 351843.6 s              | 655 µs          |
|                                                        | 500 Hz             | 762.9 S/s                 | 175921.7 s           | 703687.3 s              | 1.31 ms         |
|                                                        | 200 Hz             | 381.5 S/s                 | 351843.4 s           | 1407374.5 s             | 2.62 ms         |
|                                                        | 100 Hz             | 190.7 S/s                 | 703686.8 s           | 2814749.1 s             | 5.24 ms         |

<sup>4</sup> Exact number depends on Bandwidth, Sample Rate, Acquisition time. Achieved up to 200,000 pulses

<sup>5</sup> In spans ≤2 MHz, higher resolution data is stored.

## Displays and measurements

|                                                            |                                                                            |
|------------------------------------------------------------|----------------------------------------------------------------------------|
| <b>Frequency views</b>                                     | Spectrum (amplitude vs linear or log frequency)                            |
|                                                            | DPX® spectrum display (live RF color-graded spectrum)                      |
|                                                            | Spectrogram (amplitude vs frequency over time)                             |
|                                                            | Spurious (amplitude vs linear or log frequency)                            |
|                                                            | Phase noise (phase noise and Jitter measurement) (Opt. 11)                 |
| <b>Time and statistics views</b>                           | Amplitude vs time                                                          |
|                                                            | Frequency vs time                                                          |
|                                                            | Phase vs time                                                              |
|                                                            | DPX amplitude vs time                                                      |
|                                                            | DPX frequency vs time                                                      |
|                                                            | DPX phase vs time                                                          |
|                                                            | Amplitude modulation vs time                                               |
|                                                            | Frequency modulation vs time                                               |
|                                                            | RF IQ vs time                                                              |
|                                                            | Time overview                                                              |
|                                                            | CCDF                                                                       |
|                                                            | Peak-to-Average ratio                                                      |
| <b>Settling time, frequency, and phase (Opt. 12) views</b> | Frequency settling vs time, Phase settling vs time                         |
| <b>Noise figure and gain (Opt. 14) views</b>               | Noise figure vs. frequency                                                 |
|                                                            | Gain vs. frequency                                                         |
|                                                            | Noise figure, gain at a single frequency                                   |
|                                                            | Y-factor vs. frequency                                                     |
|                                                            | Noise temperature vs. frequency                                            |
|                                                            | Uncertainty calculator                                                     |
|                                                            | Results table of all measurements                                          |
| <b>Advanced Pulse Analysis</b>                             | Pulse results table                                                        |
|                                                            | Pulse trace (selectable by pulse number)                                   |
|                                                            | Pulse statistics (trend of pulse results, FFT of time trend and histogram) |
|                                                            | Cumulative Statistics, Cumulative Histogram and Pulse-Ogram                |
| <b>Digital demod (Opt. 21) views</b>                       | Constellation diagram                                                      |
|                                                            | EVM vs time                                                                |
|                                                            | Symbol table (binary or hexadecimal)                                       |
|                                                            | Magnitude and phase error versus time, and signal quality                  |
|                                                            | Demodulated IQ vs time                                                     |
|                                                            | Eye diagram                                                                |
|                                                            | Trellis diagram                                                            |
|                                                            | Frequency deviation vs time                                                |

## Displays and measurements

|                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Flexible OFDM analysis (Opt. 22) views                 | <p>Constellation, scalar measurement summary</p> <p>EVM or power vs carrier</p> <p>Symbol table (binary or hexadecimal)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Frequency offset analysis                              | <p>Signal analysis can be performed either at center frequency or the assigned measurement frequency up to the limits of the instrument's acquisition and measurement bandwidths.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| WLAN 802.11a/b/g/j/p measurement application (Opt. 23) | <p>WLAN Power vs time, WLAN symbol table, WLAN constellation, Spectrum emission mask</p> <p>Error vector magnitude (EVM) vs symbol (or time), vs subcarrier (or frequency)</p> <p>Mag error vs symbol (or time), vs subcarrier (or frequency)</p> <p>Phase error vs symbol (or time), vs subcarrier (or frequency)</p> <p>Channel frequency response vs symbol (or time), vs subcarrier (or frequency)</p> <p>Spectral flatness vs symbol (or time), vs subcarrier (or frequency)</p>                                                                                                                                                                                                                                                                                                            |
| WLAN 802.11n measurement application (Opt. 24)         | <p>WLAN Power vs time, WLAN symbol table, WLAN constellation, Spectrum emission mask</p> <p>Error vector magnitude (EVM) vs symbol (or time), vs subcarrier (or frequency)</p> <p>Mag error vs symbol (or time), vs subcarrier (or frequency)</p> <p>Phase error vs symbol (or time), vs subcarrier (or frequency)</p> <p>Channel frequency response vs symbol (or time), vs subcarrier (or frequency)</p> <p>Spectral flatness vs symbol (or time), vs subcarrier (or frequency)</p>                                                                                                                                                                                                                                                                                                            |
| WLAN 802.11ac measurement application (Opt. 25)        | <p>WLAN Power vs time, WLAN symbol table, WLAN constellation, Spectrum emission mask</p> <p>Error vector magnitude (EVM) vs symbol (or time), vs subcarrier (or frequency)</p> <p>Mag error vs symbol (or time), vs subcarrier (or frequency)</p> <p>Phase error vs symbol (or time), vs subcarrier (or frequency)</p> <p>Channel frequency response vs symbol (or time), vs subcarrier (or frequency)</p> <p>Spectral flatness vs symbol (or time), vs subcarrier (or frequency)</p>                                                                                                                                                                                                                                                                                                            |
| APCO P25 measurement application (Opt. 26)             | <p>RF output power, operating frequency accuracy, modulation emission spectrum, unwanted emissions spurious, adjacent channel power ratio, frequency deviation, modulation fidelity, frequency error, eye diagram, symbol table, symbol rate accuracy, transmitter power and encoder attack time, transmitter throughput delay, frequency deviation vs. time, power vs. time, transient frequency behavior, HCPM transmitter logical channel peak adjacent channel power ratio, HCPM transmitter logical channel off slot power, HCPM transmitter logical channel power envelope, HCPM transmitter logical channel time alignment, cross-correlated markers</p>                                                                                                                                  |
| Bluetooth Measurements (Opt. 27 and Opt. 31)           | <p>Peak power, average power, adjacent channel power or inband emission mask, -20dB bandwidth, frequency error, modulation characteristics including <math>\Delta F1_{avg}</math> (11110000), <math>\Delta F2_{avg}</math> (10101010), <math>\Delta F2 &gt; 115</math> kHz, <math>\Delta F2/\Delta F1</math> ratio, frequency deviation vs. time with packet and octet level measurement information, carrier frequency <math>f_0</math>, frequency offset (Preamble and Payload), max frequency offset, frequency drift <math>f_1-f_0</math>, max drift rate <math>f_n-f_0</math> and <math>f_n-f_{n-5}</math>, center frequency offset table and frequency drift table, color-coded symbol table, packet header decoding information, eye diagram, constellation diagram, editable limits.</p> |

## Displays and measurements

|                                                       |                                                                                                                                                                                                                                                                           |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LTE Downlink RF measurements (Opt. 28)</b>         | Adjacent Channel Leakage Ratio (ACLR), Spectrum Emission Mask (SEM), Channel Power, Occupied Bandwidth, Power vs. Time displaying Transmitter OFF power for TDD signals and LTE constellation diagram for PSS, SSS with Cell ID, Group ID, Sector ID and Frequency Error. |
| <b>EMC pre-compliance and troubleshooting Opt. 32</b> | EMC-EMI display, Pre-compliance Setup Wizard, Measure Ambient, Re-measure Spot, Report. Troubleshooting tools: Inspect, Harmonic Markers, Level Target, Compare Traces, Persistence display                                                                               |

## Bandwidth related

### Resolution bandwidth

|                                                       |                                                                                                                                               |
|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Resolution bandwidth range (spectrum analysis)</b> | 0.1 Hz to 5 MHz (10 MHz with Opt. B85, 20 MHz with Opt. B16x) (1, 2, 3, 5 sequence, Auto-coupled), or user selected (arbitrary)               |
| <b>Resolution bandwidth shape</b>                     | Approximately Gaussian, shape factor 4.1:1 (60:3 dB) $\pm 3\%$ , typical                                                                      |
| <b>Resolution bandwidth accuracy</b>                  | $\pm 0.5\%$ (Auto-coupled RBW mode)                                                                                                           |
| <b>Alternative resolution bandwidth types</b>         | Kaiser window (RBW, Gaussian), -6 dB mil, CISPR, Blackman-Harris 4B window, Uniform (none) window, Flat-top (CW ampl.) window, Hanning window |

### Video bandwidth

|                              |                               |
|------------------------------|-------------------------------|
| <b>Video bandwidth range</b> | 1 Hz to 10 MHz plus wide open |
| <b>RBW/VBW maximum</b>       | 10,000:1                      |
| <b>RBW/VBW minimum</b>       | 1:1 plus wide open            |
| <b>Resolution</b>            | 5% of entered value           |
| <b>Accuracy (typical)</b>    | $\pm 10\%$                    |

### Time domain bandwidth (amplitude vs time display)

|                                       |                                                                                                                                                                  |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Time domain bandwidth range</b>    | At least 1/10 to 1/10,000 of acquisition bandwidth, 1 Hz minimum                                                                                                 |
| <b>Time domain BW shape</b>           | 20 MHz (60 MHz, Opt. B85/B16x), shape factor $< 2.5:1$ (60:3 dB) typical                                                                                         |
| <b>Time domain bandwidth accuracy</b> | $\leq 10$ MHz, approximately Gaussian, shape factor 4.1:1 (60:3 dB), $\pm 10\%$ typical<br>1 Hz to 20 MHz, and ( $> 20$ MHz to 60 MHz Opt. B85/B16x), $\pm 10\%$ |

### Minimum settable spectrum analysis RBW vs. span

| Frequency span         | RBW    |
|------------------------|--------|
| $> 10$ MHz             | 100 Hz |
| $> 1.25$ MHz to 10 MHz | 10 Hz  |
| $\leq 1$ MHz           | 1 Hz   |
| $\leq 100$ kHz         | 0.1 Hz |

## Spectrum display

| Traces                                                            | Three traces + 1 math waveform + 1 trace from spectrogram for spectrum display                                                                                                                                                            |                       |                    |     |      |      |      |      |       |      |       |
|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------------|-----|------|------|------|------|-------|------|-------|
| Detector                                                          | Peak, –Peak, Average (VRMS), ±Peak, Sample, CISPR (Avg, Peak, Quasi-peak average (of logs))                                                                                                                                               |                       |                    |     |      |      |      |      |       |      |       |
| Trace functions                                                   | Normal, Average, Max hold, Min hold, Average (of logs)                                                                                                                                                                                    |                       |                    |     |      |      |      |      |       |      |       |
| Spectrum trace length                                             | 801, 2401, 4001, 8001, 10401, 16001, 32001, 64001 points                                                                                                                                                                                  |                       |                    |     |      |      |      |      |       |      |       |
| Sweep speed (typical-mean)                                        | RBW = auto, RF/IF optimization: minimize sweep time                                                                                                                                                                                       |                       |                    |     |      |      |      |      |       |      |       |
| Opt. B25                                                          | 2000 MHz/s                                                                                                                                                                                                                                |                       |                    |     |      |      |      |      |       |      |       |
| Opt. B40                                                          | 3300 MHz/s                                                                                                                                                                                                                                |                       |                    |     |      |      |      |      |       |      |       |
| Opt. B85                                                          | 8000 MHz/s (RSA5103B/RSA5106B)                                                                                                                                                                                                            |                       |                    |     |      |      |      |      |       |      |       |
|                                                                   | 6000 MHz/s (RSA5115B/RSA5126B)                                                                                                                                                                                                            |                       |                    |     |      |      |      |      |       |      |       |
| Opt. B16x                                                         | 11000 MHz/s (RSA5103B/RSA5106B)                                                                                                                                                                                                           |                       |                    |     |      |      |      |      |       |      |       |
|                                                                   | 8000 MHz/s (RSA5115B/RSA5126B)                                                                                                                                                                                                            |                       |                    |     |      |      |      |      |       |      |       |
| Minimum FFT Length vs. Trace Length (Independent of Span and RBW) | <table> <tr> <th>Trace length (points)</th><th>Minimum FFT length</th></tr> <tr> <td>801</td><td>4001</td></tr> <tr> <td>1024</td><td>8192</td></tr> <tr> <td>2401</td><td>10401</td></tr> <tr> <td>4096</td><td>16384</td></tr> </table> | Trace length (points) | Minimum FFT length | 801 | 4001 | 1024 | 8192 | 2401 | 10401 | 4096 | 16384 |
| Trace length (points)                                             | Minimum FFT length                                                                                                                                                                                                                        |                       |                    |     |      |      |      |      |       |      |       |
| 801                                                               | 4001                                                                                                                                                                                                                                      |                       |                    |     |      |      |      |      |       |      |       |
| 1024                                                              | 8192                                                                                                                                                                                                                                      |                       |                    |     |      |      |      |      |       |      |       |
| 2401                                                              | 10401                                                                                                                                                                                                                                     |                       |                    |     |      |      |      |      |       |      |       |
| 4096                                                              | 16384                                                                                                                                                                                                                                     |                       |                    |     |      |      |      |      |       |      |       |

## DPX related

DPX® digital phosphor spectrum processing

| Characteristic                                                                      | Performance                                                                                                                                                    |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Spectrum processing rate (RBW = auto, trace length 801)                             | 390,625 per second                                                                                                                                             |
| Spectrum processing rate (RBW = auto, trace length 801) (Option 300 with Option 09) | 3,125,000 per second for Span/RBW ratio ≤ 333<br>390,625 per second for Span/RBW ratio > 333                                                                   |
| DPX bitmap resolution                                                               | 201 × 801                                                                                                                                                      |
| DPX bitmap color dynamic range                                                      | 2 <sup>33</sup> levels                                                                                                                                         |
| Marker information                                                                  | Amplitude, frequency, and signal density on the DPX display                                                                                                    |
| Minimum signal duration for 100% probability of detection (Max-hold on)             | See minimum signal duration for 100% probability of trigger at 100% amplitude table                                                                            |
| Span Range (Continuous processing)                                                  | 100 Hz to 25 MHz (Opt. B25)<br>(40 MHz with Opt. B40)<br>(85 MHz with Opt. B85, B85HD)<br>(125 MHz with Opt. B125, B125HD)<br>(165 MHz with Opt. B16x, B16xHD) |
| Span range (Swept)                                                                  | Up to instrument frequency range                                                                                                                               |
| Dwell time per step                                                                 | 50 ms to 100 s                                                                                                                                                 |
| Trace processing                                                                    | Color-graded bitmap, +Peak, –Peak, average                                                                                                                     |
| Trace length                                                                        | 801, 2401, 4001, 10401                                                                                                                                         |
| Resolution BW accuracy (Auto-Coupled)                                               | ±0.5%                                                                                                                                                          |

## DPX related

Resolution BW Range vs.  
Acquisition Bandwidth (DPX®)

| Acquisition bandwidth | RBW (Min) | RBW (Max) |
|-----------------------|-----------|-----------|
| 165 MHz               | 25 kHz    | 20 MHz    |
| 85 MHz                | 12.9 kHz  | 10 MHz    |
| 40 MHz                | 6.06 kHz  | 10 MHz    |
| 25 MHz                | 3.79 kHz  | 3.8 MHz   |
| 20 MHz                | 3.04 kHz  | 3.04 MHz  |
| 10 MHz                | 1.52 kHz  | 1.52 MHz  |
| 5 MHz                 | 758 Hz    | 760 kHz   |
| 2 MHz                 | 303 Hz    | 304 kHz   |
| 1 MHz                 | 152 Hz    | 152 kHz   |
| 500 kHz               | 75.8 Hz   | 76 kHz    |
| 200 kHz               | 30.3 Hz   | 30.4 kHz  |
| 100 kHz               | 15.2 Hz   | 15.2 kHz  |
| 50 kHz                | 7.58 Hz   | 7.6 kHz   |
| 20 kHz                | 3.03 Hz   | 3.04 kHz  |
| 10 kHz                | 1.52 Hz   | 1.52 kHz  |
| 5 kHz                 | 758 Hz    | 760 Hz    |
| 2 kHz                 | 0.303 Hz  | 304 Hz    |
| 1 kHz                 | 0.152 Hz  | 152 Hz    |
| 500 Hz                | 0.1 Hz    | 76 Hz     |
| 200 Hz                | 0.1 Hz    | 30.4 Hz   |
| 100 Hz                | 0.1 Hz    | 15.2 Hz   |

## Stability

Residual FM <2 Hz<sub>p-p</sub> in 1 second (95% confidence, typical).

## Phase related


Phase noise sidebands dBc/Hz at specified center frequency (CF)

|         | CF = 10 MHz | CF = 1 GHz   | CF = 2 GHz | CF = 6 GHz | CF = 10 GHz | CF = 20 GHz |
|---------|-------------|--------------|------------|------------|-------------|-------------|
| Offset  | Typical     | Spec/Typical | Typical    | Typical    | Typical     | Typical     |
| 1 kHz   | -128        | -103/-107    | -107       | -104       | -99         | -95         |
| 10 kHz  | -134        | -109/-113    | -112       | -108       | -108        | -106        |
| 100 kHz | -134        | -112/-117    | -115       | -114       | -108        | -106        |
| 1 MHz   | -135        | -130/-139    | -137       | -135       | -128        | -125        |
| 6 MHz   | -140        | -137/-146    | -142       | -147       | -145        | -140        |
| 10 MHz  | NA          | -137/-146    | -142       | -147       | -147        | -144        |

Phase related

| Integrated phase (RMS), typical | Integrated from 1 kHz to 10 MHz. |
|---------------------------------|----------------------------------|
| Measurement frequency           | Integrated phase, radians        |
| 1 GHz                           | $1.01 \times 10^{-3}$            |
| 2 GHz                           | $1.23 \times 10^{-3}$            |
| 6 GHz                           | $1.51 \times 10^{-3}$            |
| 10 GHz                          | $2.51 \times 10^{-3}$            |
| 20 GHz                          | $3.27 \times 10^{-3}$            |

Typical phase noise performance as measured by Opt. 11.

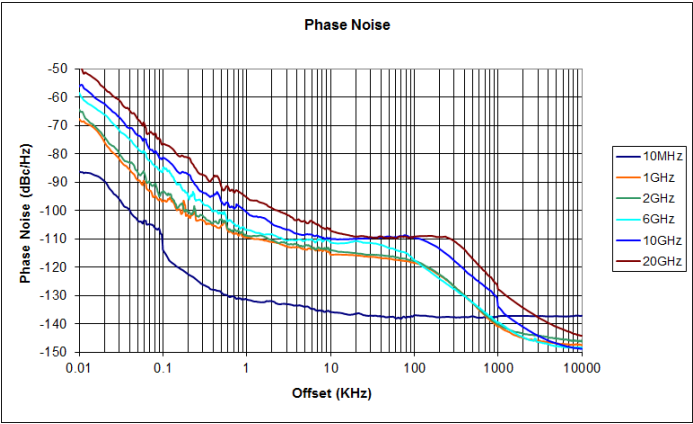

Amplitude

Specifications excluding mismatch error

|                                     |                                                                             |
|-------------------------------------|-----------------------------------------------------------------------------|
| Measurement range                   | Displayed average noise level to maximum measurable input                   |
| Input attenuator range              | 0 dB to 55 dB, 5 dB step                                                    |
| Maximum safe input level            |                                                                             |
| Average continuous                  | +30 dBm (RF ATT ≥10 dB, preamp off)                                         |
| Average continuous                  | +20 dBm (RF ATT ≥10 dB, preamp on)                                          |
| Pulsed RF                           | 50 W (RF ATT ≥30 dB, PW <10 μs, 1% duty cycle)                              |
| Maximum measurable input level      |                                                                             |
| Average continuous                  | +30 dBm (RF ATT: Auto)                                                      |
| Pulsed RF                           | 10 W (RF Input, RF ATT: Auto, PW <10 μs, 1% duty cycle repetitive pulses)   |
| Max DC voltage                      | ±5 V                                                                        |
| Log display range                   | 0.01 dBm/div to 20 dB/div                                                   |
| Display divisions                   | 10 divisions                                                                |
| Display units                       | dBm, dBmV, Watts, Volts, Amps, dBuW, dBuV, dBuA, dBW, dBV, dBV/m, and dBA/m |
| Marker readout resolution, dB units | 0.01 dB                                                                     |

**Amplitude**

|                                        |                                                                                           |
|----------------------------------------|-------------------------------------------------------------------------------------------|
| Marker readout resolution, Volts units | Reference-level dependent, as small as 0.001 $\mu$ V                                      |
| Reference level setting range          | 0.1 dB step, -170 dBm to +50 dBm (minimum ref. level -50 dBm at center frequency <80 MHz) |
| Level linearity                        | $\pm 0.1$ dB (0 to -70 dB from reference level)                                           |

**Amplitude accuracy**

|                                                  |                                                                       |
|--------------------------------------------------|-----------------------------------------------------------------------|
| Absolute amplitude accuracy at calibration point | $\pm 0.31$ dB (100 MHz, -10 dBm signal, 10 dB ATT, 18 °C to 28 °C)    |
| Input attenuator switching uncertainty           | $\pm 0.3$ dB (RSA5103B/RSA5106B)<br>$\pm 0.15$ dB (RSA5115B/RSA5126B) |

**Absolute amplitude accuracy at center frequency, 95% confidence<sup>6</sup>**

|                                     |               |
|-------------------------------------|---------------|
| 10 MHz to 3 GHz                     | $\pm 0.3$ dB  |
| 3 GHz to 6.2 GHz (RSA5106B/15B/26B) | $\pm 0.5$ dB  |
| 6.2 GHz to 15 GHz (RSA5115B/26B)    | $\pm 0.75$ dB |
| 15 GHz to 26.5 GHz (RSA5126B)       | $\pm 0.9$ dB  |

<sup>6</sup> 18 °C to 28 °C, Ref Level  $\leq$  -15 dBm, Attenuator Auto-coupled, Signal Level -15 dBm to -50 dBm. 10 Hz  $\leq$  RBW  $\leq$  1 MHz, after alignment performed.

## Amplitude accuracy

VSWR

| Typical                          |                             |                     |                                       |
|----------------------------------|-----------------------------|---------------------|---------------------------------------|
| RSA5103B / RSA5106B <sup>7</sup> |                             |                     |                                       |
| Frequency range                  | Preamp OFF (95% confidence) | Preamp ON (Typical) | Preamp ON, 0 dB attenuation (Typical) |
| >10 kHz to 10 MHz                | <1.6                        | --                  | --                                    |
| >10 MHz to 2.0 GHz               | <1.1                        | <1.2                | <1.5                                  |
| >2 GHz to 3 GHz                  | <1.25                       | <1.4                | <1.6                                  |
| >3 GHz to 5 GHz                  | <1.25                       | <1.4                | <1.4                                  |
| >5 GHz to 5.5 GHz                | <1.3                        | <1.4                | <1.4                                  |
| >5.5 GHz to 6.2GHz               | <1.3                        | <1.4                | <1.75                                 |

| Typical                          |                             |                     |                                       |
|----------------------------------|-----------------------------|---------------------|---------------------------------------|
| RSA5115B / RSA5126B <sup>7</sup> |                             |                     |                                       |
| Frequency range                  | Preamp OFF (95% confidence) | Preamp ON (Typical) | Preamp ON, 0 dB attenuation (Typical) |
| >10 kHz to 10 MHz                | <1.6                        | --                  | --                                    |
| 10 MHz to 3.0 GHz                | <1.3                        | <1.4                | <1.9                                  |
| >3.0 GHz to 6.2 GHz              | <1.3                        | <1.5                | <1.9                                  |
| >6.2 GHz to 11 GHz               | <1.5                        | <1.8                | <1.9 (RSA5115B)<br><2.25 (RSA5126B)   |
| >11 GHz to 15 GHz                | <1.5                        | <1.8                | <1.9                                  |
| >15 GHz to 22 GHz                | <1.5                        | <1.8                | <1.9                                  |
| >22 GHz to 25 GHz                | <1.7                        | <2.0                | <1.9                                  |
| >25 GHz to 26.5 GHz              | <1.7                        | <2.0                | <2.1                                  |

## Frequency response

18 °C to 28 °C, atten. = 10 dB,  
preamp off

|                                |          |
|--------------------------------|----------|
| 10 MHz to 32 MHz (LF band)     | ±0.2 dB  |
| 10 MHz to 3 GHz                | ±0.35 dB |
| >3 GHz to 6.2 GHz (RSA5106B)   | ±0.5 dB  |
| >6.2 GHz to 15 GHz (RSA5115B)  | ±1.0 dB  |
| >15 GHz to 26.5 GHz (RSA5115B) | ±1.2 dB  |

5 °C to 40 °C, all attenuator  
settings (typical, preamp off)

|                               |         |
|-------------------------------|---------|
| 100 Hz to 32 MHz (LF band)    | ±0.8 dB |
| 9 kHz to 3 GHz                | ±0.5 dB |
| 1 MHz to 3 GHz (RSA5115B/26B) | ±0.5 dB |
| >3 GHz to 6.2 GHz (RSA5106B)  | ±1.0 dB |

<sup>7</sup> Atten. = 10 dB, CF set within 200 MHz of VSWR frequency

## Frequency response

|                                      |         |
|--------------------------------------|---------|
| >6.2 GHz to 15 GHz<br>(RSA5115B/26B) | ±1.0 dB |
| >15 GHz to 26.5 GHz<br>(RSA5126B)    | ±1.5 dB |

5 °C to 40 °C, (RSA5103B/  
RSA5106B Opt. 50) (typical,  
preamp on, atten.=10 dB)

|                              |         |
|------------------------------|---------|
| 1 MHz to 32 MHz (LF band)    | ±0.8 dB |
| 1 MHz to 3 GHz               | ±0.8 dB |
| >3 GHz to 6.2 GHz (RSA5106B) | ±1.3 dB |

5 °C to 40 °C, (RSA5115B /  
RSA5126B Opt. 51) (typical,  
preamp on, atten.=10 dB)

|                                   |         |
|-----------------------------------|---------|
| 1 MHz to 3 GHz                    | ±0.8 dB |
| >3 GHz to 6.2 GHz                 | ±1.3 dB |
| >6.2 GHz to 15 GHz                | ±1.5 dB |
| >15 GHz to 26.5 GHz<br>(RSA5126B) | ±2.0 dB |

## Noise and distortion

3<sup>rd</sup> order intermodulation  
distortion at 2.13 GHz <sup>8</sup>

|                     |         |
|---------------------|---------|
| RSA5103B / RSA5106B | –84 dBc |
| RSA5115B / RSA5126B | –80 dBc |

3<sup>rd</sup> order intermodulation  
distortion – typical <sup>9</sup>

**Note:** 3<sup>rd</sup> order intercept point is calculated from 3<sup>rd</sup> order intermodulation performance.

| Frequency range               | 3 <sup>rd</sup> order intermodulation distortion, dBc<br>(typical) |                | 3 <sup>rd</sup> order intercept, dBm (typical) |                |
|-------------------------------|--------------------------------------------------------------------|----------------|------------------------------------------------|----------------|
|                               | RSA5103B/5106B                                                     | RSA5115B/5126B | RSA5103B/5106B                                 | RSA5115B/5126B |
| 10 kHz to 32 MHz<br>(LF band) | –75                                                                | –75            | +12.5                                          | +12.5          |
| 1 MHz to 120 MHz              | –70                                                                | –70            | +10                                            | +10            |
| >80 MHz to 300 MHz            | –76                                                                | –76            | +13                                            | +13            |
| >300 MHz to 6.2 GHz           | –84                                                                | –82            | +17                                            | +16            |
| >6.2 GHz to 15 GHz            | --                                                                 | –72            | --                                             | +11            |
| 15 GHz to 26.5 GHz            | --                                                                 | –72            | --                                             | +11            |

<sup>8</sup> Each signal level –25 dBm, Ref level –20 dBm, Attenuator = 0 dB, 1 MHz tone separation.

<sup>9</sup> Each signal level –25 dBm, Ref level –20 dBm, Attenuator = 0 dB, 1 MHz tone separation.

## Noise and distortion

3rd order intermodulation distortion (preamp ON) – typical <sup>10</sup>

Note: 3rd order intercept point is calculated from 3rd order intermodulation performance.

| Frequency range           | 3rd order intermodulation distortion, dBc (typical) |                | 3rd order intercept, dBm (typical) |                |
|---------------------------|-----------------------------------------------------|----------------|------------------------------------|----------------|
|                           | RSA5103B/5106B                                      | RSA5115B/5126B | RSA5103B/5106B                     | RSA5115B/5126B |
| 1 MHz to 32 MHz (LF band) | -75                                                 | -75            | -12.5                              | -12.5          |
| 1 MHz to 120 MHz          | -70                                                 | -80            | -15                                | -10            |
| >120 MHz to 300 MHz       | -75                                                 | -80            | -12.5                              | -10            |
| >300 MHz to 3.0 GHz       | -80                                                 | -90            | -10                                | -5             |
| >3.0 GHz to 6.2 GHz       | -90                                                 | -90            | -5                                 | -5             |
| >6.2 GHz to 15 GHz        | --                                                  | -80            | --                                 | -10            |
| >15 GHz to 126.5 GHz      | --                                                  | -80            | --                                 | -10            |

RSA5103B / RSA5106B 2<sup>nd</sup> harmonic distortion <sup>11</sup>

|                   |           |
|-------------------|-----------|
| 10 MHz to 1 GHz   | < -80 dBc |
| >1 GHz to 3.1 GHz | < -83 dBc |

RSA5115B / RSA5126B 2<sup>nd</sup> harmonic distortion <sup>12</sup>

|                       |           |
|-----------------------|-----------|
| 10 MHz to 500 MHz     | < -80 dBc |
| >500 MHz to 1 GHz     | < -74 dBc |
| >1 GHz to 3.1 GHz     | < -74 dBc |
| >3.1 GHz to 7.5 GHz   | < -85 dBc |
| >7.5 GHz to 13.25 GHz | < -85 dBc |

RSA5103B / RSA5106B displayed average noise level <sup>13</sup>, preamp off

| Frequency range              | Spec, dBm/Hz | Typical, dBm/Hz |
|------------------------------|--------------|-----------------|
| LF Band (all models)         |              |                 |
| 1 Hz to 100 Hz               | --           | -129            |
| >100 Hz to 2 kHz             | -124         | -143            |
| >2 kHz to 10 kHz             | -141         | -152            |
| >10 kHz to 32 MHz            | -150         | -153            |
| RF band                      |              |                 |
| 9 kHz to 1 MHz               | -108         | -111            |
| >1 MHz to 10 MHz             | -136         | -139            |
| >10 MHz to 2 GHz             | -153         | -157            |
| >2 GHz to 3 GHz              | -152         | -156            |
| >3 GHz to 4 GHz (RSA5106B)   | -151         | -155            |
| >4 GHz to 6.2 GHz (RSA5106B) | -149         | -153            |

<sup>10</sup> Each signal level -25 dBm, Ref level -20 dBm, Attenuator = 0 dB, 1 MHz tone separation.

<sup>11</sup> -40 dBm at RF input, attenuator = 0, preamp off, typical

<sup>12</sup> -40 dBm at RF input, attenuator = 0, preamp off, typical

<sup>13</sup> Measured using 1 kHz RBW, 100 kHz span, 100 averages, minimum noise mode, input terminated, log-average detector and trace function.

## Noise and distortion

RSA5115B / RSA5126B displayed  
average noise level, preamp off <sup>14</sup>

| Frequency range                | Spec, dBm/Hz | Typical , dBm/Hz |
|--------------------------------|--------------|------------------|
| LF Band (all models)           |              |                  |
| 1 Hz to 100 Hz                 |              | -129             |
| >100 Hz to 2 kHz               | -124         | -143             |
| >2 kHz to 10 kHz               | -141         | -152             |
| >10 kHz to 32 MHz              | -150         | -153             |
| RF band                        |              |                  |
| >1 MHz to 10 MHz               | -136         | -139             |
| >10 MHz to 3 GHz               | -152         | -155             |
| >3 GHz to 4 GHz                | -151         | -155             |
| >4 GHz to 6.2 GHz              | -149         | -152             |
| >6.2 GHz to 13 GHz             | -146         | -149             |
| >13 GHz to 23 GHz              | -144         | -147             |
| >23 GHz to 26.5 GHz (RSA5126B) | -140         | -143             |

### Preamplifier performance (Opt. 50)

|                       |                                        |
|-----------------------|----------------------------------------|
| Frequency range       | 1 MHz to 3.0 GHz or 6.2 GHz (RSA5106B) |
| Noise figure at 2 GHz | 7 dB                                   |
| Gain at 2 GHz         | 20 dB (nominal)                        |

### Preamplifier performance (Opt. 51)

|                          |                                                    |
|--------------------------|----------------------------------------------------|
| Frequency range          | 1 MHz to 15 GHz or 26.5 GHz (RSA5115B or RSA5126B) |
| Noise figure at 15 GHz   | <10 dB                                             |
| Noise figure at 26.5 GHz | <13 dB                                             |
| Gain at 10 GHz           | 20 dB (nominal)                                    |

Displayed Average Noise Level <sup>15</sup>,  
preamp on (Opt. 50)

| Frequency range              | Specification | Typical     |
|------------------------------|---------------|-------------|
| LF band                      |               |             |
| 1 MHz to 32 MHz              | -158 dBm/Hz   | -160 dBm/Hz |
| RF band                      |               |             |
| 1 MHz to 10 MHz              | -158 dBm/Hz   | -160 dBm/Hz |
| >10 MHz to 2 GHz             | -164 dBm/Hz   | -167 dBm/Hz |
| >2 GHz to 3 GHz              | -163 dBm/Hz   | -165 dBm/Hz |
| >3 GHz to 6.2 GHz (RSA5106B) | -162 dBm/Hz   | -164 dBm/Hz |

<sup>14</sup> Measured using 1 kHz RBW, 100 kHz span, 100 averages, minimum noise mode, input terminated, log-average detector and trace function.

<sup>15</sup> Measured using 1 kHz RBW, 100 kHz span, 100 averages, minimum noise mode, input terminated, log-average trace detector and function.

## Noise and distortion

Displayed average noise level<sup>16</sup>,  
preamp on (Opt. 51)

| Frequency range     | Specification | Typical     |
|---------------------|---------------|-------------|
| RF band             |               |             |
| 1 MHz to 10 MHz     | –158 dBm/Hz   | –160 dBm/Hz |
| >10 MHz to 2 GHz    | –164 dBm/Hz   | –167 dBm/Hz |
| >2 GHz to 3 GHz     | –163 dBm/Hz   | –165 dBm/Hz |
| >3 GHz to 4 GHz     | –160 dBm/Hz   | –163 dBm/Hz |
| >4 GHz to 6.2 GHz   | –159 dBm/Hz   | –162 dBm/Hz |
| >6.2 GHz to 13 GHz  | –159 dBm/Hz   | –162 dBm/Hz |
| >13 GHz to 23 GHz   | –157 dBm/Hz   | –160 dBm/Hz |
| >23 GHz to 26.5 GHz | –153 dBm/Hz   | –156 dBm/Hz |

### Residual response

Input terminated, RBW = 1 kHz, attenuator = 0 dB, reference level –30 dBm

|                                                          |                      |
|----------------------------------------------------------|----------------------|
| 500 kHz to 32 MHz, LF band                               | < –100 dBm (typical) |
| 1 MHz to 80 MHz, RF band                                 | < –75 dBm (typical)  |
| >80 MHz to 200 MHz                                       | < –95 dBm (typical)  |
| >200 MHz to 3 GHz                                        | –95 dBm              |
| >3 GHz to 6.2 GHz<br>(RSA5106B / RSA5115B /<br>RSA5126B) | –95 dBm              |
| >6.2 GHz to 15 GHz<br>(RSA5115B / RSA5126B)              | –95 dBm              |
| >15 GHz to 26.5 GHz<br>(RSA5126B)                        | –95 dBm              |

### Image response, up to 165 MHz bandwidth

Ref = –30 dBm, attenuator = 10 dB, RF input level = –30 dBm, RBW = 10 Hz.

|                                             |           |
|---------------------------------------------|-----------|
| 100 Hz to 30 MHz                            | < –75 dBc |
| 30 MHz to 3 GHz                             | < –75 dBc |
| >3 GHz to 6.2 GHz (RSA5106B)                | < –70 dBc |
| >6.2 GHz to 15 GHz<br>(RSA5115B / RSA5126B) | < –76 dBc |
| >15 GHz to 26.5 GHz<br>(RSA5126B)           | < –72 dBc |

<sup>16</sup> Measured using 1 kHz RBW, 100 kHz span, 100 averages, minimum noise mode, input terminated, log-average trace detector and function.

## Noise and distortion

Spurious response with signal at CF, offset  $\geq 400$  kHz<sup>17</sup>

|                                                       | Span $\leq 25$ MHz (Opt. B25) |         | Span $\leq 40$ MHz (Opt. B40) <sup>18</sup> |         | Opt. B85/B125/B16x <sup>18</sup> |         | Opt. B85HD, B125HD, B16xHD <sup>18</sup> |
|-------------------------------------------------------|-------------------------------|---------|---------------------------------------------|---------|----------------------------------|---------|------------------------------------------|
|                                                       | Swept spans $> 25$ MHz        |         | Swept spans $> 40$ MHz                      |         | 40 MHz $<$ span $\leq 160$ MHz   |         | 40 MHz $<$ span $\leq 160$ MHz           |
| Frequency                                             | Specification                 | Typical | Specification                               | Typical | Specification                    | Typical | Typical                                  |
| 10 kHz to 32 MHz (LF band)                            | -80 dBc                       | -85 dBc | --                                          | --      | --                               | --      | --                                       |
| 30 MHz to 3 GHz                                       | -73 dBc                       | -80 dBc | -73 dBc                                     | -80 dBc | -73 dBc                          | -75 dBc | -80 dBc                                  |
| $> 3$ GHz to 6.2 GHz (RSA5106B / RSA5115B / RSA5126B) | -73 dBc                       | -80 dBc | -73 dBc                                     | -80 dBc | -73 dBc                          | -75 dBc | -80 dBc                                  |
| 6.2 GHz to 15 GHz (RSA5115B / RSA5126B)               | -70 dBc                       | -80 dBc | -70 dBc                                     | -80 dBc | -70 dBc                          | -73 dBc | -80 dBc                                  |
| 15 GHz to 26.5 GHz (RSA5126B)                         | -66 dBc                       | -76 dBc | -66 dBc                                     | -76 dBc | -66 dBc                          | -73 dBc | -76 dBc                                  |

Spurious response with signal at CF (10 kHz  $\leq$  offset  $< 400$  kHz, Span = 1 MHz)<sup>19</sup>

| Frequency                               | Typical |
|-----------------------------------------|---------|
| 10 kHz to 32 MHz (LF band)              | -75 dBc |
| 30 MHz to 3 GHz                         | -75 dBc |
| 3 GHz to 6.2 GHz (RSA5106B)             | -75 dBc |
| 6.2 GHz to 15 GHz (RSA5115B / RSA5126B) | -75 dBc |
| 15 GHz to 26.5 GHz (RSA5126B)           | -68 dBc |

Spurious response with signal at Half-IF (3.532.75 GHz)  $< -80$  dBc (RF input level, -30 dBm)

<sup>17</sup> RF input level = -15 dBm, Attenuator = 10 dB, Mode: Auto. Input signal at center frequency. Center Frequency  $> 90$  MHz, Opt. B40/B85/B16x. For acquisition bandwidth 15 - 25 MHz with signals at center frequency and at  $\pm(37.5$  MHz to 42.5 MHz): 65 dBc.

<sup>18</sup> CF  $> 150$  MHz for Opt.B40 / B85 / B16x / B85HD / B125HD / B16xHD

<sup>19</sup> RF Input Level = -15 dBm, Attenuator = 10 dB, Mode: Auto. Input signal at center frequency. Center frequency  $> 90$  MHz, Opt. B40/B85/B16x. For acquisition bandwidth 15 - 25 MHz with signals at center frequency and at  $\pm(37.5$  MHz to 42.5 MHz ): 65 dBc.

## Noise and distortion

Spurious response with signal, other than CF (typical)

| Frequency                    | Span ≤25MHz, swept spans >25MHz | Opt. B40, Span ≤40MHz, swept spans >40 MHz <sup>20</sup> | Opt. B85, 40MHz < Span ≤ 85 MHz <sup>20</sup> | Opt. B16x, 85MHz < Span ≤ 165 MHz <sup>20, 21</sup> | Opt. B85HD, B125HD, B16xHD, 40 MHz < span ≤160 MHz <sup>20</sup> |
|------------------------------|---------------------------------|----------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------|------------------------------------------------------------------|
| 1 MHz - 32 MHz (LF Band)     | -80 dBc                         | --                                                       | --                                            | --                                                  | --                                                               |
| 30 MHz - 3 GHz               | -80 dBc                         | -80 dBc                                                  | -76 dBc                                       | -73 dBc                                             | -80 dBc                                                          |
| 3 GHz - 6.2 GHz (RSA5106B)   | -80 dBc                         | -80 dBc                                                  | -76 dBc                                       | -73 dBc                                             | -80 dBc                                                          |
| 6.2 GHz - 15 GHz (RSA5115B)  | -80 dBc                         | -80 dBc                                                  | -73 dBc                                       | -73 dBc                                             | -80 dBc                                                          |
| 15 GHz - 26.5 GHz (RSA5126B) | -76 dBc                         | -76 dBc                                                  | -73 dBc                                       | -73 dBc                                             | -76 dBc                                                          |

Local oscillator feed-through to input connector (attenuator = 10 dB)

< -60 dBm (RSA5103B / RSA5106B)  
< -90 dbm (RSA5115B / RSA5126B)

Adjacent channel leakage ratio dynamic range

Measured with test signal amplitude adjusted for optimum performance (CF = 2.13 GHz)

|                               |                 | ACLR, typical |           |
|-------------------------------|-----------------|---------------|-----------|
| Signal type, measurement mode |                 | Adjacent      | Alternate |
| 3GPP downlink, 1 DPCH         |                 |               |           |
|                               | Uncorrected     | -69 dB        | -70 dB    |
|                               | Noise corrected | -75 dB        | -77 dB    |

IF frequency response and phase linearity, includes all preselection and image rejection filters <sup>22</sup>

| Measurement frequency (GHz) | Acquisition bandwidth | Amplitude flatness (Spec) | Amplitude flatness (Typ, RMS) | Phase linearity (Typ, RMS) |
|-----------------------------|-----------------------|---------------------------|-------------------------------|----------------------------|
| 0.001 to 0.032 (LF band)    | ≤20 MHz               | ±0.4 dB                   | 0.3 dB                        | 0.5°                       |
| <b>Opt. B25</b>             |                       |                           |                               |                            |
| 0.01 to 6.2 <sup>23</sup>   | ≤300 kHz              | ±0.1 dB                   | 0.05 dB                       | 0.1°                       |
| 0.03 to 6.2                 | ≤25 MHz               | ±0.3 dB                   | 0.2 dB                        | 0.5°                       |
| <b>Opt. B40</b>             |                       |                           |                               |                            |
| 0.03 to 6.2                 | ≤40 MHz               | ±0.3 dB                   | 0.2 dB                        | 0.5°                       |
| <b>Opt. B85/B85HD</b>       |                       |                           |                               |                            |
| 0.07 to 3.0                 | ≤85 MHz               | ±0.5 dB                   | 0.3 dB                        | 1.5°                       |
| >3.0 to 6.2                 | ≤85 MHz               | ±0.5 dB                   | 0.4 dB                        | 1.5°                       |
| <b>Opt. B125/B125HD</b>     |                       |                           |                               |                            |
| 0.07 to 6.2                 | ≤125 MHz              | ±1.0 dB                   | 0.70 dB                       | 1.5°                       |
| <b>Opt. B16x/B16xHD</b>     |                       |                           |                               |                            |
| 0.07 to 6.2                 | ≤165 MHz              | ±0.5 dB                   | 0.4 dB                        | 1.5°                       |

<sup>20</sup> CF ≥ 150 MHz for Opt. B40 / B85 / B125 / B16x.

<sup>21</sup> -70 dBc for input signals 20 MHz above or below instrument center frequency.

<sup>22</sup> Amplitude flatness and phase deviation over the acquisition BW, includes RF frequency response. Attenuator setting: 10 dB.

<sup>23</sup> High dynamic range mode selected.

## Noise and distortion

RSA5115B / RSA5126B IF  
frequency response and phase  
linearity

Includes all preselection and image rejection filters <sup>24</sup>

| Measurement frequency (GHz) | Span       | Amplitude flatness (Spec) | Amplitude flatness (Typ, RMS) | Phase linearity (Typ, RMS) |
|-----------------------------|------------|---------------------------|-------------------------------|----------------------------|
| 6.2 to 26.5                 | ≤300 kHz   | ±0.10 dB <sup>25</sup>    | 0.05 dB                       | 0.2°                       |
| 6.2 to 26.5                 | ≤25/40 MHz | ±0.50 dB                  | 0.40 dB                       | 1.0°                       |
| 6.2 to 26.5                 | ≤80 MHz    | ±0.75 dB                  | 0.70 dB                       | 1.5°                       |
| 6.2 to 26.5                 | ≤125 MHz   | ±1.0 dB                   | 0.70 dB                       | 1.5°                       |
| 6.2 to 26.5                 | ≤165 MHz   | ±1.0 dB                   | 0.70 dB                       | 1.5°                       |

## DPX zero-span performance

Zero-span amplitude, frequency,  
phase performance (nominal)

|                                                      |                                                                  |
|------------------------------------------------------|------------------------------------------------------------------|
| Measurement BW range                                 | 100 Hz to maximum acquisition bandwidth of instrument            |
| Time domain BW (TDBW) range                          | At least 1/10 to 1/10,000 of acquisition bandwidth, 1 Hz minimum |
| Time domain BW (TDBW) accuracy                       | ±1%                                                              |
| Sweep time range                                     | 100 ns (minimum)<br>2000 s (maximum, Measurement BW >80 MHz)     |
| Time accuracy                                        | ±(0.5% + Reference frequency accuracy)                           |
| Zero-span trigger timing uncertainty (Power trigger) | ±(Zero-span sweep time/400) at trigger point                     |
| DPX frequency display range                          | ±100 MHz maximum                                                 |
| DPX phase display range                              | ±200 degrees maximum                                             |
| DPX waveforms/s                                      | 50,000 triggered waveforms/s for sweep time ≤20 μs               |

DPX spectrogram trace detection +Peak, -Peak, Avg ( $V_{RMS}$ )

DPX spectrogram trace length 801 to 10401

DPX spectrogram memory depth  
Trace length = 801: 60,000 traces  
Trace length = 2401: 20,000 traces  
Trace length = 4001: 12,000 traces  
Trace length = 10401: 4,600 traces

Time resolution per line User settable 125 μs to 6400 s

Maximum recording time vs line resolution 7.5 seconds (801 points/trace, 125 μs/line) to 4444 days (801 points/trace, 6400 s/line)

<sup>24</sup> Amplitude flatness and phase deviation over the acquisition BW, includes RF frequency response. Attenuator setting: 10 dB.

<sup>25</sup> High dynamic range mode selected

## Digital IQ Output (Opt. 65)

|                                                       |                                                                                                                 |
|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Connector type                                        | MDR (3M) 50 pin × 2                                                                                             |
| Data output                                           | Data is corrected for amplitude and phase response in real time                                                 |
| Data format                                           | I data: 16 bit LVDS<br>Q data: 16 bit LVDS                                                                      |
| Control output                                        | Clock: LVDS, Max 50 MHz (200 MHz, Opt. B85, B16x) DV (Data valid), MSW (Most significant word) indicators, LVDS |
| Control input                                         | IQ data output enabled, connecting GND enables output of IQ data                                                |
| Clock rising edge to data transition time (Hold time) | 8.4 ns (typical, Opt. B25 or B40), 1.58 ns (typical, Opt. B85 or B16x)                                          |
| Data transition to clock rising edge (Setup time)     | 8.2 ns (typical, Opt. B25 or B40), 1.54 ns (typical, Opt. B85 or Opt. B16x)                                     |

## Zero-span analog output (Opt. 66)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General information             | Option 66 provides for a real-time analog representation of the detected output of the analyzer. This output is available when either the DPX spectrum or DPX zero span function is used in spans up to the maximum acquisition bandwidth. The bandwidth of the analog output is adjustable using the resolution bandwidth control of the DPX spectrum analyzer, or can be made independent of the spectrum analyzer. The output is "OFF" when the instrument is in swept spectrum analyzer mode, as it does not correspond to the output of the swept output |
| Connector type                  | BNC - Female                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Output impedance                | On: 50 $\Omega$ , Off: 5 k $\Omega$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Output voltage                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Typical                         | 1.0V @ 0 dBm input<br>0 dBm reference level, 10 dB/div vertical scale, measured into a 50 $\Omega$ load. Full-scale voltage is relative to reference level.                                                                                                                                                                                                                                                                                                                                                                                                   |
| Maximum                         | 1.25 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Accuracy                        | ± 5% of full-scale voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Slope                           | 10 mV/dB<br>10 dB/div vertical scale, measured into a 50 $\Omega$ load. Slope will vary with vertical scale setting.                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Output range log fidelity       | > 60 dB @ 1 GHz CF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Output log accuracy             | ± 0.75 dB within range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Output delay accuracy           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| RF Input to Analog Out          | ± (1 $\mu$ s + 10%)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Output bandwidth                | Up to maximum RBW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Continuous output               | Continuous output for spans up to the maximum real-time acquisition bandwidth of the instrument. Output is disabled for swept spans.                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Output reverse power protection | ±20 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

**AM/FM/PM and direct audio measurement (Opt. 10)****Analog demodulation**

|                                                                        |                                                             |
|------------------------------------------------------------------------|-------------------------------------------------------------|
| <b>Carrier frequency range (for modulation and audio measurements)</b> | (1/2 × audio analysis bandwidth) to maximum input frequency |
| <b>Maximum audio frequency span</b>                                    | 10 MHz                                                      |

**Audio filters**

|                         |                                                                                  |
|-------------------------|----------------------------------------------------------------------------------|
| <b>Low pass (kHz)</b>   | 0.3, 3, 15, 30, 80, 300, and user-entered up to 0.9 × audio bandwidth            |
| <b>High pass (Hz)</b>   | 20, 50, 300, 400, and user-entered up to 0.9 × audio bandwidth                   |
| <b>Standard</b>         | CCITT, C-Message                                                                 |
| <b>De-emphasis (μs)</b> | 25, 50, 75, 750, and user-entered                                                |
| <b>File</b>             | User-supplied .TXT or .CSV file of amplitude/frequency pairs. Maximum 1000 pairs |

**FM Modulation Analysis  
(Modulation Index >0.1)**

|                                                                           |                                                                                                                                                                                                                 |
|---------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FM measurements</b>                                                    | Carrier Power, Carrier Frequency Error, Audio Frequency, Deviation (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation Distortion, S/N, Total Harmonic Distortion, Total Non-harmonic Distortion, Hum and Noise |
| <b>Carrier power accuracy (10 MHz to 2 GHz, -20 to 0 dBm input power)</b> | ±0.85 dB                                                                                                                                                                                                        |
| <b>Carrier frequency accuracy (deviation: 1 to 10 kHz)</b>                | ±0.5 Hz + (transmitter frequency × reference frequency error)                                                                                                                                                   |
| <b>FM deviation accuracy (rate: 1 kHz to 1 MHz)</b>                       | ±(1% of (rate + deviation) + 50 Hz)                                                                                                                                                                             |
| <b>FM rate accuracy (deviation: 1 to 100 kHz)</b>                         | ±0.2 Hz                                                                                                                                                                                                         |

**Residuals (FM) (rate: 1 to 10 kHz, deviation: 5 kHz)**

|                   |       |
|-------------------|-------|
| <b>THD</b>        | 0.10% |
| <b>Distortion</b> | 0.7%  |
| <b>SINAD</b>      | 43 dB |

**AM modulation analysis**

|                                                                           |                                                                                                                                                                                               |
|---------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AM measurements</b>                                                    | Carrier Power, Audio Frequency, Modulation Depth (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation Distortion, S/N, Total Harmonic Distortion, Total Non-harmonic Distortion, Hum and Noise |
| <b>Carrier power accuracy (10 MHz to 2 GHz, -20 to 0 dBm input power)</b> | ±0.85 dB                                                                                                                                                                                      |
| <b>AM depth accuracy (rate: 1 to 100 kHz, depth: 10% to 90%)</b>          | ±0.2% + 0.01 × measured value                                                                                                                                                                 |
| <b>AM rate accuracy (rate: 1 kHz to 1 MHz, depth: 50%)</b>                | ±0.2 Hz                                                                                                                                                                                       |

**Residuals (AM)**

|                   |       |
|-------------------|-------|
| <b>THD</b>        | 0.16% |
| <b>Distortion</b> | 0.13% |
| <b>SINAD</b>      | 58 dB |

## AM/FM/PM and direct audio measurement (Opt. 10)

### PM modulation analysis

**PM measurements** Carrier Power, Carrier Frequency Error, Audio Frequency, Deviation (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation Distortion, S/N, Total Harmonic Distortion, Total Non-harmonic Distortion, Hum and Noise

**Carrier power accuracy**  
(10 MHz to 2 GHz, -20 to 0 dBm input power)  $\pm 0.85$  dB

**Carrier frequency accuracy**  
(deviation: 0.628 rad)  $\pm 0.02$  Hz + (transmitter frequency  $\times$  reference frequency error)

**PM deviation accuracy (rate:**  
10 to 20 kHz, deviation:  
0.628 to 6 rad)  $\pm 100\% \times (0.005 + (\text{rate} / 1 \text{ MHz}))$

**PM rate accuracy (rate: 1 to**  
10 kHz, deviation: 0.628 rad)  $\pm 0.2$  Hz

### Residuals (PM) (rate: 1 to 10 kHz, deviation: 0.628 rad)

**THD** 0.1%

**Distortion** 1%

**SINAD** 40 dB

### Direct audio input

**Audio measurements** Signal power, Audio frequency (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation distortion, S/N, Total harmonic distortion, Total non-harmonic distortion, Hum and Noise

**Direct input frequency range**  
(for audio measurements only) 1 Hz to 156 kHz

**Maximum audio frequency**  
**span** 156 kHz

**Audio frequency accuracy**  $\pm 0.2$  Hz

**Signal power accuracy**  $\pm 1.5$  dB

### Residuals (Rate: 1 to 10 kHz, Input level: 0.316 V)

**THD** 0.1%

**Distortion** 0.1%

**SINAD** 60 dB

## Phase noise and jitter measurement (Opt. 11)

**Carrier frequency range** 1 MHz to maximum instrument frequency

**Measurements** Carrier power, Frequency error, RMS phase noise, Jitter (time interval error), Residual FM

**Residual Phase Noise** See Phase noise specifications

**Phase noise and jitter integration**  
**bandwidth range** Minimum offset from carrier: 10 Hz  
Maximum offset from carrier: 1 GHz

**Number of traces** 2

**Trace and measurement functions** Detection: average or  $\pm$ Peak  
Smoothing Averaging  
Optimization: speed or dynamic range

Settling time, frequency, and phase (Opt. 12)<sup>26</sup>

## Settled frequency uncertainty

95% confidence (typical), at stated measurement frequencies, bandwidths, and # of averages

|                                 | Frequency uncertainty at stated measurement bandwidth |        |        |         |
|---------------------------------|-------------------------------------------------------|--------|--------|---------|
| Measurement frequency, averages | 85 MHz                                                | 10 MHz | 1 MHz  | 100 kHz |
| 1 GHz                           |                                                       |        |        |         |
| Single measurement              | 2 kHz                                                 | 100 Hz | 10 Hz  | 1 Hz    |
| 100 averages                    | 200 Hz                                                | 10 Hz  | 1 Hz   | 0.1 Hz  |
| 1000 averages                   | 50 Hz                                                 | 2 Hz   | 1 Hz   | 0.05 Hz |
| 10 GHz                          |                                                       |        |        |         |
| Single measurement              | 5 kHz                                                 | 100 Hz | 10 Hz  | 5 Hz    |
| 100 averages                    | 300 Hz                                                | 10 Hz  | 1 Hz   | 0.5 Hz  |
| 1000 averages                   | 100 Hz                                                | 5 Hz   | 0.5 Hz | 0.1 Hz  |
| 20 GHz                          |                                                       |        |        |         |
| Single measurement              | 2 kHz                                                 | 100 Hz | 10 Hz  | 5 Hz    |
| 100 averages                    | 200 Hz                                                | 10 Hz  | 1 Hz   | 0.5 Hz  |
| 1000 averages                   | 100 Hz                                                | 5 Hz   | 0.5 Hz | 0.2 Hz  |

## Settled phase uncertainty

95% confidence (Typical), at stated measurement frequencies, bandwidths, and # of averages

|                                 | Frequency uncertainty at stated measurement bandwidth |        |       |
|---------------------------------|-------------------------------------------------------|--------|-------|
| Measurement frequency, averages | 85 MHz                                                | 10 MHz | 1 MHz |
| 1 GHz                           |                                                       |        |       |
| Single measurement              | 1.00°                                                 | 0.50°  | 0.50° |
| 100 averages                    | 0.10°                                                 | 0.05°  | 0.05° |
| 1000 averages                   | 0.05°                                                 | 0.01°  | 0.01° |
| 10 GHz                          |                                                       |        |       |
| Single measurement              | 1.50°                                                 | 1.00°  | 0.50° |
| 100 averages                    | 0.20°                                                 | 0.10°  | 0.05° |
| 1000 averages                   | 0.10°                                                 | 0.05°  | 0.02° |
| 20 GHz                          |                                                       |        |       |
| Single measurement              | 1.00°                                                 | 0.50°  | 0.50° |
| 100 averages                    | 0.10°                                                 | 0.05°  | 0.05° |
| 1000 averages                   | 0.05°                                                 | 0.02°  | 0.02° |

<sup>26</sup> Measured input signal level > -20 dBm, Attenuator: Auto

## Gain and Noise Figure (Option 14)

|                                              |                                                                                                                                                                       |
|----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Measurements (tabular)                       | Noise Figure, Gain, Y-Factor, Noise Temperature, P-Hot, P-Cold                                                                                                        |
| Measurements (displays)                      | Noise Figure, Gain, Y-Factor, Noise Temperature, Uncertainty Calculator                                                                                               |
| Single frequency measurements                | When Single Frequency mode is selected, each display acts as a meter and single-value readout for each selected trace in the measurement                              |
| Measurement configurations                   | Direct, Up-Converter, Down-Converter                                                                                                                                  |
| Frequency modes                              | Single Frequency, Swept (Center+Span or Start-Stop), Frequency Table; 1 to 999 measurement points                                                                     |
| Noise source                                 | Constant ENR or tabular entry; entry fields for noise source model and type                                                                                           |
| Noise sources supported                      | NoiseCom NC346 series and similar models from other manufacturers                                                                                                     |
| Noise source control                         | +28 V switched output, rear panel                                                                                                                                     |
| External gain/loss tables                    | 3 tables or constants available for gain or loss                                                                                                                      |
| Measurement control settings                 | Source settling time, reference temperature, RBW(50 Hz to 10 MHz), Average count(1 to 100)                                                                            |
| Instrument input control settings            | Attenuator value, Preamp On/Off                                                                                                                                       |
| Trace controls                               | 3 traces per display: Ave( $V_{RMS}$ ), Max-hold, Min-hold trace functions                                                                                            |
| Display scaling                              | Auto or manual: Auto resets scale after each measurement                                                                                                              |
| Markers                                      | Up to 5 markers on any trace; Absolute and Delta marker functions                                                                                                     |
| Limit mask testing                           | Positive and negative limits may be applied to noise figure, gain, Y-factor traces; limits and Pass/Fail indicated on screen                                          |
| Uncertainty calculator                       | Provides noise figure and gain measurement uncertainty based on user-entered values for ENR, external preamp, external preamp, and spectrum analyzer parameters       |
| Application preset for Noise Figure and Gain | Sets the analyzer to measure Gain, Noise Figure, and the Measurement Table. Sets attenuation to zero, preamplifier ON, and acquisition mode to best for minimum noise |

| Performance | Specification                                | Description                                         |
|-------------|----------------------------------------------|-----------------------------------------------------|
|             | Frequency range                              | 10 MHz to maximum frequency of instrument (nominal) |
|             | Noise figure measurement range               | 0 to 30 dB (nominal)                                |
|             | Gain measurement range                       | -10 to 30 dB (nominal)                              |
|             | Noise figure and gain measurement resolution | 0.01 dB (nominal)                                   |
|             | Noise figure measurement error               | $\pm 0.1$ dB (typical) <sup>27</sup>                |
|             | Gain measurement error                       | $\pm 0.1$ dB (typical) <sup>27</sup>                |

**Note:** These conditions for Noise Figure and Gain specifications apply: Operating temperature 18 to 28 deg. C, after 20 minute warmup with internal preamp ON, immediately after internal alignment. Specified error includes only the error of the spectrum analyzer. Uncertainty from errors in ENR source level, external amplifier gain, low SN ratio and measurement system mismatch are not included, and can all be estimated using the uncertainty calculator included in the software.

<sup>27</sup> For (ENR of noise source) > (measured noise figure + 4 dB)

## Pulse measurements (Opt. 20)

|                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Measurements</b>                      | Average on power, Peak power, Average transmitted power, Pulse width, Rise time, Fall time, Repetition interval (seconds), Repetition rate (Hz), Duty factor (%), Duty factor (ratio), Ripple (dB), Ripple (%), Droop (dB), Droop (%), Overshoot (dB), Overshoot (%), Pulse frequency, Delta frequency, Pulse-Ref Pulse frequency difference, Pulse-Ref Pulse Phase difference, Pulse-Pulse frequency difference, Pulse-Pulse phase difference, RMS frequency error, Max frequency error, RMS phase error, Max phase error, Frequency deviation, Phase deviation, Impulse response (dB), Impulse response (time), Time stamp |
| <b>Minimum pulse width for detection</b> | 150 ns (Opt. B25/B40), 50 ns (Opt. B85/B16x)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Number of pulses</b> <sup>28</sup>    | 1 to 200,000; offline analysis of more than 40,000 continuous pulses is recommended using fast frame mode and fast save option                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>System rise time (typical)</b>        | <40 ns (Opt. B25), <25 ns (Opt. B40), <12 ns (Opt. B85), <7 ns (Opt. B16x)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Pulse measurement accuracy</b>        | Signal conditions: Unless otherwise stated, Pulse width >450 ns (150 ns, Opt. B85/B16x), S/N Ratio ≥30 dB, Duty cycle 0.5 to 0.001, Temperature 18 °C to 28 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Impulse response</b>                  | Measurement range: 15 to 40 dB across the width of the chirp<br>Measurement accuracy (typical): ±2 dB for a signal 40 dB in amplitude and delayed 1% to 40% of the pulse chirp width <sup>29</sup>                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Impulse response weighting</b>        | Taylor window                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

## Pulse measurement performance

### Pulse amplitude and timing (typical)

|                                                |                                       |
|------------------------------------------------|---------------------------------------|
| <b>Average on power</b> <sup>30</sup>          | ±0.3 dB + Absolute amplitude accuracy |
| <b>Average transmitted power</b> <sup>30</sup> | ±0.4 dB + Absolute amplitude accuracy |
| <b>Peak power</b> <sup>30</sup>                | ±0.4 dB + Absolute amplitude accuracy |
| <b>Pulse width</b>                             | ±0.25% of reading                     |
| <b>Duty factor</b>                             | ±0.2% of reading                      |

<sup>28</sup> Actual number depends on time length, pulse bandwidth and instrument configuration.

<sup>29</sup> Chirp width 100 MHz, pulse width 10 µs, minimum signal delay 1% of pulse width or 10/(chirp bandwidth), whichever is greater, and minimum 2000 sample points during pulse on-time.

<sup>30</sup> Pulse width >300 ns (100 ns, Opt. B85/B16x) SNR ≥30 dB

## Pulse measurement performance

Frequency and phase error  
referenced to nonchirped signal

At stated frequencies and measurement bandwidths <sup>31</sup>, typical, 95% confidence

| Bandwidth | CF     | RMS frequency error | Pulse to pulse frequency | Pulse to pulse delta frequency | Pulse to pulse phase |
|-----------|--------|---------------------|--------------------------|--------------------------------|----------------------|
| 25 MHz    | 2 GHz  | ±2.5 kHz            | ±15 kHz                  | ±500 Hz                        | ±0.2°                |
|           | 10 GHz | ±2.5 kHz            | ±20 kHz                  | ±1.5 kHz                       | ±0.5°                |
|           | 20 GHz | ±3.5 kHz            | ±25 kHz                  | ±2 kHz                         | ±0.8°                |
| 40 MHz    | 2 GHz  | ±3.5 kHz            | ±20 kHz                  | ±1 kHz                         | ±0.2°                |
|           | 10 GHz | ±5 kHz              | ±30 kHz                  | ±2 kHz                         | ±0.5°                |
|           | 20 GHz | ±7.5 kHz            | ±40 kHz                  | ±3 kHz                         | ±0.8°                |
| 60 MHz    | 2 GHz  | ±8 kHz              | ±50 kHz                  | ±1.5 kHz                       | ±0.3°                |
|           | 10 GHz | ±15 kHz             | ±75 kHz                  | ±3 kHz                         | ±0.5°                |
|           | 20 GHz | ±20 kHz             | ±100 kHz                 | ±4 kHz                         | ±0.8°                |
| 85 MHz    | 2 GHz  | ±15 kHz             | ±100 kHz                 | ±2 kHz                         | ±0.3°                |
|           | 10 GHz | ±20 kHz             | ±125 kHz                 | ±3 kHz                         | ±0.5°                |
|           | 20 GHz | ±25 kHz             | ±175 kHz                 | ±4 kHz                         | ±0.8°                |
| 160 MHz   | 2 GHz  | ±20 kHz             | ±100 kHz                 | ±4.5 kHz                       | ±0.3°                |
|           | 10 GHz | ±25 kHz             | ±125 kHz                 | ±6 kHz                         | ±0.5°                |
|           | 20 GHz | ±40 kHz             | ±175 kHz                 | ±8 kHz                         | ±0.8°                |

Frequency and phase error  
referenced to a linear chirp

At stated frequencies and measurement bandwidths <sup>32</sup>, typical

| Bandwidth | CF     | RMS frequency error | Pulse to pulse frequency | Pulse to pulse phase |
|-----------|--------|---------------------|--------------------------|----------------------|
| 25 MHz    | 2 GHz  | ±5 kHz              | ±15 kHz                  | ±0.25°               |
|           | 10 GHz | ±8 kHz              | ±20 kHz                  | ±0.5°                |
|           | 20 GHz | ±10 kHz             | ±25 kHz                  | ±0.8°                |
| 40 MHz    | 2 GHz  | ±5 kHz              | ±20 kHz                  | ±0.25°               |
|           | 10 GHz | ±8 kHz              | ±30 kHz                  | ±0.5°                |
|           | 20 GHz | ±10 kHz             | ±50 kHz                  | ±0.8°                |
| 60 MHz    | 2 GHz  | ±25 kHz             | ±125 kHz                 | ±0.3°                |
|           | 10 GHz | ±30 kHz             | ±150 kHz                 | ±0.5°                |
|           | 20 GHz | ±30 kHz             | ±150 kHz                 | ±0.8°                |
| 85 MHz    | 2 GHz  | ±25 kHz             | ±125 kHz                 | ±0.3°                |
|           | 10 GHz | ±30 kHz             | ±150 kHz                 | ±0.5°                |
|           | 20 GHz | ±30 kHz             | ±175 kHz                 | ±0.8°                |
| 160 MHz   | 2 GHz  | ±35 kHz             | ±125 kHz                 | ±0.3°                |
|           | 10 GHz | ±40 kHz             | ±150 kHz                 | ±0.5°                |
|           | 20 GHz | ±40 kHz             | ±200 kHz                 | ±0.8°                |

<sup>31</sup> Pulse ON Power ≥ -20 dBm, Signal peak at reference Level, Attenuator = Auto,  $t_{\text{meas}} - t_{\text{reference}} \leq 10$  ms, Frequency estimation: Manual. Pulse-to-Pulse measurement time position excludes the beginning and ending of the pulse extending for a time =  $(10 / \text{Measurement BW})$  as measured from 50% of the  $t_{\text{(rise)}}$  or  $t_{\text{(fall)}}$ . Absolute frequency error determined over center 50% of pulse.

<sup>32</sup> Signal type: Linear chirp, Peak-to-Peak chirp deviation: ≤0.8 Measurement BW, Pulse ON Power ≥ -20 dBm, Signal peak at reference Level, Attenuator = 0 dB,  $t_{\text{meas}} - t_{\text{reference}} \leq 10$  ms, Frequency estimation: Manual. Pulse-to-Pulse measurement time position excludes the beginning and ending of the pulse extending for a time =  $(10 / \text{Measurement BW})$  as measured from 50% of the  $t_{\text{(rise)}}$  or  $t_{\text{(fall)}}$ . Absolute frequency error determined over center 50% of pulse.

## Digital modulation analysis (Opt. 21)

|                                                |                                                                                                                                                                                                                                 |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Modulation formats</b>                      | $\pi/2$ DBPSK, BPSK, SBPSK, QPSK, DQPSK, $\pi/4$ DQPSK, D8PSK, D16PSK, 8PSK, OQPSK, SOQPSK, CPM, 16/32-APSK, 16/32/64/128/256QAM, MSK, GMSK, 2-FSK, 4-FSK, 8-FSK, 16-FSK, C4FM                                                  |
| <b>Analysis period</b>                         | Up to 81,000 samples                                                                                                                                                                                                            |
| <b>Filter types</b>                            |                                                                                                                                                                                                                                 |
| <b>Measurement filters</b>                     | Square-root raised cosine, Raised cosine, Gaussian, Rectangular, IS-95, IS-95 EQ, C4FM-P25, Half-sine, None, User defined                                                                                                       |
| <b>Reference filters</b>                       | Raised cosine, Gaussian, Rectangular, IS-95, SBPSK-MIL, SOQPSK-MIL, SOQPSK-ARTM, none, user defined                                                                                                                             |
| <b>Alpha/B*T range</b>                         | 0.001 to 1, 0.001 step                                                                                                                                                                                                          |
| <b>Measurements</b>                            | Constellation, Error vector magnitude (EVM) vs. Time, Modulation error ratio (MER), Magnitude error vs. Time, Phase error vs. Time, Signal quality, Symbol table, Rho<br><br>FSK only: Frequency deviation, Symbol timing error |
| <b>Symbol rate range</b>                       | 1 kS/s to 100 MS/s (modulated signal must be contained entirely within acquisition BW of the instrument)                                                                                                                        |
| <b>QPSK residual EVM<sup>33</sup></b>          |                                                                                                                                                                                                                                 |
| 100 kHz symbol rate                            | <0.35%                                                                                                                                                                                                                          |
| 1 MHz symbol rate                              | <0.35%                                                                                                                                                                                                                          |
| 10 MHz symbol rate                             | <0.4%                                                                                                                                                                                                                           |
| 30 MHz symbol rate (Opt. B40/<br>B85/B16x)     | <0.75%                                                                                                                                                                                                                          |
| 60 MHz symbol rate (Opt. B85/<br>B16x)         | <1.0%                                                                                                                                                                                                                           |
| 120 MHz symbol rate (Opt.<br>B16x)             | <1.5%                                                                                                                                                                                                                           |
| <b>Offset QPSK residual EVM<sup>34</sup></b>   |                                                                                                                                                                                                                                 |
| 100 kHz symbol rate, 200 kHz<br>measurement BW | <0.5%                                                                                                                                                                                                                           |
| 1 MHz symbol rate, 2 MHz<br>measurement BW     | <0.5%                                                                                                                                                                                                                           |
| 10 MHz symbol rate, 20 MHz<br>measurement BW   | <1.1%                                                                                                                                                                                                                           |
| <b>256 QAM residual EVM<sup>35</sup></b>       |                                                                                                                                                                                                                                 |
| 10 MHz symbol rate                             | <0.4%                                                                                                                                                                                                                           |
| 30 MHz symbol rate (Opt. B40/<br>B85/B16x)     | <0.6%                                                                                                                                                                                                                           |
| 60 MHz symbol rate (Opt. B85/<br>B16x)         | <0.6%                                                                                                                                                                                                                           |
| 120 MHz symbol rate (Opt.<br>B16x)             | <1.0%                                                                                                                                                                                                                           |

<sup>33</sup> CF = 2 GHz, Measurement filter = Root raised cosine, Reference filter = Raised cosine, Analysis length = 200 symbols.

<sup>34</sup> CF = 2 GHz, Measurement filter = Root raised cosine, Reference filter = Raised cosine, Analysis length = 200 symbols.

<sup>35</sup> CF = 2 GHz, Measurement filter = Root raised cosine, Reference filter = Raised cosine, Analysis length = 400 symbols 20 averages.

## Digital modulation analysis (Opt. 21)

### S-QPSK (MIL) residual EVM<sup>36</sup>

|                                                                      |       |
|----------------------------------------------------------------------|-------|
| 4 kHz symbol rate, 64 kHz<br>measurement bandwidth, CF =<br>250 MHz  | <0.3% |
| 20 kHz symbol rate, 320 kHz<br>measurement bandwidth, CF =<br>2 GHz  | <0.5% |
| 100 kHz symbol rate, 1.6 MHz<br>measurement bandwidth, CF =<br>2 GHz | <0.5% |
| 1 MHz symbol rate, 16 MHz<br>measurement bandwidth, CF =<br>2 GHz    | <0.5% |

### S-QPSK (ARTM) residual EVM<sup>37</sup>

|                                                                      |       |
|----------------------------------------------------------------------|-------|
| 4 kHz symbol rate, 64 kHz<br>measurement bandwidth, CF =<br>250 MHz  | <0.3% |
| 20 kHz symbol rate, 320 kHz<br>measurement bandwidth, CF =<br>2 GHz  | <0.4% |
| 100 kHz symbol rate, 1.6 MHz<br>measurement bandwidth, CF =<br>2 GHz | <0.4% |
| 1 MHz symbol rate, 16 MHz<br>measurement bandwidth, CF =<br>2 GHz    | <0.4% |

### S-BPSK (MIL) residual EVM<sup>38</sup>

|                                                                      |        |
|----------------------------------------------------------------------|--------|
| 4 kHz symbol rate, 64 kHz<br>measurement bandwidth, CF =<br>250 MHz  | <0.25% |
| 20 kHz symbol rate, 320 kHz<br>measurement bandwidth, CF =<br>2 GHz  | <0.5%  |
| 100 kHz symbol rate, 1.6 MHz<br>measurement bandwidth, CF =<br>2 GHz | <0.5%  |
| 1 MHz symbol rate, 1.6 MHz<br>measurement bandwidth, CF =<br>2 GHz   | <0.5%  |

### CPM (MIL) residual EVM<sup>39</sup>

|                                                                     |       |
|---------------------------------------------------------------------|-------|
| 4 kHz symbol rate, 64 kHz<br>measurement bandwidth, CF =<br>250 MHz | <0.3% |
| 20 kHz symbol rate, 320 kHz<br>measurement bandwidth, CF =<br>2 GHz | <0.4% |

<sup>36</sup> Reference Filter: MIL STD Measurement Filter: none.

<sup>37</sup> Reference Filter: MIL STD Measurement Filter: none.

<sup>38</sup> Reference Filter: MIL STD.

<sup>39</sup> Reference Filter: MIL STD.

**Digital modulation analysis (Opt. 21)**

100 kHz symbol rate, 1.6 MHz  
measurement bandwidth, CF =  
2 GHz

&lt;0.4%

1 MHz symbol rate, 16 MHz  
measurement bandwidth, CF =  
2 GHz

&lt;0.4%

**2/4/8/16 FSK residual RMS FSK  
error<sup>40</sup>**

2FSK, 10 kHz symbol rate,  
10 kHz frequency deviation,  
CF = 2 GHz

&lt;0.3%

4/8/16FSK, 10 kHz symbol  
rate, 10 kHz frequency  
deviation, CF = 2 GHz

&lt;0.4%

**Adaptive equalizer**

|      |                                                                                                                      |
|------|----------------------------------------------------------------------------------------------------------------------|
| Type | Linear, decision-directed, feed-forward (FIR) equalizer with co-efficient adaptation and adjustable convergence rate |
|------|----------------------------------------------------------------------------------------------------------------------|

|                            |                                                                                           |
|----------------------------|-------------------------------------------------------------------------------------------|
| Modulation types supported | BPSK, QPSK, OQPSK, $\pi/2$ DBPSK, $\pi/4$ DQPSK, 8PSK, 8DPSK, 16DPSK, 16/32/64/128/256QAM |
|----------------------------|-------------------------------------------------------------------------------------------|

|                                                         |                                  |
|---------------------------------------------------------|----------------------------------|
| Reference filters for all modulation types except OQPSK | Raised cosine, rectangular, none |
|---------------------------------------------------------|----------------------------------|

|                             |                          |
|-----------------------------|--------------------------|
| Reference filters for OQPSK | Raised cosine, half sine |
|-----------------------------|--------------------------|

|               |                |
|---------------|----------------|
| Filter length | 3 to 2001 taps |
|---------------|----------------|

|                                       |            |
|---------------------------------------|------------|
| Taps/Symbol: raised cosine, half sine | 1, 2, 4, 8 |
|---------------------------------------|------------|

|                                            |   |
|--------------------------------------------|---|
| Taps/Symbol: rectangular filter, no filter | 1 |
|--------------------------------------------|---|

|                    |                         |
|--------------------|-------------------------|
| Equalizer controls | Off, train, hold, reset |
|--------------------|-------------------------|

**Flexible OFDM (Opt. 22)**

|                      |                                      |
|----------------------|--------------------------------------|
| Recallable standards | WiMAX 802.16-2004, WLAN 802.11 a/g/j |
|----------------------|--------------------------------------|

|                    |                                                       |
|--------------------|-------------------------------------------------------|
| Parameter settings | Guard interval, subcarrier spacing, channel bandwidth |
|--------------------|-------------------------------------------------------|

|                             |                                                                                           |
|-----------------------------|-------------------------------------------------------------------------------------------|
| Advanced parameter settings | Carrier detect: 802.11, 802.16-2004 - Auto-detect; Manual select BPSK; QPSK, 16QAM, 64QAM |
|                             | Channel estimation: Preamble, Preamble + Data                                             |
|                             | Pilot tracking: Phase, Amplitude, Timing                                                  |
|                             | Frequency correction: On, Off                                                             |

<sup>40</sup> Reference filter: None, Measurement filter: None.

## Flexible OFDM (Opt. 22)

|                             |                                                                                                                                                                                                                                                                                                       |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Summary measurements</b> | <p>Symbol clock error, Frequency error, Average power, Peak-to-Average, CPE</p> <p>EVM (RMS and peak) for all carriers, pilot carriers, data carriers</p> <p>OFDM parameters: Number of carriers, Guard interval (%), Subcarrier spacing (Hz), FFT Length</p> <p>Power (Average, Peak-to-Average)</p> |
| <b>Displays</b>             | <p>EVM vs symbol, vs subcarrier</p> <p>Subcarrier power vs symbol, vs subcarrier</p> <p>Mag error vs symbol, vs subcarrier</p> <p>Phase error vs symbol, vs subcarrier</p> <p>Channel frequency response</p>                                                                                          |
| <b>Residual EVM</b>         | <p>-49 dB (WiMAX 802.16-2004, 5 MHz BW)</p> <p>-49 dB (WLAN 802.11g, 20 MHz BW)</p> <p>Signal input power optimized for best EVM</p>                                                                                                                                                                  |

## WLAN IEEE802.11a/b/g/j/p (Opt. 23)

|                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Modulation formats</b>                                                                            | DBPSK (DSSS-1M), DQPSK (DSSS-2M), CCK 5.5M, CCK 11M, OFDM (BPSK, QPSK, 16QAM, 64QAM)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Measurements and displays</b>                                                                     | <p>Burst index, Burst power, Peak to average burst power, IQ origin offset, Frequency error, Common pilot error, Symbol clock error</p> <p>RMS and Peak EVM for Pilots/Data, Peak EVM located per symbol and subcarrier</p> <p>Packet header format information</p> <p>Average power and RMS EVM per section of the header</p> <p>WLAN power vs time, WLAN symbol table, WLAN constellation</p> <p>Spectrum emission mask, spurious</p> <p>Error vector magnitude (EVM) vs symbol (or time), vs subcarrier (or frequency)</p> <p>Mag error vs symbol (or time), vs subcarrier (or frequency)</p> <p>Phase error vs symbol (or time), vs subcarrier (or frequency)</p> <p>WLAN channel frequency response vs symbol (or time), vs subcarrier (or frequency)</p> <p>WLAN spectral flatness vs symbol (or time), vs subcarrier (or frequency)</p> |
| <b>Residual EVM - 802.11b (CCK-11 Mbps)</b><br><br><b>2.4 GHz:</b>                                   | <p>RMS-EVM over 1000 chips, EQ On</p> <p>Signal input power optimized for best EVM</p> <p>1%(-40 dB) typical, 0.9% (-40.9 dB) typical-mean</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Residual EVM - 802.11a/g/j (OFDM, 20 MHz, 64-QAM)</b><br><br><b>2.4 GHz</b><br><br><b>5.8 GHz</b> | <p>RMS-EVM averaged over 20 bursts, 16 symbols each</p> <p>Signal input power optimized for best EVM</p> <p>-49 dB typical, -50 dB typical-mean</p> <p>-49 dB typical, -50 dB typical-mean</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

**WLAN IEEE802.11n (Opt. 24)**

|                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Modulation formats</b>                      | OFDM (BPSK, QPSK, 16 or 64QAM)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Measurements and displays</b>               | Burst index, Burst power, Peak to average burst power, IQ origin offset, Frequency error, Common pilot error, Symbol clock error<br>RMS and Peak EVM for Pilots/Data, Peak EVM located per symbol and subcarrier<br>Packet header format information<br>Average power and RMS EVM per section of the header<br>WLAN power vs time, WLAN symbol table, WLAN constellation<br>Spectrum emission mask, spurious<br>Error vector magnitude (EVM) vs symbol (or time), vs subcarrier (or frequency)<br>Mag error vs symbol (or time), vs subcarrier (or frequency)<br>Phase error vs symbol (or time), vs subcarrier (or frequency)<br>WLAN channel frequency response vs symbol (or time), vs subcarrier (or frequency)<br>WLAN spectral flatness vs symbol (or time), vs subcarrier (or frequency) |
| <b>Residual EVM - 802.11n (40 MHz, 64-QAM)</b> | RMS-EVM over averaged over 20 bursts, 16 symbols each<br>Signal input power optimized for best EVM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>5.8 GHz</b>                                 | –48 dB typical, –48.5 dB typical-mean                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

**WLAN IEEE802.11ac (Opt. 25)**

|                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Modulation formats</b>         | OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Measurements and displays</b>  | Burst index, Burst power, Peak to average burst power, IQ origin offset, Frequency error, Common pilot error, Symbol clock error<br>RMS and Peak EVM for Pilots/Data, Peak EVM located per symbol and subcarrier<br>Packet header format information<br>Average power and RMS EVM per section of the header<br>WLAN power vs time, WLAN symbol table, WLAN constellation<br>Spectrum emission mask, spurious<br>Error vector magnitude (EVM) vs symbol (or time), vs subcarrier (or frequency)<br>Mag error vs symbol (or time), vs subcarrier (or frequency)<br>Phase error vs symbol (or time), vs subcarrier (or frequency)<br>WLAN channel frequency response vs symbol (or time), vs subcarrier (or frequency)<br>WLAN spectral flatness vs symbol (or time), vs subcarrier (or frequency) |
| <b>Residual EVM - 802.11ac</b>    | RMS-EVM averaged over 20 bursts, 16 symbols each<br>Signal input power optimized for best EVM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>5.8 GHz (80 MHz, 256-QAM)</b>  | –48 dB typical, –48.5 dB typical-mean                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>5.8 GHz (160 MHz, 256-QAM)</b> | –45 dB typical, –45.5 dB typical-mean                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## EMC pre-compliance and troubleshooting (Opt. 32)

### EMC pre-compliance and troubleshooting

|                          |                                                                                                                                                                            |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standards</b>         | EN55011, EN55012, EN55013, EN55014, EN55015, EN55025, EN55032, EN60601, DEF STAN, FCC Part 15, FCC Part18, MIL-STD 461G                                                    |
| <b>Features</b>          | EMC-EMI display, Wizard to setup accessories and limit lines, Inspect, Harmonic Markers, Level Target, Compare Traces, Measure Ambient, Report generation, Re-measure Spot |
| <b>Detectors</b>         | +Peak, Avg, Avg (of logs), Avg (VRMS), CISPR QuasiPeak, CISPR Peak, CISPR Average, CISPR Average of Logs, MIL +Peak, DEF STAN Avg, DEF STAN Peak                           |
| <b>Limit lines</b>       | Up to 3 Limit Lines with corresponding margins                                                                                                                             |
| <b>Resolution BW</b>     | Set per standard or user definable                                                                                                                                         |
| <b>Dwell time</b>        | Set per standard or user definable                                                                                                                                         |
| <b>Report format</b>     | PDF, HTML, MHT,RTF, XLSX, Image File format                                                                                                                                |
| <b>Accessory type</b>    | Antenna, Near Field Probe, Cable, Amplifier, Limiter, Attenuator, Filter, Other                                                                                            |
| <b>Correction format</b> | Gain/Loss Constant, Gain/loss table, Antenna Factor                                                                                                                        |
| <b>Traces</b>            | Save/recall up to 5 traces, Math trace (trace1 minus trace2), Ambient trace                                                                                                |

## APCO P25 (Option 26)

|                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Modulation formats</b>                                     | Phase 1 (C4FM), Phase 2 (HCPM, HDQPSK)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Measurements and displays</b>                              | RF output power, operating frequency accuracy, modulation emission spectrum, unwanted emissions spurious, adjacent channel power ratio, frequency deviation, modulation fidelity, frequency error, eye diagram, symbol table, symbol rate accuracy, transmitter power and encoder attack time, transmitter throughput delay, frequency deviation vs. time, power vs. time, transient frequency behavior, HCPM transmitter logical channel peak adjacent channel power ratio, HCPM transmitter logical channel off slot power, HCPM transmitter logical channel power envelope, HCPM transmitter logical channel time alignment |
| <b>Residual modulation fidelity</b>                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Phase 1 (C4FM)</b>                                         | ≤1.0% typical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Phase 2 (HCPM)</b>                                         | ≤0.5% typical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Phase 2 (HDQPSK)</b>                                       | ≤0.4% typical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Adjacent channel power ratio <sup>41</sup></b>             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>25 kHz offset from the center and bandwidth of 6 kHz</b>   | Phase 1 (C4FM): -74 dBc typical<br>Phase 2 (HCPM): -74 dBc typical<br>Phase 2 (HDQPSK): -75 dBc typical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>62.5 kHz offset from the center and bandwidth of 6 kHz</b> | -75 dBc typical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

<sup>41</sup> Measured with test signal amplitude adjusted for optimum performance if necessary. Measured with Averaging, 10 waveforms.

## APCO P25 (Option 26)

## Bluetooth (Options 27 and 31)

Basic Rate, Bluetooth Low Energy, Enhanced Data Rate - Revision 4.2, Bluetooth® 5 when option 31 is enabled

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Measurements and displays</b> | Peak power, average power, adjacent channel power or inband emission mask,<br>-20 dB bandwidth, frequency error, modulation characteristics including $\Delta F_{1avg}$ (11110000),<br>$\Delta F_{2avg}$ (10101010), $\Delta F_2 > 115$ kHz, $\Delta F_2/\Delta F_1$ ratio, frequency deviation vs. time with packet and octet<br>level measurement information, carrier frequency $f_0$ , frequency offset (Preamble and Payload), max<br>frequency offset, frequency drift $f_1-f_0$ , max drift rate $f_n-f_0$ and $f_n-f_{n-5}$ , center frequency<br>offset table and frequency drift table, color-coded symbol table, packet header decoding information,<br>eye diagram, constellation diagram |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**Output power (average and peak)**

|                          |                                                          |
|--------------------------|----------------------------------------------------------|
| <b>Level uncertainty</b> | Refer to instrument amplitude and flatness specification |
| <b>Measurement range</b> | > -70 dBm                                                |

**Modulation characteristics**  
( $\Delta F_{1avg}$ ,  $\Delta F_{2avg}$ ,  $\Delta F_{2avg}/\Delta F_{1avg}$ ,  
 $\Delta F_{2max} \geq 115$  kHz)

|                                         |                                         |
|-----------------------------------------|-----------------------------------------|
| <b>Deviation range</b>                  | $\pm 280$ kHz                           |
| <b>Deviation uncertainty (at 0 dBm)</b> | < 2 kHz + instrument freq. uncertainty  |
| <b>Measurement resolution</b>           | 10 Hz                                   |
| <b>Measurement range</b>                | Nominal channel frequency $\pm 100$ kHz |

**Initial Carrier Frequency Tolerance (ICFT)**

|                                           |                                            |
|-------------------------------------------|--------------------------------------------|
| <b>Measurement uncertainty (at 0 dBm)</b> | < 1 kHz + instrument frequency uncertainty |
| <b>Measurement resolution</b>             | 10 Hz                                      |
| <b>Measurement range</b>                  | Nominal channel frequency $\pm 100$ kHz    |

**Carrier frequency drift**

|                                |                                                                                                |
|--------------------------------|------------------------------------------------------------------------------------------------|
| <b>Supported measurements</b>  | Max freq. offset, drift $f_1-f_0$ , max drift $f_n-f_0$ , max drift $f_n-f_{n-5}$ (50 $\mu$ s) |
| <b>Measurement uncertainty</b> | < 1 kHz + instrument frequency uncertainty                                                     |
| <b>Measurement resolution</b>  | 10 Hz                                                                                          |
| <b>Measurement range</b>       | Nominal channel frequency $\pm 100$ kHz                                                        |

**In-band emissions and ACP**

|                          |                                                          |
|--------------------------|----------------------------------------------------------|
| <b>Level uncertainty</b> | Refer to instrument amplitude and flatness specification |
|--------------------------|----------------------------------------------------------|

## LTE Downlink RF measurements (Opt. 28)

|                                                                |                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standard Supported</b>                                      | 3GPP TS 36.141 Version 12.5                                                                                                                                                                                                                                            |
| <b>Frame Format supported</b>                                  | FDD and TDD                                                                                                                                                                                                                                                            |
| <b>Measurements and Displays Supported</b>                     | Adjacent Channel Leakage Ratio (ACLR), Spectrum Emission Mask (SEM), Channel Power, Occupied Bandwidth, Power vs. Time showing Transmitter OFF power for TDD signals and LTE constellation diagram for PSS, SSS with Cell ID, Group ID, Sector ID and Frequency Error. |
| <b>ACLR with E-UTRA bands (Nominal, with Noise Correction)</b> |                                                                                                                                                                                                                                                                        |
| 1st Adjacent Channel                                           | 73 dB                                                                                                                                                                                                                                                                  |
| 2nd Adjacent Channel                                           | 74 dB                                                                                                                                                                                                                                                                  |

## Mapping and field strength (Option MAP)

|                                     |                                                                       |
|-------------------------------------|-----------------------------------------------------------------------|
| <b>RF field strength</b>            |                                                                       |
| <b>Signal strength indicator</b>    | Located at right-side of display                                      |
| <b>Measurement bandwidth</b>        | Up to 165 MHz, dependent on span and RBW setting                      |
| <b>Tone type</b>                    | Variable frequency                                                    |
| <b>Mapping</b>                      |                                                                       |
| <b>Map types directly supported</b> | Pitney Bowes MapInfo (*.mif), Bitmap (*.bmp), Open Street Maps (.osm) |
| <b>Saved measurement results</b>    | Measurement data files (exported results)                             |
|                                     | Map file used for the measurements                                    |
|                                     | Google earth KMZ file                                                 |
|                                     | Recallable results files (trace and setup files)                      |
|                                     | MapInfo-compatible MIF/MID files                                      |

## Analog modulation analysis accuracy (typical)

|           |                                                                                                             |
|-----------|-------------------------------------------------------------------------------------------------------------|
| <b>AM</b> | ±2% (0 dBm input at center, carrier frequency 1 GHz, 10 to 60% modulation depth)                            |
| <b>FM</b> | ±1% of span<br>(0 dBm input at center)<br>(Carrier frequency 1 GHz, 400 Hz/1 kHz Input/Modulated frequency) |
| <b>PM</b> | ±3°<br>(0 dBm input at center)<br>(Carrier frequency 1 GHz, 1 kHz/5 kHz Input/Modulated frequency)          |

## Inputs and outputs

### Front panel

|                    |                                                                                                                                  |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Display            | Touch panel, 10.4 in. (264 mm)                                                                                                   |
| RF input connector | N-type female, 50 $\Omega$ (RSA5103B, RSA5106B)<br>N-Type Female Planar Crown (RSA5115B)<br>3.5mm Female Planar Crown (RSA5126B) |
| Trigger out        | BNC, High: >2.0 V, Low: <0.4 V, Output current 1 mA (LVTTL)                                                                      |
| Trigger in         | BNC, 50 $\Omega$ /5 k $\Omega$ impedance (nominal), $\pm 5$ V max input, -2.5 V to +2.5 V trigger level                          |
| USB ports          | (2) USB 2.0                                                                                                                      |
| Audio              | Speaker                                                                                                                          |

### Rear panel

|                        |                                                                                    |
|------------------------|------------------------------------------------------------------------------------|
| 10 MHz REF OUT         | 50 $\Omega$ , BNC, >0 dBm                                                          |
| External REF IN        | 50 $\Omega$ , 10 MHz, BNC                                                          |
| Trig 2 / gate IN       | BNC, High: 1.6 to 5.0 V, Low: 0 to 0.5 V                                           |
| GPIO interface         | IEEE 488.2                                                                         |
| LAN interface ethernet | RJ45, 10/100/1000BASE-T                                                            |
| USB ports              | (2) USB 2.0                                                                        |
| VGA output             | VGA compatible, 15 DSUB                                                            |
| Audio out              | 3.5 mm headphone jack                                                              |
| Noise source drive     | BNC, +28 V, 140 mA (nominal) Turn ON time: 100 $\mu$ s, Turn OFF time: 500 $\mu$ s |
| Digital I and Q out    | 2 connectors, LVDS (Opt. 65)                                                       |
| Analog Zero Span Out   | 1 connector, BNC (Opt. 66)                                                         |

## General characteristics

### Temperature range

|           |                  |
|-----------|------------------|
| Operating | +5 °C to +40 °C  |
| Storage   | -20 °C to +60 °C |

|              |            |
|--------------|------------|
| Warm-up time | 20 minutes |
|--------------|------------|

### Altitude

|              |                                         |
|--------------|-----------------------------------------|
| Operating    | Up to 3000 m (approximately 10,000 ft.) |
| Nonoperating | Up to 12,190 m (40,000 ft.)             |

### Relative humidity

|                            |                                                                               |
|----------------------------|-------------------------------------------------------------------------------|
| Operating and nonoperating | +40 °C at 95% relative humidity, meets intent of EN 60068-2-30. <sup>42</sup> |
|----------------------------|-------------------------------------------------------------------------------|

### Vibration

|                                                               |                                                                                                                                                                                                                                                        |
|---------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating (except when equipped with option 56 removable SSD) | 0.22G <sub>RMS</sub> . Profile = 0.00010 g <sup>2</sup> /Hz at 5-350 Hz, -3 dB/Octave slope from 350-500 Hz, 0.00007 g <sup>2</sup> /Hz at 500 Hz, 3 Axes at 10 min/axis                                                                               |
| Nonoperating                                                  | 2.28G <sub>RMS</sub> . Profile = 0.0175 g <sup>2</sup> /Hz at 5-100 Hz, -3 dB/Octave slope from 100-200 Hz, 0.00875 g <sup>2</sup> /Hz at 200-350 Hz, -3 dB/Octave slope from 350-500 Hz, 0.006132 g <sup>2</sup> /Hz at 500 Hz, 3 Axes at 10 min/axis |

<sup>42</sup> Frequency amplitude response may vary up to  $\pm 3$  dB at +40 °C and greater than 45% relative humidity.

## General characteristics

### Shock

|              |                                                                                            |
|--------------|--------------------------------------------------------------------------------------------|
| Operating    | 15 G, half-sine, 11 ms duration, three shocks per axis in each direction (18 shocks total) |
| Nonoperating | 30 G, half-sine, 11 ms duration, three shocks per axis in each direction (18 shocks total) |

|              |                                                            |
|--------------|------------------------------------------------------------|
| Data storage | Internal HDD (Opt. 59), USB ports, removable SSD (Opt. 56) |
|--------------|------------------------------------------------------------|

## Power

|                    |                                                                                                                  |
|--------------------|------------------------------------------------------------------------------------------------------------------|
| Power requirements | 90 V <sub>AC</sub> to 264 V <sub>AC</sub> , 50 Hz to 60 Hz<br>90 V <sub>AC</sub> to 132 V <sub>AC</sub> , 400 Hz |
|--------------------|------------------------------------------------------------------------------------------------------------------|

|                   |           |
|-------------------|-----------|
| Power consumption | 400 W max |
|-------------------|-----------|

## EMC and safety compliance

|        |                                            |
|--------|--------------------------------------------|
| Safety | UL 61010-1:2004<br>CSA C22.2 No.61010-1-04 |
|--------|--------------------------------------------|

|                                              |                                                                                                                                                    |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Electromagnetic compatibility, complies with | EU council EMC Directive 2004/108/EC<br>EN61326, CISPR 11, Class A<br>ACMA (Australia/New Zealand)<br>FCC 47CFR, Part 15, Subpart B, Class A (USA) |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|

## Physical characteristics

With feet

### Dimensions (with feet)

|        |                   |
|--------|-------------------|
| Height | 282 mm (11.1 in.) |
| Width  | 473 mm (18.6 in.) |
| Depth  | 531 mm (20.9 in.) |

|        |                                    |
|--------|------------------------------------|
| Weight | 29 kg (64.7 lb.) With all options. |
|--------|------------------------------------|

## Ordering information

### Models

|                 |                                             |
|-----------------|---------------------------------------------|
| <b>RSA5103B</b> | Real Time Signal Analyzer, 1 Hz to 3 GHz    |
| <b>RSA5106B</b> | Real Time Signal Analyzer, 1 Hz to 6.2 GHz  |
| <b>RSA5115B</b> | Real Time Signal Analyzer, 1 Hz to 15 GHz   |
| <b>RSA5126B</b> | Real Time Signal Analyzer, 1 Hz to 26.5 GHz |

**All Include:** Quick-start Manual (Printed), Application Guide, Printable Online Help File, Programmer's manual (on CD), power cord, BNC-N adapter, USB Keyboard, USB Mouse, Front Cover.

**RSA5115B also includes:** Planar Crown RF Input Connector - Type N Female PN 131-4329-00

**RSA5126B also includes:** Planar Crown RF Input Connector - 3.5 mm Female

**Note:** Please specify power plug and language options when ordering.

### Warranty

One year

## Options, accessories, and upgrades

### Options

| Product  | Options     | Description                                                             |
|----------|-------------|-------------------------------------------------------------------------|
| RSA5103B |             | Real Time Signal Analyzer, 1 Hz to 3 GHz                                |
| RSA5106B |             | Real Time Signal Analyzer, 1 Hz to 6.2 GHz                              |
| RSA5115B |             | Real Time Signal Analyzer, 1 Hz to 15 GHz                               |
| RSA5126B |             | Real Time Signal Analyzer, 1 Hz to 26.5 GHz                             |
|          | Opt. B25    | 25 MHz Acquisition Bandwidth (no-cost option)                           |
|          | Opt. B40    | 40 MHz Acquisition Bandwidth                                            |
|          | Opt. B85    | 85 MHz Acquisition Bandwidth                                            |
|          | Opt. B125   | 125 MHz Acquisition Bandwidth                                           |
|          | Opt. B16x   | 165 MHz Acquisition Bandwidth                                           |
|          | Opt. B85HD  | 85 MHz Acquisition Bandwidth, High Dynamic Range                        |
|          | Opt. B125HD | 125 MHz Acquisition Bandwidth, High Dynamic Range                       |
|          | Opt. B16xHD | 165 MHz Acquisition Bandwidth, High Dynamic Range                       |
|          | Opt. 300    | High performance real time (Opt. 09 needed for performance improvement) |
|          | Opt. 09     | Enhanced Real Time                                                      |
|          | Opt. 10     | AM/FM/PM Modulation and Audio Measurements                              |
|          | Opt. 11     | Phase Noise / Jitter Measurement                                        |
|          | Opt. 12     | Settling Time (Frequency and Phase)                                     |
|          | Opt. 14     | Noise Figure and Gain (Internal preamp recommended)                     |
|          | Opt. 20     | Pulse Measurements                                                      |
|          | Opt. 21     | General Purpose Modulation Analysis                                     |
|          | Opt. 22     | Flexible OFDM Analysis                                                  |
|          | Opt. 23     | WLAN 802.11a/b/g/j/p measurement application                            |
|          | Opt. 24     | WLAN 802.11n measurement application (requires opt 23)                  |

| Product | Options               | Description                                                |
|---------|-----------------------|------------------------------------------------------------|
|         | Opt. 25               | WLAN 802.11ac measurement application (requires opt 24)    |
|         | Opt. 26               | APCO P25 measurement application                           |
|         | Opt. 27               | Bluetooth Basic LE Tx Measurements                         |
|         | Opt. 28               | LTE Downlink RF measurements                               |
|         | Opt. 31               | Bluetooth 5 Measurements<br>(requires opt 27)              |
|         | Opt. 32               | EMC pre-compliance and troubleshooting                     |
|         | Opt. MAP              | Mapping and signal strength                                |
|         | Opt. 50               | Internal Preamp, 1 MHz to 3/6.2 GHz, RSA5103B/5106B only   |
|         | Opt. 51               | Internal Preamp, 1 MHz to 15/26.5 GHz, RSA5115B/5126B only |
|         | Opt. 53               | Memory Extension, 4 GB Acquisition Memory Total            |
|         | Opt. 56 <sup>43</sup> | Removable SSD, incompatible with Opt. 59                   |
|         | Opt. 59 <sup>43</sup> | Internal HDD, incompatible with Opt. 56 (no cost option)   |
|         | Opt. 65               | Digital I and Q outputs                                    |
|         | Opt. 66               | Zero-span analog output                                    |
|         | Opt. 6566             | Digital I and Q outputs and Zero-span analog output        |
|         | Opt. PFR              | Precision Frequency Reference                              |
|         | Opt. 54               | Signal Classification and Survey                           |

## International power plugs

|          |                                          |
|----------|------------------------------------------|
| Opt. A0  | North America power plug (115 V, 60 Hz)  |
| Opt. A1  | Universal Euro power plug (220 V, 50 Hz) |
| Opt. A2  | United Kingdom power plug (240 V, 50 Hz) |
| Opt. A3  | Australia power plug (240 V, 50 Hz)      |
| Opt. A4  | North America power plug (240 V, 50 Hz)  |
| Opt. A5  | Switzerland power plug (220 V, 50 Hz)    |
| Opt. A6  | Japan power plug (100 V, 50/60 Hz)       |
| Opt. A10 | China power plug (50 Hz)                 |
| Opt. A11 | India power plug (50 Hz)                 |
| Opt. A12 | Brazil power plug (60 Hz)                |
| Opt. A99 | No power cord                            |

## Language options

|          |                           |
|----------|---------------------------|
| Opt. L0  | English manual            |
| Opt. L5  | Japanese manual           |
| Opt. L7  | Simplified Chinese manual |
| Opt. L10 | Russian manual            |

<sup>43</sup> Must order either Opt. 56 or 59.

## Service options

|          |                                                                          |
|----------|--------------------------------------------------------------------------|
| Opt. C3  | Calibration Service 3 Years                                              |
| Opt. C5  | Calibration Service 5 Years                                              |
| Opt. CA1 | Single Calibration or Functional Verification                            |
| Opt. D1  | Calibration Data Report                                                  |
| Opt. D3  | Calibration Data Report 3 Years (with Opt. C3)                           |
| Opt. D5  | Calibration Data Report 5 Years (with Opt. C5)                           |
| Opt. G3  | Complete Care 3 Years (includes loaner, scheduled calibration, and more) |
| Opt. G5  | Complete Care 5 Years (includes loaner, scheduled calibration, and more) |
| Opt. R5  | Repair Service 5 Years (including warranty)                              |

## Recommended accessories

| Accessory                                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RTPA2A Spectrum Analyzer Probe Adapter compatibility | Supports TekConnect <sup>®</sup> probes.<br><b>Compatibility</b><br>P7225 - 2.5 GHz Active Probe, P7240 - 4 GHz Active Probe, P7260 - 6 GHz Active Probe, P7330 - 3.5 GHz Differential Probe, P7350 - 5 GHz Differential Probe, P7350SMA - 5 GHz Differential SMA Probe, P7340A - 4 GHz Z-Active Differential Probe, P7360A - 6 GHz Z-Active Differential Probe, P7380A - 8 GHz Z-Active Differential Probe, P7380SMA - 8 GHz Differential Signal Acquisition System, P7313 - >12.5 GHz Z-Active Differential Probe, P7313SMA - 13 GHz Differential SMA Probe, P7500 Series - 4 GHz to 20 GHz TriMode Probes |
| RSAVu                                                | Software based on the RSA3000 Series platform for analysis supporting 3G wireless standards, WLAN (IEEE802.11a/b/g/n), RFID, Audio Demodulation, and more measurements.                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| SignalVu-PC                                          | Software based on the RSA5000 Series Real Time Spectrum Analyzers puts the power of your RTSA signal analysis tools on your Windows 64-bit PC. Performs measurements on stored signals from RSA3000/5000/6000 series, RSA306/306B, RSA500A/600A series, RSA7100A, and MDO4000B/C oscilloscope RF captures.                                                                                                                                                                                                                                                                                                   |
| Additional Removable Hard Drive                      | Order RSA5BUP Opt. SSD. This is an additional solid-state drive for instrument with Option 56 installed. (Windows 7 and instrument software preinstalled).                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| DC Block                                             | Order 119-7902-00. 9 kHz-18 GHz. Type N Male to Type N Female. Voltage Rating: 50 V DC Max. Insertion Loss 0.9 dB. Aeroflex model 7003.                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| EMI-DEBUG-HWPARTS                                    | Bundle of EMI accessories for debug (includes EMI-NF-Probe & EMI-NF-AMP)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| EMI-RE-HWPARTS                                       | Bundle of EMI accessories for radiated pre-compliance test (includes: EMI-BICON-ANT, EMI-CLP-ANT, EMI-PREAMP, EMI-TRIPOD, CABLE-5M, CABLE-1M)                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| EMI-BICON-ANT                                        | 25 MHz to 300 MHz Biconical antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| EMI-CLP-ANT                                          | 300 MHz to 1 GHz Compact Log Periodic antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| EMI-PREAMP                                           | 1 MHz to 1 GHz Preamplifier                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| EMI-TRIPOD                                           | Antenna Tripod 0.8 to 1.5 m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| EMI-LISN50uH-US                                      | 50uH AC line impedance stabilization network for US and Canada                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| EMI-LISN50uH-EU                                      | 50uH AC line impedance stabilization network for Europe (excluding GB)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| EMI-LISN50uH-GB                                      | 50uH AC line impedance stabilization network for Great Britain                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| EMI-LISN5uH                                          | 5uH DC line impedance stabilization network                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| EMI-NF-PROBE                                         | Near Field Probe set                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| EMI-TRANS-LIMIT                                      | Transient Limiter 150 kHz to 30 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| CABLE-1M                                             | Cable, 1 m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| CABLE-3M                                             | Cable, 3 m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| CABLE-5M                                             | Cable, 5 m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| EMI-NF-AMP                                           | Near Field Probe Amplifier                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

| Accessory                                      | Description                                                                                                                                                                                                                                                                                  |
|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Noise source                                   | NoiseCom NC346C Series. Provides supported sources up to 55 GHz in a variety of connector types and ENR values. Contact NoiseCom for full information and to order: <a href="http://noisecom.com">http://noisecom.com</a>                                                                    |
| 131-4329-xx                                    | Planar Crown RF Input Connector - 7005A-3 Type-N Female                                                                                                                                                                                                                                      |
| 600 $\Omega$ BNC pass-through                  | Required for higher-speed noise figure measurements when ordering RSA5UP Opt 14 for RSA5000A. POMONA 4119-600 RF/COAXIAL ADAPTER, BNC PLUG-BNC JACK. Contact Pomona Electronics and distributors worldwide to order: <a href="http://pomonaelectronics.com">http://pomonaelectronics.com</a> |
| 131-9062-xx                                    | Planar Crown RF Input Connector - 7005A-6 3.5 mm Female                                                                                                                                                                                                                                      |
| 131-8822-xx                                    | Planar Crown RF Input Connector - 7005A-7 3.5 mm Male                                                                                                                                                                                                                                        |
| 131-8689-xx                                    | Planar Crown RF Input Connector – 7005A-1 SMA Female                                                                                                                                                                                                                                         |
| 015-0369-xx                                    | RF Adapter – N (male) to SMA (male)                                                                                                                                                                                                                                                          |
| 119-6599-xx                                    | Power Attenuator – 20 dB, 50 W, 5 GHz                                                                                                                                                                                                                                                        |
| Transit Case                                   | 016-2026-xx                                                                                                                                                                                                                                                                                  |
| RSA56KR                                        | Rackmount Retrofit                                                                                                                                                                                                                                                                           |
| Additional Quick-start Manual (Paper)          | 071-3224-xx                                                                                                                                                                                                                                                                                  |
| Additional Application Examples Manual (Paper) | 071-3283-xx                                                                                                                                                                                                                                                                                  |

## RSA5BUP – Upgrade options for the RSA5100B series

| RSA5BUP   | Option description                                                                                                                                 | HW or SW | Factory calibration required? |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------------------|
| Opt. PFR  | Precision Frequency Reference                                                                                                                      | HW       | Yes                           |
| Opt. SSD  | Additional removable solid-state drive for units equipped with Option 56. Minimum capacity 480 GB. Windows 7 and instrument software preinstalled. | HW       | No                            |
| Opt. 50   | Internal Preamp<br>1 MHz to 3 GHz (RSA5103B) or<br>1 MHz to 6.2 GHz (RSA5106B)                                                                     | HW       | Yes                           |
| Opt. 51   | Internal Preamp<br>1 MHz to 15 GHz (RSA5115B) or<br>1 MHz to 26.5 GHz (RSA5126B)                                                                   | SW       | No                            |
| Opt. 53   | Memory Extension, 4 GB Acquisition Memory total                                                                                                    | HW       | No                            |
| Opt. 54   | Signal Classification and Survey                                                                                                                   | SW       | No                            |
| Opt. 65   | Digital I and Q outputs                                                                                                                            | HW       | No                            |
| Opt. 66   | Zero-span analog output                                                                                                                            | HW       | No                            |
| Opt. 6566 | Digital I and Q outputs and Zero-span analog output                                                                                                | HW       | No                            |
| Opt. 56   | Removable Solid-State Drive (460 GB), incompatible with Opt. 59                                                                                    | HW       | No                            |
| Opt. 59   | Internal HDD (160 GB), incompatible with Opt. 56                                                                                                   | HW       | No                            |
| Opt. 09   | Enhanced Real Time                                                                                                                                 | SW       | No                            |
| Opt. 10   | AM/FM/PM Modulation and Audio Measurements                                                                                                         | SW       | No                            |
| Opt. 11   | Phase Noise / Jitter Measurements                                                                                                                  | SW       | No                            |
| Opt. 12   | Settling Time (Frequency and Phase)                                                                                                                | SW       | No                            |
| Opt. 14   | Noise Figure and Gain (Internal preamp recommended)                                                                                                | SW       | No                            |
| Opt. 20   | Pulse Measurements                                                                                                                                 | SW       | No                            |
| Opt. 21   | General Purpose Modulation Analysis                                                                                                                | SW       | No                            |
| Opt. 22   | Flexible OFDM Analysis                                                                                                                             | SW       | No                            |

| RSA5BUP         | Option description                                                  | HW or SW | Factory calibration required? |
|-----------------|---------------------------------------------------------------------|----------|-------------------------------|
| Opt. 23         | WLAN 802.11a/b/g/j/p measurement application                        | SW       | No                            |
| Opt. 24         | WLAN 802.11n measurement application (requires opt 23)              | SW       | No                            |
| Opt. 25         | WLAN 802.11ac measurement application (requires opt 24)             | SW       | No                            |
| Opt. 26         | APCO P25 measurement application                                    | SW       | No                            |
| Opt. 27         | Bluetooth Basic LE Tx Measurements                                  | SW       | No                            |
| Opt. 28         | LTE Downlink RF measurements                                        | SW       | No                            |
| Opt. 31         | Bluetooth 5 Measurements (requires opt 27)                          | SW       | No                            |
| Opt. 32         | EMC pre-compliance and troubleshooting                              | SW       | No                            |
| Opt. MAP        | Mapping and signal strength                                         | SW       | No                            |
| Opt. B40        | 40 MHz Acquisition Bandwidth (from 25 MHz BW)                       | SW       | No                            |
| Opt. B85        | 85 MHz Acquisition Bandwidth (from 25 MHz BW)                       | HW       | Yes                           |
| Opt. B85E       | 85 MHz Acquisition Bandwidth (from 40 MHz BW)                       | HW       | Yes                           |
| Opt. B16x       | 165 MHz Acquisition Bandwidth (from 25 MHz BW)                      | HW       | Yes                           |
| Opt. B16xE      | 165 MHz Acquisition Bandwidth (from 40 MHz BW)                      | HW       | Yes                           |
| Opt. B16xH      | 165 MHz Acquisition Bandwidth (from 85 MHz BW)                      | SW       | No                            |
| Opt. B125       | 125 MHz acquisition bandwidth (from 25 MHz BW)                      | HW       | Yes                           |
| Opt. B125E      | 125 MHz acquisition bandwidth (from 40 MHz BW)                      | HW       | Yes                           |
| Opt. B125H      | 125 MHz acquisition bandwidth (from 85 MHz BW)                      | SW       | No                            |
| Opt. B125HD-125 | High dynamic range, 125 MHz acquisition bandwidth (from 125 MHz BW) | HW       | Yes                           |
| Opt. B125HD-25  | High dynamic range, 125 MHz acquisition bandwidth (from 25 MHz BW)  | HW       | Yes                           |
| Opt. B125HD-40  | High dynamic range, 125 MHz acquisition bandwidth (from 40 MHz BW)  | HW       | Yes                           |
| Opt. B125HD-85  | High dynamic range, 125 MHz acquisition bandwidth (from 85 MHz BW)  | HW       | No                            |
| Opt. B16xHD-125 | High dynamic range, 165 MHz acquisition bandwidth (from 125 MHz BW) | HW       | No                            |
| Opt. B16xHD-165 | High dynamic range, 165 MHz acquisition bandwidth (from 165 MHz BW) | HW       | No                            |
| Opt. B16xHD-25  | High dynamic range, 165 MHz acquisition bandwidth (from 25 MHz BW)  | HW       | Yes                           |
| Opt. B16xHD-40  | High dynamic range, 165 MHz acquisition bandwidth (from 40 MHz BW)  | HW       | Yes                           |
| Opt. B16xHD-85  | High dynamic range, 165 MHz acquisition bandwidth (from 85 MHz BW)  | HW       | No                            |
| Opt. B16xK      | 165 MHz acquisition bandwidth (from 125 MHz BW)                     | HW       | No                            |
| Opt. B85HD-25   | High dynamic range, 85 MHz acquisition bandwidth (from 25 MHz BW)   | HW       | Yes                           |
| Opt. B85HD-40   | High dynamic range, 85 MHz acquisition bandwidth (from 40 MHz BW)   | HW       | Yes                           |
| Opt. B85HD-85   | High dynamic range, 85 MHz acquisition bandwidth (from 85 MHz BW)   | HW       | No                            |
| Opt. 300        | High performance real time                                          | HW       | No                            |



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.



Bluetooth is a registered trademark of Bluetooth SIG, Inc.



LTE is a trademark of ETSI.

ASEAN / Australasia (65) 6356 3900  
Belgium 00800 2255 4835\*  
Central East Europe and the Baltics +41 52 675 3777  
Finland +41 52 675 3777  
Hong Kong 400 820 5835  
Japan 81 (3) 6714 3086  
Middle East, Asia, and North Africa +41 52 675 3777  
People's Republic of China 400 820 5835  
Republic of Korea +822 6917 5084, 822 6917 5080  
Spain 00800 2255 4835\*  
Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835\*  
Brazil +55 (11) 3759 7627  
Central Europe & Greece +41 52 675 3777  
France 00800 2255 4835\*  
India 000 800 650 1835  
Luxembourg +41 52 675 3777  
The Netherlands 00800 2255 4835\*  
Poland +41 52 675 3777  
Russia & CIS +7 (495) 6647564  
Sweden 00800 2255 4835\*  
United Kingdom & Ireland 00800 2255 4835\*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777  
Canada 1 800 833 9200  
Denmark +45 80 88 1401  
Germany 00800 2255 4835\*  
Italy 00800 2255 4835\*  
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90  
Norway 800 16098  
Portugal 80 08 12370  
South Africa +41 52 675 3777  
Switzerland 00800 2255 4835\*  
USA 1 800 833 9200

\* European toll-free number. If not accessible, call: +41 52 675 3777

**For Further Information.** Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit [www.tek.com](http://www.tek.com).

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

