

- 若您在使用本機後感到不適，請立即停止使用本機。
- 耳墊可能會因為長期存放或使用而損壞。
- 若您有任何關於本機的疑問或問題未在本說明書中涉及，請聯絡附近的Sony經銷商。

可向附近的Sony經銷商訂購選購的替換耳塞及弧形支架。

規格

一般資訊

通訊系統：BLUETOOTH規格版本4.1
輸出：BLUETOOTH規格Power Class 2
最大通訊範圍：直視距離約10 m¹⁾
頻段：2.4 GHz波段 (2.4000 GHz - 2.4835 GHz)

模組方式：FHSS

相容的BLUETOOTH模式²⁾:

- A2DP（Advanced Audio Distribution Profile）
- AVRCP（Audio Video Remote Control Profile）
- HFP（Hands-free Profile） HSP（Headset Profile）
- 支援的Codec³⁾：SBC⁴⁾、AAC⁵⁾
- 支援的內音保護法：SCMS-T
- 傳輸範圍（A2DP）：
 - 20 Hz - 20000 Hz（採樣頻率44.1 kHz）
- 隨附物品：
 - 無線立體聲耳機（1） Micro-USB 連接線（約50 cm）（1）
 - 長型混合矽膠耳塞（SS/S/M/L各兩個）
 - 弧形支架（S/M/L各兩個）
 - 參考指南（本頁）（1）
 - 使用說明書（1）

¹⁾實際範圍將會依裝置間的障礙物、微波爐周圍的磁場、靜電、接收敏感度、天線效能、操作系統、軟體應用程式等因素而有所不同。

²⁾BLUETOOTH標準檔案說明裝置間BLUETOOTH通訊的目的。

³⁾Codec：音訊壓縮和轉換格式

⁴⁾子頻帶Codec

⁵⁾進階音訊編碼

無線立體聲耳機

電源：

- DC 3.7 V：內建鋰離子充電電池
- DC 5 V：使用USB充電時質

量：約22 g（不含弧形支架）
操作溫度：5 °C至35 °C
額定功耗：0.8 W
使用時數：

- 當經由BLUETOOTH裝置連線使用時
 - 音樂播放時間：最長8.5小時
 - 通訊時間：最長8小時
 - 待機時間：最長200小時
- 注意事項：使用時數可能會較短，視Codec和使用情況而定。

充電時間：

- 約2.5小時
- 注意事項：充電時數可能視使用情況而有所不同。

充電溫度：5 °C至35 °C

接收器

型式：封閉式，動態
激勵單元：12 mm
頻率響應：4 Hz - 24000 Hz

麥克風

型式：駐極體電容式
指向性：全指向
有效頻率範圍：

- 50 Hz - 8000 Hz

BLUETOOTH 무선기능을사용하지 못하는 경우 주의하십시오

- 당신은BLUETOOTH 통신도중장시간에휴면상태임을 지지 않습니다

- 모든 BLUETOOTH 장치에 대한 연결을 보증하지는 않습니다
 - BLUETOOTH기능이있는장치는Bluetooth SIG, Inc.에서 정한BLUETOOTH 표준을 준수하고 인증을받아야 합니다
 - 연결되어 있는 장치가 유에서 연결한 BLUETOOTH 표준을 지원하지 않는 장치가거나 또는 주요 제품에 따라 일부 장치가 연결되지 않거나 올바른 동작하지 않을 수 있습니다
 - 해당 모든 제품 중 일부 경우 장치는 통신 연결에 따라 노이즈를 발생시킬 수 있습니다
- 연결되는 장치가 해당 통신을 지원하는 데 시간이 걸릴 수 있습니다

스마트 폰 및 컴퓨터의 전화 걸기 앱 사용에 대하여

- 본 기기는 일반적인 경우에만 전화 걸기 앱을 지원합니다
- 스마트 폰의 제조사 및 운영 체제에 따라 다를 수 있습니다

재생 도중 사운드가 자주 스킵되는 경우

- 전송 장치가 유선 연결을 지원하지 않거나 무선 재생 모드를 SBC로 고정하면 상황이 개선될 수 있습니다
- 자제된 내용은 전송 장치에 부속된 사용 설명서를 참조하십시오

기기 충전에 대하여

- 본 기기는 USB를 사용하여 충전됩니다
- 충전하는 동안 USB 포트는 사용하지할 필요가 없습니다

- 충전 중에 기기를 켜거나 BLUETOOTH 기능을 사용할 수 없습니다

- 본 제품을 안전 표시용 카이온은 경우에는 충전해야 된 전량이 충전하게 유지되지 않을 수 있습니다
- 충전과 방전을 몇 번 반복하여는 배터리의 전압 수준으로 유지됩니다

- 본 제품을 안전 표시용 카이온은 경우에는 방전을 방지하기 위해 기기를 완전히 충전해야 할 권장합니다

- 기기를 사용할 수 있는 시간이 더 길어질어진 경우 충전 시 배터리를 완전히 충전해야 합니다
- 배터리 교체은 있는 기기는Sony 담당으로 하십시오

정전기에 관한 주의

- 신체에서 정전기 누적되면 기기에서 정전기를 일으키지 않습니다
- 이 장치는 정전기를 방지하는 장치를 갖추고 있습니다

읽으십시오 **기기가 올바르게 작동하지 않는 경우**

- 기기를 완전히 충전하십시오
- 부속된 마이크로USB 케이블을 사용하여 컴퓨터에

헤드셋을 연결하십시오. A버튼과 B버튼을 함께 누르십시오

패어링 장치는 작동하지 않습니다

- 위장 방법: 헤드셋을 헤드셋에 연결하지 않으면 기기를 다음과 같이 초기화하십시오
- 마이크로USB 포트에 마이크로USB 케이블을 분리한 다음, A 및 B버튼을 함께 3초 이상 길게 누르십시오
- 표시등 파란색이 4번 깜박이고 기기를 켜고 시 설정으로 되돌아옵니다
- 모든 설정을 재설정하십시오

- 기기가 초기화된 후 iPhone 또는 컴퓨터에 연결되지 않을 수 있습니다
- 이 경우 iPhone 또는 컴퓨터에서 기기 페어링 장치를 삭제한 다음 다시 페어링하십시오

| |
|--|
| 방직 성능 |
| 본 기기의 방직 주요 재료은 IEC 60529 "Degrees of protection against ingress of water (IP Code)"의 IPX4 ¹⁾ 와 동등하며, 이 규준은 물이 유입될 때 차단 장치를 포함합니다 |
| 그러나 기기를 속에서 사용할 수 없습니다 |
| 기기 통풍구 사용하지 않을 경우, 기기로 물이 들어가서 화재 감지 또는 오작동이 발생할 수도 있습니다 |
| 다음과 같은 상황에 주의하여 기기를 사용하지 마십시오 |

유료 주파수 범위:
50 Hz - 8,000 Hz

USB를 사용한 배터리 충전 시스템 요구 사항

다음은 현재 충전하는 USB 포트가 전송된 기기인용 컴퓨터

운영 체제



(Windows를 사용하는 경우)
Windows® 10 Home / Windows® 10 Pro
Windows® 8.1 / Windows® 8.1 Pro
Windows® 8 / Windows® 8 Pro
Windows® 7

Home Basic / Home Premium / Professional / Ultimate
Windows Vista® (Service Pack 2 이상)
Home Basic / Home Premium / Business / Ultimate / Media Center Edition 2005

(Mac을 사용하는 경우) Mac

OS X (버전 10.8 이상)

다시 시도 주요 재원에 고장이 발생할 수 있습니다

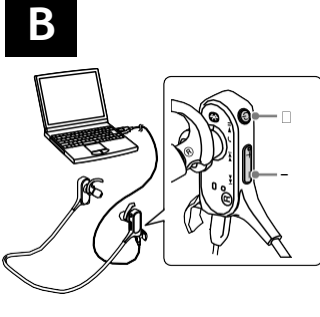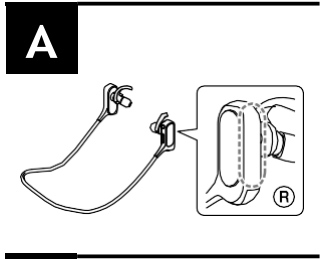

| Русский |
|----------------|
|----------------|

ВНИМАНИЕ

Для снятия опасности поражения электрическим током не открывайте корпус устройства.

Для ремонта обращайтесь только к квалифицированному специалисту.

Не устанавливайте этот аппарат в изолированном пространстве, например, в нижнем шкафу или во встроенной мебели.

Не подвешивайте батарею (батареный блок или установленную батарею) чрезмерному нагреванию, например, не оставляйте на долгое время под солнечными лучами, рядом с огнем и т. п. Не разбирайте, не вскрывайте и не прикасайтесь к аккумулятор или батареи. В случае протечки аккумулятора следите, чтобы жидкость не попала на кожу или в глаза. При контакте с жидкостью промойте пораженную область большим количеством воды и обратитесь к врачу. Аккумуляторы и батареи необходимо зарядить перед использованием. Всегда пользуйтесь инструкциями или руководством производителя при выполнении зарядки. При продолжительном хранении может потребоваться несколько раз зарядить и разрядить аккумулятор или батареи для обеспечения наиболее эффективной работы. Соблюдайте правила по утилизации.

ENG

Беспроводная стереофоническая гарнитура

Производитель: Сонн Корпорейшн, 1-7-1 Коан, Минато-ку, Токио 108-0075, Япония

Сделано вВьетнам
Импортер на территориистран Таможенного союза АО «Сони Электроникс», Россия, 123103, Москва, Карамышевский проезд, 6

Дата изготовления устройства
Год и месяц изготовления указаны на упаковке.
MM.YYYY, гдеMM - месяц, YYYY - год изготовления.

В гарнитуре применяется беспроводная технология BLUETOOTH.
Гарнитуру можно использовать для беспроводного прослушивания музыки со смартфона, мобильного телефона или проигрывателя.
Кроме того, с помощью гарнитуры можно осуществлять или принимать телефонные вызовы.

Срок годности (срок службы) составляет 5 лет.

Условия хранения:

Хранить в упакованном виде в темных, сухих, чистых, вентилируемых помещениях, изолированными отмест хранения кислот и щелочей. Хранить при температуре от -10˚ С до +45˚ С и относительной влажности не более ~75%, без образования конденсата. Срок хранения не установлен.

Транспортировать в оригинальной упаковке, во время транспортировки не бросать, оберегать от падений, ударов, не подвергать излишней вибрации.

Если неисправности не удастся устранить следуя данной инструкции - обратитесь в ближайший авторизованный SONY центр по ремонту и обслуживанию.

Реализацию осуществлять в соответствии с действующими техническими регламентами законодательства. Отслеживая изделие утилизировать в соответствии с действующими требованиями законодательства.

| |
|---|
| Информация для покупателей в Украине |
| Оборудование отвечает требованиям: <ul style="list-style-type: none">Технического регламента о ограничении использования некоторых опасных веществ в электрическом и электронном оборудовании (постановление КМУ от 03.12.2008 №1057); |
| 001 |
| <ul style="list-style-type: none">Настоящим Сонн Корпорейшн заявляет, что тип радиооборудования MDR-XB50BS / Беспроводная стереофоническая гарнитура соответствует Техническому регламенту радиооборудования и телекоммуникационного конечного (терминального) оборудования. Полный текст регламента соответствует доступен в Интернете по адресу:info@sony.ua. |

| |
|---|
| 001 |
| <ul style="list-style-type: none">Настоящим Сонн Корпорейшн заявляет, что тип радиооборудования MDR-XB50BS / Беспроводная стереофоническая гарнитура соответствует Техническому регламенту радиооборудования и телекоммуникационного конечного (терминального) оборудования. Полный текст регламента соответствует доступен в Интернете по адресу:info@sony.ua. |
| 001 |
| <ul style="list-style-type: none">Настоящим Сонн Корпорейшн заявляет, что тип радиооборудования MDR-XB50BS / Беспроводная стереофоническая гарнитура соответствует Техническому регламенту радиооборудования и телекоммуникационного конечного (терминального) оборудования. Полный текст регламента соответствует доступен в Интернете по адресу:info@sony.ua. |

Уполномоченный представитель в Украине по вопросам соответствия требованиям технических регламентов: ООО «Сони Украина», ул. Ильская, 8, г. Киев, 04070, Украина.

ВНИМАНИЕ! ЗВУКОВОЕ СОПРОВОЖДЕНИЕ ДЛЯ ДАННОГО УСТРОЙСТВА ДОСТУПНО ТОЛЬКО НА АНГЛИЙСКОМ ЯЗЫКЕ

Звукоее сопровождение включается на устройстве в следующих случаях:

- Включение устройства: “Power on” (Питание включено)
- Низкий уровень заряда батареи при включении устройства: “Battery Level Low” (Низкий уровень заряда батареи)
- Включение устройства: “Power off” (Питание отключено)
- Переход устройства в режим сопряжения: “BLUETOOTH pairing” (Сопряжение с BLUETOOTH)
- Устройство подключено к устройству BLUETOOTH: “BLUETOOTH connected” (Подключено к BLUETOOTH)
- Устройство отключено от устройства BLUETOOTH: “BLUETOOTH disconnected” (Отключено от BLUETOOTH)
- Завершение вызова с использованием гарнитуры: “Call ended” (Вызов завершен)
- Устройство автоматически отключается при низком уровне заряда батареи: “Please recharge headset” (Пожалуйста, перезарядите гарнитуру)

Логотипы товарных знак Bluetooth® и слогансы являются зарегистрированными товарными знаками Bluetooth SIG, Inc., использование этих знаков компанией Sony Corporation производится по условиям лицензионного соглашения.

N-Mark является товарным знаком или зарегистрированным товарным знаком NFC Forum, Inc. в США и других странах.

Microsoft, Windows и Windows Vista являются зарегистрированными товарными знаками или товарными знаками Microsoft Corporation в США и/или других странах.

Mac и Mac OS являются товарными знаками Apple Inc., зарегистрированными в США и других странах.

iPhone является товарным знаком Apple Inc., зарегистрированным в США и других странах.

Другие товарные знаки и торговые наименования являются собственностью их соответствующих владельцев.

Меры предосторожности

О связи BLUETOOTH

- Беспроводная технология BLUETOOTH обеспечивает диапазон действия в радиусе приблизительно 10 метров. Максимальное расстояние связи может отличаться в зависимости от наличия препятствий (тело человека, металл, стена и т. д.) или электромагнитной среды.
- Расположение встроеной антенны этого изделия указано пунктирной линией (рис. □). Чувствительность связи BLUETOOTH может быть улучшена путем поворота встроеной антенны к подключенному устройству BLUETOOTH. Когда между антенной подключенного устройства и встроеной антенной этого изделия имеется препятствие, возможно возникновение помех или пропадание звука, а также отключение связи.
- При следующих условиях возможно отключение связи BLUETOOTH, а также возникновение помех или пропадание звука.
 - Между этим изделием и устройством BLUETOOTH находится человек. Эту проблему можно решить, разместив устройство BLUETOOTH таким образом, чтобы его антенна была направлена в сторону этого изделия.
 - Между этим изделием и устройством BLUETOOTH находится препятствие, например металлический предмет или стена.
 - Рядом с данным изделием находится устройство, работающее на частоте 2,4 ГГц, например устройство Wi-Fi, беспроводной телефон или микроволновая печь.
 - Поскольку устройства BLUETOOTH Wi-Fi (IEEE802.11b/g/n) работают на одной частоте (2,4 ГГц), то при использовании этого изделия рядом с устройством Wi-Fi может возникнуть интерференция микроволн, что приводит к возникновению помех, пропаданию звука или отключению связи. В этом случае выполните следующие действия.
 - Используйте это изделие на расстоянии не менее 10 м от устройства Wi-Fi.
 - Если это изделие используется на расстоянии менее 10 м от устройства Wi-Fi, выключите устройство Wi-Fi.
 - Установите это изделие и устройство BLUETOOTH настолько близко друг к другу, насколько это возможно.
- Микроволновое излучение устройства BLUETOOTH может влиять на работу электронных медицинских приборов. Выключайте это изделие и другие устройства BLUETOOTH в следующих местах, поскольку их работа может привести к несчастному случаю.
 - В местах, где имеется горючий газ, в больницах, поезде или на автозаправочной станции.
 - Рядом с автоматическими дверями или системами пожарной сигнализации.
- Не используйте это изделие в самолете. Радиоволны могут влиять на работу инструментов, что может стать причиной несчастного случая из-за неисправности.
- Из-за особенностей беспроводной технологии BLUETOOTH звук с устройства может воспроизводиться с небольшой задержкой на устройстве BLUETOOTH при разговоре по телефону или прослушивании музыки.
- Это изделие поддерживает функции безопасности, удовлетворяющие требованиям стандарта BLUETOOTH для обеспечения защиты от несоединения, устанавливаемого с помощью технологии беспроводной связи BLUETOOTH, однако существующие настройки безопасности могут быть недостаточными. Соблюдайте осторожность, применяя технологию беспроводной связи BLUETOOTH для обмена данными.

- Мы не принимаем на себя никакой ответственности в случае утери информации во время сеансов связи BLUETOOTH.
- Связь со всеми устройствами BLUETOOTH не гарантируется.
 - Устройство, поддерживающее функцию BLUETOOTH, должно соответствовать требованиям стандарта BLUETOOTH, установленного группой Bluetooth SIG, Inc., и его пригодность должна быть удостоверена.
 - Даже если подключенное устройство соответствует требованиям вышеуказанного стандарта BLUETOOTH, возможно, не удастся подключить некоторые устройства или они будут работать неправильно, что зависит от функций или технических характеристик устройства.
 - При использовании в режиме разговора телефонной гарнитуры могут возникать помехи в зависимости от устройства и среды связи.
- В зависимости от подключаемого устройства для начала обмена данными может потребоваться некоторое время.
- Об использовании приложений для вызовов для смартфонов и компьютеров**
 - Данное изделие поддерживает только стандартные входящие вызовы. Приложения для вызовов для смартфонов и компьютеров не поддерживаются.

Если во время воспроизведения пропадает звук

- Связание можно исправить, изменив настройки качества беспроводного воспроизведения или изменив режим беспроводного воспроизведения на SBC на передающем устройстве. Для получения дополнительной информации см. инструкцию по эксплуатации, прилагаемую к передающему устройству.

О зарядке этого изделия

- Это изделие можно заряжать только через интерфейс USB. Для зарядки потребуется компьютер с портом USB.
- Во время зарядки не удасться включить это изделие или использовать функцию BLUETOOTH.
- Если не использовать изделие в течение длительного времени, аккумуляторная батарея может не сохранить достаточный заряд. Батарея сможет удерживать заряд надлежащим образом после нескольких циклов перезарядки.
- При длительном хранении изделия зарядите батарею не реже одного раза в полгода во избежание ее сильной разрядки.
- Если время использования изделия становится очень малым, аккумуляторную батарею следует заменить новой. Для замены батареи обратитесь к ближайшему дилеру Sony.

Примечание по статическому электричеству

- Статическое электричество, накопленное телом, может вызвать легкое покалывание в ушах. Чтобы свести к минимуму этот эффект, носите одежду из натуральных материалов.

Изделие не работает надлежащим образом

- Перезарядите изделие (рис. □).
- Подключите гарнитуру к заряжаемому компьютеру с помощью прилагаемого кабеля micro-USB, затем нажмите кнопки □ и - одновременно. При этом будет выполнена перезагрузка изделия. Информация о согласовании не удаляется.
- Если проблема не устранена даже после вышеописанной операции перезарядки, выполните инициализацию изделия следующим образом.
 - Отключите кабель micro-USB от порта micro-USB, выключите устройство, затем нажмите и удерживайте кнопки □ и - одновременно в течение более 7 секунд. Индикатор (синий) мигнет 4 раза и изделие вернется к заводским настройкам. Вся информация о согласовании будет удалена.
 - После инициализации изделия, возможно, не удастся подключиться к iPhone или компьютеру. В этом случае удалите информацию о согласовании изделия с iPhone или компьютера, затем выполните согласование снова.

Характеристики защиты от брызг
Характеристики защиты от брызг¹⁾ этого изделия эквивалентны IPX4²⁾ по стандарту IEC 60529 “Степень защиты от попадания воды (степень защиты IP)”, который определяет степень защиты от попадания воды. Однако это изделие нельзя использовать в воде. При неправильном использовании этого изделия вода может попасть внутрь и привести к возгоранию, поражению электрическим током или неисправностям. Внимательно соблюдайте следующие предупреждения и правильно используйте изделие.

Жидкости, для которых обеспечиваются характеристики защиты от брызг

| |
|--|
| Применно: пресная вода, водопроводная вода, пот |
| Неприменно: жидкости, отсутствующие в списке выше (например: мыльная вода, вода с моющим средством, шампунь, горячая ключевая вода, вода из бассейна, морская вода и т. д.) |
| ¹⁾ При использовании изделия убедитесь, что крышка порта micro-USB плотно закрыта. |
| ²⁾ IPX4 (степень защиты от брызг): защищено от брызг со всех направлений. |

Характеристики защиты от брызг для этого изделия основаны на измерениях Sony в условиях, описанных выше. Помните, что несправности, вызванные погружением в воду вследствие неправильного использования, не покрываются действующей гарантией.

Обеспечение надлежащей защиты от брызг
Внимательно соблюдайте следующие предупреждения и правильно используйте изделие.

- Не роняйте изделие и не подвергайте его механическому воздействию. В противном случае изделие может оказаться деформировано или повреждено, что может привести к ухудшению свойств защиты от брызг.
- Не погружайте изделие в воду и не используйте его во влажной среде, например в ванной комнате.
- Крышка порта micro-USB является важной элементом для защиты от брызг. При использовании изделия убедитесь, что крышка порта micro-USB плотно закрыта. Если на крышке имеются какие-либо посторонние предметы или она неплотно закрыта, невозможно гарантировать надежную защиту от брызг. Кроме того, вода может проникнуть внутрь изделия и стать причиной неисправности.
- Не допускайте принудительного разбрызгивания воды на цилиндрическую часть, из которой исходит звук. В противном случае защита изделия от брызг может ухудшиться.
- Любую влагу, попадающую на изделие, следует удалять мягкой сухой тканью. Если в отверстиях внешней стороны остаются вода, возможно, звук будет воспроизводиться тише или не будет слышен совсем. В этом случае выньте вкладыши, поверните их звуковыми каналами вниз и потрясите несколько раз (рис. □).
- Не оставляйте изделие в холодном месте там, чтобы на нем оставалась вода, так как вода может замерзнуть. Во избежание неисправности обязательно удаляйте воду тканью после использования изделия.

Прочее

- Не помещайте данное изделие в места, подверженных воздействию влажности, пыли, копоти или пара, а также прямым солнечным лучей. Не оставляйте изделие в автомобиле в течение длительного времени. Это может привести к неисправности.
- Устройство BLUETOOTH может не работать с мобильным телефоном при некоторых условиях передачи радиосигнала и в некоторых местах, где применяется оборудование.
- Высокий уровень громкости этого изделия при прослушивании может оказывать отрицательное воздействие на слух.
- В целях безопасности на дорогах не пользуйтесь данным изделием при управлении автомобилем или езде на велосипеде.
- Не используйте изделие в местах, где в целях безопасности необходимо слышать внешние звуки, например на железнодорожных платформах и строительных объектах.
- Не кладите тяжелые предметы и не надавливайте сильно на это изделие, так как это может вызвать его деформацию во время длительного хранения.
- Не подвергайте изделие сильному ударам.
 - Выполняйте чистку изделия мягкой сухой тканью.
- При возникновении дискомфорта во время использования изделия немедленно прекратите его использование.
- Амбушоры могут прийти в негодность при длительном хранении или использовании.
- В случае возникновения вопросов или проблем, касающихся данного устройства и не описанных в данном руководстве, обращайтесь к ближайшему дилеру Sony.

| |
|---|
| Дополнительные сменные вкладыши и заушные держатели можно заказать у ближайшего дилера Sony. |
|---|

Технические характеристики

Общие

Система связи: спецификация BLUETOOTH версии 4.1

Выход: класс мощности 2 по спецификации BLUETOOTH

Максимальная дальность связи: в пределах прямой видимости: прибл. 10 м

Диапазон частот: диапазон 2,4 ГГц (2,4000 ГГц-2,4835 ГГц)

Метод модуляции: FHSS

Совместимые профили BLUETOOTH[®]: A2DP (Advanced Audio Distribution Profile)

AVRCP (Audio Video Remote Control Profile)
HFP (Hands-free Profile)
HSP (Headset Profile)

Поддерживаемые кодеки¹⁾: SBC²⁾, AAC³⁾

Поддерживаемый метод защиты данных: SCMS-T

Диапазон передачи (A2DP): 20 Гц - 20000 Гц (частота дискретизации 44,1 кГц)

Входящие в комплект элементы:
Беспроводная стереофоническая гарнитура (1)
Кабель micro-USB (прибл. 50 см) (1)
Длинные гибридные вкладыши из силиконового каучука (S/S/M/L по 2 шт.)
Заушные держатели (S/M/L по 2 шт.)
Справочник (эта памятка) (1)
Инструкция по эксплуатации (1)

- Действительный диапазон может отличаться при наличии таких факторов, как препятствия между устройствами, магнитные поля вокруг микроволновой печи, статическое электричество, чувствительность прена, эффеицы антенны, операционная система, программное приложение и т. д.
- Стандартные профили BLUETOOTH определяют назначение связи BLUETOOTH между устройствами.
- Кодек: формат сжатия аудиосигнала и преобразования
- Кодек с многополосным кодированием
 - Расширенное кодирование аудио

Беспроводная стереофоническая гарнитура

Источник питания:
3,7 В постоянного тока: встроенная литий-ионная аккумуляторная батарея

5 В постоянного тока: при зарядке с использованием USB

Масса: Прибл. 22 г (за исключением заушных держателей)

Рабочая температура: от 5˚ С до 35˚ С

Номинальная потребляемая мощность: 0,8 Вт

Время работы:
При подключении к устройству BLUETOOTH
Время воспроизведения музыки: макс. 8,5 часов
Время работы в режиме коммуникации: макс. 8 часов
Время работы в режиме ожидания: макс. 200 часов
Примечание: Время использования может быть меньше в зависимости от кодека в процессе эксплуатации.
Время зарядки:
Прибл. 2,5 часов
Примечание: Время зарядки может отличаться в зависимости от условий эксплуатации.

Температура зарядки: от 5˚ С до 35˚ С

Ресивер

Тип: закрытый, динамический

Динамик: 12 мм

Диапазон воспроизводимых частот: 4 Гц - 24000 Гц

Микрофон

Тип: электретный конденсаторный

Направленность: всенаправленный

Рабочий частотный диапазон: 50 Гц - 8000 Гц

Системные требования для зарядки батареек с помощью USB

Персональный компьютер с предварительно установленной операционной системой из следующего списка и портом USB:

Операционные системы
(при использовании Windows)
Windows® 10 Home / Windows® 10 Pro
Windows® 8.1 / Windows® 8.1 Pro
Windows® 8 / Windows® 8 Pro
Windows® 7
Windows® Home Basic / Home Premium / Professional / Ultimate
Windows Vista® (Service Pack 2 или более поздней версии)
Home Basic / Home Premium / Business / Ultimate / Media Center Edition 2005

(при использовании Mac)
Mac OS X (версии 10.8 или более поздней версии)

Конструкция и технические характеристики могут быть изменены без предварительного уведомления.

Українська

ПОПЕРЕДЖЕННЯ

Щоб зменшити ризик ураження електричним струмом, не відкривайте корпус. Технічне обслуговування обладнання може здійснювати лише кваліфікований персонал.

Не встановлюйте обладнання в обмеженому просторі, наприклад, у книжкових чи вбудованих шафах.

Не піддавайте елементи живлення (аккумулятор чи встановлені батареї) впливу надмірного тепла, наприклад, сонячного світла, воногю тепло проводож тривалою періоду. Не розбирайте додаткові елементи живлення або аккумулятори.

У разі протікання елемента живлення не допускайте контакту рідни з шкірою або очима. У разі контакту промитте уражену область великою кількістю води та зверніться до лікаря.

Додаткові елементи живлення та аккумулятори слід зарядити перед використанням. Для отримання інструкцій з належного заряджання завжди звертайтеся до інструкцій виробника або посібника для обладнання. Після тривалого періоду зберігання може знадобитися кілька разів зарядити та розрядити елементи живлення або аккумулятори для забезпечення максимальної продуктивності. Виконуйте утилізацію належним чином.

Бездротова стереофонічна гарнитура

Виробник: Сонн Корпорейшн, 1-7-1 Коан, Минато-ку, Токио 108-0075, Японія

Зроблено у В'єтнам

Дата виготовлення пристрою
Рік і місяць виготовлення зазначені на пакуванні.
MM.YYYY, де MM - місяць, YYYY - рік виготовлення.

Срок придатності (срок служби) складає 5 років.

Умови зберігання.
Продукцію зберігання в упакованому виді в темних, сухих, чистих, добре вентильованих приміщеннях, зволяювач від місць зберігання кислот / лугів.
Температура зберігання: від -10 до +45˚ С.
Відносна вологість зберігання: 75% без конденсату.
Термін зберігання не встановлений.

Транспортувати в оригінальній упаковці виробника. Під час транспортування не кидати, обертігати від падін, ударів, не піддавати надмірній вібрації.

Обладнання відповідає вимогам:

- Технічного регламенту обмеження використання деяких небезпечних речовин в електронному обладнанні (постанова КМУ від 03.12.2008 № 1057);

| |
|---|
| 001 |
| <ul style="list-style-type: none">Справжнім Сонн Корпорейшн заявляє, що тип радиообладнання MDR-XB50BS /Бездротова стереофонічна гарнитура відповідає Технічному регламенту радиообладнання і телекоммуникаційного кінцевого (терминального) обладнання. Полный текст деклараций по відповідності доступный в Интернеті за такою адресою: info@sony.ua. |
| 001 |
| <ul style="list-style-type: none">Справжнім Сонн Корпорейшн заявляє, что тип радиообладнання MDR-XB50BS /Бездротова стереофонічна гарнитура відповідає Технічному регламенту радиообладнання и телекоммуникационного конечного (терминального) оборудования. Полный текст регламента соответствует доступен в Интернеті за такою адресою: info@sony.ua. |

Уповноважений представник в Україні з питань відповідності вимогам технічних регламентів:ТОВ «Соні Україна», вул. Ільїнська, 8, м. Київ, 04070, Україна.

ВАЖЛИВО. ЗВУКОВІ ВАКЗАВИ ДЛЯ ЦЬОГО ПРОДУКТУ ДОСТУПНІ ТІЛЬКІ АНГЛІЙСЬКОЮ МОВОЮ

Звукові вказівки можна почути з пристрою у таких випадках:

- Пристрій вмикається: “Power on” (Живлення увімкнено)
- Низький заряд аккумулятора, коли пристрій вмикається: “Battery LevelLow” (Рівень заряду низький)
- Пристрій вмикається: “Power off” (Живлення вимкнено)
- Пристрій переходить в режим об’єднання в пару: “BLUETOOTHpairing” (об’єднання в пару BLUETOOTH)
- Пристрій підключається до пристрою BLUETOOTH: “BLUETOOTH connected” (підключення до BLUETOOTH)
- Пристрій відключається від пристрою BLUETOOTH: “BLUETOOTH disconnected” (відключення від BLUETOOTH)
- Завершується виклик у режимі «вільні руки»: “Call ended” (виклик завершено)
- Пристрій автоматично вмикається через низький заряд аккумулятора: “Please recharge headset” (Перезарядіть гарнитуру)

Словесна марка та логотип Bluetooth® є зареєстрованими торговельними марками компанії Bluetooth SIG, Inc. Корпорація Sony Corporation використовує цю марку за ліцензією.

N-Mark є торговельною або зареєстрованою торговельною маркою компанії NFC Forum, Inc. у США та інших країнах.

Microsoft, Windows і Windows Vista товарними знаками або зареєстрованими товарними знаками Microsoft Corporation у США й інших країнах.

Mac і Mac OS є товарними знаками компанії Apple Inc., зареєстрованими у США та інших країнах.

iPhone є товарним знаком компанії Apple Inc., зареєстрованим у США та інших країнах.

Інші торговельні марки та назви належать відповідним власникам.

Застережні заходи

Про з’єднання BLUETOOTH

Бездротова технологія BLUETOOTH працює в радіусі приблизно 10 м. Максимальна дальність зв’язку залежить від наявності перешкод (тіла людей, металеві предмети, стіни тощо) або електромагнітного середовища.

- У пристрій вбудовано антену, на яку виває пунктирна лінія (рис. □). Чутливість з’єднання BLUETOOTH можна покращити, повернувши вбудовану антену в напрямку підключеного пристрою BLUETOOTH. Наявність перешкод між антенною підключеного пристрою та вбудованою антенною цього пристрою може призвести до шуму або «випадання» звуку чи переривання з’єднання.

Переривання з’єднання BLUETOOTH, шум або «випадання» звуку можуть статися за наведених нижче умов.



- Між цим пристроєм і пристроєм BLUETOOTH стоїть людина.
- Щоб покращити якість з’єднання в такій ситуації, розташуйте пристрій BLUETOOTH у напрямку антени цього пристрою.
- Між цим пристроєм і пристроєм BLUETOOTH є перешкода, наприклад металевий предмет або стіна.
- Недалеко від цього пристрою використовується пристрій, що працює в радіусі 2,4 ГГц, наприклад пристрій із підтримкою Wi-Fi, бездротові телефони або мікрохвильова піч.
- Оскільки пристрої BLUETOOTH і пристрої з підтримкою Wi-Fi (IEEE802.11b/g/n) працюють в одній частоті (2,4 ГГц), можуть виникнути мікрохвильові перешкоди, які у свою чергу призводять до появи шуму, «випадання» звуку чи переривання з’єднання, якщо цей пристрій використовується під час роботи з підтримкою Wi-Fi. У такому разі виконайте наведені нижче дії.

- Використовуйте цей пристрій на відстані принаймні 10 м від пристрою з підтримкою Wi-Fi.
- Якщо цей пристрій використовується в радіусі 10 м від пристрою з підтримкою Wi-Fi, вимкніть пристрій Wi-Fi.
- Розташуйте цей пристрій і пристрій BLUETOOTH якомога ближче один до одного.
- Мікрохвилі, які надходять від пристрою BLUETOOTH, можуть вливати на роботу електронних медичних пристроїв. Вимкніть цей пристрій та інші пристрої BLUETOOTH у таких розташуваннях, оскільки це може призвести до нещасних випадків.
- У місцях, де наявний легкозаймистий газ, у лікарнях і наавтозаправках;
 - була автоматичних дверей або пожежних сигналізацій.
- Не використовуйте пристрій на літаку. Радіохвилі можуть призвести до несправності інструментів і пов’язаних із цим нещасних випадків.



Щоб особливі вимоги бездротової технології BLUETOOTH звуку на цьому пристрої відтворювалися з незначним відставанням порівняно зі звуком, що відтворюється на пристрої BLUETOOTH під час телефонної розмови або прослуховування музики.

- Цей пристрій підтримує функції безпеки, які відповідають вимогам стандарту BLUETOOTH, тим самим забезпечуючи безпеку як з боку пристрою, так і при використанні бездротової технології BLUETOOTH. Однак рівень безпеки може бути недостатнім залежно від установлених параметрів. Будь-яобачні під час спілкування з використанням бездротової технології BLUETOOTH.
- Ми не несемо ж


1

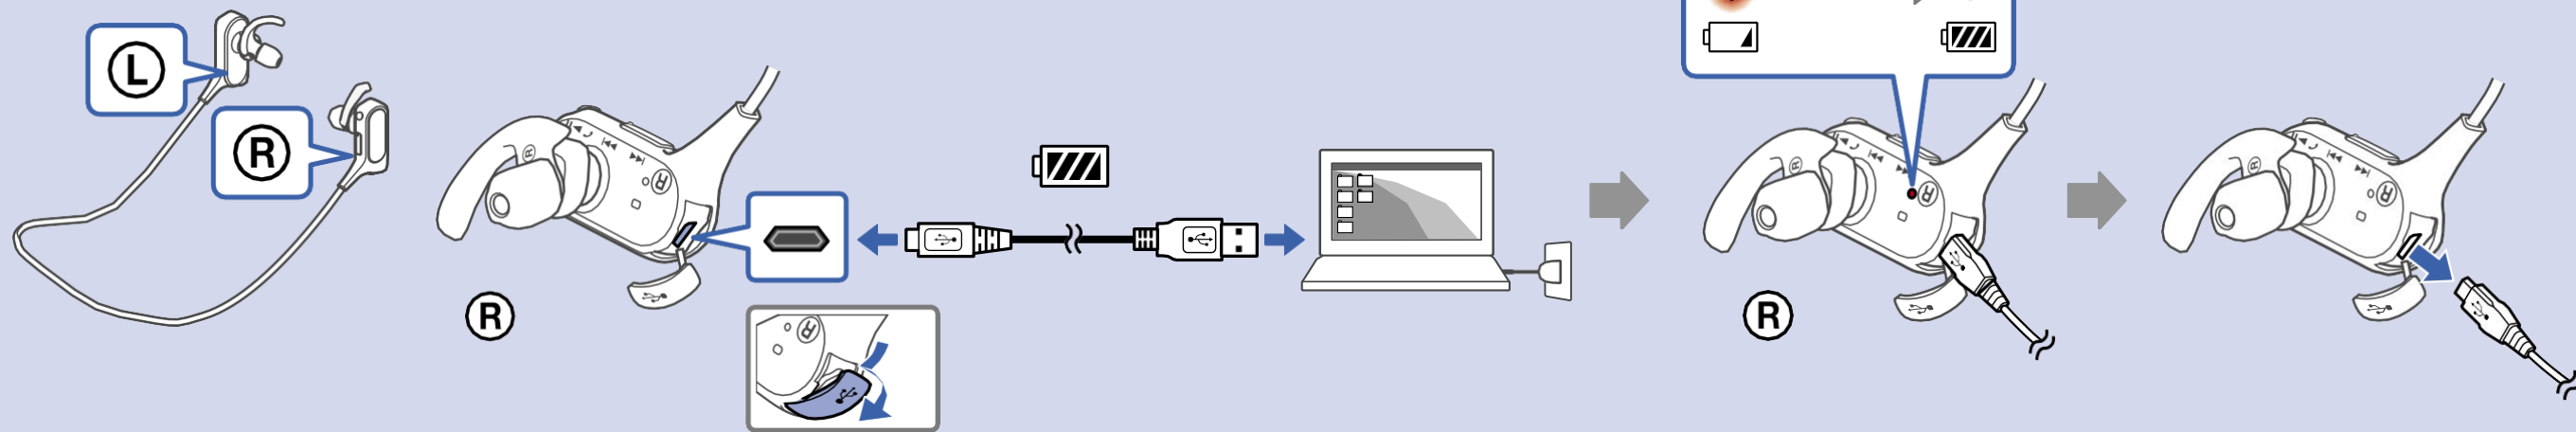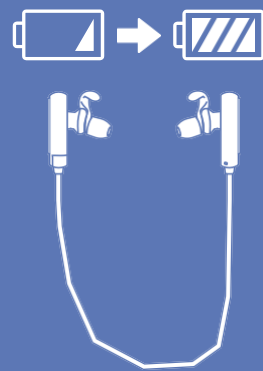



2



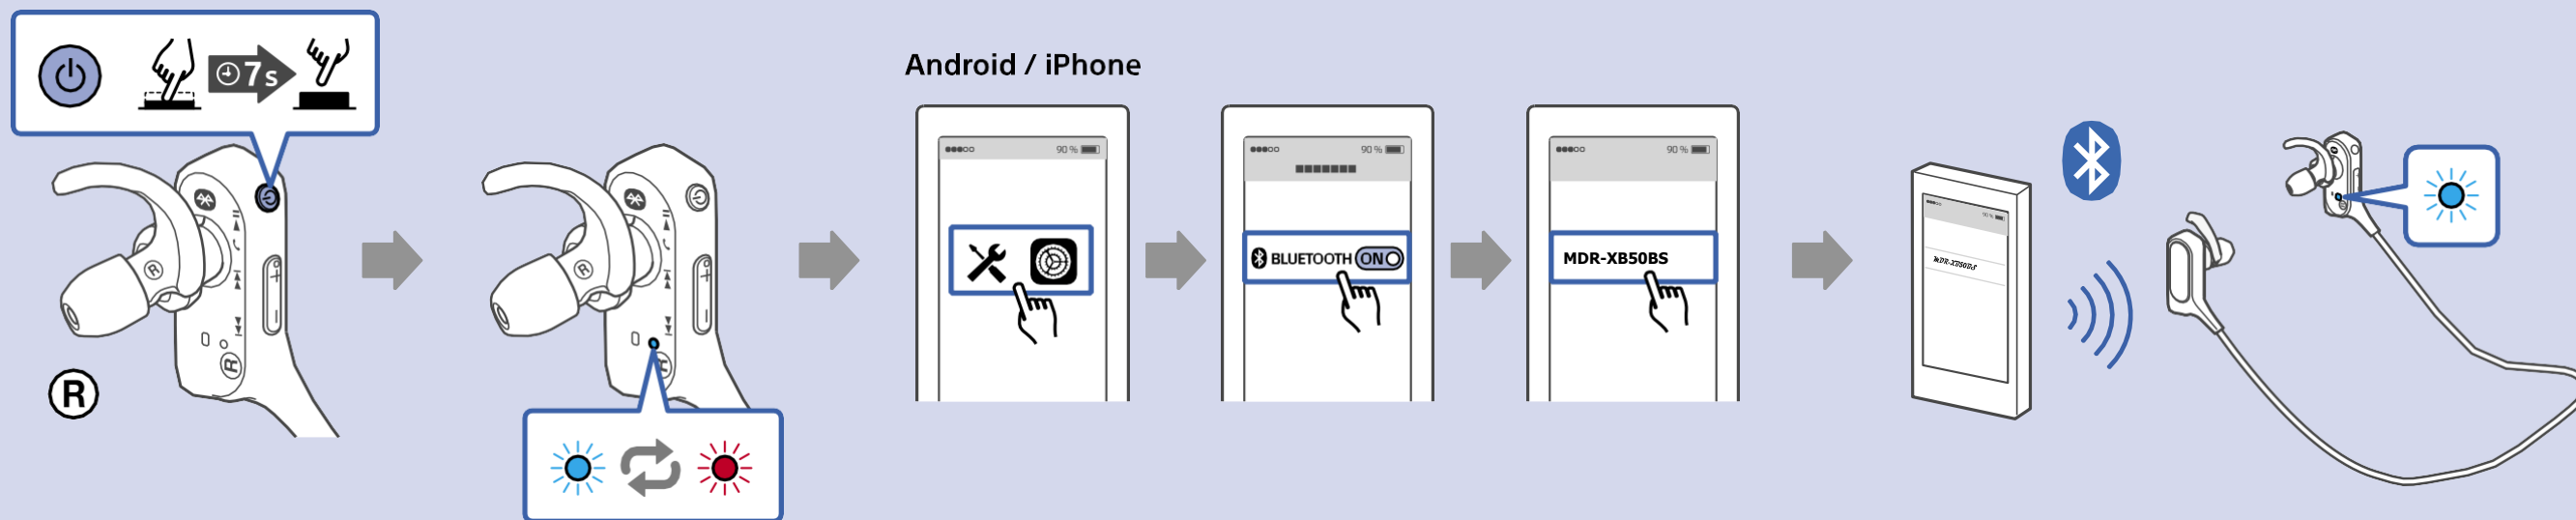



3


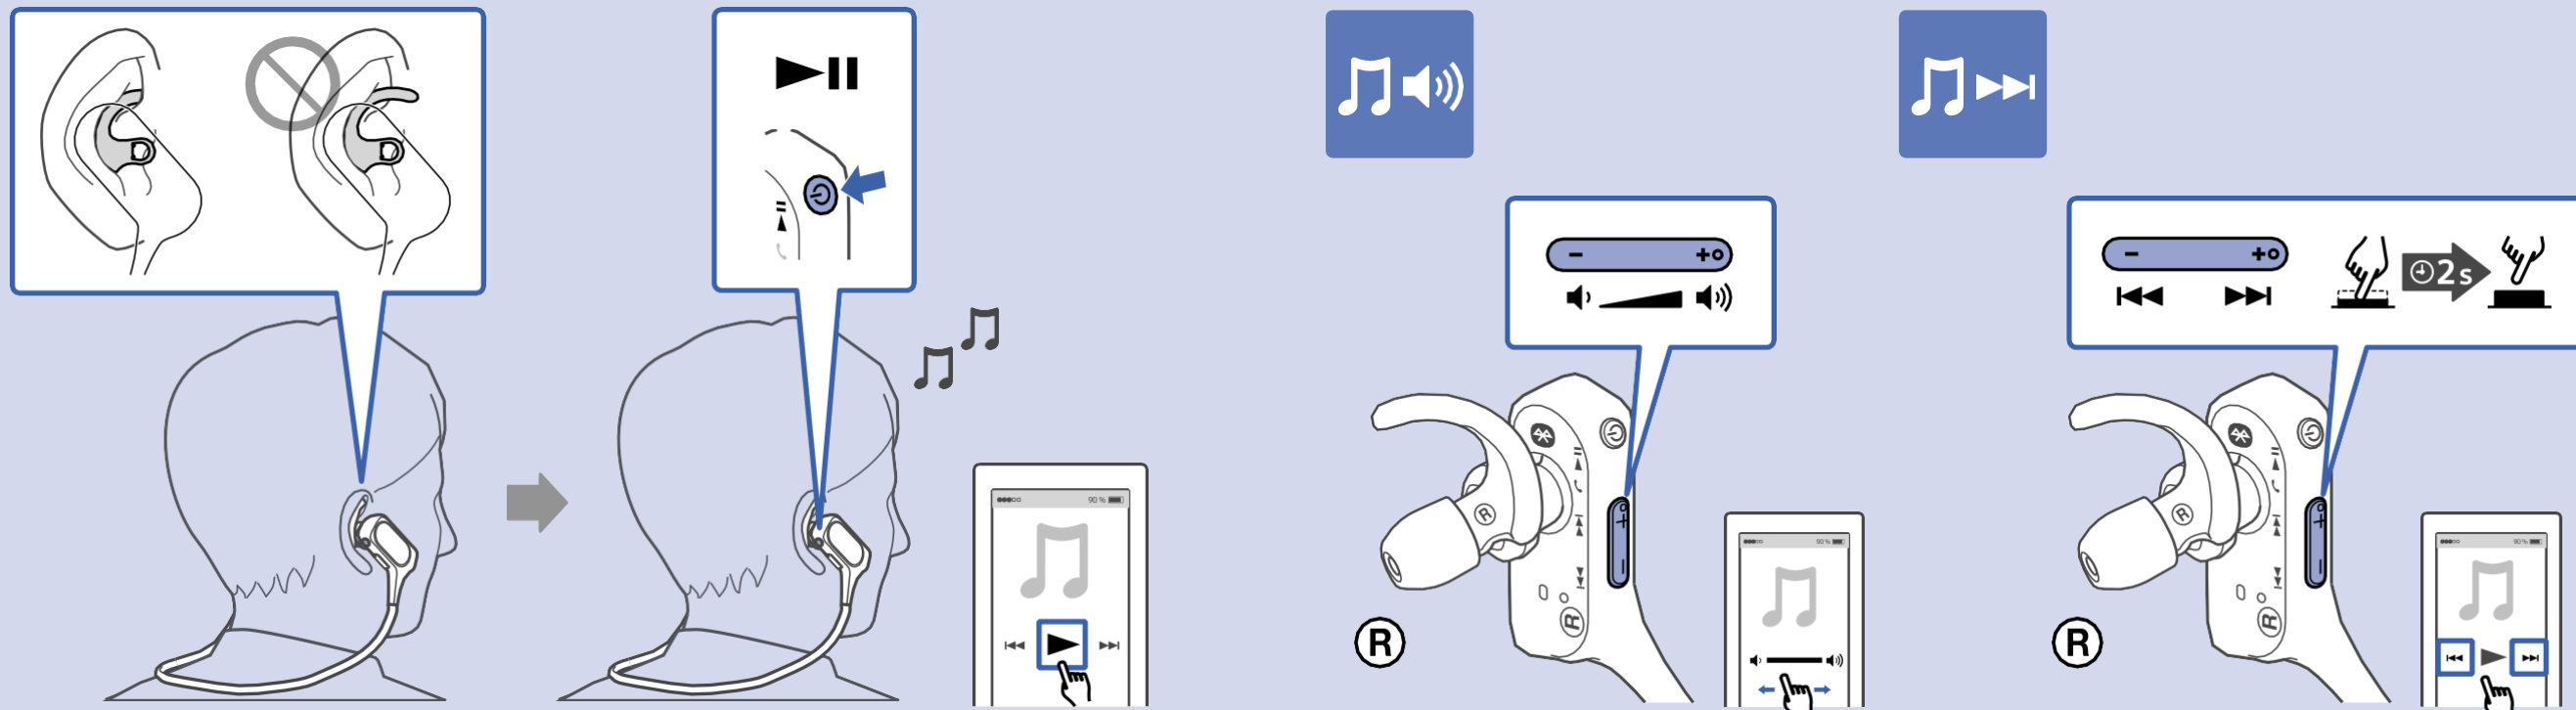


MDR-XB50BS

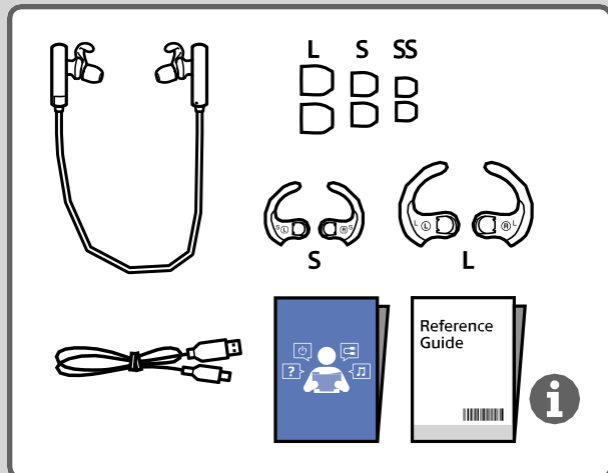

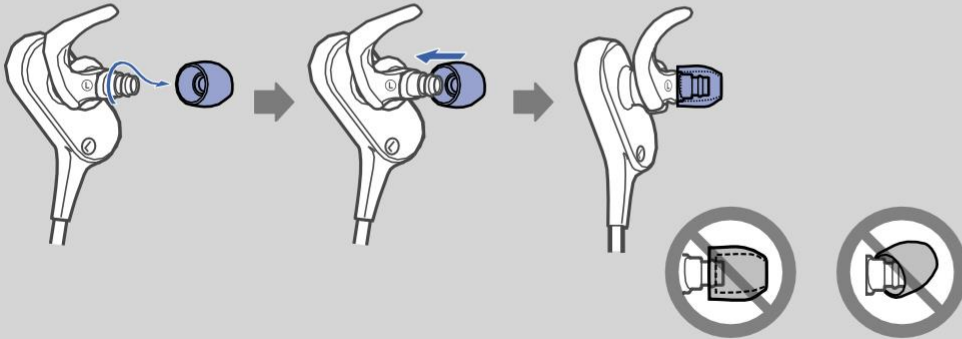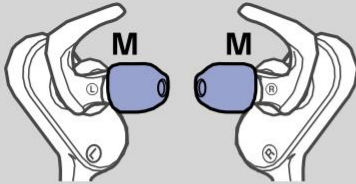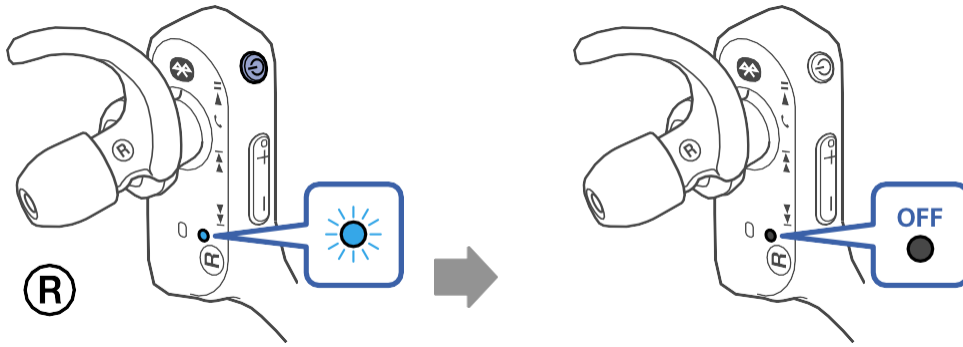

Android

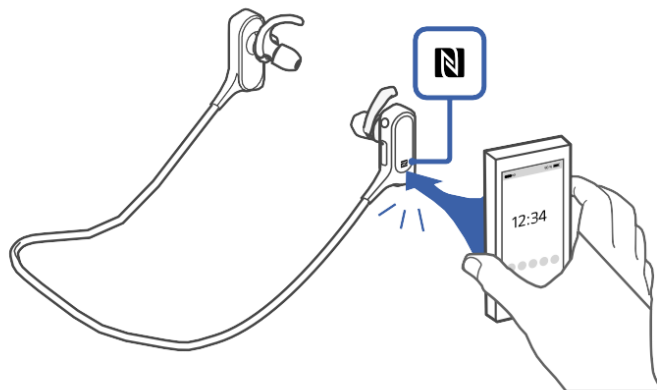

Service center details

| Service Entity Name | City | Address | PIN CODE | CONTACT DETAILS |
|----------------------------------|-------------|--|----------|-----------------|
| Rajpath Service Centre | Bhubaneswar | 15, Bapuji Nagar, Patel Building Bhubaneswar - 751 009Orissa | 751009 | 1800-103-7799 |
| Shreejal Services | Cuttack | Plot No: 203/2901, 196/2977 unit 34, Srimam Nagar, Near FM Complex, Badambadi, Cuttack - 753012, Oris | 753012 | 1800-103-7799 |
| Sree Laxmi Services | Balasure | At- Padhuan PadaBidyut Marg,Balasure - 756001, Orissa | 756001 | 1800-103-7799 |
| Hi-Tech Solutions | Rourkela | House No: EL-111, Basanti Colony, Rourkela - 769012, Orissa | 769012 | 1800-103-7799 |
| Happy Care Services | Bhubaneswar | N-4/251, Opp. ID. Market, IRC Village, Bhubaneswar, Orissa - 751015. | 751015 | 1800-103-7799 |
| Excellent care | Berhampur | Park street, Disrt. Ganjam, Berhampur -760002, Orissa | 760002 | 1800-103-7799 |
| Excellent care | Jeypore | Dolomandap Street, Near Radhakrishna temple, Disst. Koraput, Jeypore-764001, Orissa | 764001 | 1800-103-7799 |
| Royal Services | Sambalpur | Khata No.142 , Plot No.510/3086At- Charbhathi Chowk, PO/Distt - Sambalpur-768001Orissa | 768001 | 1800-103-7799 |
| Zinam Enterprises | Itanagar | 1st Floor, City Center, NH52AOpp ICICI Bank, E-Sector, Etanagar, Papum Pare, Itanagar-791111, Arunacha | 791111 | 1800-103-7799 |
| Tech Shop | Guwahati | Rajgarh Main Road, Guwahati - 781003 , Assam | 781003 | 1800-103-7799 |
| M/s Technosys | Jorhat | Mithapukhuri Road, Off Gar-Ali, Jorhat - 785001, Assam | 785001 | 1800-103-7799 |
| Sandhya Enterprise | Silchar | Shop No. 28, M. N. Dutta Road Silchar - 788001 Assam | 788001 | 1800-103-7799 |
| C. P. Enterprise | Guwahati | C. P. Tower, M G Path, Christian Basti, Guwahati - 781005, Assam | 781005 | 1800-103-7799 |
| Bee Dee.Com | Dibrugarh | Swagatam Complex, 1st Floor, KC Gogoi Path, Thana Chariali, Dibrugarh - 786001, Assam | 786001 | 1800-103-7799 |
| Tech Shop | Bongaigaon | Chapaguri Road, Opp Axis Bank, Beside Bank of India ATM, North Bongaigaon, Assam - 783380 | 783380 | 1800-103-7799 |
| C. P. Enterprise | Tezpur | N. T. ROAD, MURATETELI , 1ST FLOOR OF FRENCH MOTOR, TEZPUR -784001 | 784001 | 1800-103-7799 |
| Bee Dee.Com | Tinsukia | TDA Market, 2nd Floor, Tinsukia-786125, Assam | 786125 | 1800-103-7799 |
| Tech shop | Nagaon | RKB Road, Ward no. 11, Opp. Ayakar Bhawan Christian patty Nagaon - 782001 (Assam) | 782001 | 1800-103-7799 |
| Digital Electronics Centre | Imphal | Singjamei, Chongtham Leikai, Imphal - 795 001, Manipur | 795001 | 1800-103-7799 |
| D K Enterprises | Shillong | Behind Step by Step School Below OM Books, Barik Shillong-793001, Meghalaya | 793001 | 1800-103-7799 |
| Blue Eyes Systems | Aizawl | Near Axis Bank Chandmari, Aizwal-796005, Mizoram | 796005 | 1800-103-7799 |
| Tech Shop | Dimapur | 1st Floor, Above Space-M, Merry Ville Building, Church Road, Dimapur-797112 Nagaland | 797112 | 1800-103-7799 |
| RESTART | Dimapur | Merry Ville Building, Nyamo Lotha (NL) Road, Dimapur-797112 Nagaland | 797112 | 1800-103-7799 |
| G.R.Service | Agartala | 16, Office Lane, Agartala-799001 Tripura (W) | 799001 | 1800-103-7799 |
| Anees Electronics | Port Blair | No. 3, Babu Lane, Aberdeen Bazar, Port Blair-744101, Andaman & Nicobar | 744101 | 1800-103-7799 |
| Neosa Electronics (P) Ltd. | Kolkata | 158, S.P. Mukherjee Road, Kolkata - 700026, West Bengal | 700026 | 1800-103-7799 |
| Neosa Electronics (P) Ltd. | Asansol | S. B. Gorai Road S. B. Gorai Road N/I-Birinchil Marriage Hall Beside-Kaji Nazrul Islam University & Su | 713303 | 1800-103-7799 |
| Nav Technology Pvt. Ltd. | Kolkata | 130A, Bagmari Road, Near Bagmari Kabarsthan, Kolkata - 700054 | 700054 | 1800-103-7799 |
| Smart-Tech Solutions | Siliguri | 23 Ram Krishna Road, Near Angela School Ashrampara, Siliguri - 734401, West Bengal | 734401 | 1800-103-7799 |
| Teknoplaza | Kolkata | Binoy Giri Apartment, Fartabad More, Garia Station Rd., Kolkata-700084 | 700084 | 1800-103-7799 |
| Neosa Electronics (P) Ltd. | Kolkata | 70/1/2, Gouri Bari Lane, Ground Floor, Calcutta - 700 004 | 700004 | 1800-103-7799 |
| Neosa Electronics (P) Ltd. | Durgapur | Nachan Road, Bhiringi, Benachity, Durgapur - 713213, West Bengal | 713213 | 1800-103-7799 |
| Neosa Electronics (P) Ltd. | Burdwan | Baronilpur More , Near Laltu Smriti Sangha Sripally , Burdwan - 713103, West Bengal | 713103 | 1800-103-7799 |
| Teknoplaza | Kolkata | CD-95, Sec I, Salt Lake City Kolkata-700064 | 700064 | 1800-103-7799 |
| Neosa Electronics (P) Ltd. | Haldia | Plot No. 3056, J.L. No 126, Ward No. 7, Basudevpur, PO & PS: Durgachak, Distt: East Medinipur, Haldia- | 721602 | 1800-103-7799 |
| Smart-Tech Solutions | Cooch-Behar | Keshab Road, Opposite Polytechnic College, Cooch Behar - 736101, West Bengal | 736101 | 1800-103-7799 |
| Smart-Tech Solutions | Malda | Vivekananda Pally, Near Sabuj Abujh Shishu Angan, Malda - 732101, West Bengal | 732101 | 1800-103-7799 |
| Neosa Electronics (P) Ltd. | Kolkata | 520, D. H. Road, Behala, Kolkata - 700034 | 700034 | 1800-103-7799 |
| Neosa Electronics (P) Ltd. | Kolkata | 72, Sarojini Pally, Colony More, Opp. Pioneer Market, Barasat Near Hela Battola More, Kolkata - 700126 | 700126 | 1800-103-7799 |
| Neosa Electronics (P) Ltd. | Howrah | 20, Aurobinda Road, Salkia, Howrah - 700002, West Bengal | 700002 | 1800-103-7799 |
| Neosa Electronics (P) Ltd. | Murshidabad | 63, Babul Bona Road, Post - Behrampore, Murshidabad - 742101, West Bengal | 742101 | 1800-103-7799 |
| Videoplaza | Midnapore | Ward No-8, R.S. - Kotlwal at Bibigunj, Near Nimtolarchak, Midnapore , Distt- Paschim Medinipur, Midn | 721101 | 1800-103-7799 |
| Teknoplaza | Barrackpore | 195, Barasnt Road, Post - Nona Chandan Pukur, Barrackpore-700122, West Bengal | 700122 | 1800-103-7799 |
| Neosa Electronics (P) Ltd. | Serampore | 27, Dey Street, PO & PS - Serampore Dist. Hoogly, Serampore-712201 , West Bangal | 712201 | 1800-103-7799 |
| Dunamis Trade & Services Pvt. Lt | Kolkata | 42/6A, Gariahat Road, Kolkata-700029 West Bengal | 700029 | 1800-103-7799 |
| PowerLux Enterprises | Patna | K-611, Kali Mandir Road Hanuman Nagar , Kankerbagh Patna - 800020 | 800020 | 1800-103-7799 |
| R&S Enterprises | Motihari | 1st Floor, Saran Complex, Near Town Hall Motihari-845401, Bihar | 845401 | 1800-103-7799 |
| Sai Enterprises | Darbhanga | Holding No:- 622, Ward No 14 Ganes Mandir Marg, Tower Chowk, Darbhanga-846004 Bihar | 846004 | 1800-103-7799 |
| M. S. Service | Gaya | West side portion of 429A. P. Colony, P.O - Rampur Opp. PNB, Gaya-823001, Bihar | 823001 | 1800-103-7799 |
| Prakash Communication | Bhagalpur | Holding No: 12/A Ward No:- 23, Akashwani Chowk Adampur, Bhagalpur-812001 Bihar | 812001 | 1800-103-7799 |
| M. S. Service | Patna | M42, Ground Floor, Road No- 26, Sri Krishna Nagar, Patna-800001, Bihar | 800001 | 1800-103-7799 |
| Onus Services | Patna | Ground Floor, 15/CSri Krishna Puri, Basawan park Lane, Patna-800001, Bihar | 800001 | 1800-103-7799 |
| Onus Services | Muzaffarpur | Ground Floor, Euro Kids School Building Jawahar Cinema Road, Hari Sabha chowk Muzaffarpur-842001, Bi | 842001 | 1800-103-7799 |
| Onus Services | Purnea | Ground Floor, Kali Bari Road, Bhatta Bazar, Purnea-854301, Bihar | 854301 | 1800-103-7799 |
| Fortune | Ranchi | Pradhan Towers, 5, Main Road, Ranchi - 834 001, Jharkhand | 834001 | 1800-103-7799 |
| Fortune | Jamshedpur | 157, New Baradwari, Saktchi, Jamshedpur - 831001, Jharkhand | 831001 | 1800-103-7799 |
| Fortune | Dhanbad | HN:-122, Near Smrat Hotel, Housing Colony, Bartand, Dhanbad-826001, Jharkhand | 826001 | 1800-103-7799 |
| Fortune | Hazaribagh | Forest Colony, Near Sematery Gate Hazaribagh - 825301, Jharkhand | 825301 | 1800-103-7799 |
| Fortune | Deoghar | Near Dr. DK Singh, Hanuman Tikri Chowk, Deoghar - 814112, Jharkhand | 814112 | 1800-103-7799 |
| Fortune | Bokaro | Shop No. P 31 , Beside Alok Cinema Hall, Sector-4, City Center, Bokaro Steel City - 827004, Jharkhand | 827004 | 1800-103-7799 |
| System n Service | Kolkata | BB-120, Sector-I Salt Lake City Kolkata- 700064 | 700064 | 1800-103-7799 |
| Modern AKM Electronics Pvt Ltd | Chandigarh | SCO 126-127, 1st Floor, Sector 34 A, Chandigarh - 160022 | 160022 | 1800-103-7799 |
| Techno Care | Chandigarh | SCO 128-129 1st Floor, Sector -34 Chandigarh-160022 | 160022 | 1800-103-7799 |
| Ultimate Services | Panchkula | Showroom No - 55, Sector 5, Swastik Vihar, Mansa Devi Complex, Panchkula - 134109 | 134109 | 1800-103-7799 |
| Johny Electronics | Shimla | Highway home near police Chowk Opposite HDFC bank, Local Bus Stand Sanjauli, Shimla - 171006, Hima | 171006 | 1800-103-7799 |
| Hateshwari Care Centre | Mandi | Opp. Pst. Office - Bhangrotu Near Chowk Tehsil Sadar Mandi - 175021 Himachal Pradesh | 175021 | 1800-103-7799 |
| S.S. Electronics | Kangra | Ohri complex, Jayanti Vihar, Zamanabad Road, Kangra-176001, Himachal Pradesh | 176001 | 1800-103-7799 |
| Vista Electronic Care | Jammu | H.NO. 526 A, BEHIND LAKSHMI NARYAN MANDIR GANDHI NAGAR, JAMMU (J&K) - 180004 | 180004 | 1800-103-7799 |
| OHI Enterprises | Srinagar | Abi Guzar, Mandir Lane, Residency Raod, Srinagar, Jammu & Kashmir-190001 | 190001 | 1800-103-7799 |
| Gee & Sons | Baramulla | Jadeed Link Road, Main Chowk Oppsite Punjab National Bank Baramulla-193101, Jammu & Kashmir | 193101 | 1800-103-7799 |
| A P Network Services | Delhi | Basement 1, Plot No.5, Sagar Complex(Local Shopping Centre) New Rajdhani Enclave, Opp. Sagar Ratna, D | 110092 | 1800-103-7799 |
| Ace Electronic Services | Delhi | J 3/7, Rajouri Garden, New Delhi - 110027 | 110027 | 1800-103-7799 |
| Star Electronics | Delhi | A-9, Ground Floor, C-Block Community Center, Naraina Vihar, New Delhi - 110045 | 110045 | 1800-103-7799 |
| Jolly Electronics World | Delhi | I - 177, Karampura New Delhi - 110015 | 110015 | 1800-103-7799 |

| | | | | |
|------------------------------------|-------|--|--------|---------------|
| Dhanvi Communication | Delhi | D-66, Kamla Nagar, New Delhi - 110007 | 110007 | 1800-103-7799 |
| Technocare Solutions Pvt Ltd | Delhi | B 10-11, Basement, Central Market, Near Axis Bank, Lajpat Nagar-II, Delhi-110024 | 110024 | 1800-103-7799 |
| Krishna Services | Delhi | C-921, Ground Floor, Extn 1, Sec-7, Harijan Basti Palam, Dwarka-110075, Delhi | 110075 | 1800-103-7799 |
| F1 Info Solutions & Services Pvt L | Delhi | 208, 2nd Floor, Ashok Bhawan 93, Nehru Place New Delhi-110019 | 110019 | 1800-103-7799 |

| | | | | |
|------------------------------------|---------------|---|--------|---------------|
| F1 Info Solutions & Services Pvt L | Delhi | E2/233 B , Shastri Nagar , opp to Metro Pillar No. 172, Near Shastri Nagar Metro Station New Delhi -110 | 110052 | 1800-103-7799 |
| Immortal Innovation Services Pvt | Delhi | B-20/21, 1st Floor, Opp. Metro Pillar No. 80, East Krishna Nagar, Delhi- 110051 | 110051 | 1800-103-7799 |
| Arsh Care Centre | Jhansi | 14, Jeevan Shah Chauraha, Jhansi - 284001 | 284001 | 1800-103-7799 |
| Unique Quality Experts | Meerut | 4, Nehru Road Near Kehchhari Meerut - 250001 | 250001 | 1800-103-7799 |
| S.V. Enterprises | Saharanpur | Pawel House Church Road Opposite Sadar Thana Saharanpur - 247001 Uttar Pradesh | 247001 | 1800-103-7799 |
| Digital Informatics Pvt Ltd. | Bareilly | 146, Civil Lines, Circuit House Crossing Bhagwati Complex (Etn) Near IDBI Bank Bareilly - 243122 | 243122 | 1800-103-7799 |
| N. R. I. Electronics | Ghaziabad | 94 , GT Road, Choudhary More, Ghaziabad - 201001 | 201001 | 1800-103-7799 |
| J.P. Electronics | Ghaziabad | Plot No - 331, Upper Ground Floor, Sector -4, Vaishali, Ghaziabad - 201010 Uttar Pradesh | 201010 | 1800-103-7799 |
| Jaypee Electronics | Noida | B-59, Ground Floor, Sector - 6 Noida - 201301, Uttar Pradesh | 201301 | 1800-103-7799 |
| Prachi Electronics | Bulandshahar | 595, Kothiyat , opp. Azad Building, Bulandshahar-203001, Uttar Pradesh | 203001 | 1800-103-7799 |
| JMD Enterprises | Aligarh | J-11A, Jahakpuri Ramghat Road, Aligarh- 202001, Uttar Pradesh | 202001 | 1800-103-7799 |
| Unique Quality Experts | Moradabad | 398, Beside Wilsonia School, Civil Line, Moradabad - 244001, Uttar Pradesh | 244001 | 1800-103-7799 |
| R.K. System & Services | Mathura | 64/710, Chowki Bag Bahadur, Basudev Bhawan, Near State Bank Chauraha, Mathura -281001 , Uttar Prad | 281001 | 1800-103-7799 |
| S.V. Enterprises | Muzaffarnagar | Shop No-43B, ground floor, Near Nandi Sweets, New Mandi, Muzaffarnagar (U.P.) Pin-251001 Uttar Prade | 251001 | 1800-103-7799 |
| Vardhman Electronics | Firozabad | 1/66, Suhag Nagar, Firozabad - 283203, Uttar Pradesh | 283203 | 1800-103-7799 |
| F. K. Electronics | Agra | 10, LIC Building, Dholpur House, M G Road Agra- 282002, Uttar Pradesh | 282002 | 1800-103-7799 |
| A Square Infotech India | Dehradun | 92/72, Vrindavan Tower 1st Floor, Ravindra Nath Tagore Marg New Cantt Road, Dehradun-248001 Uttaran | 248001 | 1800-103-7799 |
| Shradha Services | Haldwani | L 16-17, Ground Floor Durga City Centre, Haldwani-263139 Uttaranchal | 263139 | 1800-103-7799 |
| Ujjwal Telecoms | Haridwar | 22, Chandracharya Chowk New Haridwar, Haridwar-249407, Uttaranchal | 249407 | 1800-103-7799 |
| Kamla Enterprises | Hissar | FF-51-S Model Town, Gurudwara Road Hisar-125001, Haryana | 125001 | 1800-103-7799 |
| I Connect | Gurgaon | Plot No - 1, Opposite Utsav Garden, Atul Kataria Chowk , Sheeta Mata Road , Near Sec - 14, Gurgaon - 1 | 122001 | 1800-103-7799 |
| Chugh Telecom | Sirsa | New M.C Market Shop No. 81,82,83 Sirsa-125055, Haryana | 125055 | 1800-103-7799 |
| Sai Electronics | Faridabad | 5C / 12 BP NIT Railway Road Faridabad -121001 , Haryana | 121001 | 1800-103-7799 |
| SSR Care Center | Rewari | Shop No 9 & 10, New Balaji Market, New BMG Mall, Rewari-123401, Haryana | 123401 | 1800-103-7799 |
| Sai Security Systems | Rohtak | Near Malabar Guest House, Green road, Rohtak-124001, Haryana | 124001 | 1800-103-7799 |
| F1 Info Solutions & Services Pvt L | Karnal | H No. 493-L, Model Town, Near SBI Training Center, Karnal - 132001, Haryana | 132001 | 1800-103-7799 |
| Vipan Electronics | Yamuna Nagar | Dhawan Complex, SCO-235 C, Opp. M. C. Market, Near Santosh Hospital, Kanhaiya Sahib Chowk, Jagadhri | 135001 | 1800-103-7799 |
| I-Tech Care | Gurgaon | Plot No. 1, Opp. Utsav Garden Banquet Atul Kataria Chowk Sheeta Mata Road, Near Sector-14 Gurgaon-1 | 122001 | 1800-103-7799 |
| Tejasv Enterprises | Ambala | Shop No. 14, Jail Land, Sector -01 Huda Shopping Complex, Ambala City-134002, Haryana | 134002 | 1800-103-7799 |
| Shachi Enterprises | Sonipat | Shop No 1 , LGF Basement, Tulip Mall, Gandhi Chowk Sonipat-131001, Haryana | 131001 | 1800-103-7799 |
| Aditya Enterprises | Panipat | 24, Assandh Road Opp Bharat Petrol Pump Panipat-132103, Haryana | 132103 | 1800-103-7799 |
| Nehal Techno Services | Jodhpur | Behind SBBJ Bank, Near Himmat Jai Motor, Jalori gate, Chopasni Road Jodhpur - 342 001, Rajasthan | 342001 | 1800-103-7799 |
| Genius Services | Udaipur | 12, Jain Colony, Near Edan School University Road, Udaipur - 313001, Rajasthan | 313001 | 1800-103-7799 |
| Global Services | Jaipur | 3-A, Ram Nagar Corssing, Near Sodala Thana Raj Bhawan Road, Civil Lines, Jaipur - 302006 | 302006 | 1800-103-7799 |
| H. H. Network | Sriganganagar | House No 14, E Block Sri Ganganagar - 335001 | 335001 | 1800-103-7799 |
| H. H. Network | Bikaner | Shop No.2, Plot No.372, Opp. Mahila Jagrati School, Panchsati Circle, Sadulganj, Bikaner, Rajasthan -334 | 334001 | 1800-103-7799 |
| Nehal Techno Services | Ajmer | Opp. Ram Bhawan, Varsha Palace, Shastri Nagar, Ajmer - 305001 Rajasthan | 305001 | 1800-103-7799 |
| Global Techno Care | Alwar | Opp. Pursharthi Dharm Shala, Bheru ka chabutra, Near Bus Stand Alwar -301001, Rajasthan | 301001 | 1800-103-7799 |
| Nitesh Enterprises | Kota | Jaishree sadan, Near Kotri chauraha, Jhalawar Road, Kota-324007, Rajasthan | 324007 | 1800-103-7799 |
| Komal Service Plaza | Sikar | 1st Floor, Near new Kotwali, Behind Tabela Market, Sikar - 332001, Rajasthan | 332001 | 1800-103-7799 |
| H. H. Network | Hanumangarh | Shop No. 20, Ground Floor Goyal Plaza, Opp Taxi Stand Tanwar Colony, Sangria Road, Hanumangarh Jn, H | 335512 | 1800-103-7799 |
| Sonic Care | Lucknow | Flat no 1 , Ground Floor, Manoram Appartment, C-994 , Sector - B , Mahanagar , Behind U.P. Biz Vikash Nig | 226006 | 1800-103-7799 |
| Libra Technicom | Varanasi | D-64/98 A, Shivpurva, Madhopur Siga Varanasi-221001, Uttar Pradesh | 221001 | 1800-103-7799 |
| Sona Associates | Faizabad | Near Babu Balika Girls Inter College Faizabad - 224001 Uttar Pradesh | 224001 | 1800-103-7799 |
| Raj Electronics | Gorakhpur | A-67 , Budha Vihar Commercial Near Vardayini Hospital, Tara Mandal Road, Gorakhpur-273016 Uttar Prad | 273016 | 1800-103-7799 |
| Care and Care Services Pvt Ltd | Allahabad | 40-C, L.B.S. Marg, Civil Lines, Allahabad - 211001 | 211001 | 1800-103-7799 |
| Aditya Infosolutions | Lucknow | B-11, Tilak Marg, Dali Bagh, Near Ganna Sansthan - 226001 | 226001 | 1800-103-7799 |
| Suvitech | Kanpur | 112/08 (16) benajhar main road, Swaroop Nagar, Kanpur-208002 | 208002 | 1800-103-7799 |
| V.S. Engineering | Renukoot | Shyam Complex, (Opp- Padmini Hotel) Patel Nagar , Murdhwa , Sonebhadra, Renukoot - 231217, Uttar Pr | 231217 | 1800-103-7799 |
| Libra Technicom | Azamgarh | Shop No: 82 Narauli Tiraha, Sidhari Thana Road Near Dr. Hridya Chauhan, Narauli Azamgarh-276001, Uttar | 276001 | 1800-103-7799 |
| Sigma Marketing | Jalandhar | 178, Master Tara Singh Nagar, Jalandhar - 144 001 | 144001 | 1800-103-7799 |
| Modern Electronics | Ludhiana | SCO - 2650, Balwant Complex, Dashmesh Nagar Opp. Dyal Sweets, Gill Road, Ludhiana - 141003 | 141003 | 1800-103-7799 |
| Soni Bros. (Electronic Services) | Amritsar | SCO 24, National Shopping Complex, Near Nandan Cinema Chowk Amritsar - 143 001 | 143001 | 1800-103-7799 |
| Sankalp Electronics | Patiala | Near First Gole Chakkar, Adjoining National Insurance, Factory Area Patiala-147001, Punjab | 147001 | 1800-103-7799 |
| Shriram Communication | Pathankot | Old City Club, Opposite Anmol Colony, College Road, Pathankot-145001, Punjab | 145001 | 1800-103-7799 |
| Kristal Enterprises | Ferozepur | Baghi Hospital Road Opp. Malhotra Petrol Pump Ferozepur - 152002 | 152002 | 1800-103-7799 |
| Digital Care | Ludhiana | SCO -39 G , LGF BRS Nagar Market Op. Police Station Ludhiana - 141001 Punjab | 141001 | 1800-103-7799 |
| A.K Electronics | Hoshiarpur | Opp. Primary School, Kacha Tobha Chowk, Red Road Hoshiarpur-146001, Punjab | 146001 | 1800-103-7799 |
| Piyush Electronics | Bathinda | 2069/A, First Floor, Behind Doctor Nagpal Hospital, The Mall Bathinda-151001, Punjab | 151001 | 1800-103-7799 |
| Digital Care | Amritsar | SCO-6, Kamal Tower, Adjoining Kamal Palace Batala Road, Amritsar-143001 | 143001 | 1800-103-7799 |
| Sunshine Solution | Jaipur | 29, Indira Colony Bani Park, Jaipur-302006 | 302006 | 1800-103-7799 |
| Daksha Services | Pondicherry | No. 147 Eswaran Koil Street Puducherry-605001 | 605001 | 1800-103-7799 |
| Max Electronics | Trichy | Vijay Towers, Ground Floor 4D, Collector Office Road Trichy - 620001 | 620001 | 1800-103-7799 |
| Clarity Services | Chennai | AJ-97, 9th Main Road, Annanagar Chennai-600040, Opp to Anna Adharsh Matriculation School | 600040 | 1800-103-7799 |
| Chennai Service | Chennai | Abirami Plaza 17/4, M.K. Reddy Street West Tambaram Near Tambaram Bus Stand Chennai-600045, Tamil | 600045 | 1800-103-7799 |
| Vimas Intek | Chennai | Y-177 , First Street Near Iyyappa Temple , Anna Nagar Chennai-600040, Tamil Nadu | 600040 | 1800-103-7799 |
| Paragon Enterprises | Vellore | 2/12, Officer line, vellore city center, Vellore- 632001, Tamil Nadu | 632001 | 1800-103-7799 |
| Digital Vision | Chennai | # 44, Veerappa Nagar, 2nd Street, Alwarthirunagar, Chennai-600087, Tamil Nadu | 600087 | 1800-103-7799 |
| Max Electronics | Kumbakonam | Jeba Building, No. 1/2112, New Railway Road, Kumbakonam-612001, Tamil Nadu | 612001 | 1800-103-7799 |
| N CARE | Trichy | 10, Jerome Building, Fort Station Road Near Maris Theatre Trichy-620002, Tamil Nadu | 620002 | 1800-103-7799 |
| Smart Care | Nungambakkam | G.1, Apollo Dubai Plaza No. 100, Mahalingapuram Main Road Nungambakkam, Chennai-600034 Tamil Nad | 600034 | 1800-103-7799 |
| Micro Electronics | Chengalpet | No.5A, Ground Floor, SLKK Building, GST Road Chengalpattu Town & Taluk Kancheepuram Dist. Tamil Na | 603001 | 1800-103-7799 |
| Smart Care | Adyar | 25, Adyar Bridge Road Opp. To Fortis (Malar) Hospital Adyar-600020 Chennai, Tamil Nadu | 600020 | 1800-103-7799 |
| Paragon Enterprises | Peravallur | 147A / 383 A Paper Mills (70 Feet Road) Peravallur-600082, Tamil Nadu | 600082 | 1800-103-7799 |

| | | | | |
|----------------------------|-------------|---|--------|---------------|
| City Electronics Pvt. Ltd. | Madurai | 99/47/2B, T.B. Road,Mehaboopalayam,Madurai -625010 , Tamil Nadu | 625010 | 1800-103-7799 |
| City Electronics Pvt. Ltd. | Tirunelveli | 11/1, South By Pass Road, Kruthi Plaza, Near Kuruchi Bus Stop, Tirunelveli - 627005, Tamil Nadu | 627005 | 1800-103-7799 |
| K.G Electronics | Coimbatore | 505, Cross Cut Road,Gandhipuram,Coimbatore-641012 | 641012 | 1800-103-7799 |
| Sharon Electronics | Salem | Sai Sundaram Plaza71 / 315-CBrindhavan Main RoadSalem- 636004 | 636004 | 1800-103-7799 |
| K.G Electronics | Tiruppur | 157/1, Mangalam Road, Karuvampalayam, Pillayar Kovil Bus Stop Tiruppur - 641604, Tamil Nadu | 641604 | 1800-103-7799 |
| City Electronics Pvt. Ltd. | Tuticorin | 20/6C, Palayamkottai Main Road(Near Medical College) Tuticorin - 628008, Tamil Nadu | 628008 | 1800-103-7799 |
| K.G. Electronics | Coimbatore | 553, N.V.N LayoutCross Cut Road, GandhipuramCoimbatore-641012, Tamil Nadu | 641012 | 1800-103-7799 |
| Sharon Electronics | Erode | JP Buildings , No. 5,Muthu Velappa Street,Erode-638004 | 638004 | 1800-103-7799 |
| Sri Mobiles | Nagercoil | 197/9, Periya Nadar Street, P.W.D.Road,(Opp) Police Quarters, Nagercoil-629002, Tamil Nadu | 629002 | 1800-103-7799 |

| | | | | |
|---------------------------------|---------------|--|--------|---------------|
| Digitek Computer Services | Ooty | No.1, UMC Shopping Complex,M.S Lane, Dist. NilgiriOoty-643001, Tamil Nadu | 643001 | 1800-103-7799 |
| Service Care | Dharmapuri | No: 16 S, 1st Floor, Netaji Bye Pass Road, Dharmapuri-636701Tamil Nadu | 636701 | 1800-103-7799 |
| Service Care | Hosur | 16 F/8, 1st FloorOld Krishnagiri Road, Hosur-635109Tamil Nadu | 635109 | 1800-103-7799 |
| Rayalaseema Enterprises | Kurnool | Shop No. 17 & 18, R.M.K.Plaza,Opp:- Zilla Parishad, Raj Vihar CenterKurnool - 518002 | 518002 | 1800-103-7799 |
| Mabood Electronics | Secunderabad | 1-7-228 / 97 and 98,Shyam Builders,Behind Hotel Swathi,Paradise Circle, M. G. Road,Secunderabad - 500003 | 500003 | 1800-103-7799 |
| Universal Electronics | Hyderabad | 10-4-43/4/A, 1st Floor,Zarar Chambers,Humayun Nagar, Mehadipatnam,Hyderabad - 500028 | 500028 | 1800-103-7799 |
| Sree Balaji Electronics | Hyderabad | 1-1-214/A, Vivek Nagar,Beside Andhra Bank Lane,ChikkadapallyHYDERABAD - 500020 | 500020 | 1800-103-7799 |
| Pranank Electronics | Hyderabad | MIG-501 , 4th RoadNear Venkateswara Swamy TempleKPHB Colony , kukatpallyHyderabad-500072 | 500072 | 1800-103-7799 |
| Universal Electronics | Khammam | 9-11-61/62Khaman Bazar, Khammam-507001 | 507001 | 1800-103-7799 |
| G.S. Technologies | Warangal | D. No:- 1-8-567Nakkalagutta, Hanamkonda, Opp Water TankWarangal -506001, Andhra Pradesh | 506001 | 1800-103-7799 |
| Run Service Infocare Pvt. Ltd. | Secundrabad | H. No:- 1-2-63&64, 1-2-73/25.R Arcade, First FloorPark Land, Part -ASecundrabad-500003, Telangana | 500003 | 1800-103-7799 |
| K.R. Electronics | Nizamabad | Shop No:- 5/6/372Yellammagutta ArchNear LIC Office, Nizamabad-503001, Telangana | 503001 | 1800-103-7799 |
| Pranank Electronics | Vijayawada | D. No- 40-6-4A , Opp. Boyapati BuildingKandhari Road, Vijaywada - 520010 | 520010 | 1800-103-7799 |
| Rayalaseema Enterprises | Tirupati | 18-2-268/20D, Tirumala By-Pass Road,Korlagunta, Near Leela Mahal JunctionTirupati - 517501 | 517501 | 1800-103-7799 |
| S. S. Technologies | Visakhapatnam | D.No: 52-9-3Resapuvanipalem, Jaibheri Maruthi Showroom,Visakhapatnam - 530013Land Mark: Opp. Si | 530013 | 1800-103-7799 |
| Pranank Electronics | Guntur | Dno:- 6-12-27 , 1st Floor,12/1 Arundal Pet, Guntur -522002 , Andhra Pradesh | 522002 | 1800-103-7799 |
| Rayalaseema Enterprises | Nellore | 16/03/625, Ground Floor, 1st Main RoadRammurthy Nagar, Nellore-524001, Andhra Pradesh | 524001 | 1800-103-7799 |
| Hyma Mechatronics | Srikakulam | Near Madhava Motors,Konna Street, One Way Traffic RoadSrikakulam-532001, Andhra Pradesh | 532001 | 1800-103-7799 |
| Saketh Excellent Mobile Commu | Eluru | Shop no. 3,Vasavi Plaza, Eedara Prabhavathi Hospital Road, R.R PetaEluru-534002, Andhra Pradesh | 534002 | 1800-103-7799 |
| Smart Services | Vijayawada | 27-1-5/7, Kruthiventi Vari StreetBeside South India Shopping MallGovernorpet, Eluru RoadVijayawada-5 | 520002 | 1800-103-7799 |
| Durga Electronics | Rajahmundry | D No. 36-25-25 1st FloorSappavari Street, InnespetRajahmundry-533101, Andhra Pradesh | 533101 | 1800-103-7799 |
| Roshan Electronics | Mysore | LIG. 123, Hudco, Panchamanthra Road,Behind JSS Law College, Jayanagar First Stage, Kuvempunagar,My | 570023 | 1800-103-7799 |
| Benchmark Infotech | Bangalore | No.5, 10th Cross, CBI Road,Ganganagar, Bangalore - 560024 | 560024 | 1800-103-7799 |
| Vigneshwar Services | Koramangala | No:659, Ground Floor, 7th D Main, Opp. Koramangala Club, 6th Block, KoramangalaBangalore - 650095 | 650095 | 1800-103-7799 |
| Abhivrudhi Tech | Bangalore | 235/12, Suraj Center, Ground Floor,27th Cross , 7th Block , Jayanagar,Bangalore - 560082 | 560082 | 1800-103-7799 |
| Sonnet Care | Bangalore | 237-240 , 13th Cross, CMH roadHAL 2nd Stage, Indiranagar *Behind Shanthi Sagar)Bangalore - 560038 | 560038 | 1800-103-7799 |
| R-Logic Technology (I) Pvt Ltd. | Bangalore | C/o Iron & Steel Indtrial Consumer's Co-operative Society LimitedNo. 6&7, 1st Floor, Industrial Town, W | 560044 | 1800-103-7799 |
| Jai Hanuma's Enterprises | Mandya | No. 2220, Star Plaza,Above Reliance Fresh, 100ft RoadMandya-571401, Karnataka | 571401 | 1800-103-7799 |
| Prayog Info Solutions Pvt Ltd | Hospet | F16 & F17, JKS Commercial ComplexMain Bazaar, Bellary District,Hospet-583201, Karnataka | 583201 | 1800-103-7799 |
| Eesha Technologies | Tumkur | Ground Floor, GG Archad, Opp SP OfficeB H Road, Vidya NagarTumkur-572103, Karnataka | 572103 | 1800-103-7799 |
| Madonna Care Center | Thiruvalla | D.No.120(2), Ward No.20Kuttathil BuildingThukalassery, M. C Road,Thiruvalla-689101 | 689101 | 1800-103-7799 |
| Madonna Care Center | Vyttila | Allen's Cube, Paradise Road, Manatha Junction, Vyttila - 682019, Kerala | 682019 | 1800-103-7799 |
| Madonna Electronics | Cochin | Door No. XXXIII/14 (A4),Chemmankuzha Building, Opp Metro Piller No. 379, AKG Road, Edapally TollCoc | 682024 | 1800-103-7799 |
| Access Electronics | Thrissur | IV/691-A/14 , 1st FloorAbhcon Axis, Thrissur -Ernakulam HighwayGalilee Junction, Chiyaram Kuriachira | 680006 | 1800-103-7799 |
| Madonna Care Center | Thodupuzha | D No : 26/306 - D1 , Parachalil Building,Vengalloor, Dstt. Idukki,Thodupuzha- 685608, Kerala | 685608 | 1800-103-7799 |
| Expert Zone | Calicut | 4/436 B1, 1st Floor, 4th Gate Building, P.T.usha Road, Calicut - 673032, Kerala | 673032 | 1800-103-7799 |
| Sincere Services | Malappuram | 10/127D, E,Kootheradan Complex, By Pass RoadMuduparambu, Malappuram-676509, Kerala | 676509 | 1800-103-7799 |
| Bright Care | Alappuzha | Nelppura Juma Masjid Building,1st Floor, Near Kallupalam, Mo WardAlappuzha-688013, Kerala | 688013 | 1800-103-7799 |
| Dzire Communication | Ernakulam | Shop No: E8,E93rd Floor,Penta MenakaMarine DriveErnakulam-682031, Kerala | 682031 | 1800-103-7799 |
| V K Technologies | Kottayam | D No II/100, Thekkekkuttu BuildingsK K Road, KanjikuzhyKottayam-686004, Kerala | 686004 | 1800-103-7799 |
| Omkar Electronics | Kollam | MC/V111/1514-413AKadapakkadaKollam-691008, Kerala | 691008 | 1800-103-7799 |
| Trinity Solutions | Trivandrum | TC-3/121-10, Opp M. G College,Kesavadasapuram, Pattom (PO)Trivandrum-695004, Kerala | 695004 | 1800-103-7799 |
| Access Electronics | Palakkad | 14/748/8, 1st Floor, Sakthi Complex,Coimbatore Road, KalmandapamPalakkad-678001, Kerala | 678001 | 1800-103-7799 |
| Excellent | Kannur | TK 1 / 453, A9Vasantham Building, Parakkandy Kannur-670001, Kerala | 670001 | 1800-103-7799 |
| Nishant Enterprises | Margaon | G 9-10Building A, Premabai EnclaveNear Goa State Co-op Bank, BordaMargaon-403601, Goa | 403601 | 1800-103-7799 |
| Vishnu Service Centre | Shimoga | G.N. ComplexPark ExtensionDurgigudiShimoga - 577201 | 577201 | 1800-103-7799 |
| Vishnu Service Centre | Belgaum | Shop No-G2&G3, Saraswathi residency CTS no. 234, Ranade road,Tilakwadi,Belgaum - 590006, Karnatak | 590006 | 1800-103-7799 |
| Upadhyya Electronic Device | Udupi | D.No :- 10-3-98E,Opp. Geethanjali Theater,Udupi - 576001 | 576001 | 1800-103-7799 |
| Abhinav Enterprises | Mangalore | Door No:- 25-02-90/2(2)First Floor, Car Mansion, Kankanady (Bye Pass Road)Mangalore, Karnataka - 575 | 575002 | 1800-103-7799 |
| Upadhyya Electronic Device | Hubli | Emkay Complex, Door No. 7, 1st floor, Kusugal road, Mathura Colony stop, Hubli -580023, Karnataka | 580023 | 1800-103-7799 |
| SRV Electronics | Gulbarga | Shop no. 3-1006, Opp devani Hospital, Gulbarga -585104, Karnataka | 585104 | 1800-103-7799 |
| Shristi Enterprises | Davangere | #609, 2nd Main, Sri Nijalingappa Badavane, Davangere-577004, karnataka | 577004 | 1800-103-7799 |
| Sanika Enterprises | Bijapur | 1st Floor, Above Rohan Motors, Ganpathi Chowk, ShahapathBijapur -586101, Karnataka | 586101 | 1800-103-7799 |
| Engee Computers | Kumta | Hanuman TowersCollege Road, 1st FloorKumta-581343, Karnataka | 581343 | 1800-103-7799 |
| Prayog Info Solutions Pvt Ltd | Bellary | No. 7 , Ward No. 21Veerbhadrethwara Complex, Basaveshwara Nagara, Bellary-583103, Karnataka | 583103 | 1800-103-7799 |
| SRV Electronics | Raichur | Shop No:- 02 & 03, MPI 183 / 7 / 14Mantralayam Road, Beside SLV Indian GasRaichur-585101 | 585101 | 1800-103-7799 |
| Dhvani Sales & Services | Rajkot | 7, Laxmi NagarTrishul Chownk, Kailash Dairy StreetNana Mava Road,Rajkot - 360002, Gujarat | 360002 | 1800-103-7799 |
| Perfect Care | Mehsana | 56/A&B Singapore Hub, Opp Telephonic Exchange, Malgodown Road, Mehsana-384002, Gujarat | 384002 | 1800-103-7799 |
| Angel Electronics | Bhavnagar | Shop No. 135, First FloorMadhav Darshan Complex, Waghawadi Road Bhavnagar - 364001, Gujarat | 364001 | 1800-103-7799 |
| Parshwa Services | Ahmedabad | 14, Agarwal Centre,Opp. Ajanta Commercial Center,Near Kalupur Bank, Income Tax,Ahmedabad - 38001 | 380014 | 1800-103-7799 |
| Jay Shree Electronics | Jamnagar | Digvijay Plot 13Opp. Ambika DairyJamnagar , Gujarat -361005 | 361005 | 1800-103-7799 |
| Om Services | Anand | G18, Tirveni Arcade, Anand-Vidhanagar Road,Near Motikakani Chali, Anand-388001,Gujarat | 388001 | 1800-103-7799 |
| Sunrise Services | Ahmedabad | 8-9-10, Bhagyoday Shopping CenterNr. Rashtrabharti School,Nr. Hatkeshwar AMTS Depo. CTM , Ahmeda | 380026 | 1800-103-7799 |
| Avani Services | Kutch | Shop no-35, Mani complex, Sector-8,Plot no-84, Near Ramlila Maidan,Gandhidham, Kutch-370201, Guja | 370201 | 1800-103-7799 |
| Esquare Point | Indore | LG-1B, Kanchan Sagar, 18/1 Old Palasiya, A.B Road, Indore - 452003 | 452003 | 1800-103-7799 |
| Samriya Marketing | Ujjain | A-27/4, Ved NagarNanakheda (Near Ganesh Temple)Ujjain - 456010Madhya Pradesh | 456010 | 1800-103-7799 |
| Cool India | Gwalior | Nisha Plaza , Near Acharan Press Park Jinsi Road No 1, Lakar, Gwalior -474001Madhya Pradesh | 474001 | 1800-103-7799 |
| Prompt Services | Bhopal | GF-10, Block-B, Mansarovar Complex, Bhopal-462011, Madhya Pradesh | 462011 | 1800-103-7799 |
| Active Techno Care | Indore | M 9-10, Yashwant Plaza, Station Road, Indore- 452001, Madhya Pradesh | 452001 | 1800-103-7799 |

| | | | | |
|-------------------------|------------|---|--------|---------------|
| Computer World Services | Chhindwara | F-10 ,Mansarovar Complex, Near Bus Stand, Chhindwara-480001, Madhya Pradesh | 480001 | 1800-103-7799 |
| Active Techno Care | Ratlam | 91, Shastri Nagar, Opp Sai Mandir, Ratlam-457001, Madhya Pradesh | 457001 | 1800-103-7799 |
| Esquare Point | Khandwa | Plot no-44, Anand Nagar, Main Road, Khandwa-450001, Madhya Pradesh, Near Bramha Kumari Ashra | 450001 | 1800-103-7799 |
| Life Style | Sagar | 1st Floor, Opposite Deepak Hotel, 5 Civil line, Sagar-470001, Madhya Pradesh | 470001 | 1800-103-7799 |
| Excellent Infosys | Katni | Opposite Prem Ramayan Samaj BhawanGurunanak ward, Katni-483501Madhya Pradesh | 483501 | 1800-103-7799 |
| Life Style | Satna | Shop No. 4-5, 1st Floor, Kanodia Complex, Opposite Thana Kotwali, Satna-485001, Madhya Pradesh | 485001 | 1800-103-7799 |
| Prompt Service | Bhopal | 10, Shanti Niketan, Sector 2,near Chetak Bridge, Govindpura,Bhopal - 462023, Madhya Pradesh | 462023 | 1800-103-7799 |
| Prompt Service | Jabalpur | 1292/1AWright Town, Near IDBI BankOpp Dr Meera SanghiJabalpur-482002, Madhya Pradesh | 482002 | 1800-103-7799 |
| Vega Electronics | Mumbai | Shop No.5-A, Bezzola Complex,V.N. Purav Marg, Behind Vijay SalesSuman Nagar, Sion Trombay Road,Che | 400071 | 1800-103-7799 |
| Teknika Electronics | Kalyan | Shop No. 11, ARICIA ALTIS Building, CTS no - 3435, Valipir Road, Near Fortis hospital, Kalyn Shill Road | 421301 | 1800-103-7799 |
| Sri Sai Electronics | Vashi | Shop F1-11, Sector 5,Vashi,Nav Mumbai - 400703 | 400703 | 1800-103-7799 |
| Sonu Electronics | Thane | Shop No. 1&2, Sai Sakshinear Shanti Vihar, Mira Road (E)Thane - 401107 | 401107 | 1800-103-7799 |
| Krish Electronics | Mumbai | 90/676, Ajinkya CHS., MHB Colony,Near Reliance Energy Office, W.E. Highway,Dindoshi Nagar, Malad Eas | 400097 | 1800-103-7799 |
| Metal Tech | Mumbai | 7A Abhishek, C5 Dalia Industrial Estate, Andheri Link Road, Andheri West - 400053 | 400053 | 1800-103-7799 |

| | | | | |
|------------------------------------|---------------|--|--------|---------------|
| S.G. Infotech | Vasai | Shop no:- 1&2, Friendship corner Co Op. Society, Dindyal Nagar, Near ICICI Bank, Vasai Road- WestThane- | 401202 | 1800-103-7799 |
| DG Mobile Service | Panvel | Shop No:-5&6 , Yasho Narayan buildingPlot no:- 403 /B , Old Panvel, Opp Railway Station, Near Naunath | 410206 | 1800-103-7799 |
| Media Enterprises | Dombivili (E) | Shop no. 1, Rakhi Appartment, Near Sarvesh Hall, Dombivili (E) - 421201, Maharashtra | 421201 | 1800-103-7799 |
| Sonu Electronics | Thane | Shop no:- 4, Shirsagar House,Below Bank of Maharashtra Gouthan Road Virar W Thane - 401303 | 401303 | 1800-103-7799 |
| Aar Vee Infoservices | Mumbai | UB-59, Dheeraj Heritage Commercial Complex, S.V road, Santacruz (W), Mumbai -400054, Maharashtra | 400054 | 1800-103-7799 |
| Mangalmurti Enterprises | Thane | Office no 2, 1st Floor, Aakar Longe, Ram Maruti Road, Near Vandana ST Bus Stand, Landmark : ICIC Bank | 400602 | 1800-103-7799 |
| S. B. Electronics | Thane | Shop No.- 4, Bldg No.- B1Pride Plaza, Ghodbunder RoadChrist Nagar, Next to R Mall, Thane (West)-40060 | 400607 | 1800-103-7799 |
| P.S. Electronics | Nagpur | 143, Thakare Bhavan, Zenda Chowk, Abyankar Nagar, Nagpur - 440011 | 440011 | 1800-103-7799 |
| Vaishnavi Electronics | Chandrapur | Haveli Complex, Shop no:- 23/33, Opp ZP Office, Chandrapur-442402Maharashtra | 442402 | 1800-103-7799 |
| Sneha Electronics | Amravati | Shop no:- 1& 12, Swastik Sankool, Nawathe Plot, Badnera Road, Amravati-444607 , Maharashtra | 444607 | 1800-103-7799 |
| Shree Ganpati Services | Gondia | Shop No. 1 , 2Gorkshan Market, Behind Birsi Garage, Gondia-441601, Maharashtra | 441601 | 1800-103-7799 |
| Star Electronics | Yavatmal | Shree Balaji Complex, Ram mandir Road, Beside Sham Takies, Yavatmal-445001, Maharashtra | 445001 | 1800-103-7799 |
| Shree Nitai Services | Akola | Krishnakruty Residency, Tapdiya NagarNear Vinayak Sankul, In front of Bhamburker Hospital, Akola-4440 | 444001 | 1800-103-7799 |
| Raja Electronics & Services Pvt. L | Pune | Shop No 3 & 4, Girls School Extn. Building, 390 B, New Modikhana, Off M.G Road, Pune - 411001 | 411001 | 1800-103-7799 |
| Raja Electronics & Services Pvt. L | Kolhapur | Shop No.8, Centre Point Complex, 511K/1A, E Ward Shahupuri, Station Road, Kolhapur - 416001 | 416001 | 1800-103-7799 |
| Chaitanya Electronics | Pune | Shop no-18/19/20 Gawade Kunal GardenOpp. Gawade Petrol PumpPimpri Chinchawad Link RoadChinch | 411033 | 1800-103-7799 |
| Prachi Enterprises | Solapur | Shop No. 4, Avantinagar Commercial Complex, Near Old Pune Naka, Solapur - 413001 | 413001 | 1800-103-7799 |
| Creative Electronics | Aurangabad | Shop No-LR04Kuber AvenueB Plaza, Jalna RoadAurangabad- 431001 | 431001 | 1800-103-7799 |
| Geeta Electronics | Kolhapur | Plot No: 10, Sawali BunglowShivaji Park, Kolhapur - 416001 | 416001 | 1800-103-7799 |
| New Sai Electronics | Pune | Shop No:1, Gurukrupa Apartment ,Opp. Sujay Garden Pune - 411037 | 411037 | 1800-103-7799 |
| Yash Electronics | Nashik | Shop No:- 8&9, Patil Plaza, Canada CornerNashik - 422005 | 422005 | 1800-103-7799 |
| Shree Sai Ganesh Electronics | Sangli | 729/B , In Front of Janata Light House, Ganpathi Peth, Sangli-416416 ,Maharashtra | 416416 | 1800-103-7799 |
| KSP Services | Kolhapur | Shop No.3, Maruti Plaza , Rajarampuri, 3rd lane , Kolhapur - 416008, Maharashtra | 416008 | 1800-103-7799 |
| Balaji Enterprises | Nanded | Shop-10, Bagath Sing Road , Ganarag Nagar, Nanded-431602 Maharashtra | 431602 | 1800-103-7799 |
| Video Audio Services | Ahmednagar | Shop No:2, Omkar Residency , Behind Zopadi CanteenSavedi Road, Near Urban Bank , Ahmednagar-4140 | 414003 | 1800-103-7799 |
| Hira Electronics | Solapur | Shop No :- 19, Ground Floor, Waterfront phase - I, "D" Wing, Vijapur Road, Civil Lines, Solapur - 413004 | 413004 | 1800-103-7799 |
| Balaji Electronics | Jalgaon | Shop no. 38, New B.J Market, Near Red Cross Blood Bank, Jalgaon- 425001, Maharashtra | 425001 | 1800-103-7799 |
| Geeta Enterprises | Satara | Shop No. 2 &3, Anantraj Appt., Raviwar Peth, Satara-415612, Maharashtra | 415612 | 1800-103-7799 |
| S.P. IN Corporation | Nashik | Shop No. 117Shivam Complex, Nashik RoadOpp. To Muktidham, Nashik-422101Maharashtra | 422101 | 1800-103-7799 |
| New Prasanna Electronics | Aurangabad | 32, Shardashram ColonyNear SBH Paithan Gate, Aurangabad-431001Maharashtra | 431001 | 1800-103-7799 |
| Friends Electronics | Pune | Shreenam ComplexS. No. 51/1 , 1st FloorGagangiri Soc. D. P. Road, KothrudPune-411038, Maharashtra | 411038 | 1800-103-7799 |
| Shree Ganesh Services | Malegaon | G 28 Royal Hub ComplexNear Malegaon CourtMalegaon-423203 | 423203 | 1800-103-7799 |
| Cyber Services | Bilaspur | 1/2, First Floor, Arpa Complex, In Front of Nav Bharat Press, Old Bus Stand Road, Near CMD Chowk Bilaspu | 495001 | 1800-103-7799 |
| Ultra Care | Raipur | LG 21-23 & 26, Samvet Shikhar Complex, Nr. DB City Corporate Park, Rajbandha Maidan, G.E.Road, Raipu | 492001 | 1800-103-7799 |
| Cyber Services | Korba | Plot no. 302, India Residential & Commercial Complex, Infront of SBI Main Branch, T. P Nagar, Korba-4956 | 495678 | 1800-103-7799 |
| Cyber Services | Raigarh | HIG-05, Housing Board Colony, Standard Chandmari, Near Circuit house Road, Raigarh-496001Chattisgar | 496001 | 1800-103-7799 |
| Vikas Enterprises | Bhilai | 3 / 11Dakshin Gangotri, Behind Gouri BarSupela, Bhilai-490023, Chattisgarh | 490023 | 1800-103-7799 |
| Maa Mahamaya Associates | Ambikapur | Roopdev MarketNear Fun-n-Food, Behind Indulnd BankDeviganj Road, Ambikapur-497001, Chattisgarh | 497001 | 1800-103-7799 |
| IT CARE | Jagdarpur | First Floor, Front of Ashirwad CompNext of MRP Showroom, Ravat NagarChitrakoot Road, Jagdarpur-494 | 494001 | 1800-103-7799 |
| Shree Sai Services | Vapi | Shop No.142,143 , Tirupati Plaza,Daman Road, Chala, Vapi--396191District--Valsad, Gujarat | 396191 | 1800-103-7799 |
| Balaji Service | Vadodara | Shop No:- 6-7,Sukhsagar Apprtment,Near Radha Krishan Cross Road,Akota, Vadodara-390020Gujarat | 390020 | 1800-103-7799 |
| D.C Service | Valsad | 105-106, Riddhish, Tithal Road, Near Dreamland Cinema, Valsad-396001, Gujarat | 396001 | 1800-103-7799 |
| D.C Service | Navsari | LG-10, Fountain Plaza, Navsari - 396445, GujaratNear Lakshmi Cinema | 396445 | 1800-103-7799 |
| Om Services | Godhra | F36, Ami Arcade, Opp. Bus Station, Godhra-389001, Gujarat | 389001 | 1800-103-7799 |
| Tanay Communication | Surat | Sar Corporate Center , M24-27Near Rajkumar Cinema , Vivek Hospital, Shashtri Nagar Road, Udhana Dar | 395002 | 1800-103-7799 |
| Shree Sai Services | Surat | G 12, Western Plaza , Besides Bhulka Bhavan School, Adajan Road, Surat-395009, Gujarat | 395009 | 1800-103-7799 |
| Shree Parshwa Services | Vadodara | 52/B, Kunj Society, AlkapuriVadodara-390005, GujaratNear Milan Kunj Hall | 390005 | 1800-103-7799 |
| Tushar Enterprises | Ahmedabad | 3rd Floor, Purohit AvenueAbove Shoe Tree, Near Jain DeraerG. G. Road, NavrangpuraAhmedabad - 3800 | 380015 | 1800-103-7799 |



http://rd1.sony.net/help/mdr/xb50bs/h_zz/

