NICOR® Lighting
2013 Catalog

NICOR®
Shining Brighter™

TABLE OF CONTENTS

COMMERCIAL AND RESIDENTIAL LED DOWNLIGHTING

4″ LED page 2
5″ & 6″ LED page 4
LED Tape Light page 6
LED Troffers page 9
LED Conopy page 12
LED Outdoor Surface Mounts page 14
LED Floods page 16

COMMERCIAL AND RESIDENTIAL DOWNLIGHTING

Compact Fluorescent
- 4″ page 20
- 5″ page 34
- 6″ page 46
- 8″ page 78
- Ballasts page 90

Line Voltage
- 3″ page 95
- 4″ page 98
- 5″ page 117
- 6″ page 127
- 8″ page 174

Low Voltage
- 3″ page 175
- 4″ page 179

Retrofit page 191
Accessories page 203

RESIDENTIAL LED

LED Step Lights page 206
LED Undercabinets page 209
LED Surface Mounts
- Indoor page 210
- Outdoor page 212

RESIDENTIAL CONVENTIONAL

Undercabinets page 216
Strip Lights page 219
Wraparounds
- Standard page 223
- Designer page 225

Deco Clouds page 227
Mushrooms • Drums page 228
Step Lights page 229
Track Lighting
- Line Voltage Heads page 232
- Low Voltage Heads page 238
- 2 Head Packs page 240
- 3 Head Packs page 241
- 4 Head Packs page 244
- Linear Track page 245
- Accessories page 246

Indoor Surface Mounts
- Wall Mount page 249
- Ceiling Mount page 250

Outdoor Surface Mounts
- Wall Mount page 251
- Ceiling Mount page 252

Outdoor Wall Packs page 253
Outdoor Bullets • Wallmounts page 254

SPECIALTY CONVENTIONAL

Entrance Chimes page 261
Keyless Lampholders page 265
Occupancy • Vacancy Sensors page 266

INDUSTRIAL

High Bay
- Aluminator page 279
- No-Hassle page 284
- Eco-bay page 287
- High Bay Occupancy Sensors page 289

Vaportite page 291

EMERGENCY • EXIT

LED Indoor page 294
LED Outdoor page 311
Conventional Indoor page 314
Conventional Outdoor page 320
Remote Lamp Heads page 325
Accessories page 326

CEILING FANS

Masterbuilder page 329
Aspen page 337
Chateau page 339
Contractor page 345
Industrial page 349
Light Fixtures page 350
Light Fitters page 352
Light Fitter Glass page 355
Accessories page 357

FIXTURE LISTINGS AND RATINGS

NICOR lighting fixtures are designed with unique features that make them superior to similar products. We build these features into our fixtures to make them more efficient, easier to install, and out perform our competition. The following is a guide to these unique features in order to help you in choosing the right fixture for your application.

ENERGY STAR

The federal government establishes minimum performance requirements for energy efficiency in lighting and other consumer products. Buying ENERGY STAR labeled products ensures that you are making an environmentally responsible choice that will also reduce your energy costs.

FCC

The Federal Communications Commission has regulations to ensure that low power transmitters, that do not require a license, do not interfere with licensed transmissions. Our products have FCC Authorization to be marketed in the United States and its territories. More information can be found at http://www.fcc.gov.

TITLE 24

The State of California has set energy efficiency standards for residential and non residential buildings. The rules apply to lamps and ballasts such as those used in NICOR® and MAXCOR™ fixtures and are often adopted as job specification requirements for building projects in other states. More information can be found at http://www.energy.ca.gov/title24.

UL LISTED

"UL is a world leader in product safety testing and certification. For more than 100 years, manufacturers have had their merchandise evaluated and tested for safety risks by our independent, third-party safety certification organization. Last year alone, approximately 14 billion products with the UL Mark entered the global marketplace." More Information can be found at www.ul.com.

CUL LISTED

Same as above, but meets the particular needs and requirements for marketing in the Canadian market.

ETL INTERTEK LISTED

The ETL Listed Mark indicates that NICOR® products have been tested by Intertek and found in compliance with accepted national standards. Sometimes used in place of UL certification. More information can be found at http://www.intertek.com

SDT

Indicates that this product includes a self diagnostic testing feature. Tests every 30 days to ensure proper charging of the battery for emergency operation.

FIXTURE LISTINGS AND RATINGS

IC AND IC AIRTIGHT FIXTURES

If lighting fixtures are being installed in an insulated attic area, choose IC (Insulated Ceiling), or IC Airtight fixtures. IC fixtures allow for uninterrupted insulation around the fixture. IC Airtight fixtures seal all openings between attic spaces above and heated/air conditioned living spaces below. Standard recessed housings allow 5.0 cubic ft. per minute of air leakage to escape into unconditioned spaces. Airtight fixtures prevent this leakage by sealing all air pathways between living areas and attic spaces. Sealed housings can be completely covered in insulation. Additional benefits include reduced sound transmission between rooms, reduced heating and air conditioning bills, prevention of moisture damage to ceilings, and elimination of drafts for greater comfort.

WET LOCATION

Many NICOR® trims are NEC Listed, Article #410, wet locations such as in showers or over tubs. Lamps are concealed behind a lens or diffuser. Portions of the fixture that are exposed to water vapor are manufactured of non-conductive and non-corrosive materials. Wet Location fixtures are well suited for outdoor porches and breezeways, too.

NICOR® FASTENER

NICOR® Fasteners are made for ease of use and ease of installation. Double-headed captive nail fasteners allow easy repositioning of the housing during rough-in. Integrated T-bar clips hold fast to commercial drop down ceiling grids.

NICOR LENS-LOCK

Exclusive four corner NICOR® Lens Locks secure our Dream Cloud lens in place, even on sloped ceilings. Easiest lens installation in the industry.

UNIVERSAL INPUT BALLAST

Commercially rated, high power factor ballasts that adapt automatically to line voltages between 110 and 277V. NICOR® Universal Input Ballasts are listed as Consortium for Energy Efficiency (CEE) approved.

5 YEAR WARRANTY

These products are warranted to be free from defects and failures at the time of manufacture. NICOR® high bay ballasts are warranted for 5 years at 55D C, three years at 65D C. More information about our warranties can be found at www.nicorlighting.com.

CREE LEDs

CREE LED'S

These products contian certified CREE® LED components. More information can be found out www.cree.com

MARKETING SUPPORT ITEMS

We provide top-quality Merchandisers, Displays, and Sales Literature.

DLR4 & DLR56 Display Cube
PrimeChime Display
LED Step Light Display
LED Under Cabinet Display
T2 Display
Motion Sensor Merchandiser
DLR56 Gondola
Detailed Sell Sheets, Cut Sheets, and IES Literature
Consult factory for availability.

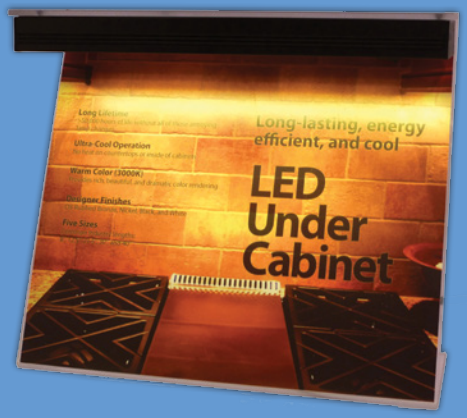

APERTURE SIZE CHOICES

NICOR® PROVIDES SEVERAL DIFFERENT SIZES OF RECESSED LIGHTING, GIVING YOU PLENTY OF OPTIONS TO CREATE THE PERFECT LIGHTING SOLUTION FOR ANY INTERIOR SPACE. THE SIZES ABOVE ARE SHOWN AT ACTUAL SIZE.

DOWNLIGHT TRIM TYPES

REFLECTORS

Reflector trims maximize the efficiency of the light source and create wide light patterns. Reflectors are well suited for use with both incandescent lamps and energy efficient compact fluorescent lamps. Gold-color reflectors add richness and black-color reflectors reduce glare.

REFLECTOR CONES

Reflector cones narrow the pattern of light and are designed for use with reflector style (R, BR and PAR lamps), directing full lamp output to the illumination task.

EYEBALLS

Eyeball and other adjustable trims provide variable direction lighting useful for directing light to accent areas, hanging artwork and task areas.

WALLWASHERS

Wall wash trims provide vertical surface illumination. Trims can provide uniform, scalloped or non-uniform lighting wall patterns, depending on fixture positioning.

OPEN TRIMS

Simple and economical, open trims create an attractive finished look for incandescent reflector-style lamps.

BAFFLES

Baffle trims shape light to soften glare and minimize ceiling brightness. For use with R, BR and PAR lamps.

LENSES AND DIFFUSERS

Lenses and diffusers are designed to soften and direct the light of incandescent lamps. Some trims can be used for shower lighting and others are specific to closet lighting.

Commercial and Residential LED Downlighting
Cutting edge LED lighting technology meets world-class energy savings, giving you the best value in lighting.

COMMERCIAL AND RESIDENTIAL LED DOWNLIGHTING

DLR4

4" RECESSED LED DOWNLIGHT

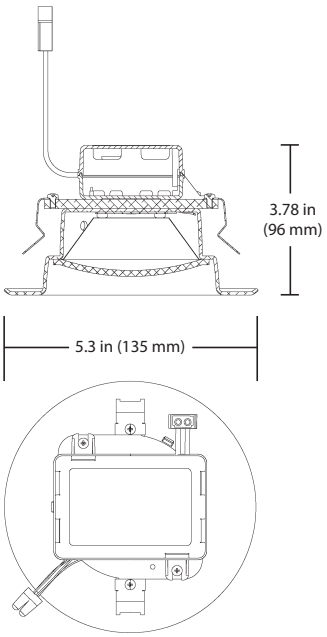

MAXCOR™

DESCRIPTION

The MAXCOR DLR4 is perfect for accent and direct lighting in residential and commercial applications. The DLR4 is an architectural light that adds instant "eye-appeal." It will dynamically alter a room's design with its subtle application of warm and pleasing light.

FEATURES

Compatible with most 4" recessed housings
Easy installation with mounting clips
Integrated trim
Dimmable to 10% with most dimmers
Durable construction
120V
Edison Base and adaptor included
GU24 Base is available
5 Year Warranty

SPECIFICATIONS

543 lumens (compare to a 75W lamp)
83.3 CRI
11 Watts, 49.6 lumens per watt
Lifetime of >35,000 hours

DIMENSIONS

Width (trim): 5.3 in (135mm)
Height (fixture): 3.78 in (96mm)

COLOR TEMPERATURES

Available in 3000, 4000, and 5000K warm white light

FIXTURE ORDERING

DLR4-10-120V-3K-WH
DLR4-10-120V-4K-WH
DLR4-10-120V-5K-WH

LISTINGS

Energy Star
UL Listed

AVAILABLE ACCESSORIES

GU24 Base - Item# GU24-SKT-STR

c UL us LISTED

ENERGY STAR

Can be used for T24 California Title 24 High Energy Compliant

CREE LEDs

5 YEAR WARRANTY

WET LOCATION RATED

Custom COLORS

Available in Custom Colors for details see page 5

NICOR® Shining Brighter™

MAXCOR™

DLR56

5" & 6" Recessed LED Downlight

NEW & IMPROVED

FEATURES

Compatible with most 5" and 6" recessed housings
Easy installation with adjustable torsion springs
Integrated trim
Dimmable to 10% with most dimmers
Durable construction
Edison Base and adaptor included
GU24 Base is available
5 Year Warranty

MAXimum efficiency
MAXimum performance
MAXimum value

ALSO AVAILABLE:
DLR4, 4" RECESSED LED DOWNLIGHT

DLR56

5" AND 6" RECESSED LED DOWNLIGHT

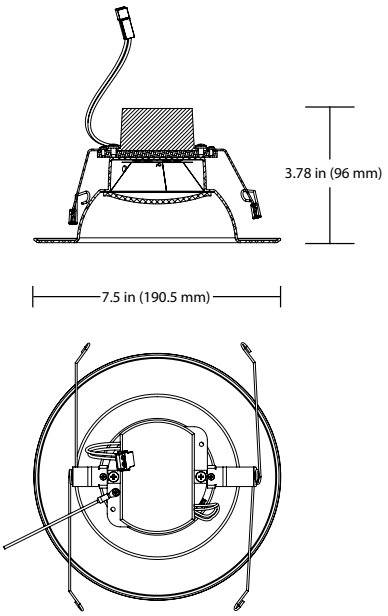

MAXCOR™

DESCRIPTION

The MAXCOR™ DLR56 (v2) is a 5" & 6" Recessed LED Downlight which is suitable for both remodel and new construction applications. The DLR56 is setting a new standard with its economical price and the highest lumens in its category.

FEATURES

Compatible with most 5" and 6" recessed housings
Easy installation with adjustable torsion springs
Integrated trim
Dimmable to 10% with most dimmers
Durable construction
120V
Edison Base and adaptor included
GU24 Base is available
>35,000 Hr Lifetime
5 Year Warranty

DIMENSIONS

Width (trim): 7.5 in (190.5mm)
Height (fixture): 3.78 in (96mm)

COLOR TEMPERATURES

Available in 2700, 3000, 4000, and 5000K warm white light

FIXTURE ORDERING

DLR56-20-2K-WH (2700 K)
DLR56-20-3K-WH (3000 K)
DLR56-20-4K-WH (4000 K)
DLR56-20-5K-WH (5000 K)

LISTINGS

Energy Star
UL Listed

AVAILABLE ACCESSORIES
GU24 Base - Item# GU24-SKT-STR

c UL us LISTED

ENERGY STAR

Can be used for T24 California Title 24 High Energy Compliant

CREE LEDs

WET LOCATION RATED

5 YEAR WARRANTY

Custom COLORS

SPECIFICATIONS

	2700 K	3000 K	4000 K	5000 K
LUMENS	728	781	873	937
LPW	46	50	56	61
CRI	80	80	78	71
WATTS	15	15	15	15

Available in Custom Colors for details see page 5

NICOR® Shining Brighter™

MAXCOR™ Custom COLOR

Custom Trims

CUSTOM COLORS

NICOR® offers custom finishes on our MAXCOR™ line of DLR56, DLR4, T2's, and CL94 fixtures. You can choose from Black, Black Baffle/White Trim, Copper, Brushed Nickel, and Specular. You can also provide a color sample to be matched.

There is a minimum order quantity of 24 pieces.
Allow a 2 - 3 week turnaround.
Mixing and matching fixture types is okay.

Contact your NICOR® sales representative for more information.
800.821.6283

MAXimum efficiency
MAXimum performance
MAXimum value

LED TAPE LIGHT

LED ACCENT LIGHTING

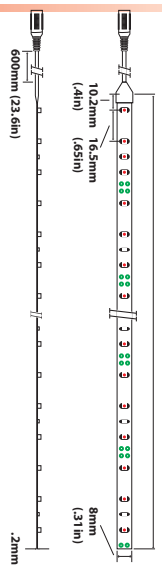

MAXCOR™

DESCRIPTION

NICOR's LED Tape Light is the perfect solution for all of your accent lighting needs. The possibilities are limitless. Place it behind picture frames for a nice back glow, place it under tables and bars, wrap a patio tree, and much more. In fact, any place you can imagine accent lighting.

FEATURES

5 meter rolls cuttable to any size.
3 Varieties: Standard Output, High Output, and Waterproof
5 colors available
300 LEDs per 5 meter (16.4') strip (150 LEDs on High Output)
Viewable angle of 120 degrees
Adhesive Backing
Variety of connection options

DIMENSIONS

Standard: 16.4" x 5/16" x 1/8"
High Output: 16.4" x 1/2" x 1/8"
Waterproof: 16.4" x 3/8" x 1/8"

Color Temperatures
Pure White 6500K, Warm White 3500K, Red, Green, and Blue

MAXIMUM TEST DATA AT 25°C

PARAMETER	*MAXIMUM*
Forward Current (IF)	2000mA/3000mA
Electrical Power (PD)	24W/36W
UV Voltage (ESD)	800V
Working Temp (Topr)	-13°F to +140°F
Storage Temp (Tstg)	-40°F to +176°F

Standard & Waterproof/ High Output

ELECTRO-OPTICS TEST DATA AT 25°C

PARAMETER	*MIN*	*NORM*	*MAX*
Forward Voltage (VF)	11.5V	12V	12.5V
Color Temperature (K)		Varies	
Luminous Flux (oV)	900Lm/ 14000Lm	1250Lm/ 1800Lm	
Forward Current (IF)		2000mA/ 3000mA	

ORDERING INFORMATION ON NEXT PAGE

NICOR® Shining Brighter™

LED TAPE LIGHT

LED ACCENT LIGHTING

ORDERING LED TAPE AND ACCESSORIES

SLS-5M-300-12V-W	LED TAPE STD OUTPUT 6000-7000K
SLS-5M-300-12V-WW	LED TAPE STD OUTPUT 3000-3500K
SLS-5M-300-12V-R	LED TAPE STD OUTPUT RED
SLS-5M-300-12V-B	LED TAPE STD OUTPUT BLUE
SLS-5M-300-12V-G	LED TAPE STD OUTPUT GREEN
HLS-5M-150-12V-WW	LED TAPE HGH OUTPUT 3000-3500K
SLSPS-12V-30W	LED TAPE STD PWR SUPPLY 30W
HLSPS-12V-48W	LED TAPE HIGH PWR SUPPLY 48W
SLSCON	LED STND STRIP CONNECTOR
SLSCON-12	LED STND STRIP CONNECT 12" WRE
SLSCON-24	LED STND STRIP CONNECT 24" WRE
SLSCON-36	LED STND STRIP CONNECT 36" WRE
SLSCON-60	LED STND STRIP CONNECT 60" WRE
HLSCON	LED HGH OP STRIP CONNECTOR
HLSCON-12	LED HGH OP STRIP CONNECT 12"WR
HLSCON-24	LED HGH OP STRIP CONNECT 24"WR
HLSCON-36	LED HGH OP STRIP CONNECT 36"WR
HLSCON-60	LED HGH OP STRIP CONNECT 60"WR
LSMANUAL-STHO	LED TAPE MANUAL - STANDARD/HO
WPLS-5M-300-12-W	LED TAPE WATERPROOF 6000-7000K
WPLS-5M-300-12V-WW	LED TAPE WATERPROOF 3000-3500K
WPLS-5M-300-12V-R	LED TAPE WATERPROOF RED
WPLS-5M-300-12V-B	LED TAPE WATERPROOF BLUE
WPLS-5M-300-12V-G	LED TAPE WATERPROOF GREEN
WPLSPS-12V-30W	LED TAPE WTRPROOF PWR SUP 30W
WPLSEC	LED WATERPROOF ENDCAP
WPLSSC	LED WATERPROOF SILICONE 10G/BT
WPLSCLIP	LED TAPE WATERPROOF STRIP CLIP
WPLSSW	LED TAPE WATERPROOF STRP SCREW
LEDTD24WH	LED TAPE DIMMER SWITCH
LEDTAPEPC	POWER CONNECTOR
LEDTAPEPCHO	POWER CONNECTOR HIGH POWER
LEDWP-DR-12V-60W	WEATHER PROOF POWER SUPPLY 60W

NOTES

Strip Connector

Comes in various lengths and is used to connect two sections of either Standard or High Output tape together.

Power Supplies

Various types of power supplies are available, specific to the type of tape light and usage.

Waterproof Endcap

Caps the end of Waterproof tape after cutting.

Waterproof Silicone

Used to re-seal Waterproof tape after it has been cut to length.

Waterproof Strip Clip

Used to connect two sections of Waterproof tape together.

Waterproof Strip Screw

Used in connecting two lengths of Waterproof tape together.

Tape Dimmer

Used for dimming the LED Tape.

MAXCOR™

Our LED troffers are economical, efficient, environmentally friendly, and offer an elegant look to complement any atmosphere or setting.

T2LED

2' x 2' LED Troffer

MAXimum efficiency
MAXimum performance
MAXimum value

FEATURES

LED based, indoor lay-in ceiling fixture
3 sizes: T2 (2x2), T2 Plus (2x4), and T2 Slim (1x4) (Plus and Slim Coming Soon)
3 color temperatures: 3500K, 4000K, and 5000K
Low voltage and low power usage
Estimated life >60,000 hours
Sealed fixture design
Operating temp of -40^0 to 40^0 C
Dimmable to 10%
High color rendering

T2 LED

2X2 LED TROFFER

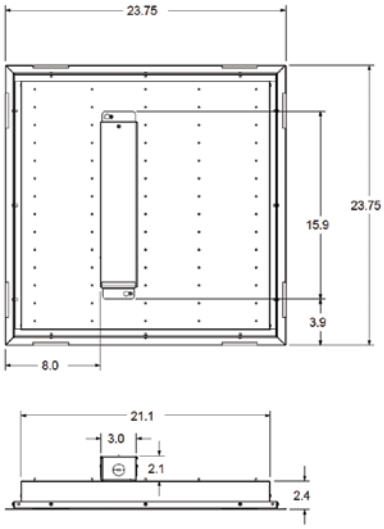

MAXCOR™

DESCRIPTION

T2 LED is a Solid State Lighting Luminaire that can be installed in conventional suspended grid ceilings or flat mounted with an optional adaptor.
Available for 2'x2' (2'x4' and 1'x4' available as special order) ceiling grids, the T2 LED troffers can easily be installed in new construction or retrofit projects alike.

FEATURES

Class 2 compliant design (low voltage, limited power)
Estimated Lifetime > 60,000 hours
Sealed Fixture Design
5 year warranty
Dimmable to 10% with a compatible 0 to +10V dimmer

A DesignLights Consortium qualified product

COLOR TEMPERATURE

Available in color temperature of 3500, 4000, and 5000K

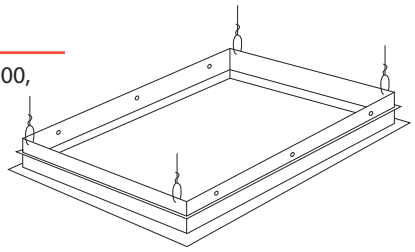

Also Available
***FK22** Drywall Grid Adapter Kit*

PRODUCT ORDERING INFO

Luminaire		*Input Voltage (VAC)*	*System Level Power (W)*	*Delivered Lumens (Lm)*	*System Efficacy (Lm/W)*	*Correlated Color Temp (K)*	*Color Rendering Index (CRI)*
T2-20-MV-35-1400	(3500K w/ 1400mA)	120 - 277	35	3319	92.5	3308	85.4
T2-20-MV-35-1670	(3500K w/ 1670mA)	120 - 277	45	3995	87.8	3287	85.3
T2-20-MV-35-2800	(3500K w/ 2800mA)	120 - 277	75	6180	82.3	3398	88.2
T2-20-MV-40-1400	(4000K w/ 1400mA)	120 - 277	35	3613	100.6	3902	85.9
T2-20-MV-40-1670	(4000K w/ 1670mA)	120 - 277	45	4298	94.3	3983	89.6
T2-20-MV-40-2800	(4000K w/ 2800mA)	120 - 277	75	6647	88.0	3953	88.0
T2-20-MV-50-1400	(5000K w/ 1400mA)	120 - 277	35	3561	98.9	5005	86.6
T2-20-MV-50-1670	(5000K w/ 1670mA)	120 - 277	45	4204	92.2	4999	87.8
T2-20-MV-50-2800	(5000K w/ 2800mA)	120 - 277	75	6531	86.7	5126	90.2

5Y 5 YEAR WARRANTY

T2-P LED

2X4 LED TROFFER

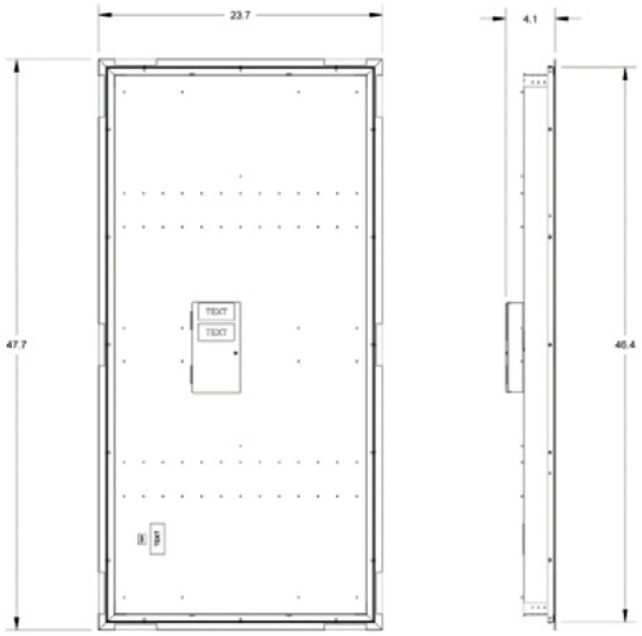

PRODUCT INFORMATION

Color Temperature (K)	3500 K	4000 K	5000 K
Operating Temp. (°C)	-30 to 50	-30 to 50	-30 to 50
Dimensions (in)	47.7 x 23.7 x 4.1 (w/1670) 47.7 x 23.7 x 4.1 (w/2800)		

ORDERING INFO

Example: T2-P-10-16B-40-WH

Series	*Version*	*Driver*	*Color Temp. (K)*	*Trim*
T2-P	10 (1.0)	16D (1670mA Dimming)	35 (3500 K)	WH (white)
		16B (1670mA Battery-Backup)	40 (4000 K)	
		28 (2800 Dimming)	50 (5000 K)	

ENERGY DATA

Luminaire	*Input Voltage (VAC)*	*System Level Power (W)*	*Delivered Lumens (Lm)*	*System Efficacy (Lm/W)*	*Color Rendering Index (CRI)*
3500K w/ 1670mA	120 - 277	42	3836	84.1	80
3500K w/ 2800mA	120 - 277	72	5900	82	80
4000K w/ 1670mA	120 - 277	42	4099	90.1	80
4000K w/ 2800mA	120 - 277	72	6450	90	80
5000K w/ 1670mA	120 - 277	42	4011	87.8	80
5000K w/ 2800mA	120 - 277	72	6450	90	80

Specifications and dimensions subject to change without notice.

5Y 5 YEAR WARRANTY

Call factory for availability.

T2-S LED

1X4 LED TROFFER

ALSO AVAILABLE:
T2-S Conversion Kit - converts a T2-S to fit into a 2' x 4' ceiling grid.

MAXCOR™

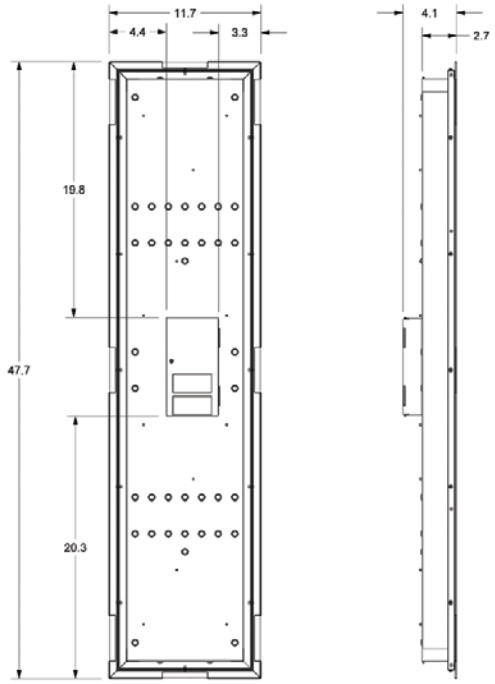

PRODUCT INFORMATION

Color Temperature (K)	3500 K	4000 K	5000 K
Operating Temp. (°C)	-30 to 50	-30 to 50	-30 to 50
Dimensions (in)	47.7 x 11.7 x 4.1		47.7 x 23.7 x 4.6

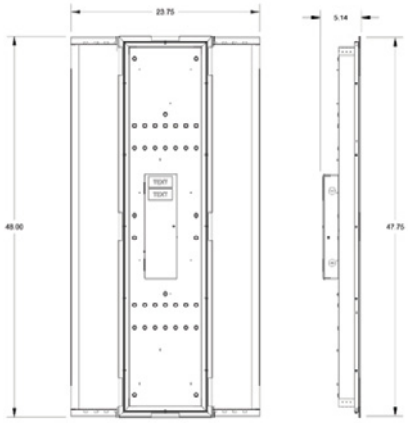

Dimensions with T2-S Conversion Kit

ORDERING INFO

Example: T2-S-10-16B-40-WH

Series	*Version*	*Driver*	*Color Temp. (K)*	*Trim*
T2-S	10 (1.0)	14D (1400mA Dimming)	35 (3500 K)	WH (white)
		14B (1400mA Battery-Backup)	40 (4000 K)	
		16D (1670mA Dimming)	50 (5000 K)	
		16B (1670mA Battery-Backup)		
		28 (2800 Dimming)		

ENERGY DATA

Luminaire	*Input Voltage (VAC)*	*System Level Power (W)*	*Delivered Lumens (Lm)*	*System Efficacy (Lm/W)*	*Color Rendering Index (CRI)*
3500K w/ 1400mA	120 - 277	35	3251	89.1	84.1
3500K w/ 1670mA	120 - 277	45	3836	84.1	86.1
3500K w/ 2800mA	120 - 277	75	5957	78.7	81.7
4000K w/ 1400mA	120 - 277	35	3473	95.4	88.2
4000K w/ 1670mA	120 - 277	45	4099	90.1	87.8
4000K w/ 2800mA	120 - 277	75	6445	85.8	82.5
5000K w/ 1400mA	120 - 277	35	3393	93.0	85.7
5000K w/ 1670mA	120 - 277	45	4011	87.8	88.8
5000K w/ 2800mA	120 - 277	75	6248	82.9	83.6

Specifications and dimensions subject to change without notice.

5Y 5 YEAR WARRANTY

Call factory for availability.

CL94
LED CANOPY LIGHT

MAXCOR™

DESCRIPTION

The MAXCOR™ CL94 is your best choice for energy efficient, LED canopy lighting. Use it in parking garages, outdoor shopping areas, fueling stations, or anywhere that exterior canopy lighting is needed.

The CL94 illuminates with clear and shadow eliminating lighting, that enhances security and visibility. It is a cost effective and superior replacement for HID, HPS, and Fluorescent canopy lights.

PRODUCT INFORMATION

Input Voltage (VAC)	**120-277**	**347-480**
System Level Power (W)	94	102
Delivered Lumens (Lm)	9300	9300
System Efficacy (Lm/W)	99	91
Color Temperature (K)	5000	5000
Color Rendering Index (CRI)	80	80
Operating Temp. (°C)	-30 to 50	-30 to 50
Dimensions (in)	18.62 x 18.62 x 2.75	
Net Weight (Wt)	9 lbs	

Product Information subject to change without notice.

FEATURES

Incredible 9300 (Lm) light output
Low energy usage, only 94 Watts
Class 2 compliant design (low voltage, limited power)
Lifetime of 173,000 hours
DLC approved (low voltage)
Conforms to ANSI/UL 1598 Standard
Wet Location Rated
5 year warranty

ORDERING

Series	*Version*	*Voltage*	*Color Temp. (K)*	*Trim*
CL94	10 (1.0)	120V (120-277 VAC) 347V (347-480 VAC)	50 (4700 K)	WH (white)

Example: CL94-10-347V-50-WH

5 YEAR WARRANTY

WET LOCATION RATED

NICOR® Shining Brighter™

OUTDOOR LED SURFACE MOUNTS

30106
14" Wall Mount

120~277V/38W
4700 K, 75 CRI, 1890 Lumens
-30°C Starting Temp
Architectural Bronze
14.4" x 9.3" x 7.1"

c UL us LISTED

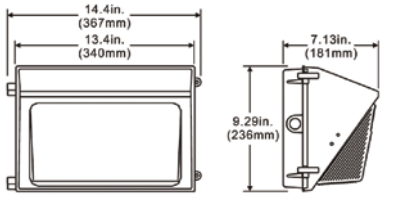

30106HL
14" Wall Mount

120~277V/76W
4700 K, 75 CRI, 3780 Lumens
-30°C Starting Temp
Architectural Bronze
14.4" x 9.3" x 7.1"

c UL us LISTED

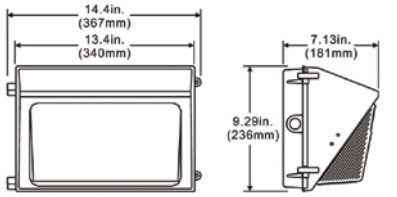

30303
18" Wall Mount

120~277V/36W
4700 K, 75 CRI, 2445 Lumens
-30°C Starting Temp
Architectural Bronze
18.1" x 9.1" x 9.1"

c UL us LISTED

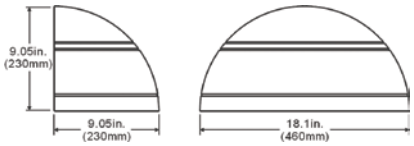

30304
18" Wall Mount

120~277V/36W
4700 K, 75 CRI, 2336 Lumens
-30°C Starting Temp
Architectural Bronze
18.1" x 9.1" x 8.5"

c UL us LISTED

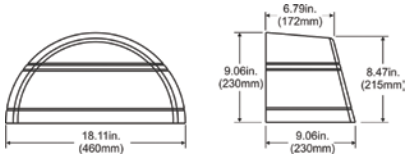

30352PC
7" Wall Mount

120~277V/13W
4700 K, 75 CRI, 751 Lumens
-30°C Starting Temp
Architectural Bronze
6.9" x 11" x 5.2"

c UL us LISTED

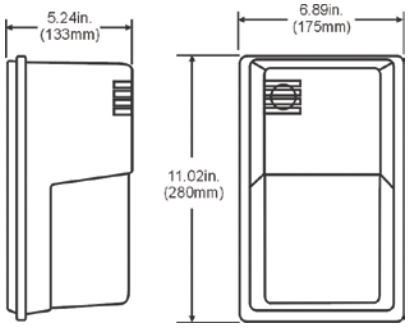

MAXCOR™

OUTDOOR LED SURFACE MOUNTS



30364
10" Wall Mount

120~277V/39W
4700 K, 75 CRI, 2512 Lumens
-30°C Starting Temp
Architectural Bronze
10.3" x 10.3" x 2.4"

c UL us LISTED

Also Available:
30797-OPT
Optical LED Lens

30797
14" Wall Mount

120~277V/38W
4700 K, 75 CRI, 2941 Lumens
-30°C Starting Temp
Architectural Bronze
10.6" x 4.8" x 8.3"

c UL us LISTED



30360
6" Wall Mount

120~277V/13W
4700 K, 75 CRI, 637 Lumens
-30°C Starting Temp
Architectural Bronze
6.2" x 6.2" x 13.9"

c UL us LISTED



30360HL-OPT
6" Wall Mount

120~277V/18W
4700 K, 75 CRI, 1019 Lumens
-30°C Starting Temp
Architectural Bronze
6.2" x 6.2" x 13.9"

c UL us LISTED



30360XHL-OPT
6" Wall Mount

120~277V/39W
4700 K, 75 CRI, 1704 Lumens
-30°C Starting Temp
Architectural Bronze
6.2" x 6.2" x 13.9"

c UL us LISTED

COMMERCIAL AND RESIDENTIAL LED LIGHTING

MAXCOR™

OUTDOOR LED SURFACE MOUNTS

30460

6" Wall Mount

120~277V/13W
4700 K, 75 CRI, 748 Lumens
-30°C Starting Temp
Architectural Bronze
6.0" x 12.6" x 2.4"

c UL us LISTED



30460-OPT

14" Wall Mount

120~277V/23W
4700 K, 75 CRI, 1156 Lumens
-30°C Starting Temp
Architectural Bronze
6.0" x 12.6" x 2.4"

c UL us LISTED



MAXCOR™

COMMERCIAL AND RESIDENTIAL LED LIGHTING

OUTDOOR LED FLOOD LIGHTS

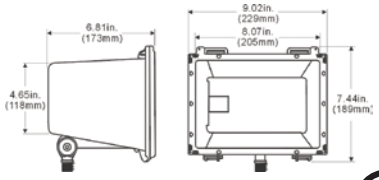

30214

9" Flood

120~277V/27W
4700 K, 75 CRI, 1360 Lumens
-30°C Starting Temp
Architectural Bronze
9.0" x 7.4" x 6.8"

c UL us LISTED

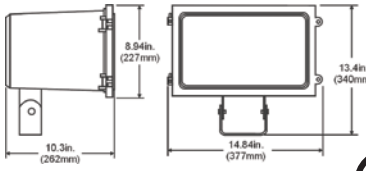

30206

15" Flood

120~277V/38W
4700 K, 75 CRI, 3132 Lumens
-30°C Starting Temp
Architectural Bronze
14.8" x 13.4" x 10.3"

c UL us LISTED

MAXCOR™

COMMERCIAL AND RESIDENTIAL LED LIGHTING

NICOR® Shining Brighter™

Commercial and Residential Downlighting
Whether your needs are for retrofit or new construction, NICOR housings are designed for easy installation and durability.

The Can-do Can

FEATURES

1. Four-port, full-barrel, push-in wire connectors provide fast no-twist connections, positive electrical contact and easy daisy-chain wiring capability
2. 120-277V electronic ballast
3. Heavy-duty rolled hanger bars eliminate sharp edges and provide greater stability
4. Hanger bars can be shortened to accommodate 12″ joist span without tools
5. Hanger bars can be repositioned 90˚ on plaster frame without tools
6. Notched clip provides easy T-bar installation
7. Housing adjusts to accommodate ceiling thickness
8. Installed housing is removable from below allowing access to junction box
9. Multiple pry-outs with integral strain relief simplify Romex installation

New products and catalog updates are just a click away at **nicorlighting.com**

14300AEB13 • 14300AEB18 • 14300AEB26

1X13W, 18W, 26W DOUBLE TWIN FLUORESCENT UNIVERSAL AIRTIGHT HOUSING

Suitable for direct contact with insulation

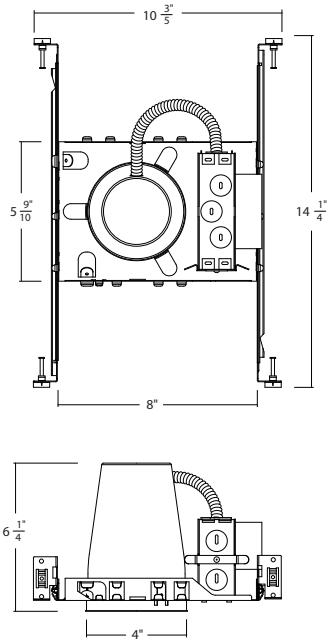

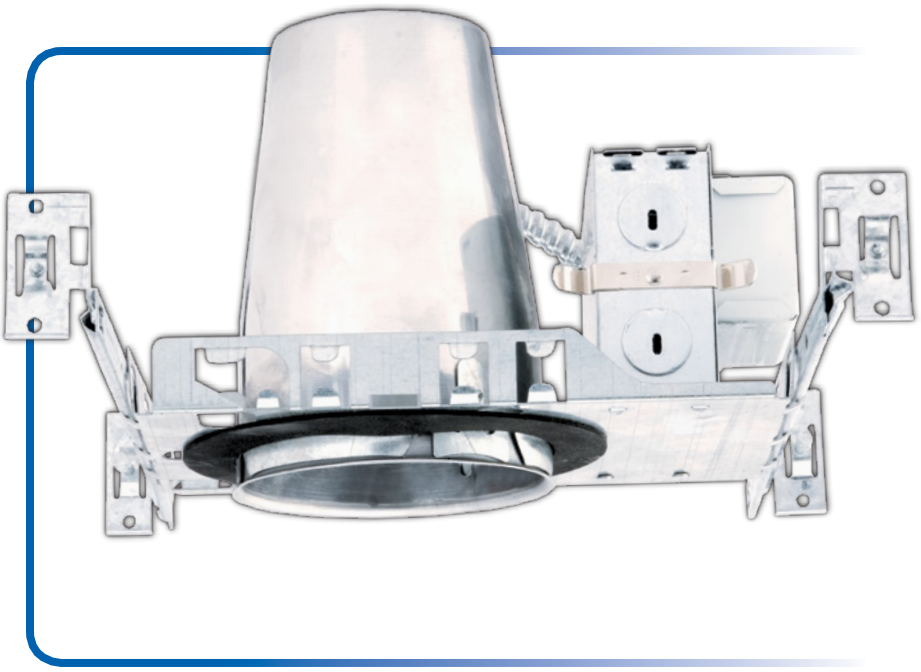

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W, 18W, 26W double twin tube, G24Q-1 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120V Electronic ballast.
6 1/4" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

Can be used for T24 California Title 24 High Energy Compliant

AIRTIGHT HOUSING

NICOR FASTENER

14301AREB13 • 14301AREB18 • 14301AREB26

DOUBLE TWIN FLUORESCENT REMODEL AIRTIGHT HOUSING

Suitable for direct contact with insulation

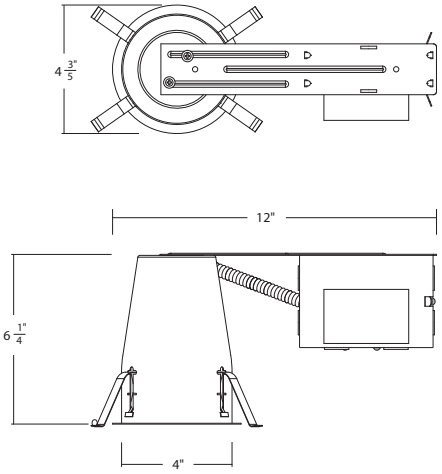

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W, 18W, 26W double twin tube, G24Q-1 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120V Electronic ballast.
6 1/4" height allows use in 2" x 8" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS

FOR 14300AEB13, 14300AEB18, 14300AEB26, 14301AREB13, 14301AREB18, 14301AREB26

SPECULAR CONE • 1X13W | G24Q-1

Item NO.	Description	Dimensions
19503	GOLD (shown)	OD: 5"



SPECULAR CONE • 1X13W | G24Q-1

Item NO.	Description	Dimensions
19504	CLEAR	OD: 5"



ALBALITE SHOWER • 1X13W | G24Q-1

Item NO.	Description	Dimensions
19509BK	BLACK (shown)	OD: 5"
19509BZ	BRONZE	GE F13BX/835/A/ECO
19509CL	CLEAR	IS RECOMMENDED
19509OB	OIL-RUBBED BRONZE	
19509WH	WHITE	



WET LOCATION RATED

DROP OPAL SHOWER • 1X13W | G24Q-1

Item NO.	Description	Dimensions
19510CL	CLEAR	OD: 5"
19510GD	GOLD (shown)	
19510WH	WHITE	



WET LOCATION RATED

SPECULAR CONE • 1X26W | G24Q-3

Item NO.	Description	Dimensions
19552CL	GOLD (shown)	OD: 4"
19552MT	MATTE	



ALBALITE SHOWER • 1X26W | G24Q-3

Item NO.	Description	Dimensions
19555CL	CLEAR	OD: 4"
19555MT	MATTE	



WET LOCATION RATED

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

TRIMS

FOR 14300AEB13, 14300AEB18, 14300AEB26, 14301AREB13, 14301AREB18, 14301AREB26

BAFFLE • 1X26W | G24Q-3

Item NO.	Description	Dimensions
19550BKCL	BLACK BAFFLE/CLEAR	OD: 4"
19550NKCL	BRUSHED NICKEL BAFFLE/CLEAR	
19550OBCL	OIL-RUBBED BRONZE BAFFLE/CLEAR (shown)	
19550WHCL	WHITE BAFFLE/CLEAR	



BAFFLE • 1X26W | G24Q-3

Item NO.	Description	Dimensions
19550BK	BLACK	OD: 5"
19550NK	BRUSHED NICKEL	
19550OB	OIL-RUBBED BRONZE	
19550WH	WHITE (shown)	



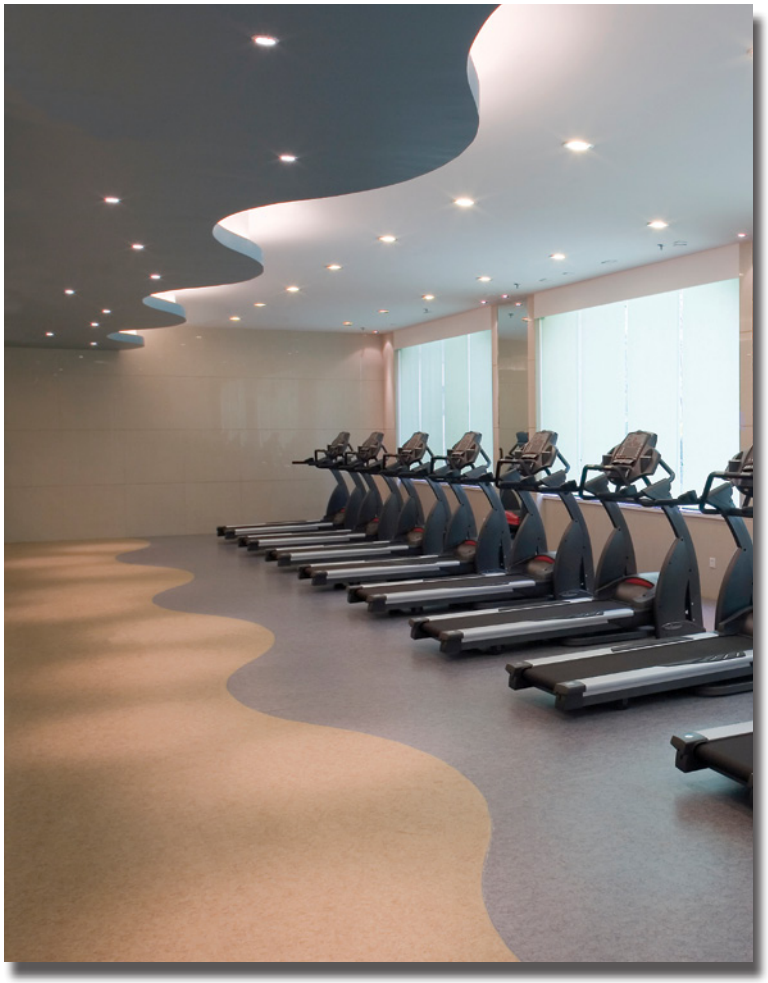

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

14305AEBM13 • 14305AEBM18 • 14305AEBM26

DOUBLE TWIN FLUORESCENT COMPACT HOUSING

Suitable for direct contact with insulation

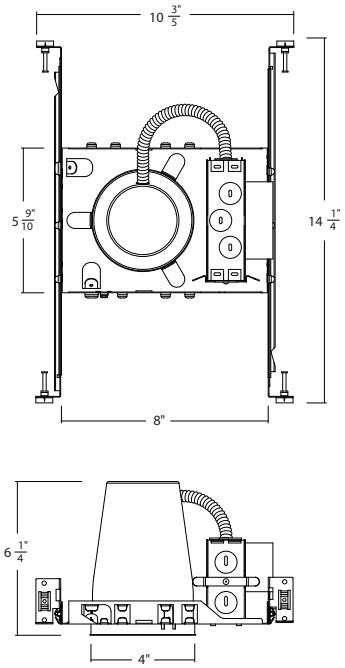

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W, 18W or 26W double twin tube, G24Q-1 (not included).

HOUSING

Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120-277V Universal input electronic ballast.
6 1/4" height allows use in 2" x 6" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

Can be used for T24 California Title 24 High Energy Compliant

AIRTIGHT HOUSING

NICOR FASTENER

UNIVERSAL INPUT 120-277V BALLAST

14306AREBM13 • 14306AREBM18 • 14306AREBM26

DOUBLE TWIN FLUORESCENT REMODEL COMPACT HOUSING

Insulation must be kept a minimum of 3" from housing

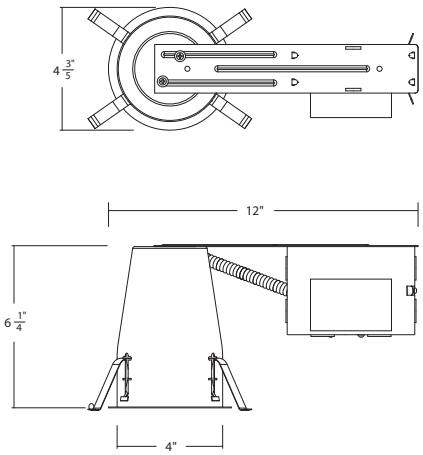

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W, 18W or 26W double twin tube, G24Q-1 (not included).

HOUSING

Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120-277V Universal input electronic ballast.
6 1/4" height allows use in 2" x 6" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

Can be used for T24 California Title 24 High Energy Compliant

AIRTIGHT HOUSING

UNIVERSAL INPUT 120-277V BALLAST

TRIMS

FOR 14300AEB13, 14300AEB18, 14300AEB26, 14301AREB13, 14301AREB18, 14301AREB26

SPECULAR CONE • 1X13W | G24Q-1

Item NO.	Description	Dimensions
19503	GOLD (shown)	OD: 5"



SPECULAR CONE • 1X13W | G24Q-1

Item NO.	Description	Dimensions
19504	CLEAR	OD: 5"



ALBALITE SHOWER • 1X13W | G24Q-1

Item NO.	Description	Dimensions
19509BK	BLACK (shown)	OD: 5"
19509BZ	BRONZE	GE F13BX/835/A/ECO
19509CL	CLEAR	IS RECOMMENDED
19509OB	OIL-RUBBED BRONZE	
19509WH	WHITE	



WET LOCATION RATED

DROP OPAL SHOWER • 1X13W | G24Q-1

Item NO.	Description	Dimensions
19510CL	CLEAR	OD: 5"
19510GD	GOLD (shown)	
19510WH	WHITE	



WET LOCATION RATED

SPECULAR CONE • 1X26W | G24Q-3

Item NO.	Description	Dimensions
19552CL	GOLD (shown)	OD: 4"
19552MT	MATTE	



ALBALITE SHOWER • 1X26W | G24Q-3

Item NO.	Description	Dimensions
19555CL	CLEAR	OD: 4"
19555MT	MATTE	



WET LOCATION RATED

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

TRIMS

FOR 14300AEB13, 14300AEB18, 14300AEB26, 14301AREB13, 14301AREB18, 14301AREB26

BAFFLE • 1X26W | G24Q-3

Item NO.	*Description*	*Dimensions*
19550BK	BLACK	OD: 5"
19550NK	BRUSHED NICKEL	
19550OB	OIL-RUBBED BRONZE	
19550WH	WHITE (shown)	



BAFFLE • 1X26W | G24Q-3

Item NO.	*Description*	*Dimensions*
19550BKCL	BLACK BAFFLE/CLEAR	OD: 4"
19550NKCL	BRUSHED NICKEL BAFFLE/CLEAR	
19550OBCL	OIL-RUBBED BRONZE BAFFLE/CLEAR (shown)	
19550WHCL	WHITE BAFFLE/CLEAR	



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

19024A18

AIRTIGHT UNIVERSAL HOUSING GU24

Suitable for direct contact with insulation

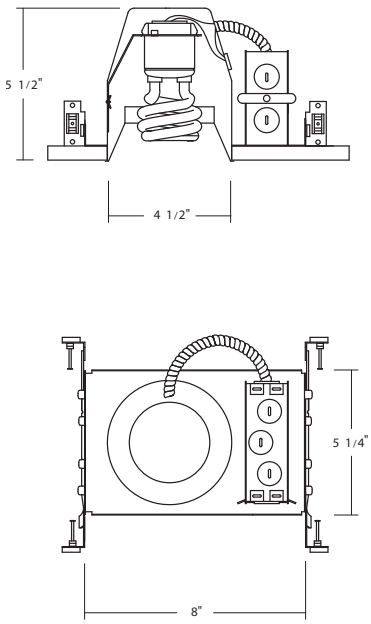

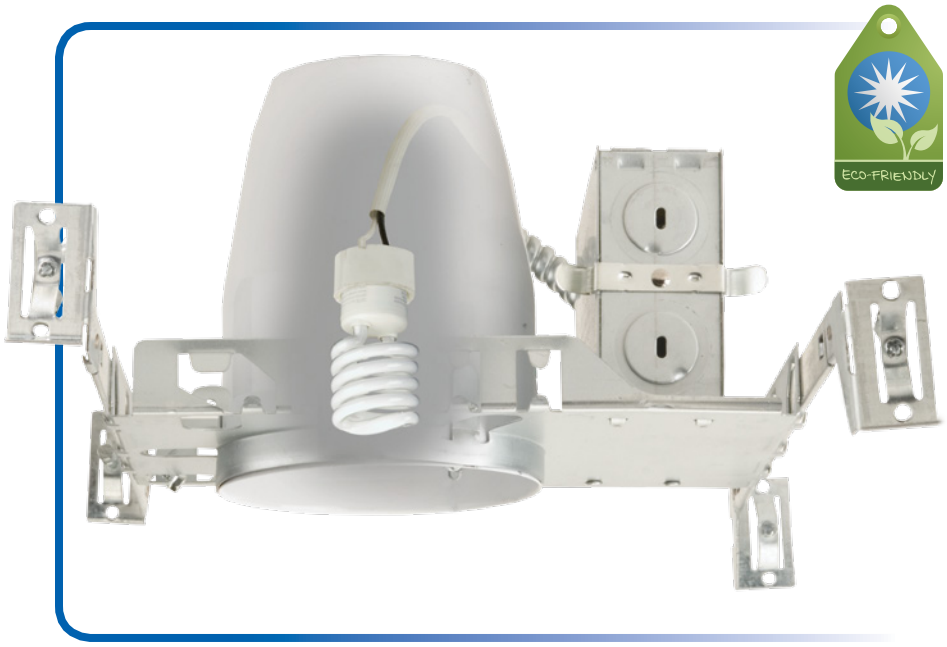

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W-18W, GU24 lamp (not included).

HOUSING

Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Adjustable socket bracket assures proper and consistent lamp positioning.
5 1/2" height allows use in 2" x 6" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

Can be used for T24 California Title 24 High Energy Compliant

AIRTIGHT HOUSING

NICOR FASTENER

19024AR18

AIRTIGHT REMODEL HOUSING GU24

Suitable for direct contact with insulation

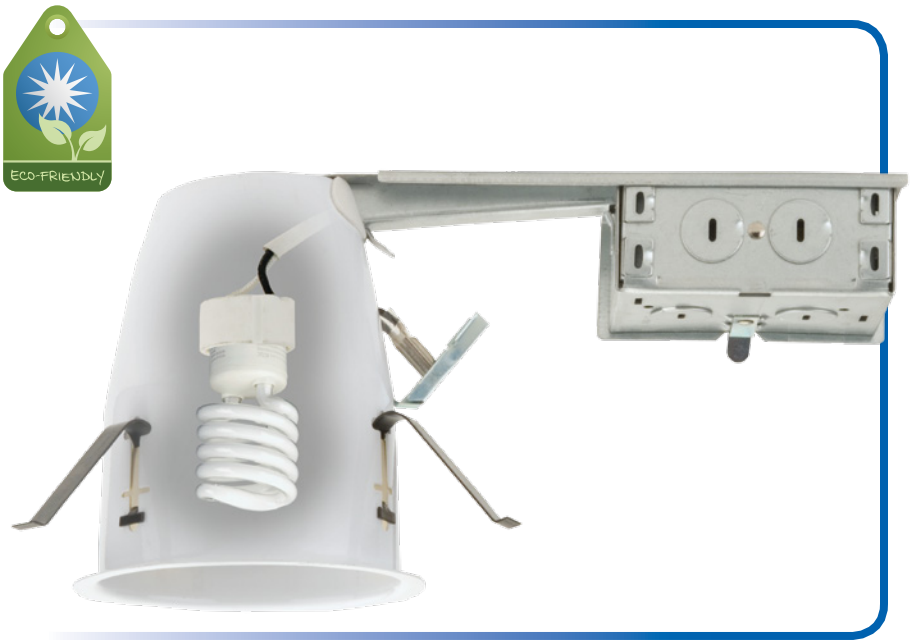

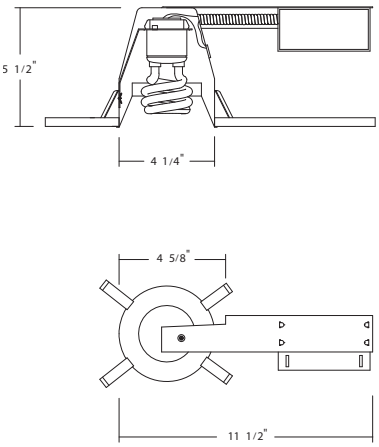

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W-18W, GU24 lamp (not included).

HOUSING

Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Adjustable socket bracket assures proper and consistent lamp positioning.
5 1/2" height allows use in 2" x 6" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL listed for direct contact with insulation.
UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

Can be used for T24 California Title 24 High Energy Compliant

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS

FOR 19024A18, 19024AR18

SPECULAR CONE • 18W | GU24

Item NO.	Description
19503	GOLD

Dimensions

OD: 5″



SPECULAR CONE • 18W | GU24

Item NO.	Description
19504	CLEAR

Dimensions

OD: 5″



ALBALITE SHOWER • 18W | GU24

Item NO.	Description
19509BK	BLACK (shown)
19509BZ	BRONZE
19509CL	CLEAR
19509OB	OIL-RUBBED BRONZE
19509WH	WHITE

Dimensions

OD: 5″

WET LOCATION RATED



DROP OPAL SHOWER • 18W | GU24

Item NO.	Description
19510CL	CLEAR
19510GD	GOLD (shown)
19510WH	WHITE

Dimensions

OD: 5″

WET LOCATION RATED



SPECUALR CONE • 18W | GU24

Item NO.	Description
19661BK	BLACK
19661NK	NICKEL
19661OB	OIL-RUBBED BRONZE
19661WH	WHITE (SHOWN)

Dimensions

OD: 5″



ALBALITE SHOWER • 18W | GU24

Item NO.	Description
19662BK	BLACK (shown)
19662NK	NICKEL
19662OB	OIL-RUBBED BRONZE
19662WH	WHITE

Dimensions

OD: 5″

WET LOCATION RATED



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

TRIMS

FOR 19024A18, 19024AR18

BAFFLE • 18W | GU24

Item NO.	Description	Dimensions
19663BK	BLACK	OD: 5″
19663NK	NICKEL	
19663OB	OIL-RUBBED BRONZE	
19663WH	WHITE (shown)	



BAFFLE /CLEAR REFLECTOR • 18W | GU24

Item NO.	Description	Dimensions
19664BKCL	BLACK	OD: 5″
19664WHCL	WHITE (shown)	



BAFFLE • 18W | GU24

Item NO.	Description	Dimensions
19501	BLACK (WHITE RING)	OD: 5″
19501BZ	BRONZE	
19501NK	NICKEL (shown)	
19501OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZE RING)	
19501OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)	



BAFFLE • 18W | GU24

Item NO.	Description	Dimensions
19502WH	WHITE (shown)	OD: 5″
19502BK	BLACK (BLACK TRIM)	



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

27804EBM32

4" COMPACT FLUORESCENT SQUARE HOUSING

Insulation must be kept a minimum of 3" from housing

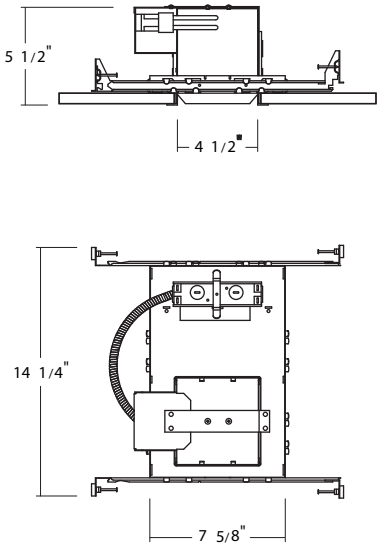

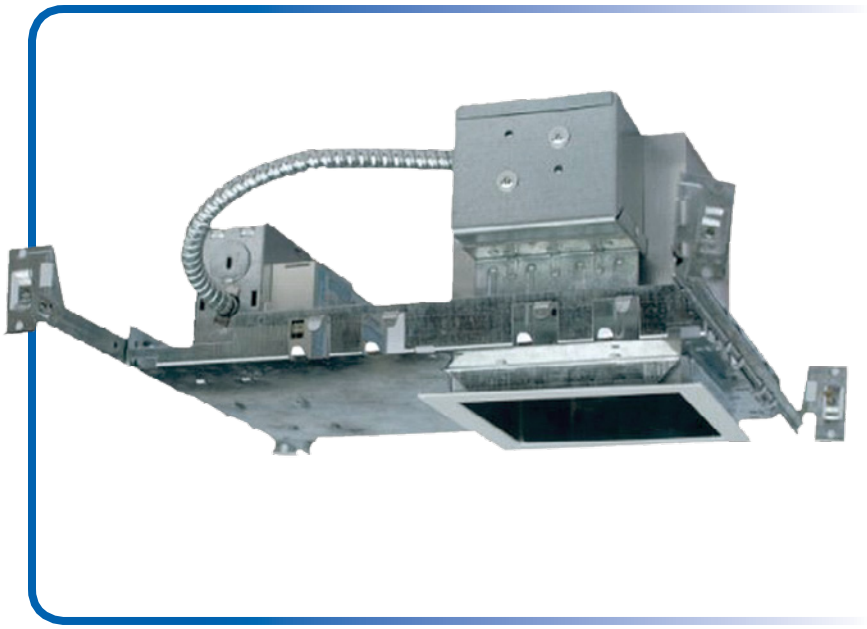

DESCRIPTION

Suitable for new construction in residential and commercial applications.
Uses one 13W-32W lamp, G24Q (not included).

HOUSING

5 1/2" height allows use in 2" x 8" joist construction.
120-277V Universal input electronic ballast.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box. Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

Consult factory for dimming options.

c UL us LISTED

ENERGY STAR

NICOR FASTENER

UNIVERSAL INPUT 120-277V BALLAST

NICOR Shining Brighter™

TRIMS
FOR 27804EBM32

REFLECTOR • 1 X 13W-32W

Item NO.	Description
27841BK	BLACK
27841CL	CLEAR
27841GD	GOLD
27841WH	WHITE

Dimensions: TRIPLE 4 PIN LAMP, BASE G24Q



REFLECTOR W/LOUVER • 1 X 13W-32W

Item NO.	Description
27842BK	BLACK
27842CL	CLEAR
27842WH	WHITE

Dimensions: TRIPLE 4 PIN LAMP, BASE G24Q



FRESNEL • 1 X 13W-32W

Item NO.	Description
27843CL	CLEAR
27843WH	WHITE

Dimensions: TRIPLE 4 PIN LAMP, BASE G24Q



ENERGY STAR
The federal government establishes minimum performance requirements for energy efficiency in lighting and other consumer products. Buying ENERGY STAR labeled products ensures that you are making an environmentally responsible choice that will also reduce your energy costs.

TITLE 24
The State of California has set energy efficiency standards for residential and non residential buildings. The rules apply to lamps and ballasts used in NICOR fixtures and are often adopted as job specification requirements for building projects in other states.

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

15024A27

AIRTIGHT HOUSING GU24

Suitable for direct contact with insulation

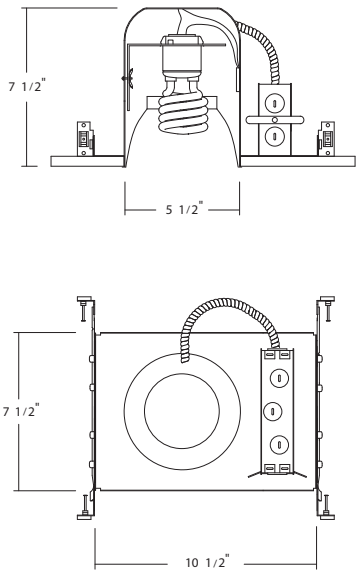

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W- 27W GU24 lamp (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

Can be used for T24 California Title 24 High Energy Compliant

AIRTIGHT HOUSING

NICOR FASTENER

15024AR27

REMODEL AIRTIGHT HOUSING GU24

Suitable for direct contact with insulation

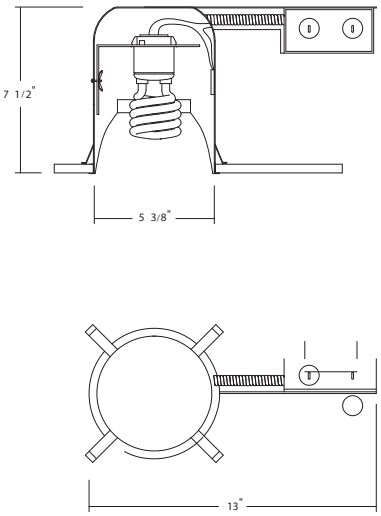

DESCRIPTION

Suitable for remodel construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W- 27W GU24 lamp (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
7 1/2" height allows use in 2" x 8" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

Can be used for T24 California Title 24 High Energy Compliant

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS

FOR 15024A27, 15024AR27

BAFFLE • 27W | GU24

Item NO.	Description	Dimensions
15520BK	BLACK	OD: 6 1/2"
15520NK	NICKEL	
15520OB	OIL-RUBED BRONZE (shown)	
15520WH	WHITE	



REFLECTOR • 27W | GU24

Item NO.	Description	Dimensions
15520CL	CLEAR	OD: 6 1/2"



REFLECTOR/BAFFLE • 27W | GU24

Item NO.	Description	Dimensions
15559WH	WHITE	OD: 6 1/2"
15559BK	BLACK	



FRESNEL SHOWER TRIM WITH REFECTOR • 27W | GU24

Item NO.	Description	Dimensions
15520BKLNS	BLACK	OD: 6 1/2"
15520NKLNS	NICKEL	
15520OBLNS	OIL-RUBBED BRONZE	
15520WHLNS	WHITE	



Helpful Hints *All IC housings can be used in direct contact with insulation. If you are planning to use cellulose/wet spray type insulation, call the factory for the recommended housing.*

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

Never leave the lights on again.

On average you can reduce energy usage by as much as 45% with **MAXCOR™** Motion Sensors.

Visit www.nicorlighting.com for more info.

MAXCOR™

15007A

1X13W DOUBLE TWIN FLUORESCENT UNIVERSAL AIRTIGHT HOUSING

Suitable for direct contact with insulation

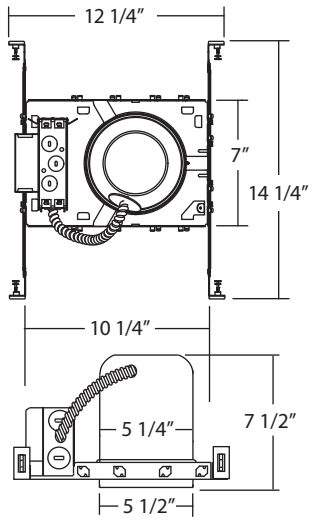

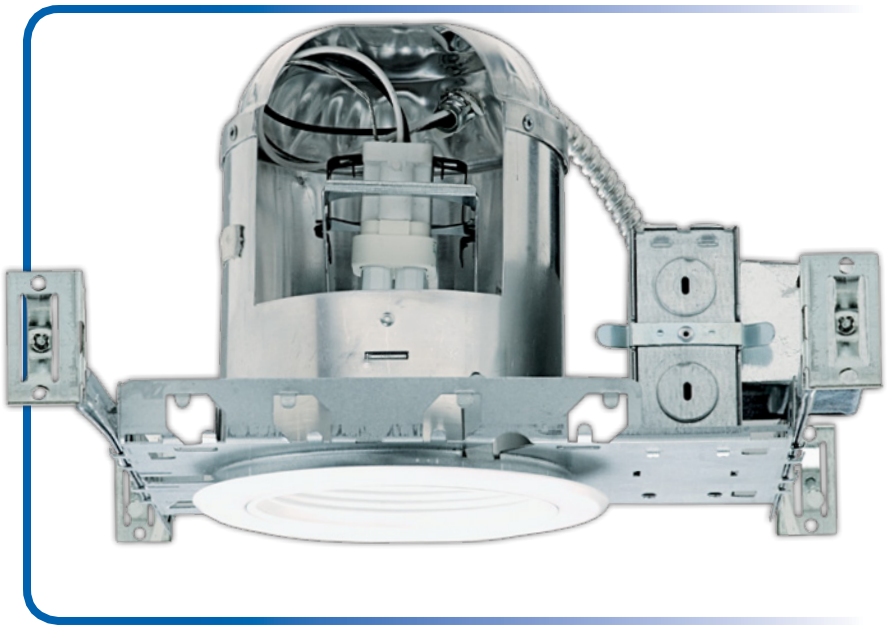

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use 13W double twin tube, GX23-2 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120V Magnetic ballast.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

15007AR

1X13W DOUBLE TWIN FLUORESCENT REMODEL AIRTIGHT HOUSING

Suitable for direct contact with insulation

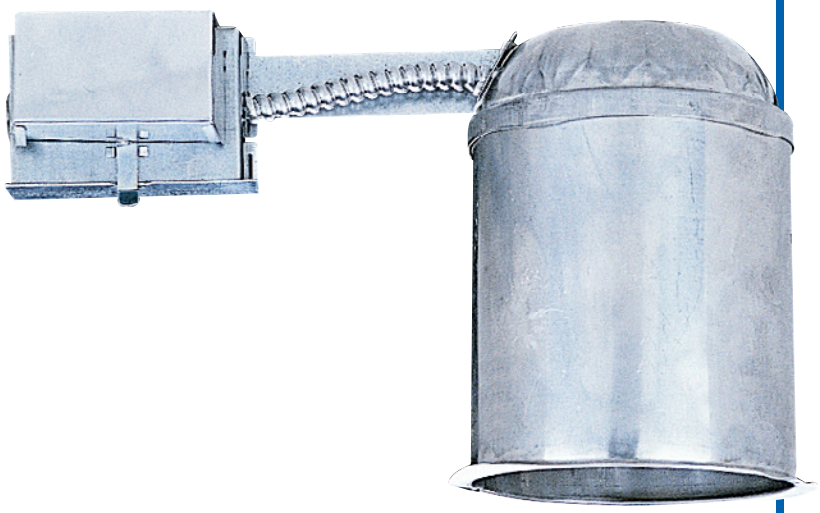

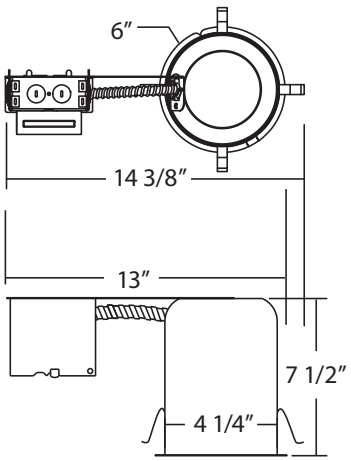

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use 13W double twin tube, GX23-2 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120V Magnetic ballast.
7 1/2" height allows use in 2" x 8" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

15007AEBM

1X13W DOUBLE TWIN FLUORESCENT UNIVERSAL AIRTIGHT HOUSING

Suitable for direct contact with insulation

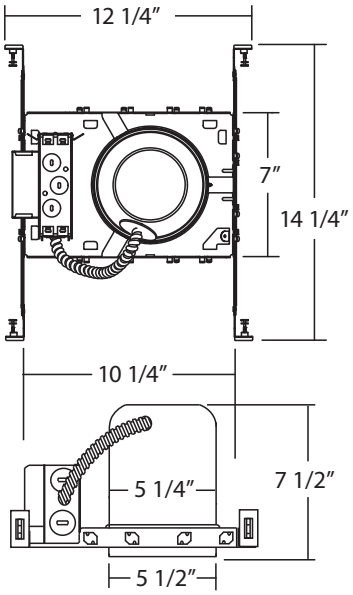

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W double twin tube, G24Q-1 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120-277V Universal input electronic ballast.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

Can be used for T24 California Title 24 High Energy Compliant

AIRTIGHT HOUSING

NICOR FASTENER

UNIVERSAL INPUT 120-277V BALLAST

NICOR Shining Brighter™

15017AEB13 • 15017AEB18 • 15017AEB26

DOUBLE TWIN FLUORESCENT UNIVERSAL AIRTIGHT HOUSING

Suitable for direct contact with insulation

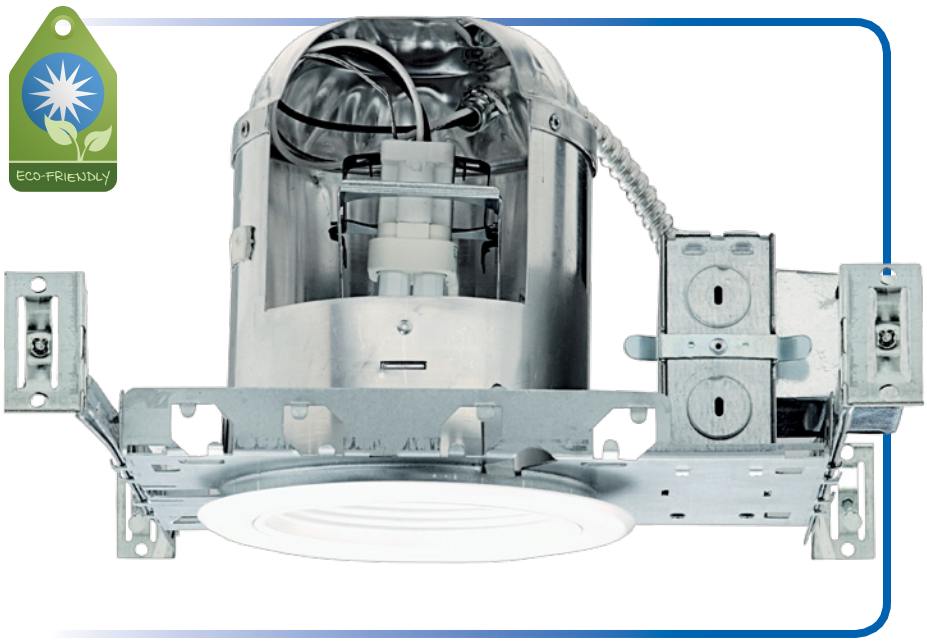

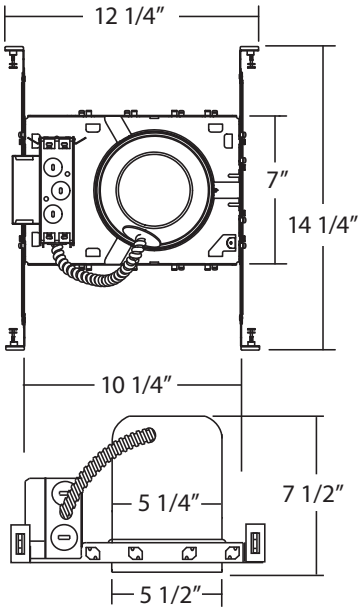

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W, 18W, 26W double twin tube, G24Q-1 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120V Electronic ballast.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

15017AREB13 • 15017AREB18 • 15017AREB26

DOUBLE TWIN FLUORESCENT REMODEL AIRTIGHT HOUSING

Suitable for direct contact with insulation

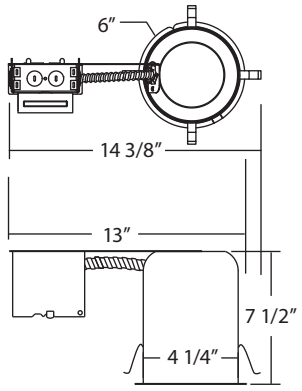

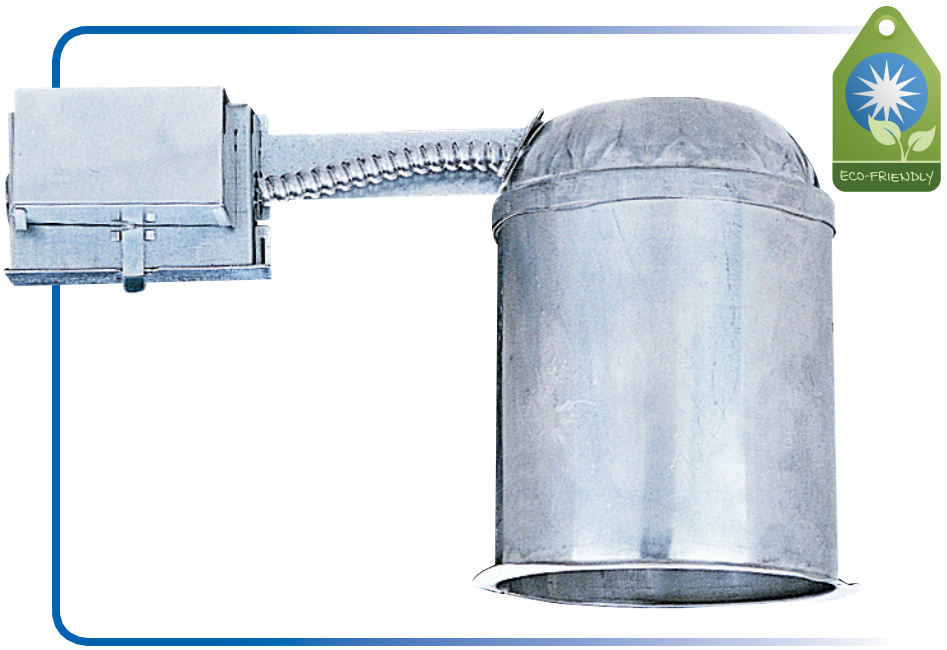

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W, 18W, 26W double twin tube, G24Q-1 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120V Electronic ballast.
7 1/2" height allows use in 2" x 8" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

15027AEBM13 • 15027AEBM18 • 15027AEBM26

DOUBLE TWIN FLUORESCENT UNIVERSAL AIRTIGHT HOUSING

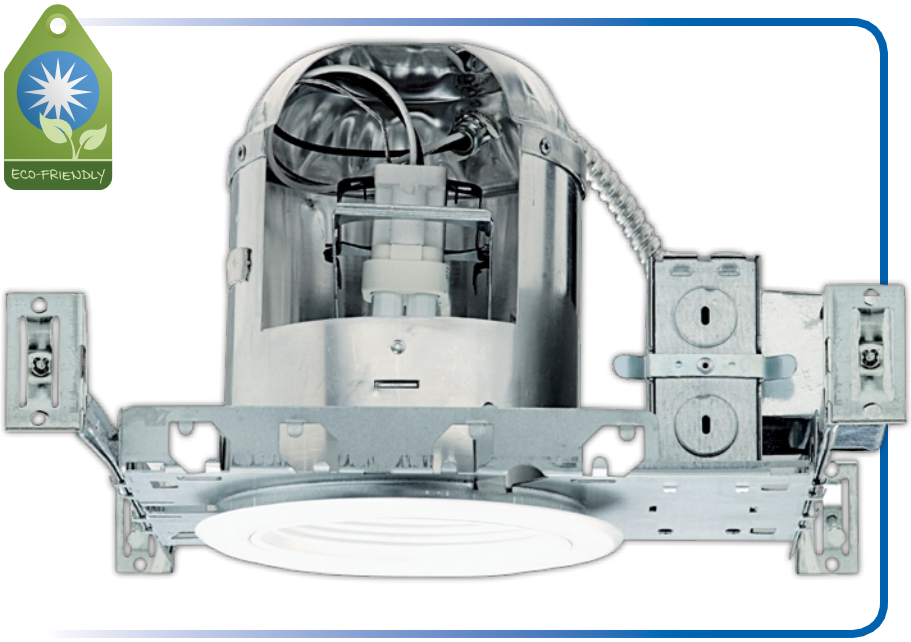

Suitable for direct contact with insulation

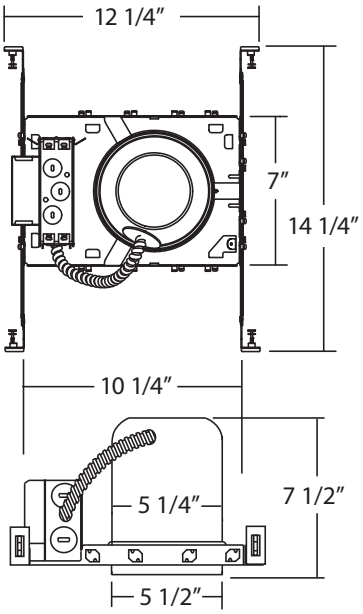

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W, 18W or 26W double twin tube, GX23-2 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120-277V Universal input electronic ballast.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

c UL us LISTED

ENERGY STAR

AIRTIGHT HOUSING

NICOR FASTENER

UNIVERSAL INPUT 120-277V BALLAST

15029AREBM13 • 15029AREBM18 • 15029AREBM26

DOUBLE TWIN FLUORESCENT REMODEL AIRTIGHT HOUSING

Suitable for direct contact with insulation

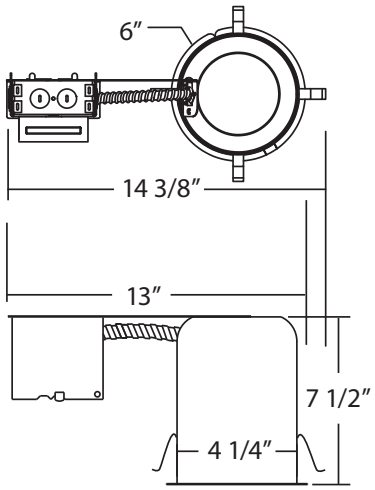

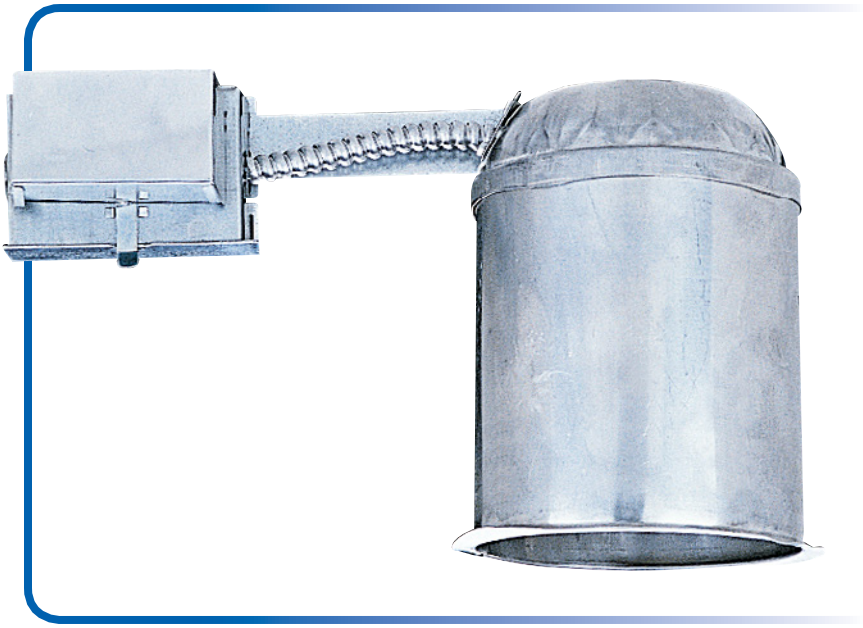

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W, 18W or 26W double twin tube, GX23-2 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120-277V Universal input electronic ballast.
7 1/2" height allows use in 2" x 8" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.
LISTINGS
UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

AIRTIGHT HOUSING

NICOR FASTENER

UNIVERSAL INPUT 120-277V BALLAST

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

TRIMS

FOR 15007AEBM, 15007A, 15017AEB13, 15017AEB18, 15017AEB26, 15027AEBM13, 15027AEBM18, 15027AEBM26, 15007AR, 15017AREB13, 15017AREB18, 15017AREB26, & 15029AREBM13, 15029AREBM18, 15029AREBM26

FRESNEL SHOWER • 1X13W, 18W, 26W | G24Q-1

Item NO.	*Description*	*Dimensions*
15502	WHITE	OD: 6 1/2"



WET LOCATION RATED

SHOWER DROP OPAL • 1X13W, 18W, 26W | G24Q-1

Item NO.	*Description*	*Dimensions*
15509	WHITE (shown)	OD: 6 1/2"
15509OB	OIL-RUBBED BRONZE	



WET LOCATION RATED

BAFFLE • 27W | GU24

Item NO.	*Description*	*Dimensions*
15520BK	BLACK	OD: 6 1/2"
15520NK	NICKEL	
15520OB	OIL-RUBED BRONZE (shown)	
15520WH	WHITE	



REFLECTOR • 27W | GU24

Item NO.	*Description*	*Dimensions*
15520CL	CLEAR	OD: 6 1/2"



REFLECTOR/BAFFLE • 27W | GU24

Item NO.	*Description*	*Dimensions*
15559WH	WHITE	OD: 6 1/2"
15559BK	BLACK	



FRESNEL SHOWER TRIM WITH REFECTOR • 27W | GU24

Item NO.	*Description*	*Dimensions*
15520BKLNS	BLACK	OD: 6 1/2"
15520NKLNS	NICKEL	
15520OBLNS	OIL-RUBBED BRONZE	
15520WHLNS	WHITE	



REFLECTOR • 1X13W, 18W, 26W | G24Q-1

Item NO.	*Description*	*Dimensions*
15518BK	BLACK	OD: 6 1/2"
15518CL	CLEAR	
15518GD	GOLD (shown)	
15518WH	WHITE	



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

17007AEBM13 • 17007AEBM18 • 17007AEBM26

DOUBLE TWIN FLUORESCENT COMPACT HOUSING

Suitable for direct contact with insulation

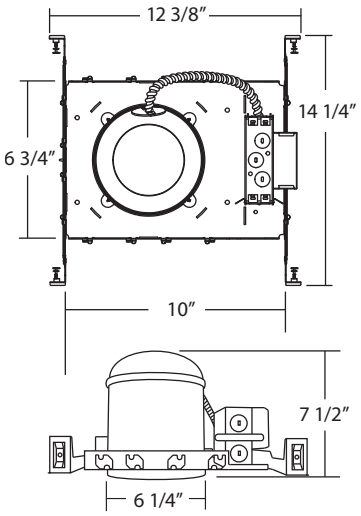

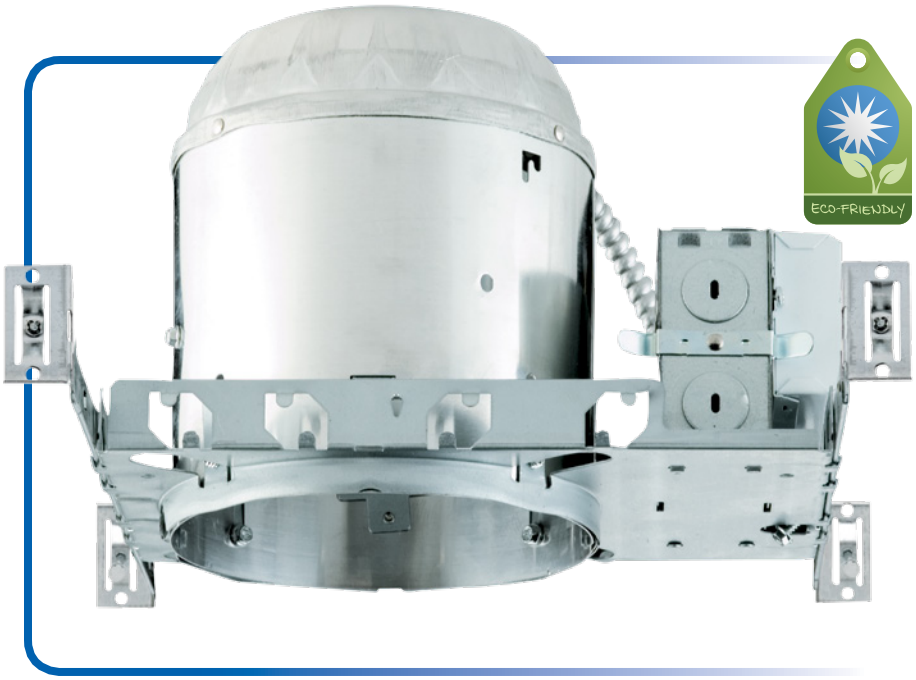

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W, 18W or 26W double twin tube, G24Q (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120-277V Universal input electronic ballast.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

c UL us LISTED

ENERGY STAR

Can be used for T24 California Title 24 High Energy Compliant

AIRTIGHT HOUSING

NICOR FASTENER

UNIVERSAL INPUT 120-277V BALLAST

NICOR Shining Brighter™

17008AREB26

1X26W DOUBLE TWIN FLUORESCENT REMODEL COMPACT HOUSING

Suitable for direct contact with insulation

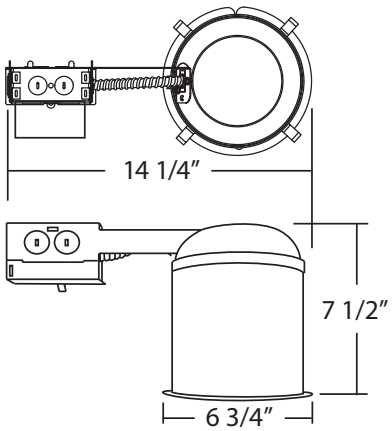

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 26W double twin tube G24Q-1 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Electronic Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120V Electronic ballast.
7 1/2" height allows use in 2" x 8" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL listed for direct contact with insulation.
UL damp location
UL feed-through
CUL

17008R

1X13W DOUBLE TWIN FLUORESCENT REMODEL COMPACT HOUSING

Suitable for direct contact with insulation

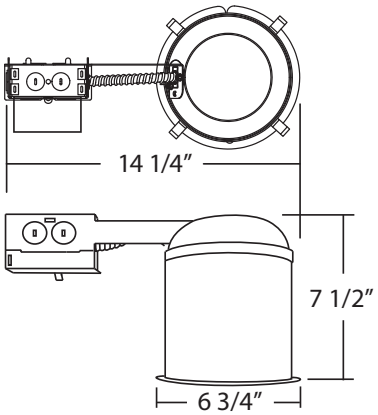

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W double twin tube, GX23-2 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120V Magnetic ballast.
7 1/2" height allows use in 2" x 8" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL listed for direct contact with insulation.
UL damp location
UL feed-through
CUL

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

17017AEB13 • 17017AEB18 • 17017AEB26

AIRTIGHT HOUSING DOUBLE TWIN FLUORESCENT COMPACT HOUSING

Suitable for direct contact with insulation

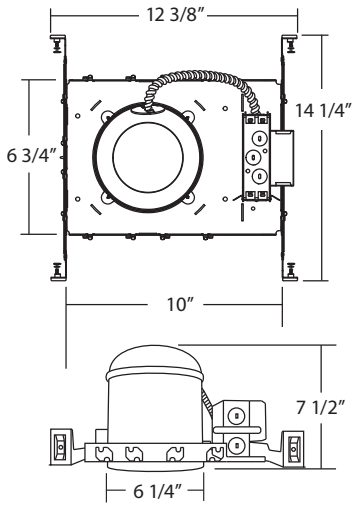

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 13W, 18W or 26W double twin tube, G24Q (not included).

HOUSING

Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Washington State Energy Code approved to meet restricted airflow requirements.
Aluminum construction provides greater heat dissipation.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120V Electronic ballast.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR™ captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

Can be used for T24 California Title 24 High Energy Compliant

AIRTIGHT HOUSING

NICOR FASTENER

New products and catalog updates are just a click away at **nicorlighting.com**

17010AEBM2642

1X26W 32W, 42W, VERTICAL HOUSING

Suitable for direct contact with insulation

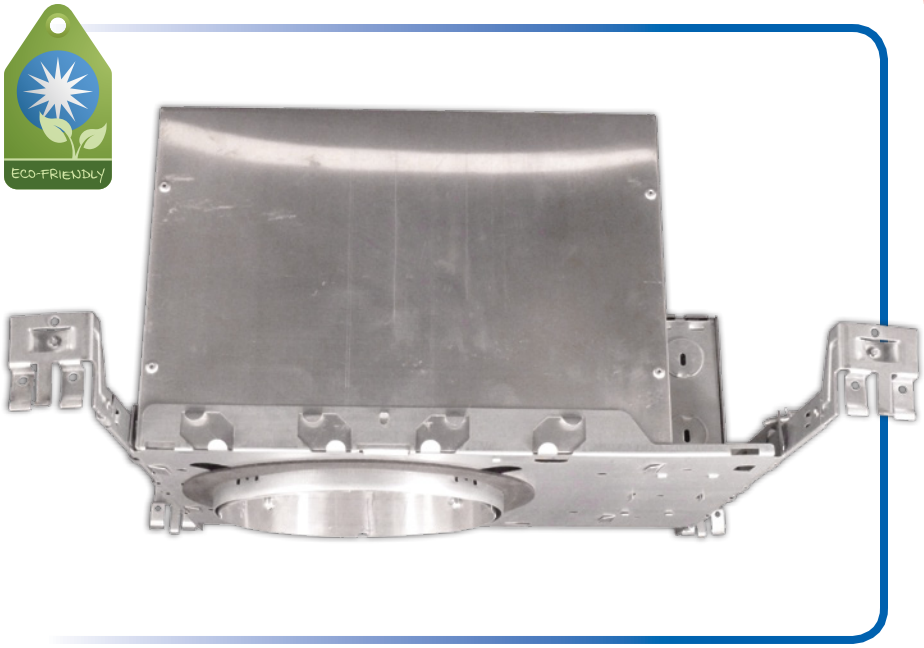

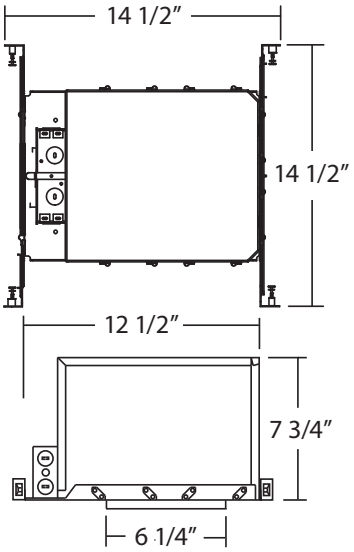

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 26W, 32W or 42W lamp, GX24Q-1 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
120-277V Universal input electronic ballast.
7 3/4" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation.
UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

NICOR FASTENER

UNIVERSAL INPUT 120-277V BALLAST

TRIMS

FOR 17007AEBM, 17017AEB13, 17017AEB18, 17017AEB26, 17008R, 17008AREB26, 17101AEBM2642

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

LEXAN SHOWER/FRESNEL LENS

Item NO.	Description	Dimensions
17502BZ	BRONZE (shown)	OD: 8"
17502R	(WHITE WITH REFLECTOR)	
17502OB	OIL-RUBBED BRONZE	
17502	WHITE (WITH METAL TRIM RING)	
	Also Available	
17572WH	WHITE (WITH PLASTIC TRIM RING)	



WET LOCATION RATED

LEXAN SHOWER/ALBALITE LENS

Item NO.	Description	Dimensions
17505BZ	BRONZE	OD: 8"
17505NK	NICKEL	
17505R	(WHITE WITH REFLECTOR)	
17505OB	OIL-RUBBED BRONZE	
17505	WHITE (WITH METAL TRIM RING) (shown)	
	Also Available	
17575WH	WHITE (WITH PLASTIC TRIM RING)	



WET LOCATION RATED

LEXAN DROP OPAL

Item NO.	Description	Dimensions
17509R	(WHITE WITH REFLECTOR)	OD: 8"
17509	WHITE (WITH METAL TRIM RING) (shown)	
17579WH	WHITE (WITH PLASTIC TRIM RING)	



WET LOCATION RATED

SPECULAR REFLECTOR

Item NO.	Description	Dimensions
17518CL	CLEAR (shown)	OD: 7"
17518WH	WHITE	





REFLECTOR/BAFFLE

Item NO.	Description	Dimensions
17520CL	CLEAR (BLACK/BAFFLE) (shown)	OD: 7 1/4"
17520CLWH	CLEAR (WHITE/BAFFLE)	



Lamp Information		
	17007EBM	1X13W G24Q-1
	17017EB13	1X13W G24Q-1
	17008R	1X13W G23Q-2
	17017EB18	1X18W G24Q-2
	17017EB26	1X26W G24Q-3
	17008AREB26	1X26W G24Q-3

ABZ *Aged Bronze* | ***BK*** *Black* | ***BZ*** *Bronze* | ***CH*** *Chrome* | ***GD*** *Gold* | ***NK*** *Nickel* | ***OB*** *Oil-Rubbed Bronze* | ***PB*** *Polished Brass* | ***PW*** *Pewter*

NICOR® Shining Brighter™

TRIMS

FOR 17007AEBM, 17017AEB13, 17017AEB18, 17017AEB26, 17008R, 17008AREB26

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

BAFFLE/FRESNEL LENS

Item NO.	Description	Dimensions
17522BK	BLACK	OD: 7″
17522WH	WHITE (shown)	



BAFFLE/ALBALITE LENS

Item NO.	Description	Dimensions
17523BK	BLACK (shown)	OD: 7″
17523WH	WHITE	



BAFFLE/DROP OPAL

Item NO.	Description	Dimensions
17524BK	BLACK (shown)	OD: 7 1/4″
17524WH	WHITE	



BAFFLE/CONE

Item NO.	Description	Dimensions
17525BK	BLACK	OD: 7 1/2″
17525BZ	BRONZE	
17525NK	NICKEL	
17525OB	OIL RUBBED BRONZE	
17525WH	WHITE (shown)	



WALL WASH/BAFFLE

Item NO.	Description	Dimensions
17537BK	BLACK (shown)	OD: 7 1/4″
17537WH	WHITE	



WALL WASH/REFLECTOR

Item NO.	Description	Dimensions
17540BK	BLACK	OD: 7 1/4″
17540CL	CLEAR (shown)	
17540GD	GOLD	
17540WH	WHITE	



RIBBED REFLECTOR

Item NO.	Description	Dimensions
17554	CLEAR	OD: 7 1/4″



Lamp Information		
	17007EBM	1X13W G24Q-1
	17017EB13	1X13W G24Q-1
	17008R	1X13W G23Q-2
	17017EB18	1X18W G24Q-2
	17017EB26	1X26W G24Q-3
	17008AREB26	1X26W G24Q-3

ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

TRIMS

FOR 17007AEBM, 17017AEB13, 17017AEB18, 17017AEB26, 17008R, 17008AREB26

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

RIBBED REFLECTOR

Item NO.	*Description*	*Dimensions*
17555	GOLD	OD: 7 1/4"



Lamp Information	17007EBM	1X13W G24Q-1
	17017EB13	1X13W G24Q-1
	17008R	1X13W G23Q-2
	17017EB18	1X18W G24Q-2
	17017EB26	1X26W G24Q-3
	17008AREB26	1X26W G24Q-3

ABZ *Aged Bronze* | ***BK*** *Black* | ***BZ*** *Bronze* | ***CH*** *Chrome* | ***GD*** *Gold* | ***NK*** *Nickel* | ***OB*** *Oil-Rubbed Bronze* | ***PB*** *Polished Brass* | ***PW*** *Pewter*

Efficient lighting. Lower costs.

MAXCOR LED Downlights can reduce your energy cost by as much as 80%*.

Visit www.nicorlighting.com for more info.

MAXCOR™

*Compared to a 65WBR30/FL Incandescent.

17010

2X13W DOUBLE TWIN FLUORESCENT COMPACT HOUSING

Suitable for direct contact with insulation

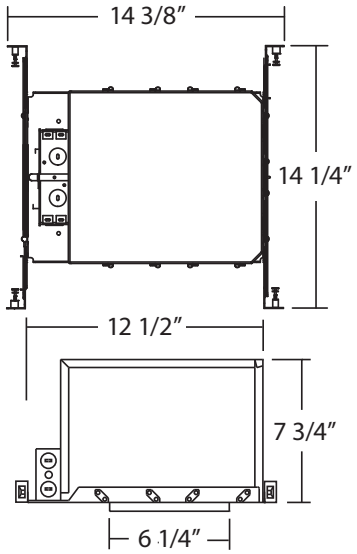

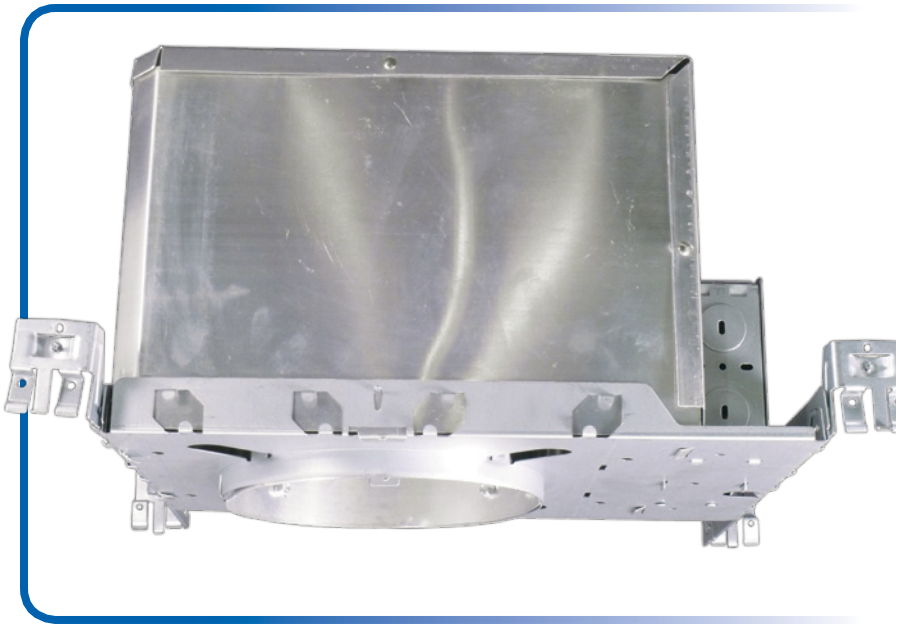

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use two 13W double twin tube, GX23 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
120V Magnetic ballast.
7 3/4" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

NICOR FASTENER

17010AEBM

2X13W DOUBLE TWIN FLUORESCENT COMPACT HOUSING

Suitable for direct contact with insulation

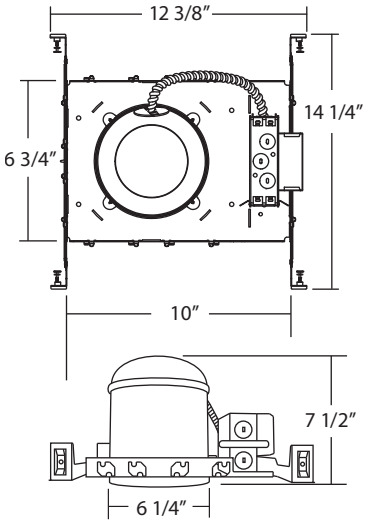

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use two 13W double twin tube, G24Q-1 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
120-277V Universal input electronic ballast.
7 3/4" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR® captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

NICOR FASTENER

UNIVERSAL INPUT 120-277V BALLAST

TRIMS

FOR 17010, 17010AEBM

SEE LAMP INFORMATION AT BOTTOM OF COLUMN



LEXAN SHOWER/FRESNEL LENS

Item NO.	Description	Dimensions
17502BZ	BRONZE (shown)	OD: 8"
17502R	WHITE WITH REFLECTOR	
17502OB	OIL-RUBBED BRONZE	
17502	WHITE (WITH METAL TRIM RING)	
	ALSO AVAILABLE	
17572WH	WHITE (WITH PLASTIC TRIM RING)	



WET LOCATION RATED

LEXAN SHOWER/ALBALITE LENS

Item NO.	Description	Dimensions
17505BZ	BRONZE	OD: 8"
17505NK	NICKEL	
17505R	WHITE WITH REFLECTOR	
17505OB	OIL-RUBBED BRONZE	
17505	WHITE (WITH METAL TRIM RING) (shown)	
	ALSO AVAILABLE	
17575WH	WHITE (WITH PLASTIC TRIM RING)	



WET LOCATION RATED

SPECULAR

Item NO.	Description	Dimensions
17507BK	BLACK	OD: 7"
17507CL	CLEAR	
17507GD	GOLD	
17507WH	WHITE (shown)	



LEXAN DROP OPAL

Item NO.	Description	Dimensions
17509R	WHITE WITH REFLECTOR	OD: 8"
17509	WHITE (WITH METAL TRIM RING) (shown)	
	ALSO AVAILABLE	
17579WH	WHITE (WITH PLASTIC TRIM RING)	



WET LOCATION RATED

BAFFLE/FRESNEL LENS

Item NO.	Description	Dimensions
17522BK	BLACK	OD: 7"
17522WH	WHITE (shown)	



BAFFLE/ALBALITE LENS

Item NO.	Description	Dimensions
17523BK	BLACK (shown)	OD: 7"
17523WH	WHITE	



Lamp Information 17010AEBM, 17010 2X13W G24Q-1

ABZ *Aged Bronze* | ***BK*** *Black* | ***BZ*** *Bronze* | ***CH*** *Chrome* | ***GD*** *Gold* | ***NK*** *Nickel* | ***OB*** *Oil-Rubbed Bronze* | ***PB*** *Polished Brass* | ***PW*** *Pewter*

NICOR® Shining Brighter™

TRIMS

FOR 17010, 17010AEBM

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

BAFFLE/DROP OPAL

Item NO.	Description	Dimensions
17524BK	BLACK (shown)	OD: 7 1/4"
17524WH	WHITE	



WALL WASH/BAFFLE

Item NO.	Description	Dimensions
17537BK	BLACK (shown)	OD: 7 1/4"
17537WH	WHITE	



WALL WASH REFLECTOR

Item NO.	Description	Dimensions
17540BK	BLACK	OD: 7 1/4"
17540CL	CLEAR (shown)	
17540GD	GOLD	
17540WH	WHITE	



RIBBED REFLECTOR

Item NO.	Description	Dimensions
17554	GOLD	OD: 7 3/4"



RIBBED REFLECTOR

Item NO.	Description	Dimensions
17555	CLEAR	OD: 7 3/4"



Lamp Information 17010AEBM, 17010 2X13W G24Q-1

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

17011

2X13W DOUBLE TWIN FLUORESCENT HORIZONTAL FRAME-IN

Insulation must be kept a minimum of 3" from housing

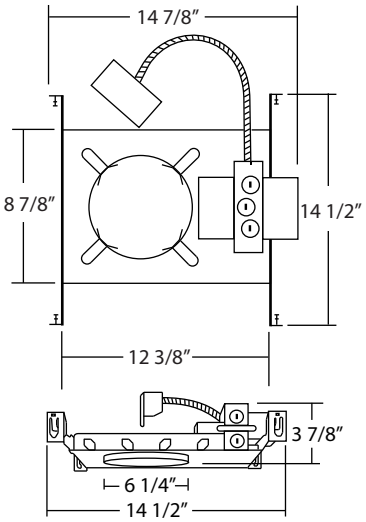

Shown complete with trim and insert, available separately.

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.
Use two 13W double twin tube, GX23-Q (not included).
FRAME-IN
120V Magnetic ballast.
Commercial frame allows direct installation to wood joist or steel stud constructions.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

NICOR FASTENER

NICOR® Shining Brighter™

17011EBM2642

1X26W, 32W, 42W FLUORESCENT HORIZONTAL FRAME-IN

17011EBM2X13 • 17011EBM2X18 • 17011EBM2X26

DOUBLE TWIN FLUORESCENT HORIZONTAL FRAME-IN

Shown complete with trim and insert, available separately.

Insulation must be kept a minimum of 3" from housing

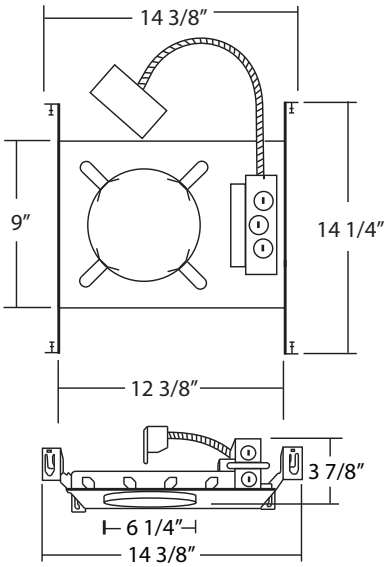

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.
Use two 13W, 18W, 26W double twin tube, G24Q-1 (not included).

FRAME-IN

120-277V Universal input electronic ballast.
Commercial frame allows direct installation to wood joist or steel stud constructions.
JUNCTION BOX
Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist. Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

OPTIONS
17011EBM18EMBL
17011EBM26EMBL

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

TRIMS

FOR 17011EBM2642, 17011EBM2X13, 17011EBM2X18, 17011EBM2X26, 17011

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

FRESNEL LENS

Item NO.	Description	Dimensions
17502BZ	BRONZE (shown)	OD: 8"
17502	WHITE	ALSO REQUIRES 17600 FRAME INSERT



WET LOCATION RATED

LEXAN DROP OPAL

Item NO.	Description	Dimensions
17509R	WHITE (WITH REFLECTOR)	OD: 8"
17509	WHITE (shown)	ALSO REQUIRES 17600 FRAME INSERT



WET LOCATION RATED

FRAME INSERT (REQUIRES TRIM)

Item NO.	Description	Dimensions
17600	FRAME INSERT (REQUIRES TRIM)	OD: 7 1/2"





REFLECTOR/FRESNEL LENS

Item NO.	Description	Dimensions
17604	CLEAR	OD: 7 1/4" ALSO REQUIRES 17600 FRAME INSERT



REFLECTOR

Item NO.	Description	Dimensions
17607BK	BLACK (shown)	OD: 7 1/2"
17607CL	CLEAR	
17607GD	GOLD	
17607WH	WHITE	



BAFFLE REFLECTOR

Item NO.	Description	Dimensions
17620BK	BLACK (shown)	OD: 7"
17620WH	WHITE	



BAFFLE/ALBALITE LENS

Item NO.	Description	Dimensions
17623BK	BLACK (shown)	OD: 7 3/8"
17623WH	WHITE	



Lamp Information 17011EBM NEW 2X 13W G24Q-1 17011 2X 13W GX23-Q

ABZ *Aged Bronze* | **BK** *Black* | **BZ** *Bronze* | **CH** *Chrome* | **GD** *Gold* | **NK** *Nickel* | **OB** *Oil-Rubbed Bronze* | **PB** *Polished Brass* | **PW** *Pewter*

TRIMS

FOR 17011EBM2642, 17011EBM2X13, 17011EBM2X18, 17011EBM2X26, 17011

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

BAFFLE WALL WASH

Item NO.	Description	Dimensions
17627BK	BLACK (shown)	OD: 7 3/8"
17627WH	WHITE	



REFLECTOR WITH FROST LENS

Item NO.	Description	Dimensions
17638CL	CLEAR (shown)	OD: 7 3/8"
17638WH	WHITE	



WALL WASH

Item NO.	Description	Dimensions
17644CL	CLEAR	OD: 7 3/8"



REFLECTOR/LOUVER

Item NO.	Description	Dimensions
17645CL	CLEAR (shown)	OD: 7 3/8"



BAFFLE/DROP OPAL

Item NO.	Description	Dimensions
17660BK	BLACK	OD: 7 1/4"
17660WH	WHITE (shown)	



Lamp Information 17011EBM 2X 13W G24Q-1 17011 2X 13W GX23-Q

ABZ *Aged Bronze* | ***BK*** *Black* | ***BZ*** *Bronze* | ***CH*** *Chrome* | ***GD*** *Gold* | ***NK*** *Nickel* | ***OB*** *Oil-Rubbed Bronze* | ***PB*** *Polished Brass* | ***PW*** *Pewter*

17012

2X13W DOUBLE TWIN HORIZONTAL FRAME-IN

Suitable for direct contact with insulation

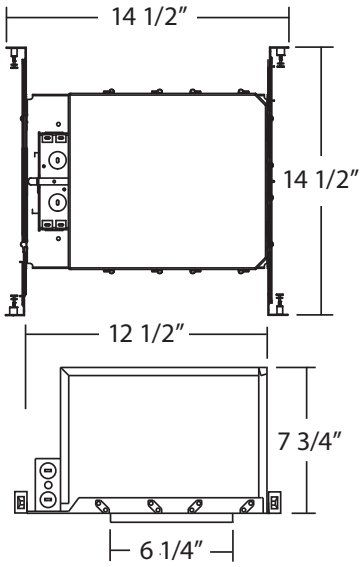

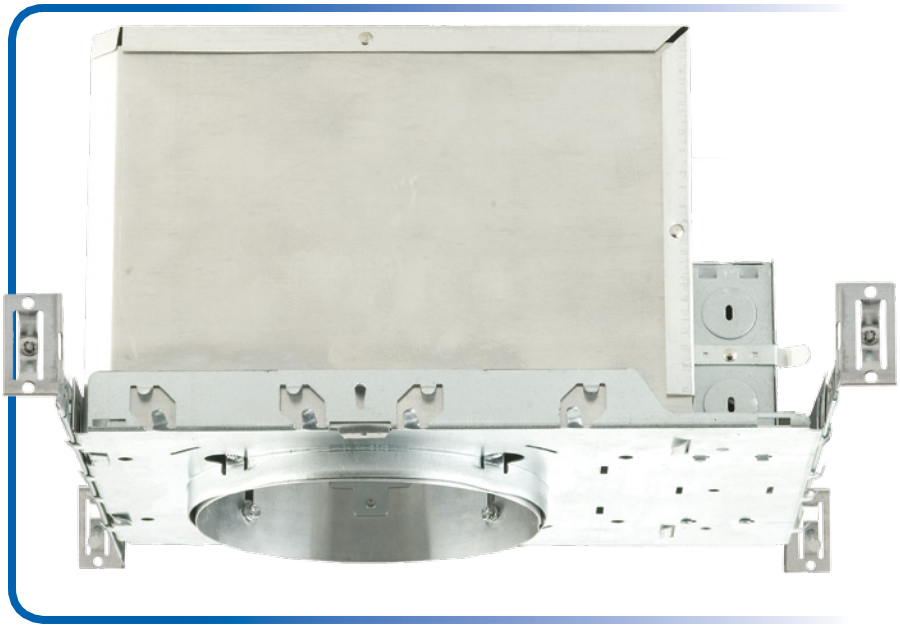

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use two 13W double twin tube. GX23Q (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
120V Magnetic ballast.
7 3/4" height allows use in 2" x 8" joist construction.
Plaster Frame
Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

NICOR FASTENER

17012AEBM2X13

DOUBLE TWIN HORIZONTAL FRAME-IN

Suitable for direct contact with insulation

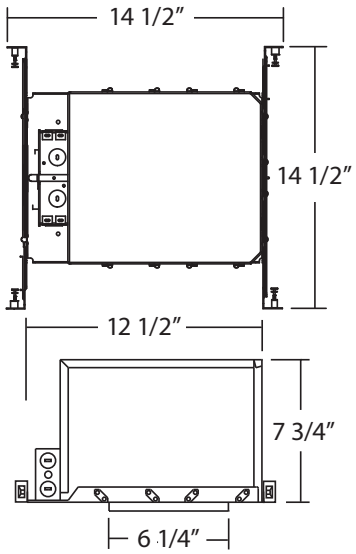

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use two 13W double twin tube. G24Q-1 (not included).

FRAME-IN

Aluminum construction provides greater heat dissipation.
120-277V Universal input electronic ballast.
7 3/4" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR® captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation.
UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

NICOR FASTENER

UNIVERSAL INPUT 120-277V BALLAST

TRIMS

FOR 17012 & 17012AEBM2X13

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

FRESNEL LENS

Item NO.	Description	Dimensions
17502BZ	BRONZE	OD: 8"
17502OB	OIL-RUBBED BRONZE (shown)	ALSO REQUIRES 17600
17502WH	WHITE (WITH METAL TRIM RING)	FRAME INSERT
	ALSO AVAILABLE	
17572WH	WHITE (WITH PLASTIC TRIM RING)	



WET LOCATION RATED

LEXAN DROP OPAL

Item NO.	Description	Dimensions
17509WH	WHITE (WITH METAL TRIM RING) (shown)	OD: 8"
	ALSO AVAILABLE	ALSO REQUIRES 17600
17579WH	WHITE (WITH PLASTIC TRIM RING)	FRAME INSERT



WET LOCATION RATED



REFLECTOR/FRESNEL LENS

Item NO.	Description	Dimensions
17604	CLEAR	OD: 7 1/4"
		ALSO REQUIRES 17600 FRAME INSERT



REFLECTOR

Item NO.	Description	Dimensions
17607BK	BLACK (shown)	OD: 7 1/2"
17607CL	CLEAR	
17607GD	GOLD	
17607WH	WHITE	



CLEAR REFLECTOR/BAFFLE

Item NO.	Description	Dimensions
17620BK	BLACK (shown)	OD: 7"
17620WH	WHITE	



BAFFLE WALL WASH

Item NO.	Description	Dimensions
17627BK	BLACK	OD: 7 1/4"
17627WH	WHITE (SHOWN)	



WALL WASH

Item NO.	Description	Dimensions
17644CL	CLEAR	OD: 7 3/8"



Lamp Information	*17012EBM*	*2X13W G24Q-1*
	17012	*2X13W GX23-2*

ABZ *Aged Bronze* | ***BK*** *Black* | ***BZ*** *Bronze* | ***CH*** *Chrome* | ***GD*** *Gold* | ***NK*** *Nickel* | ***OB*** *Oil-Rubbed Bronze* | ***PB*** *Polished Brass* | ***PW*** *Pewter*

NICOR® Shining Brighter™

TRIMS

FOR 17012 & 17012AEBM2X13

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

BAFFLE | DROP OPAL

Item NO.	*Description*	*Dimensions*
17660BK	BLACK	OD: 7 1/4"
17660WH	WHITE (SHOWN)	



Lamp Information	*17012EBM*	*2X13W G24Q-1*
	17012	*2X13W GX23-2*

ABZ *Aged Bronze* | ***BK*** *Black* | ***BZ*** *Bronze* | ***CH*** *Chrome* | ***GD*** *Gold* | ***NK*** *Nickel* | ***OB*** *Oil-Rubbed Bronze* | ***PB*** *Polished Brass* | ***PW*** *Pewter*

Never leave the lights on again.

On average you can reduce energy usage by as much as 45% with **MAXCOR™** Motion Sensors.

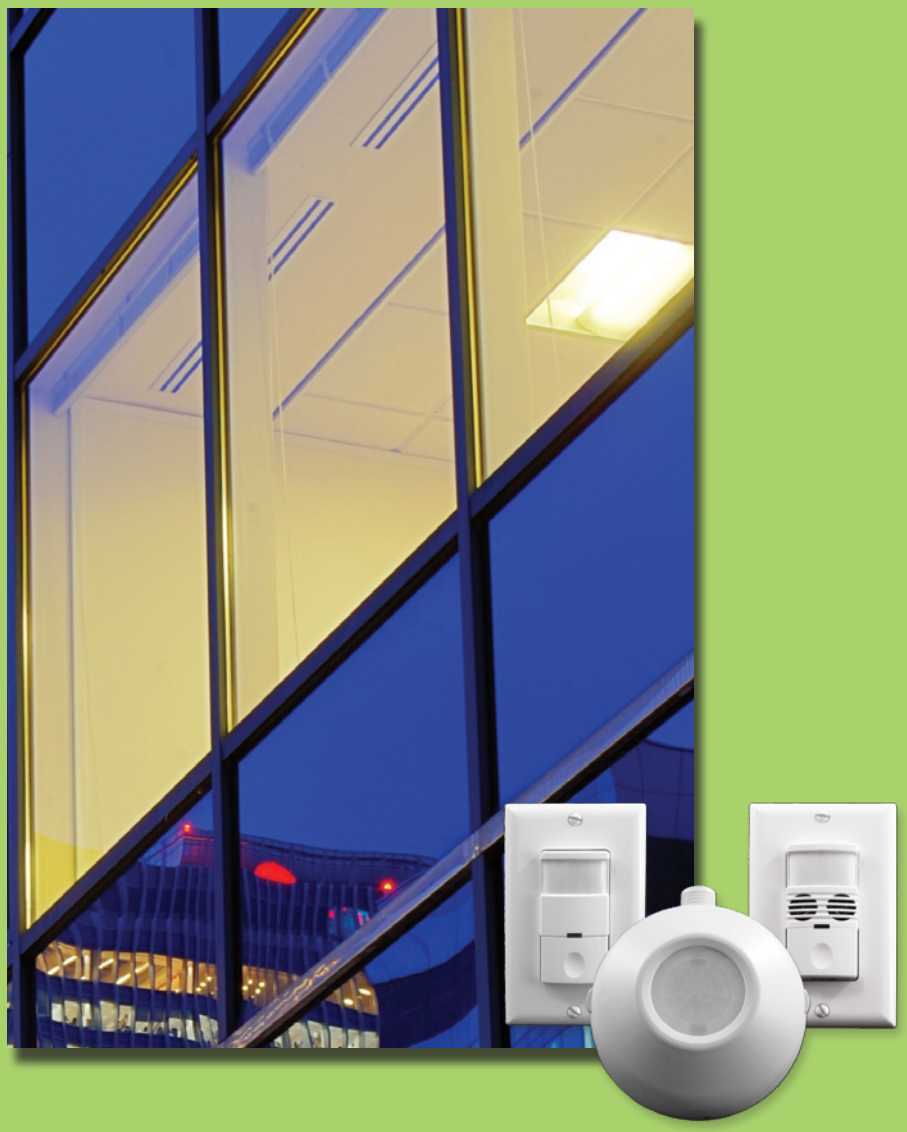

Visit www.nicorlighting.com for more info.

MAXCOR™

17013EBM2642

1X26W, 32W, 42W TRIPLE BIAX VERTICAL FRAME-IN

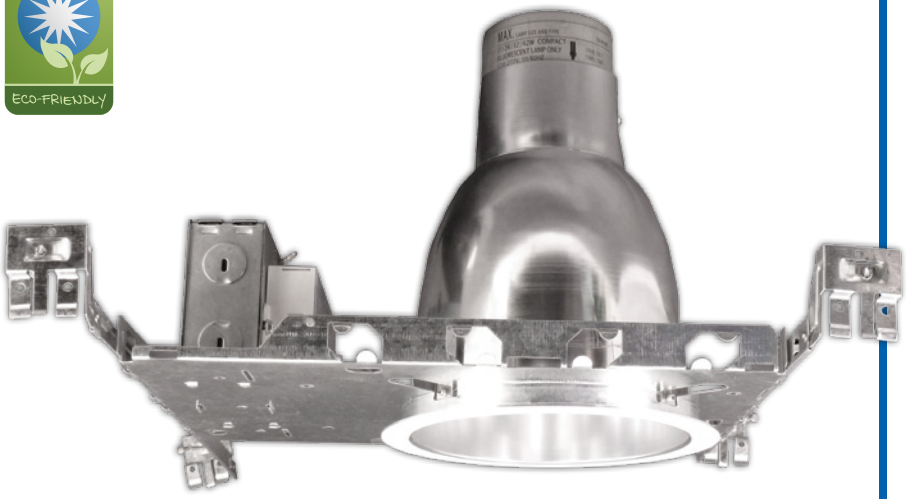

Shown complete with trim, sold separately.

Insulation must be kept a minimum of 3" from housing

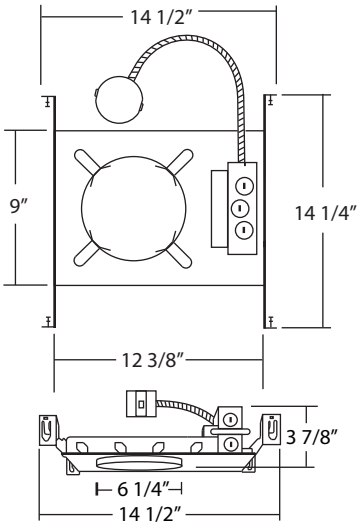

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.
Use one GX24Q-lamp (not included).

FRAME-IN

120-277V Universal input electronic ballast.
Commercial frame allows direct installation to wood joist or steel strut constructions.
JUNCTION BOX
Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

OPTIONS
17013EBM18EMBL
17013EBM26EMBL

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

27009EBM2642

1X26W, 32W, 42W ARCHITECTURAL VERTICAL FRAME-IN

Insulation must be kept a minimum of 3" from housing

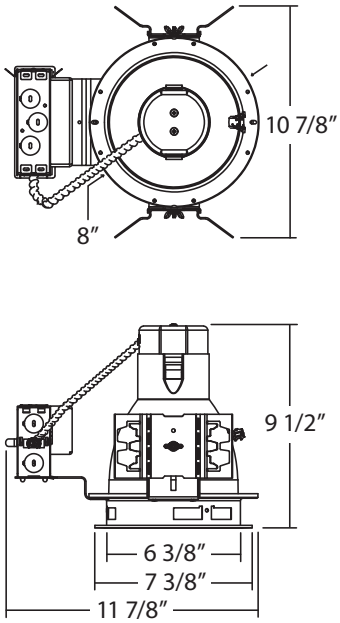

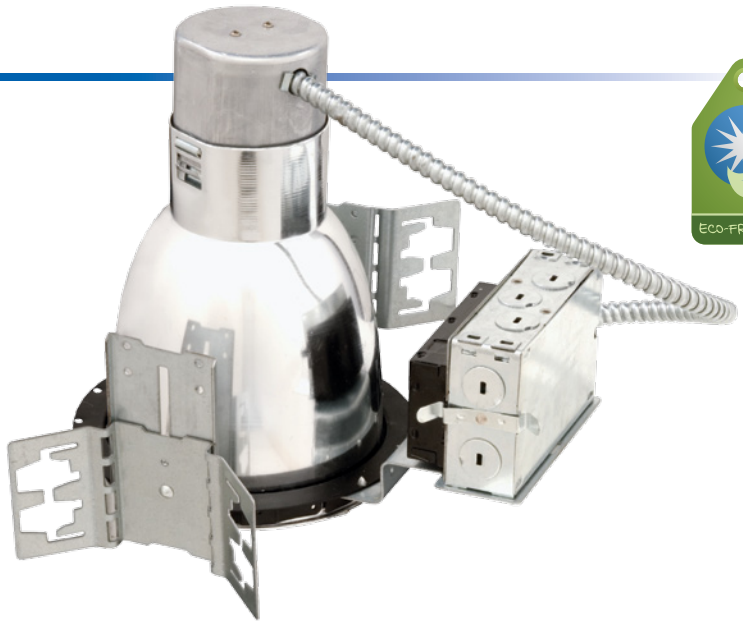

Shown complete with trim, sold separately.

DESCRIPTION

Suitable for new construction in commercial applications where uniform light distribution is required.
NON-IC. Insulation must be kept a minimum of 3" from housing.

FRAME-IN

Designed for vertically mounted compact fluorescent lamp.
120-277V Universal input electronic ballast. Ballast includes integral thermal protector for over-lamping.
Lamp type: 1X26W, 32W, 42W 4-pin quad/triple. G24Q (not included).
Universal mounting bracket accepts #17203 flat bar hanger, #17208 C-channel bar and 1/2" EMT.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts for commercial wiring.
Supplied with three push-in wire connectors.

SOCKET CUP

Die-cast socket cap dissipates heat for improved lamp life and performance.
Socket yoke allows vertical adjustment of socket cup for optimum light distribution and output.

HANGER BAR BRACKET

Universal brackets accept C-channel or flat bar hangers (ordered separately); alternately, use rigid 1/2" steel conduit for tie-down to ceiling grids.

EMERGENCY OPTION

NICOR emergency ballast 650L4FEB provides 650 Lumen for minimum 90 minutes in the event of a power failure.

LISTINGS

UL damp location
UL feed-through
CUL

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

TRIMS

FOR 17013EBM2642, 17013EBM18EMBL, 17013EBM26EMBL, 27009EBM2642

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

REFLECTOR

Item NO.	Description	Dimensions
17610BK	BLACK	OD: 7 3/8"
17610CL	CLEAR (shown)	
17610GD	GOLD	
17610WH	WHITE	
	This trim only compatible with 27009EBM2642	



BAFFLE/REFLECTOR

Item NO.	Description	Dimensions
17611BK	BLACK (shown)	OD: 7 1/2"
17611WH	WHITE	
	This trim only compatible with 27009EBM2642	



REFLECTOR WITH CLEAR LENS

Item NO.	Description	Dimensions
17638CL	CLEAR (shown)	OD: 7 3/8"
17638WH	WHITE	





WALL WASH

Item NO.	Description	Dimensions
17629CL	CLEAR	OD: 7 3/8"



REFLECTOR WITH LOUVER

Item NO.	Description	Dimensions
17635CL	CLEAR (shown)	OD: 7 3/8"



REFLECTOR WITH LOUVER

Item NO.	Description	Dimensions
17663BK	BLACK	OD: 7 1/2"
17663WH	WHITE (SHOWN)	



Lamp Information

17013EBM2642	*1X26W G24Q-3, 1X32W G24Q-3, 1X42W G24Q-4*
27009EBM2642	*1X26W G24Q-3, 1X32W G24Q-3, 1X42W G24Q-4*

ABZ *Aged Bronze* | ***BK*** *Black* | ***BZ*** *Bronze* | ***CH*** *Chrome* | ***GD*** *Gold* | ***NK*** *Nickel* | ***OB*** *Oil-Rubbed Bronze* | ***PB*** *Polished Brass* | ***PW*** *Pewter*

TRIMS

FOR 17013EBM2642, 17013EBM18EMBL, 17013EBM26EMBL, 27009EBM2642

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

BAFFLE WALL WASH

Item NO.	*Description*	*Dimensions*
17665BK	BLACK (shown)	OD: 7 1/4"
17665WH	WHITE	



Lamp Information	*17013EBM2642*	*1X26W G24Q-3, 1X32W G24Q-3, 1X42W G24Q-4*
	27009EBM2642	*1X26W G24Q-3, 1X32W G24Q-3, 1X42W G24Q-4*

ABZ *Aged Bronze* | ***BK*** *Black* | ***BZ*** *Bronze* | ***CH*** *Chrome* | ***GD*** *Gold* | ***NK*** *Nickel* | ***OB*** *Oil-Rubbed Bronze* | ***PB*** *Polished Brass* | ***PW*** *Pewter*

17024A27
AIRTIGHT HOUSING GU24

Suitable for direct contact with insulation

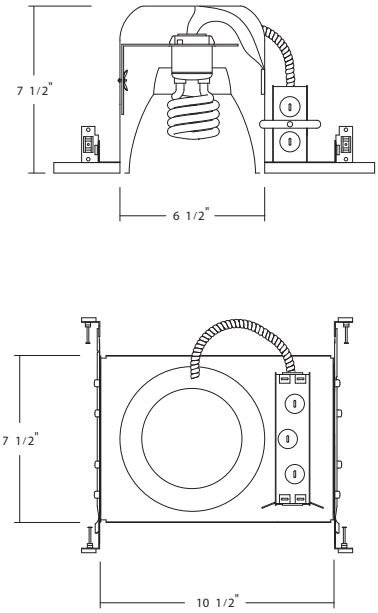

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 120V 13W-27W GU24 lamp (not included).

HOUSING

Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Washington State Energy Code approved to meet restricted airflow requirements.
Adjustable socket bracket assures proper and consistent lamp positioning.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.
JUNCTION BOX
Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

17024AR27

REMODEL AIRTIGHT HOUSING GU24

Suitable for direct contact with insulation

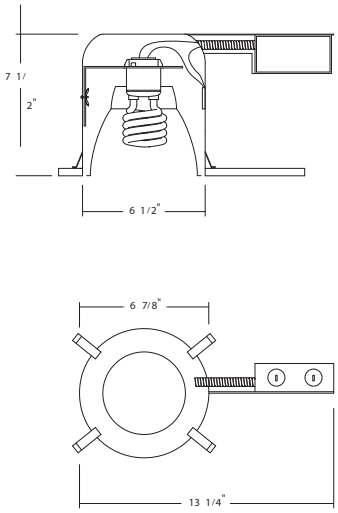

ECO-FRIENDLY

DESCRIPTION

Suitable for remodel construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 120V 13W-27W GU24 lamp (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Adjustable socket bracket assures proper and consistent lamp positioning.
7 1/2" height allows use in 2" x 8" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

Can be used for T24 California Title 24 High Energy Compliant

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS

FOR 17024A27 & 17024AR27

BAFFLE/CONE • 27W | GU24

Item NO.	Description	Dimensions
17525BK	BLACK	OD: 7 1/2"
17525BZ	BRONZE	
17525NK	NICKEL	
17525OB	OIL RUBBED BRONZE	
17525WH	WHITE (shown)	



LEXAN SHOWER/FRESNEL LENS • 27W | GU24

Item NO.	Description	Dimensions
17502BZ	BRONZE (shown)	OD: 8"
17502R	(WHITE WITH REFLECTOR)	
17502OB	OIL-RUBBED BRONZE	
17502	WHITE (WITH METAL TRIM RING)	
	Also Available	
17572WH	WHITE (WITH PLASTIC TRIM RING)	



SPECULAR • 27W | GU24

Item NO.	Description	Dimensions
17507BK	BLACK	OD: 7"
17507CL	CLEAR	
17507GD	GOLD	
17507WH	WHITE (shown)	



LEXAN DROP OPAL • 27W | GU24

Item NO.	Description	Dimensions
17509R	WHITE WITH REFLECTOR	OD: 8"
17509	WHITE (WITH METAL TRIM RING) (shown)	
	ALSO AVAILABLE	
17579WH	WHITE (WITH PLASTIC TRIM RING)	



SPECULAR REFLECTOR

Item NO.	Description	Dimensions
17518CL	CLEAR (shown)	OD: 7"
17518WH	WHITE	



REFLECTOR/BAFFLE • 27W | GU24

Item NO.	Description	Dimensions
17520CL	CLEAR (BLACK/BAFFLE) (shown)	OD: 7 1/4"
17520CLWH	CLEAR (WHITE/BAFFLE)	



LEXAN SHOWER/ALBALITE LENS • 27W | GU24

Item NO.	Description	Dimensions
17505BZ	BRONZE	OD: 8"
17505NK	NICKEL	
17505R	(WHITE WITH REFLECTOR)	
17505OB	OIL-RUBBED BRONZE	
17505	WHITE (WITH METAL TRIM RING) (shown)	
	Also Available	
17575WH	WHITE (WITH PLASTIC TRIM RING)	



ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

27007EBM2X26

ARCHITECTURAL HORIZONTAL FRAME-IN

27008EBM2642

1X26W, 32W, 42W ARCHITECTURAL HORIZONTAL FRAME-IN

Insulation must be kept a minimum of 3" from housing

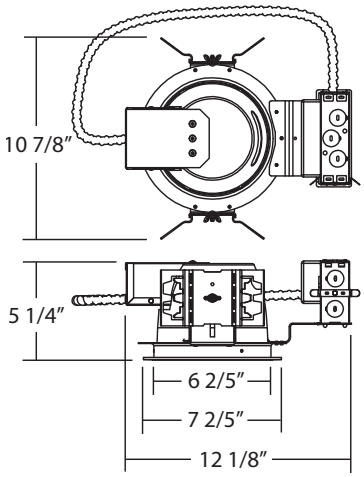

Shown complete with trim, sold separately.

DESCRIPTION

Suitable for new construction in commercial applications where uniform light distribution is required.
NON-IC. Insulation must be kept a minimum of 3" from housing.

FRAME-IN

Designed for horizontally mounted compact fluorescent lamp.
120-277V Universal input electronic ballast. Ballast includes integral thermal protector for over-lamping.
Lamp type: 2X26W 4-pin quad/triple or 1X26, 32, 42W 4-pin quad/triple. G24Q-1 (not included).
Universal mounting bracket accepts #17203 flat bar hanger, #17208 C-channel bar and 1/2" EMT.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts for commercial wiring.
Supplied with three push-in wire connectors.

HANGER BAR BRACKET

Universal brackets accept C-channel or flat bar hangers (ordered separately); alternately, use rigid 1/2" steel conduit for tie-down to ceiling grids.

EMERGENCY OPTION

NICOR emergency ballast 650L4FEB provides 650 Lumen for minimum 90 minutes in the event of a power failure.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

UNIVERSAL INPUT 120-277V BALLAST

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

NICOR® Shining Brighter™

TRIMS

FOR 27007EBM2X26, 27008EBM2642

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

REFLECTOR

Item NO.	Description	Dimensions
17607BK	BLACK (shown)	OD: 7 1/2"
17607CL	CLEAR	
17607GD	GOLD	
17607WH	WHITE	



CLEAR REFLECTOR/BAFFLE

Item NO.	Description	Dimensions
17620BK	BLACK (shown)	OD: 7"
17620WH	WHITE	



BAFFLE/ALBALITE LENS

Item NO.	Description	Dimensions
17623BK	BLACK (shown)	OD: 7 3/8"
17623WH	WHITE	



BAFFLE WALL WASH

Item NO.	Description	Dimensions
17627BK	BLACK (shown)	OD: 7 3/8"
17627WH	WHITE	



REFLECTOR WITH FROST LENS

Item NO.	Description	Dimensions
17638CL	CLEAR (shown)	OD: 7 3/8"
17638WH	WHITE	



WALL WASH

Item NO.	Description	Dimensions
17644CL	CLEAR (shown)	OD: 7 3/8"



REFLECTOR/LOUVER

Item NO.	Description	Dimensions
17645CL	CLEAR (shown)	OD: 7 3/8"



BAFFLE/DROP OPAL

Item NO.	Description	Dimensions
17660BK	BLACK	OD: 7 1/4"
17660WH	WHITE (shown)	



Lamp Information

27007EBM2X26	*2X26W G24Q-3*
27008EBM2642	*1X26W G24Q-3, 1X 32W G24Q-3, 1X42W G24Q-4*

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

17801EBM2642

1X26W, 32W, 42W TRIPLE BIAX VERTICAL FRAME-IN

Insulation must be kept a minimum of 3" from housing

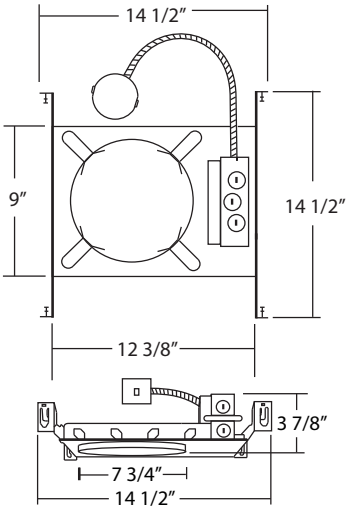

Shown complete with trim and insert, available separately.

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.
Use one Triple GX24Q-1 lamp (not included).

FRAME-IN

120-277V Universal input electronic ballast.
Commercial frame allows direct installation to wood joist or steel stud constructions.
Lamp type: 1X26W, 32W, 42W 4-pin G24Q (not included).

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

NICOR FASTENER

UNIVERSAL INPUT 120-277V BALLAST

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

27805EBM

1X26W, 32W, 42W ARCHITECTURAL VERTICAL FRAME-IN

Shown complete with trim, sold separately.

Insulation must be kept a minimum of 3" from housing

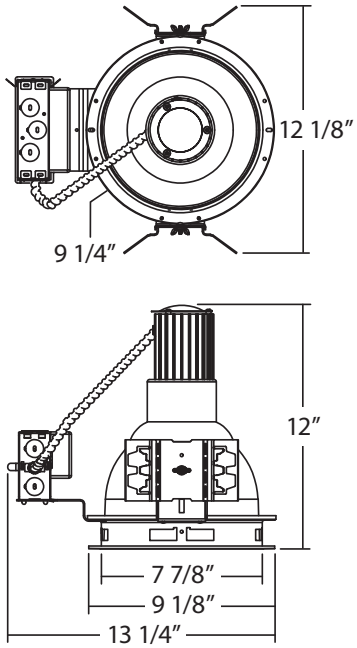

DESCRIPTION

Suitable for new construction in commercial applications where uniform light distribution is required.
NON-IC. Insulation must be kept a minimum of 3" from housing.

FRAME-IN

Designed for vertically mounted compact fluorescent lamp.
120-277V Universal input electronic ballast. Ballast includes integral thermal protector for over-lamping.
Lamp type: 1X26W, 32W, 42W 4-pin quad/triple. G24Q (not included).
Universal mounting bracket accepts #17203 flat bar hanger, #17208 C-channel bar and 1/2" EMT.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts for commercial wiring.
Supplied with three push-in wire connectors.

SOCKET CUP

Die-cast socket cap dissipates heat for improved lamp life and performance.
Socket yoke allows vertical adjustment of socket cup for optimum light distribution and output.

HANGER BAR BRACKET

Universal brackets accept C-channel or flat bar hangers (ordered separately); alternately, use rigid 1/2" steel conduit for tie-down to ceiling grids.

EMERGENCY OPTION

NICOR emergency ballast 650L4FEB provides 650 Lumen for minimum 90 minutes in the event of a power failure.

LISTINGS

UL damp location
UL feed-through
CUL

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

TRIMS

FOR 17801EBM2642, 27805EBM2642

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

REFLECTOR/RING

Item NO.	Description	Dimensions
17811BK	BLACK	OD: 9 1/8"
17811CL	CLEAR (shown)	
17811GD	GOLD	
17811WH	WHITE	



BAFFLE/CONE REFLECTOR

Item NO.	Description	Dimensions
17814BK	BLACK (shown)	OD: 9 1/8"
17814WH	WHITE	



REFLECTOR WITH CLEAR LENS

Item NO.	Description	Dimensions
17812CL	CLEAR (shown)	OD: 9 1/8"
17812WH	WHITE	



BAFFLE WALL WASH/DROP OPAL

Item NO.	Description	Dimensions
17823BK	BLACK (shown)	OD: 9 1/8"
17823WH	WHITE	



BAFFLE WITH ALBALITE LENS

Item NO.	Description	Dimensions
17863BK	BLACK (shown)	OD: 9 1/8"
17863WH	WHITE	



WALL WASH

Item NO.	Description	Dimensions
17829CL	CLEAR	OD: 9 1/8"



REFLECTOR/LOUVER

Item NO.	Description	Dimensions
17830CL	CLEAR (shown)	OD: 9 1/8"
17830GD	GOLD	



Lamp Information		
	17801EBM2642	1X26W, 32W G24Q-3, 1X42W G24Q-4
	27805EBM2642	1X26W, 32W G24Q-3, 1X42W G24Q-4

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

17802EBM2642

1X26-42W TRIPLE BIAX HORIZONTAL FRAME-IN

17802EBM2X2642

2X26-42W TRIPLE BIAX HORIZONTAL FRAME-IN

Insulation must be kept a minimum of 3" from housing

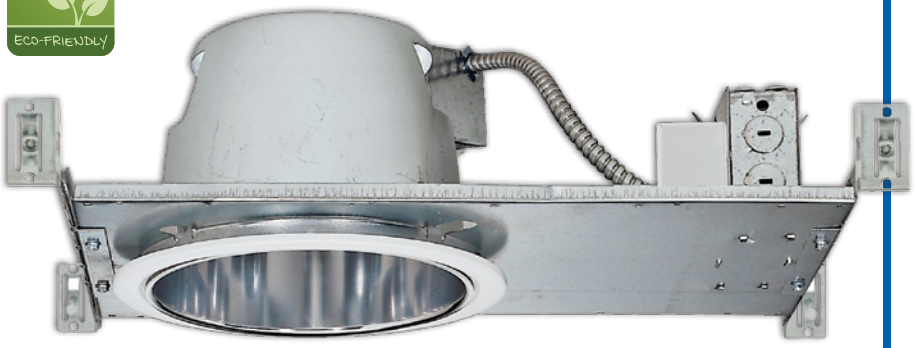

Shown complete with trim, sold separately.

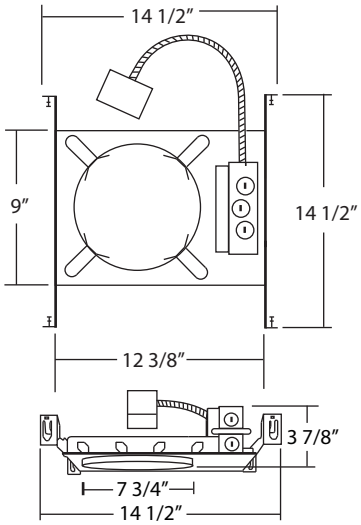

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.
Use two 26W, 32W, 42W Quad G24Q-1 lamps (not included).

FRAME-IN

120-277V Universal input electronic ballast.
Commercial frame allows direct installation to wood joist or steel stud constructions.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

TRIMS

FOR 17802EBM2642, 17802EBM2X2642

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

REFLECTOR

Item NO.	Description	Dimensions
17815CL	CLEAR	OD: 9 1/8"



BAFFLE REFLECTOR

Item NO.	Description	Dimensions
17832BK	BLACK (shown)	OD: 9 1/8"
17832WH	WHITE	



REFLECTOR WITH FROST LENS

Item NO.	Description	Dimensions
17817CL	CLEAR (shown)	OD: 9 1/8"
17817WH	WHITE	



BAFFLE WALL WASH

Item NO.	Description	Dimensions
17835BK	BLACK (shown)	OD: 9 1/8"
17835WH	WHITE	



REFLECTOR WITH LOUVER

Item NO.	Description	Dimensions
17842CL	CLEAR (shown)	OD: 9 1/8"



WALL WASH

Item NO.	Description	Dimensions
17844CL	CLEAR	OD: 9 1/8"



Lamp Information		
	17802EBM2642	1X26W, 32W, 42W G24Q-3
	17802EBM2X2642	2X26W, 32W, 42W G24Q-3

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

17803
8" COMPACT SQUARE HOUSING

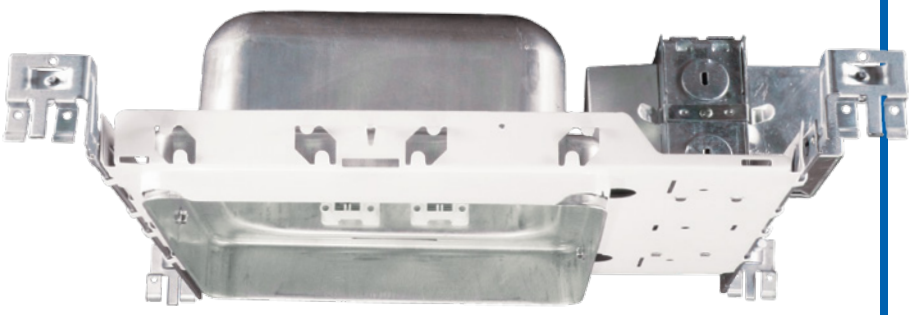

Shown complete with trim, sold separately.

Insulation must be kept a minimum of 3" from housing

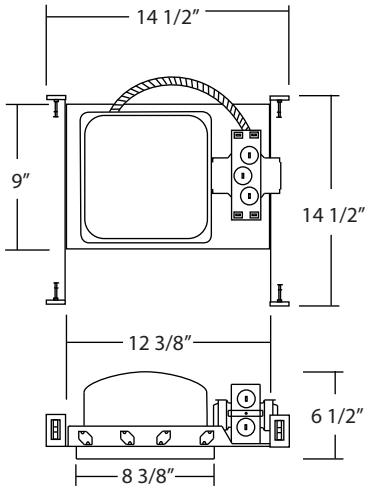

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.
Uses two 13W lamps, GX23-2 (not included).

HOUSING

Aluminum construction provides greater heat dissipation.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
6 1/2" height allows use in 2" x 8" joist construction.
120V Magnetic ballast.
Plaster Frame
Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

Trim Option
17800CG Cover and glass as shown in picture.

c UL us LISTED

NICOR FASTENER

27800EBM

1X26-42W ARCHITECTURAL HORIZONTAL FRAME-IN

Insulation must be kept a minimum of 3" from housing

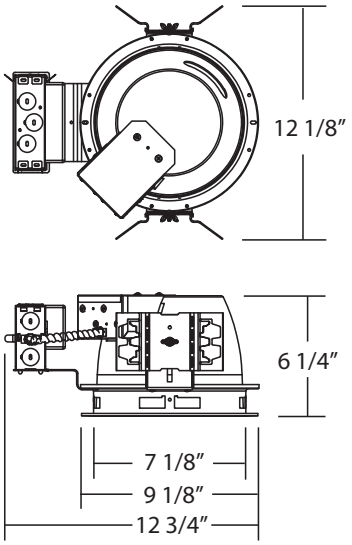

Shown complete with trim, sold separately.

DESCRIPTION

Suitable for new construction in commercial applications where uniform light distribution is required.
NON-IC. Insulation must be kept a minimum of 3" from housing.

FRAME-IN

Designed for horizontally mounted compact fluorescent lamp.
120-277V Universal input electronic ballast.
Ballast includes integral thermal protector for over-lamping.
Lamp type: 1X26W, 32W, 42W 4-pin. G24Q (not included)
2X26W, 32W, 42W 4-pin G24Q (not included).
Universal mounting bracket accepts #17203 flat bar hanger, #17208 C-channel bar and 1/2" EMT.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts for commercial wiring.
Supplied with three push-in wire connectors.

HANGER BAR BRACKET

Universal brackets accept C-channel or flat bar hangers (ordered separately); alternately, use rigid 1/2" steel conduit for tie-down to ceiling grids.

EMERGENCY OPTION

NICOR emergency ballast 650L4FEB provides 650 Lumen for minimum 90 minutes in the event of a power failure.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

UNIVERSAL INPUT 120-277V BALLAST

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

27800EBM2X26

2X26W ARCHITECTURAL HORIZONTAL FRAME-IN

27800EBM2X2642

2X26W-42W ARCHITECTURAL HORIZONTAL FRAME-IN

Shown complete with trim, sold separately.

Insulation must be kept a minimum of 3" from housing

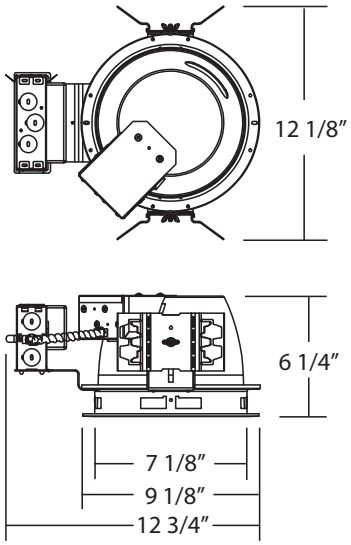

DESCRIPTION

Suitable for new construction in commercial applications where uniform light distribution is required.
NON-IC. Insulation must be kept a minimum of 3" from housing.

FRAME-IN

Designed for horizontally mounted compact fluorescent lamp.
120-277V Universal input electronic ballast.
Ballast includes integral thermal protector for over-lamping.
Lamp type: 1X26W, 32W, 42W 4-pin.
G24Q (not included)
2X26W, 32W, 42W 4-pin G24Q (not included).
Universal mounting bracket accepts #17203 flat bar hanger, #17208 C-channel bar and 1/2" EMT.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts for commercial wiring.
Supplied with three push-in wire connectors.

HANGER BAR BRACKET

Universal brackets accept C-channel or flat bar hangers (ordered separately); alternately, use rigid 1/2" steel conduit for tie-down to ceiling grids.

EMERGENCY OPTION

NICOR emergency ballast 650L4FEB provides 650 Lumen for minimum 90 minutes in the event of a power failure.

LISTINGS

UL damp location
UL feed-through
CUL

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

TRIMS

FOR 27800EBM, 27800EBM2X26, 27800EBM2X2642

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

REFLECTOR

Item NO.	Description	Dimensions
17815CL	CLEAR	OD: 9 1/8"



BAFFLE REFLECTOR

Item NO.	Description	Dimensions
17832BK	BLACK (shown)	OD: 9 1/8"
17832WH	WHITE	



REFLECTOR WITH FROST LENS

Item NO.	Description	Dimensions
17817CL	CLEAR (shown)	OD: 9 1/8"
17817WH	WHITE	



BAFFLE WALL WASH

Item NO.	Description	Dimensions
17835BK	BLACK (shown)	OD: 9 1/8"
17835WH	WHITE	



BAFFLE WITH ALBALITE LENS

Item NO.	Description	Dimensions
17838BK	BLACK (shown)	OD: 9 1/8"
17838WH	WHITE	



REFLECTOR WITH LOUVER

Item NO.	Description	Dimensions
17842CL	CLEAR (shown)	OD: 9 1/8"



Lamp Information		
	17802EBM2X26	2X26W G24Q-3
	27800EBM2642	1X26W G24Q-3, 1X32W G24Q-3, 1X42W G24Q-4
	27800EBM2X2642	2X26W G24Q-3, 2X32W G24Q-3, 2X42W G24Q-4

ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

TRIMS

FOR 27800EBM, 27800EBM2X26, 27800EBM2X2642

SEE LAMP INFORMATION AT BOTTOM OF COLUMN

WALL WASH • 70W - 100W ED17/PAR38 • 39W PAR 20

Item NO.	*Description*	*Dimensions*
17844CL	CLEAR	OD: 9 1/8"



Lamp Information	*17802EBM2X26*	*2X26W G24Q-3*
	27800EBM2642	*1X26W G24Q-3, 1X32W G24Q-3, 1X42W G24Q-4*
	27800EBM2X2642	*2X26W G24Q-3, 2X32W G24Q-3, 2X42W G24Q-4*

ABZ *Aged Bronze* | ***BK*** *Black* | ***BZ*** *Bronze* | ***CH*** *Chrome* | ***GD*** *Gold* | ***NK*** *Nickel* | ***OB*** *Oil-Rubbed Bronze* | ***PB*** *Polished Brass* | ***PW*** *Pewter*

27808EBM2X26 • 27808EBM2X3242

8" COMPACT FLUORESCENT SQUARE HOUSING

Insulation must be kept a minimum of 3" from housing

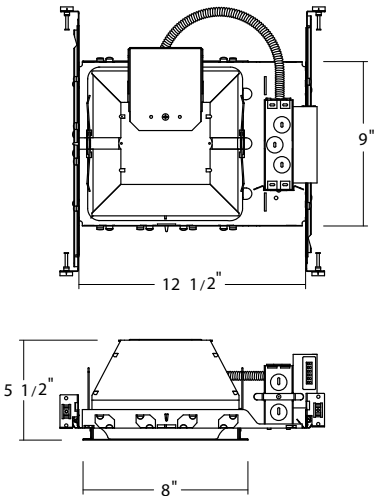

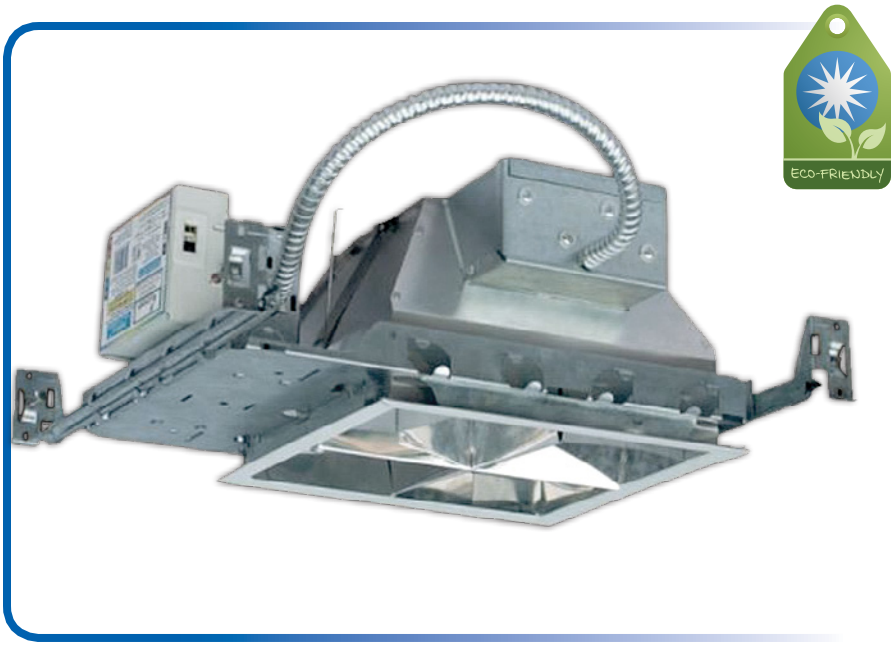

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.
Uses 2x13W-32W 4- pin G24Q-1 (not included)

HOUSING

5 1/2" height allows use in 2" x 8" joist construction.
120-277V Universal input electronic ballast.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box. Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

ENERGY STAR

NICOR FASTENER

UNIVERSAL INPUT 120-277V BALLAST

NICOR Shining Brighter™

TRIMS

FOR 27808EBM2X26, 27808EBM2X3242

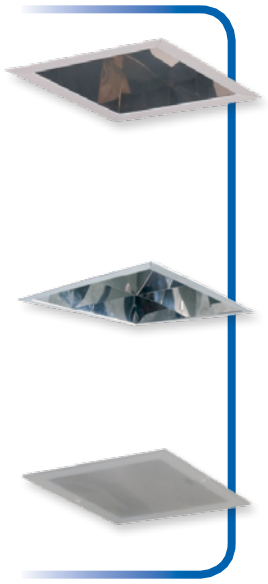

REFLECTOR • 2 X 13W-32W

Item NO.	Description
27881BK	BLACK
27881CL	CLEAR
27881GD	GOLD
27881WH	WHITE

Dimensions: TRIPLE 4 PIN LAMP BASE, G24Q, OD: 9″



REFLECTOR WITH LOUVER • 2 X 13W-32W

Item NO.	Description
27882BK	BLACK
27882CL	CLEAR
27882WH	WHITE

Dimensions: TRIPLE 4 PIN LAMP BASE, G24Q, OD: 9″



FRESNEL • 2 X 13W-32W

Item NO.	Description
27883CL	CLEAR
27883WH	WHITE

Dimensions: TRIPLE 4 PIN LAMP BASE, G24Q, OD: 9″



COLOR TABLE	
BK	BLACK
BZ	BRONZE
CL	CLEAR
GD	GOLD
OB	OIL-RUBBED BRONZE
NK	NICKEL
WH	WHITE

ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

BALLASTS

NICOR fluorescent emergency ballasts allow the same fixture to be used for both normal and emergency operation.
In the event of a power failure, the ballast switches to emergency mode and operates one or two existing lamps for a minimum of 90 minutes.
A battery, charger and inverter circuit are contained within each unit. The ballast can be mounted in the wireway or on top of the fixture. NICOR emergency ballasts are UL and CUL listed for factory installation and retrofit applications.
Universal 120V-277V, 60Hz power requirements.
Test button included.

500LFEB

9.4″L X 2.5″W X 1.6″D
Lamps operated in emergency mode: 1X 2′-4′ 17W-40W
Emergency lumens: 500

700LFEB

9.4″L X 2.5″W X 1.6″D
Lamps operated in emergency mode: 1X 2′-8′ 17W-215W
2X 2′-4′ 17W-40W
Emergency lumens: 700

1400LFEB

13.3″L X 2.5″W X 1.6″D
Lamps operated in emergency mode: 1X 2′-8′ 17W-215W
2X T8-T12 13W-40W
Emergency lumens: 1400

3000LFEB

16.3″L X 5.5″W X 1.7″D
Lamps operated in emergency mode: 1 or 2X 17W-215W
T8, T9, T10, or T12
4-pin twin, quad.
Emergency lumens: 1450-3000

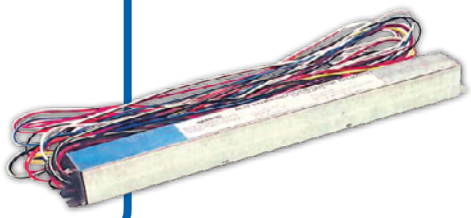

500LFEBLP

14.2″L X 1.1″W X 1.2″D
Lamps operated in emergency mode: 1X 14W-32W
Emergency lumens: 450-500

c UL us LISTED

NICOR® Shining Brighter™

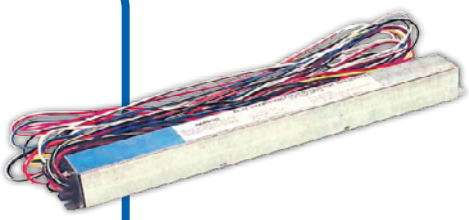

800LFEBLP

17.5″L X 1.1″W X 1.2″D

Lamps operated in emergency mode: 1X 2′-4′ 14W-54W T5
1X 2′-4′ 14W-40W T8

Emergency lumens: 800

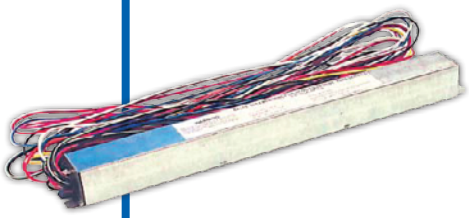

1300LFEBLP

21.5″L X 1.1″W X 1.2″D

Lamps operated in emergency mode: 1X 2′-4′ 14W-54W T5
1X 2′-4′ 14W-40W T8

Emergency lumens: 1300

650L2FEB

9.4″L X 2.5″W X 1.6″D

Lamps operated in emergency mode: 1X CFL 10, 13, 16, 18, 22, 26W quad. or 2-pin with flex

Emergency lumens: 650

650L4FEB

9.4″L X 2.5″W X 1.6″D

Lamps operated in emergency mode: 1X CFL 13W-42W 4-pin
2X CFL 13W-39W 4-pin

Emergency lumens: 650

c UL us LISTED

DIMMABLE PRODUCT ORDERING CHART

BALLAST	WATTAGE															RECOMMENDED LUTRON DIMMING CONTROL
		HOUSING NUMBER														
		15017A	15017AR	17000	17001R	17007A	17008R	17011	17013	17801	17802	27007	27009	27800	27805	
		NUMBER OF LAMPS														
MX1D	18	1	1	1	1	1	1	2	1	1	2	2	1	2	1	NTFTU-5A-(COLOR)
MX1D	26	1	1			1	1	2			2	2		2		NTFTU-5A-(COLOR)
MX1D	26/32/42			1	1			1	1	1	1	1	1	1	1	NTFTU-5A-(COLOR)
MX1D	32/42										2			2		NTFTU-5A-(COLOR)
MX2D	18	1	1	1	1	1	1	2	1	1	2	2	1	2	1	NTFTU-5A-277-(COLOR)
MX2D	26	1	1			1	1	2			2	2		2		NTFTU-5A-277-(COLOR)
MX2D	32								1							NTFTU-5A-277-(COLOR)
MX2D	42				1											NTFTU-5A-277-(COLOR)
MX2D	26/32/42			1				1		1	1	1	1	1	1	NTFTU-5A-277-(COLOR)
MX2D	32/42										2			2		NTFTU-5A-277-(COLOR)
M7D	18	1	1	1	1	1	1	2	1	1	2	2	1	2	1	NTFTV-(COLOR)
M7D	26	1	1			1	1	2			2	2		2		NTFTV-(COLOR)
M7D	32								1							NTFTV-(COLOR)
M7D	42				1											NTFTV-(COLOR)
M7D	26/32/42			1				1		1	1	1	1	1	1	NTFTV-(COLOR)
M7D	32/42										2			2		NTFTV-(COLOR)
L5D	18	1	1	1	1	1	1	2	1	1	2	2	1	2	1	NTF-10-(COLOR)
L5D	26	1	1			1	1	2			2	2		2		NTF-10-(COLOR)
L5D	32								1							NTF-10-(COLOR)
L5D	42				1											NTF-10-(COLOR)
L5D	26/32/42			1				1		1	1	1	1	1	1	NTF-10-(COLOR)
L5D	32/42										2			2		NTF-10-(COLOR)
LHD	18	1	1	1	1	1	1	2	1	1	2	2	1	2	1	NTF-10-(COLOR)
LHD	26	1	1			1	1	2			2	2		2		NTF-10-(COLOR)
LHD	32								1							NTF-10-(COLOR)
LHD	42				1											NTF-10-(COLOR)
LHD	26/32/42			1				1		1	1	1	1	1	1	NTF-10-(COLOR)
LHD	32/42										2			2		NTF-10-(COLOR)

BALLAST LEGEND

MX1D ADVANCE MARK 10 (120V)
MX2D ADVANCE MARK 10 (277V)
M7D ADVANCE MARK 7 (120~277V)
L5D LUTRON SE 5% (120V~277V)
LHD LUTRON HL 1% (120V~277V)

Efficient lighting. Lower costs.

MAXCOR LED Downlights can reduce your energy cost by as much as 80%*.

Visit www.nicorlighting.com for more info.

MAXCOR™

*Compared to a 65WBR30/FL Incandescent.

The Can-do Can

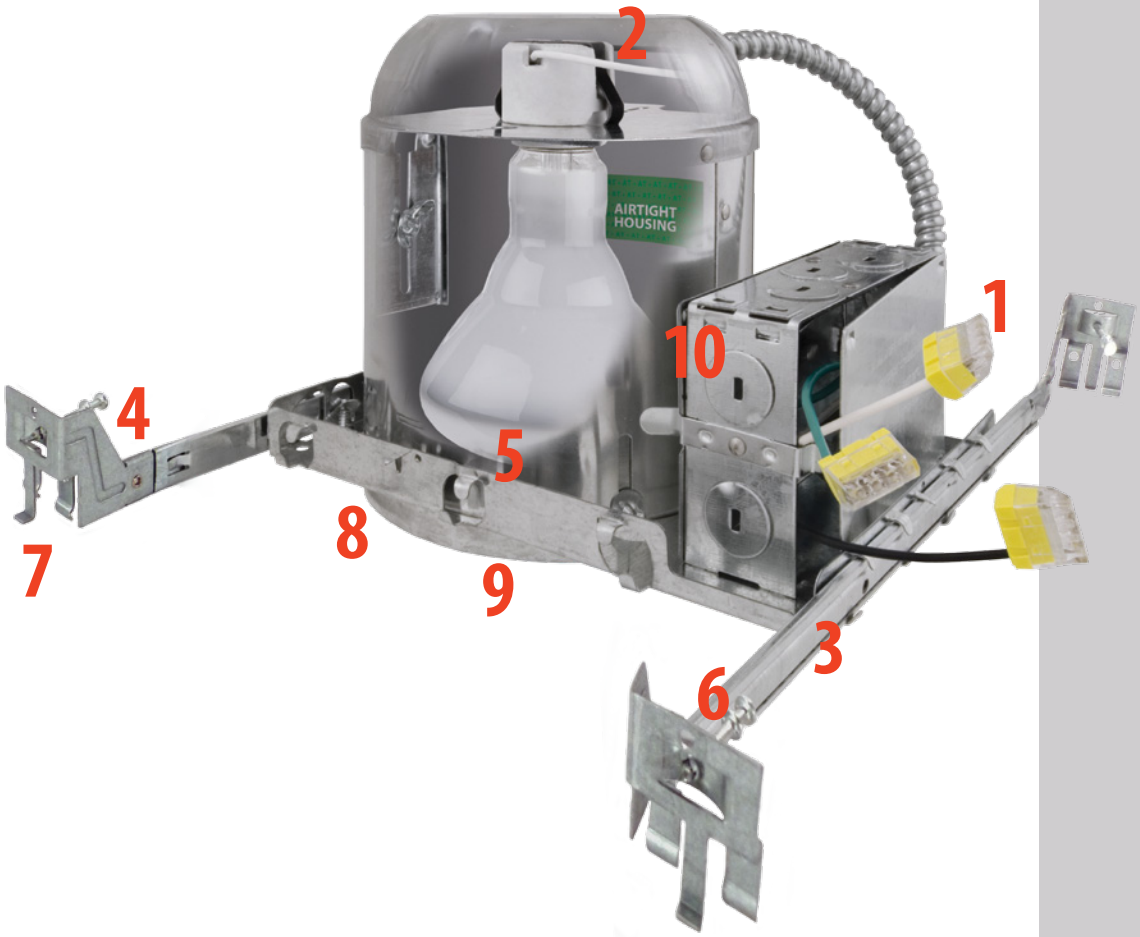

FEATURES

1. Four-port, full-barrel, push-in wire connectors provide fast no-twist connections, positive electrical contact and easy daisy-chain wiring capability
2. Fully adjustable socket plate with removable socket
3. Heavy-duty rolled hanger bars eliminate sharp edges and provide greater stability
4. Hanger bars can be shortened to accommodate 12″ joist span without tools
5. Hanger bars can be repositioned 90˚ on plaster frame without tools
6. Double-headed captive nail fasteners ease repositioning
7. Notched foot provides easy T-bar installation
8. Housing adjusts to accommodate ceiling thickness
9. Installed housing is removable from below allowing access to junction box
10. Multiple pry-outs with integral strain relief simplify Romex installation

13100
UNIVERSAL HOUSING 120V MR16

Insulation must be kept a minimum of 3" from housing

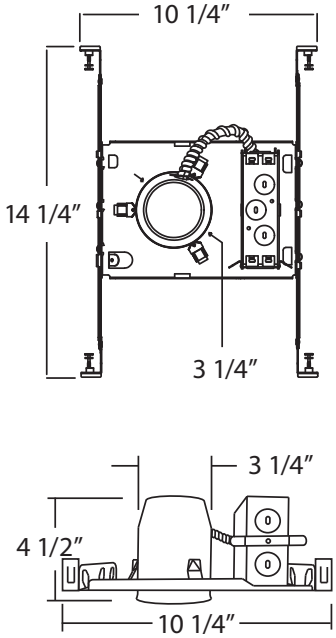

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Integral thermal protector guards against improper lamping and misuse of insulation materials.
4 1/2" height allows use in 2" x 6" joist construction.
Uses 120V MR-16 lamp (not included) with a GU10 base.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box. Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL.

c UL us LISTED

NICOR FASTENER

13100R

REMODEL HOUSING 120V MR16

Insulation must be kept a minimum of 3" from housing

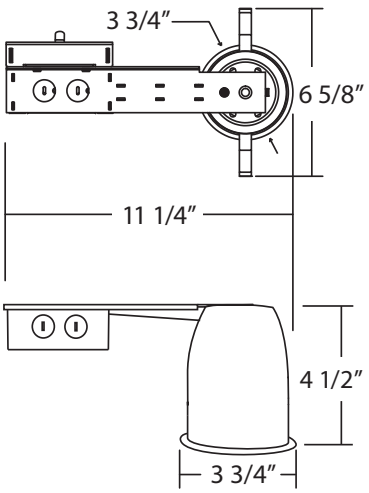

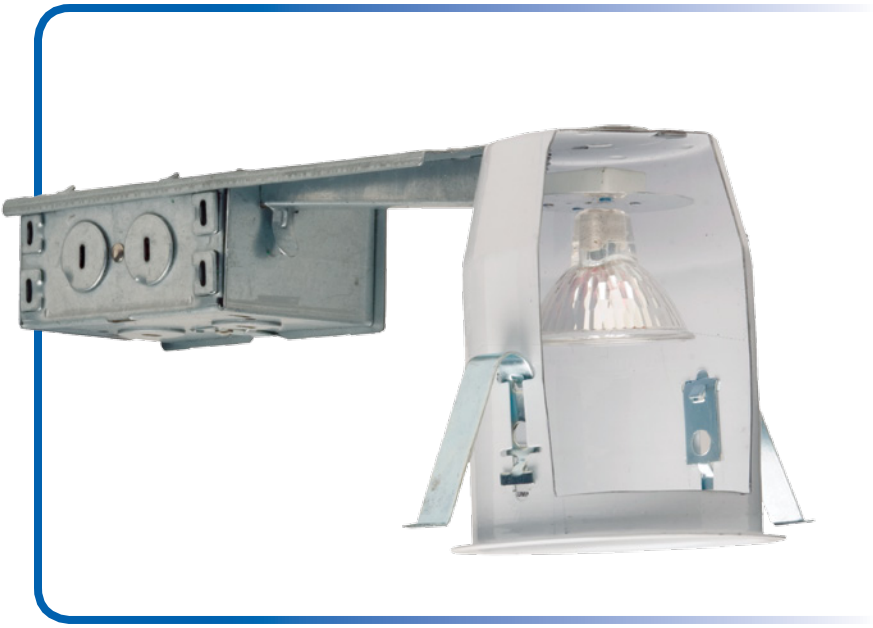

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Integral thermal protector guards against improper lamping and misuse of insulation materials.
4 1/2" height allows use in 2" x 6" joist construction.
Uses 120V MR-16 lamp (not included) with a GU10 base.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL damp location
UL feed-through
CUL.

c UL us LISTED

NICOR FASTENER

TRIMS

FOR 13100 & 13100R

WALL WASH • 50W | 120V MR-16

Item NO.	Description	Dimensions
13001BK	BLACK	GU10BASE
13001CH	CHROME (shown)	OD: 3 3/4"
13001GD	GOLD	
13001WH	WHITE	



BAFFLE • 50W | 120V MR-16

Item NO.	Description	Dimensions
13002BK	BLACK (WHITE RING)	GU10BASE
13002WH	WHITE (WHITE RING)	OD: 3 3/4"
13002OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZE RING)	
13002OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING) (shown)	



CHROME RIBBED REFLECTOR • 50W | 120V MR-16

Item NO.	Description	Dimensions
13003BK	BLACK	GU10BASE
13003WH	WHITE (shown)	OD: 3 3/4"



WALL WASH • 50W | 120V MR-16

Item NO.	Description	Dimensions
13007BK	BLACK	GU10BASE
13007CH	CHROME	OD: 3 3/4"
13007OB	OIL-RUBBED BRONZE	
13007WH	WHITE (shown)	



SLOTTED APERTURE • 50W | 120V MR-16

Item NO.	Description	Dimensions
13008BK	BLACK	GU10BASE
13008WH	WHITE (shown)	OD: 3 3/4"



CHROME REFLECTOR • 50W | 120V MR-16

Item NO.	Description	Dimensions
13025WH	WHITE	GU10BASE
		OD: 4"



DONUT GLASS • 50W | 120V MR-16

Item NO.	Description	Dimensions
13030PK	PINK (shown)	GU10BASE
13030BL	BLUE	OD: 4 1/4"



ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

19000A
UNIVERSAL AIRTIGHT HOUSING

Insulation must be kept a minimum of 3" from housing

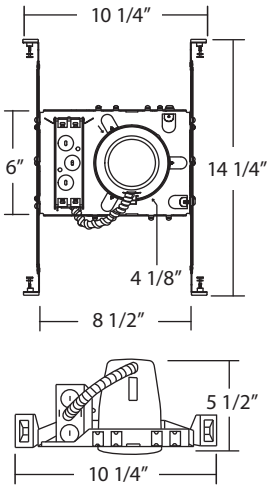

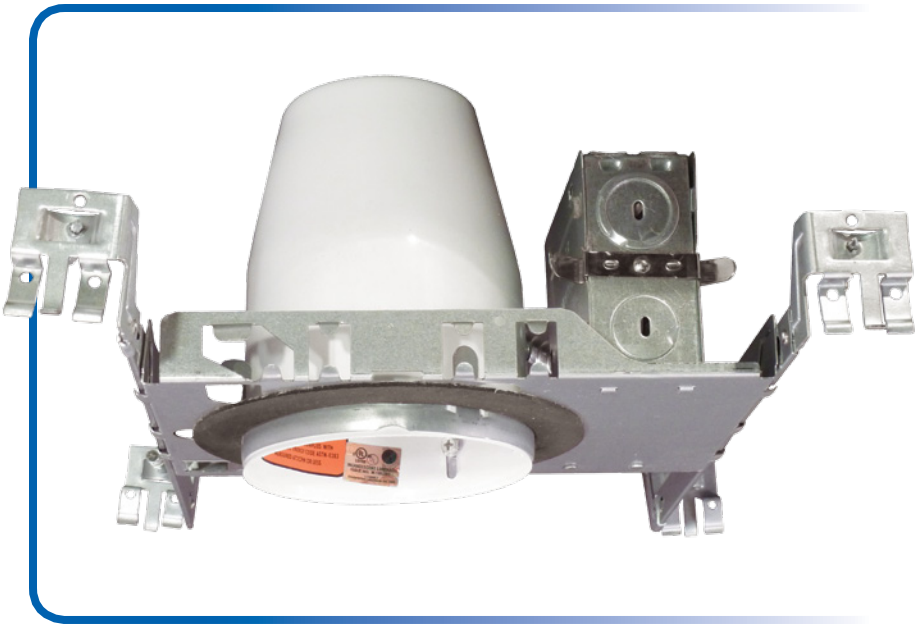

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Washington State Energy Code approved to meet restricted airflow requirements.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
5 1/2" height allows use in 2" x 6" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL.

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

NICOR Shining Brighter™

19001AR
REMODEL AIRTIGHT HOUSING

Insulation must be kept a minimum of 3" from housing

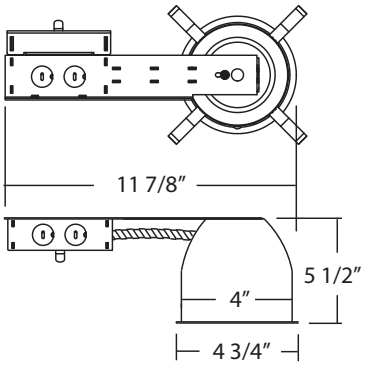

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Washington State Energy Code approved to meet restricted airflow requirements.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
5 1/2" height allows use in 2" x 6" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL damp location
UL feed-through
CUL.

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS

FOR 19000A & 19001AR

BAFFLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19501	BLACK (WHITE RING)	OD: 5"
19501BZ	BRONZE	
19501NK	NICKEL (shown)	
19501OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZE RING)	
19501OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)	



BAFFLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19501SP	BLACK (Air-Tight)	OD: 5"



BAFFLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19502WH	WHITE (shown)	OD: 5"
19502BK	BLACK (BLACK TRIM)	



BAFFLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19502SP	WHITE (Air-Tight)	OD: 5"



SPECULAR CONE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19503	GOLD	OD: 5"



SPECULAR CONE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19504	CLEAR	OD: 5"



SPECULAR CONE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19505	BLACK	OD: 5"



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

TRIMS

FOR 19000A & 19001AR

EYEBALL • 50W | R20/PAR20

Item NO.	Description
19506BZ	BRONZE (shown)
19506NK	BRUSHED NICKEL
19506PB	POLISHED BRASS
19506WH	WHITE
19506OB	OIL-RUBBED BRONZE

Dimensions

OD: 5″



WALL WASH • 50W | R20/PAR20

Item NO.	Description
19507	WHITE

Dimensions

OD: 5″



SLOT APERTURE • 50W | R20/PAR20

Item NO.	Description
19508	WHITE

Dimensions

OD: 5″



ALBALITE SHOWER • 50W | R20/PAR20

Item NO.	Description
19509BK	BLACK (shown)
19509BZ	BRONZE
19509CL	CLEAR
19509OB	OIL-RUBBED BRONZE
19509WH	WHITE

Dimensions

OD: 5″

WET LOCATION RATED



DROP OPAL SHOWER • 50W | R20/PAR20

Item NO.	Description
19510CL	CLEAR
19510GD	GOLD (shown)
19510WH	WHITE

Dimensions

OD: 5″

WET LOCATION RATED



WALL WASH • 50W | R20/PAR20

Item NO.	Description
19511BK	BLACK BAFFLE (shown)
19511WH	WHITE BAFFLE

Dimensions

OD: 5″



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

TRIMS

FOR 19000A & 19001AR

PIN HOLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19521	WHITE	OD: 5"



SQUARE TRIM/BAFFLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19522BK	WHITE TRIM/BLACK BAFFLE	OD: 5"
19522NK	NICKEL	
19522OB	OIL-RUBBED BRONZE	
19522WH	WHITE (shown)	



SQUARE TRIM/ROUND GIMBLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19523BK	BLACK	OD: 5"
19523NK	NICKEL	
19523OB	OIL-RUBBED BRONZE	
19523WH	WHITE (shown)	



GIMBLE RING • 50W | R20/PAR20

Item NO.	Description	Dimensions
19558WH	WHITE	OD: 5"



ABZ Aged Bronze | BK Black | BZ Bronze | CH Chrome | GD Gold | NK Nickel | OB Oil-Rubbed Bronze | PB Polished Brass | PW Pewter

NICOR® Shining Brighter™

19002A
AIRTIGHT HOUSING

Suitable for direct contact with insulation

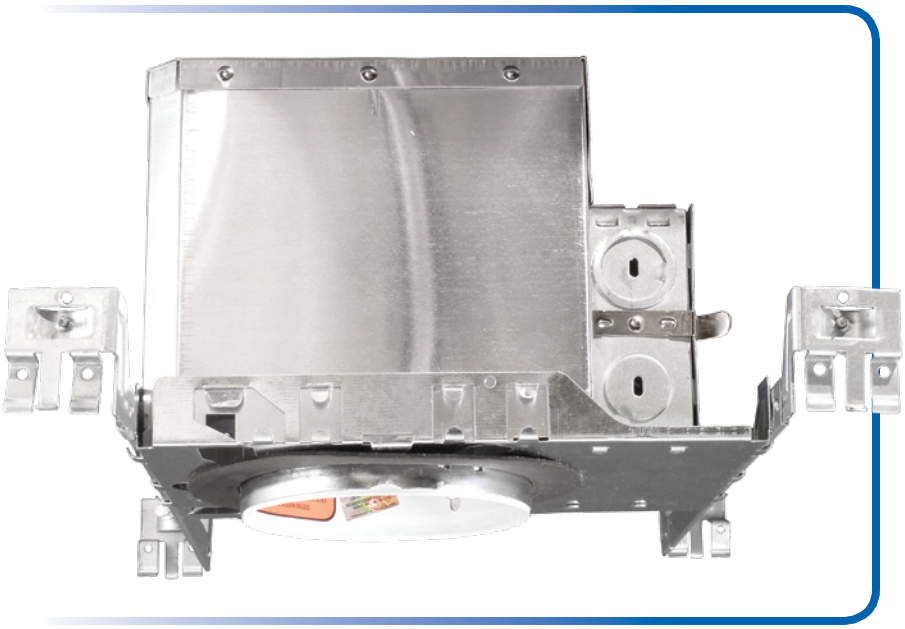

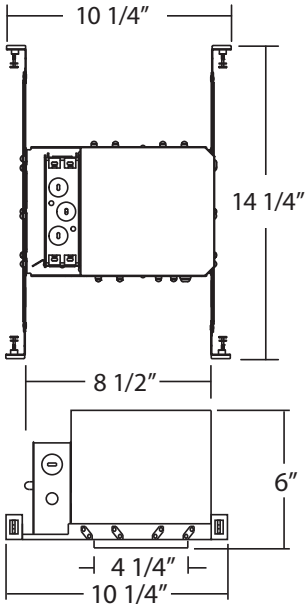

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
6" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL.

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS
FOR 19002A

BAFFLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19501	BLACK (WHITE RING)	OD: 5"
19501BZ	BRONZE	
19501NK	NICKEL (shown)	
19501OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZE RING)	
19501OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)	



BAFFLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19501SP	BLACK (Air-Tight)	OD: 5"



BAFFLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19502WH	WHITE (shown)	OD: 5"
19502BK	BLACK (BLACK TRIM)	



BAFFLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19502SP	WHITE (AIR-TIGHT)	OD: 5"



SPECULAR CONE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19503	GOLD	OD: 5"



SPECULAR CONE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19504	CLEAR	OD: 5"



SPECULAR CONE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19505	BLACK	OD: 5"



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

TRIMS
FOR 19002A

EYEBALL • 50W | R20/PAR20

Item NO.	Description
19506BZ	BRONZE (shown)
19506NK	BRUSHED NICKEL
19506PB	POLISHED BRASS
19506WH	WHITE
19506OB	OIL-RUBBED BRONZE

Dimensions

OD: 5″



WALL WASH • 50W | R20/PAR20

Item NO.	Description
19507	WHITE

Dimensions

OD: 5″



SLOT APERTURE • 50W | R20/PAR20

Item NO.	Description
19508	WHITE

Dimensions

OD: 5″



ALBALITE SHOWER • 50W | R20/PAR20

Item NO.	Description
19509BK	BLACK (shown)
19509BZ	BRONZE
19509CL	CLEAR
19509OB	OIL-RUBBED BRONZE
19509WH	WHITE

Dimensions

OD: 5″

WET LOCATION RATED



DROP OPAL SHOWER • 50W | R20/PAR20

Item NO.	Description
19510CL	CLEAR
19510GD	GOLD (shown)
19510WH	WHITE

Dimensions

OD: 5″

WET LOCATION RATED



WALL WASH • 50W | R20/PAR20

Item NO.	Description
19511BK	BLACK BAFFLE (shown)
19511WH	WHITE BAFFLE

Dimensions

OD: 5″



ABZ Aged Bronze | BK Black | BZ Bronze | CH Chrome | GD Gold | NK Nickel | OB Oil-Rubbed Bronze | PB Polished Brass | PW Pewter

TRIMS
FOR 19002A

PIN HOLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19521	WHITE	OD: 5"



SQUARE TRIM/BAFFLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19522BK	WHITE TRIM/BLACK BAFFLE	OD: 5"
19522NK	NICKEL	
19522OB	OIL-RUBBED BRONZE	
19522WH	WHITE (shown)	



SQUARE TRIM/ROUND GIMBLE • 50W | R20/PAR20

Item NO.	Description	Dimensions
19523BK	BLACK	OD: 5"
19523NK	NICKEL	
19523OB	OIL-RUBBED BRONZE	
19523WH	WHITE (shown)	



GIMBLE RING • 50W | R20/PAR20

Item NO.	Description	Dimensions
19558WH	WHITE	OD: 5"



Helpful Hints • Incandescent lamps are available in a variety of shapes, sizes and wattages. • The most economical are A-lamps which are utilized in a wide range of downlights, lensed trims and wall washers. • Lamps with built-in reflectors (BR lamps and PAR lamps) are most effective when used with reflector cones, baffles and adjustables to create a range of effects from downlighting to directional accent lighting.

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

19003A

UNIVERSAL HOUSING 120V MR16

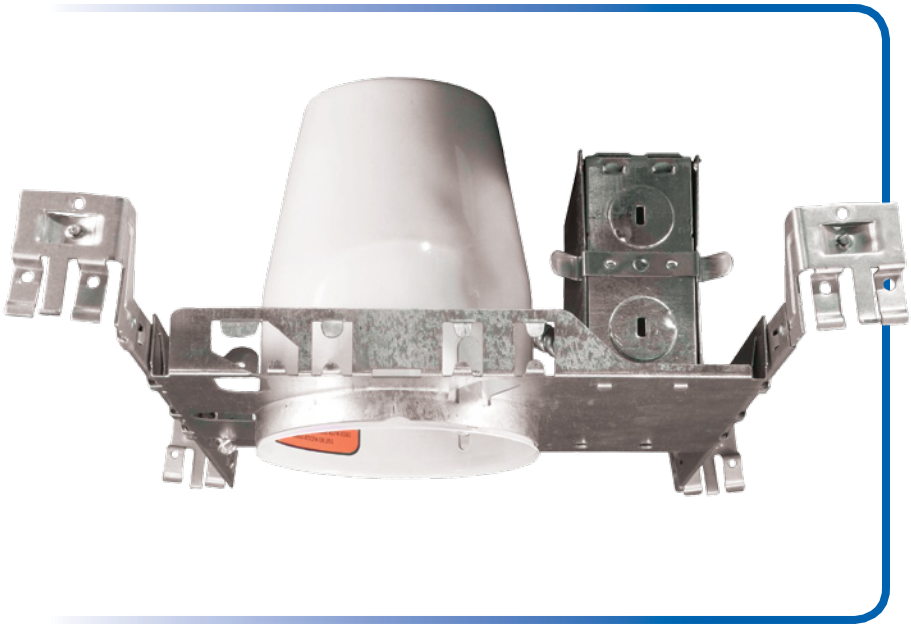

INSULATION MUST BE KEPT A MINIMUM OF 3" FROM HOUSING

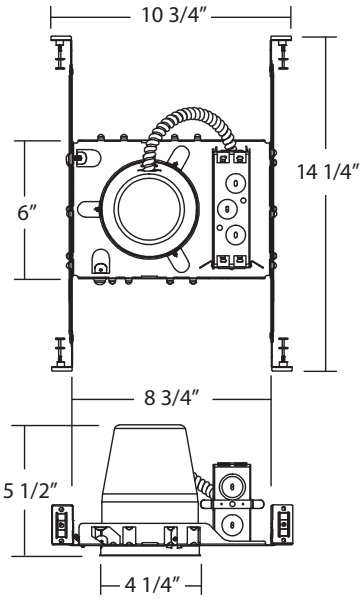

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
5 1/2" height allows use in 2" x 6" joist construction.
Uses 120V MR-16 lamp (not included) with a GU10 base.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box. Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist. Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

19003AR

REMODEL HOUSING 120V MR16

INSULATION MUST BE KEPT A MINIMUM OF 3" FROM HOUSING

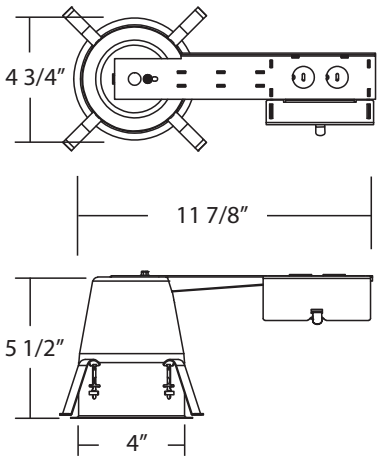

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
5 1/2" height allows use in 2" x 6" joist construction.
Uses 120V MR-16 lamp (not included) with a GU10 base.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS

FOR 19003A & 19003AR

WALL WASH • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14001BK	BLACK	OD: 5"
14001WH	WHITE (shown)	



BAFFLE • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14002BK	BLACK (BLACK RING)	OD: 5"
14002BZ	BRONZE (BRONZE RING)	
14002NK	NICKEL	
14002WH	WHITE (WHITE RING)	
14002OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)	
14002OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING) (shown)	



BAFFLE • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14003	BLACK	OD: 5"



SPECULAR • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14004	BLACK	OD: 5"



SPECUALR • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14005	CLEAR (shown)	OD: 5"
14020CL	CLEAR (WITH CHROME RING)	
14002OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING) (shown)	



EYEBALL | BAFFLE • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14006WH	WHITE (shown)	OD: 5"
14006OB	OIL-RUBBED BRONZE	
14006BK	BLACK	



SPECULAR • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14007	GOLD (shown)	OD: 5"
14020GD	CHROME (WITH GOLD RING)	



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

TRIMS

FOR 19003A & 19003AR

SLOTTED APERTURE • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14008	WHITE	OD: 5″



PIN HOLE | BLACK BAFFLE • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14009	WHITE	OD: 5″



EYEBALL • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14015WH	WHITE	OD: 5″



WALL WASH • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14016WH	WHITE	OD: 5″
14016BK	BLACK	



EYEBALL • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14019	WHITE	OD: 5″



ADJUSTABLE DROP SPOT • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14021	WHITE	OD: 5″



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

TRIMS

FOR 19003A & 19003AR

SQUARE TRIM/BAFFLE • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14022BK	WHITE TRIM/BLACK BAFFLE	OD: 5"
14022NK	NICKEL	
14022OB	OIL-RUBBED BRONZE	
14022WH	WHITE (shown)	



SQUARE TRIM/SQUARE GIMBAL • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14023BK	BLACK	OD: 5"
14023NK	NICKEL	
14023OB	OIL-RUBBED BRONZE	
14023WH	WHITE (shown)	



SHOWER TRIM • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14509WH	WHITE	OD: 5"

WET LOCATION RATED



GIMBAL RING • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14558WH	WHITE	OD: 5"



GU10 WHIP • GU10 | 120V MR-16

Item NO.	Description	Dimensions
GU10WHIP	TO FIELD CONVERT 4" LINE VOLTAGE PAR20/R20 HOUSING TO 120V MR-16 GU10 LAMP.	MAX WATTAGE PER TRIM AND HOUSING COMBO

ABZ *Aged Bronze* | **BK** *Black* | **BZ** *Bronze* | **CH** *Chrome* | **GD** *Gold* | **NK** *Nickel* | **OB** *Oil-Rubbed Bronze* | **PB** *Polished Brass* | **PW** *Pewter*

19004A

AIRTIGHT HOUSING 120V MR16

Suitable for direct contact with insulation

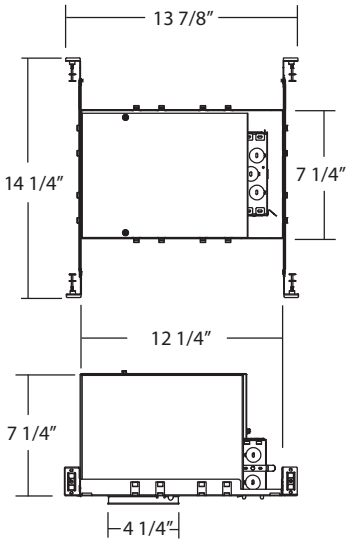

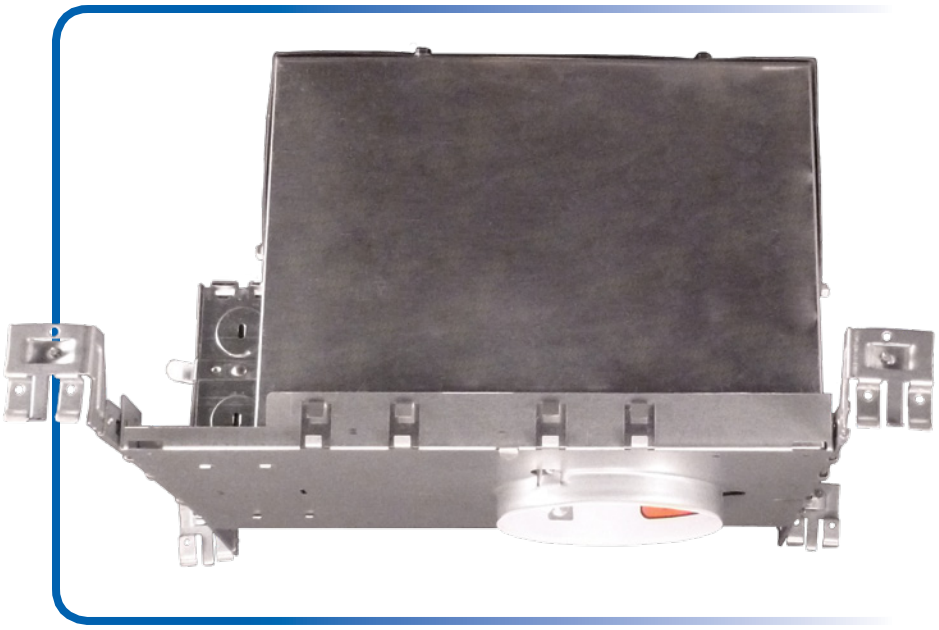

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.

HOUSING

Integral thermal protector guards against improper lamping and misuse of insulation materials.
Washington State Energy Code approved to meet restricted airflow requirements.
Adjustable socket bracket assures proper and consistent lamp positioning.
7 1/4" height allows use in 2" x 8" joist construction.
Uses 120V MR-16 lamp (not included) with a GU10 base.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS
FOR 19004A

WALL WASH • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14001BK	BLACK	OD: 5"
14001WH	WHITE (shown)	



BAFFLE • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14002BK	BLACK (BLACK RING)	OD: 5"
14002BZ	BRONZE (BRONZE RING)	
14002NK	NICKEL	
14002WH	WHITE (WHITE RING)	
14002OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)	
14002OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING) (shown)	



BAFFLE • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14003	BLACK	OD: 5"



SPECULAR • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14004	BLACK	OD: 5"



SPECUALR • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14005	CLEAR (shown)	OD: 5"
14020CL	CLEAR (WITH CHROME RING)	
14002OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING) (shown)	



EYEBALL | BAFFLE • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14006WH	WHITE (shown)	OD: 5"
14006OB	OIL-RUBBED BRONZE	
14006BK	BLACK	





SPECULAR • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14007	GOLD (shown)	OD: 5"
14020GD	CHROME (WITH GOLD RING)	



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

TRIMS
FOR 19004A



SLOTTED APERTURE • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14008	WHITE	OD: 5″



PIN HOLE | BLACK BAFFLE • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14009	WHITE	OD: 5″



EYEBALL • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14015WH	WHITE	OD: 5″



WALL WASH • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14016WH	WHITE	OD: 5″
14016BK	BLACK	



EYEBALL • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14019	WHITE	OD: 5″



ADJUSTABLE DROP SPOT • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14021	WHITE	OD: 5″



ABZ *Aged Bronze* | **BK** *Black* | **BZ** *Bronze* | **CH** *Chrome* | **GD** *Gold* | **NK** *Nickel* | **OB** *Oil-Rubbed Bronze* | **PB** *Polished Brass* | **PW** *Pewter*

NICOR® Shining Brighter™

TRIMS
FOR 19004A

SQUARE TRIM/BAFFLE • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14022BK	WHITE TRIM/BLACK BAFFLE	OD: 5″
14022NK	NICKEL	
14022OB	OIL-RUBBED BRONZE	
14022WH	WHITE (shown)	



SQUARE TRIM/SQUARE GIMBAL • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14023BK	BLACK	OD: 5″
14023NK	NICKEL	
14023OB	OIL-RUBBED BRONZE	
14023WH	WHITE (shown)	



SHOWER TRIM • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14509WH	WHITE	OD: 5″

WET LOCATION RATED



GIMBAL RING • GU10 | 120V MR-16 | 50W MAX

Item NO.	Description	Dimensions
14558WH	WHITE	OD: 5″



GU10 WHIP • GU10 | 120V MR-16

Item NO.	Description	Dimensions
GU10WHIP	TO FIELD CONVERT 4″ LINE VOLTAGE PAR20/R20 HOUSING TO 120V MR-16 GU10 LAMP.	MAX WATTAGE PER TRIM AND HOUSING COMBO

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

Never leave the lights on again.

On average you can reduce energy usage by as much as 45% with **MAXCOR™** Motion Sensors.

Visit www.nicorlighting.com for more info.

MAXCOR™

15000
UNIVERSAL HOUSING

Insulation must be kept a minimum of 3" from housing

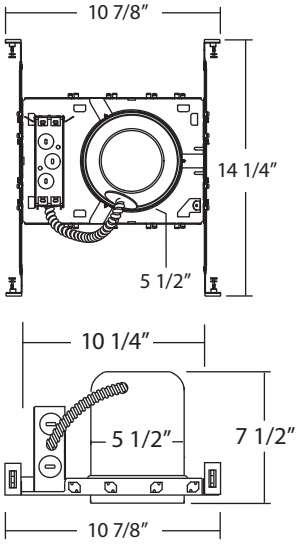

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Integral thermal protector guards against improper lamping and misuse of insulation materials.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box. Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

NICOR FASTENER

15000R
REMODEL HOUSING

Insulation must be kept a minimum of 3" from housing

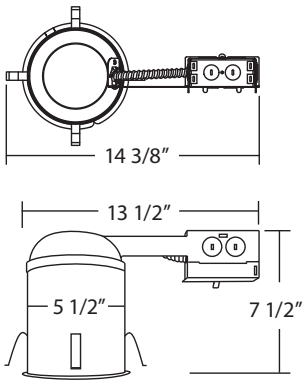

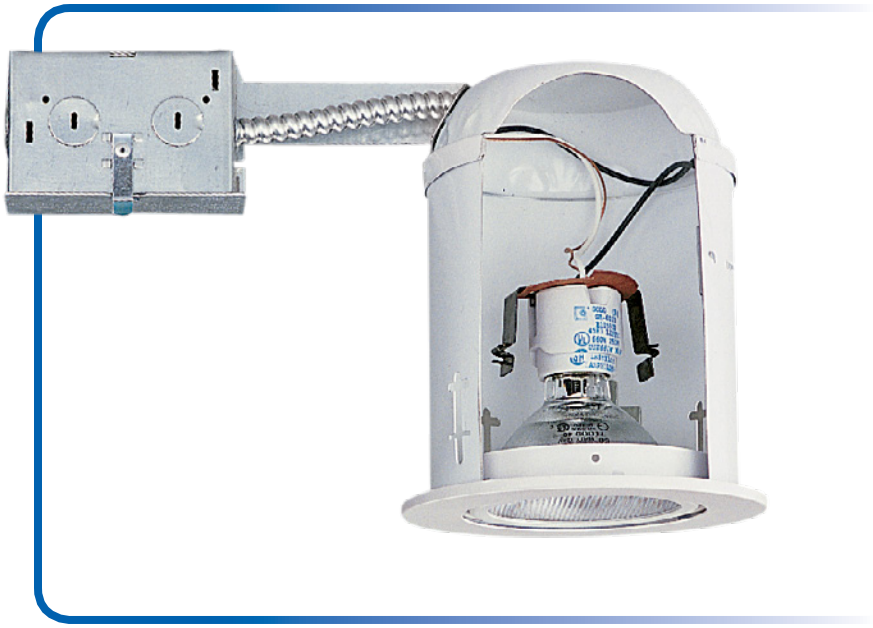

DESCRIPTION
Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING
Integral thermal protector guards against improper lamping and misuse of insulation materials.
7 1/2" height allows use in 2" x 8" joist construction.

JUNCTION BOX
Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS
UL damp location
UL feed-through
CUL

c UL us LISTED

NICOR FASTENER

NICOR Shining Brighter™

TRIMS

FOR 15000 & 15000R

FRESNEL SHOWER • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15502	WHITE	OD: 6 1/2"

WET LOCATION RATED



BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15504	BLACK	OD: 6 1/2"



EYEBALL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15506BK	BLACK	OD: 6 1/2"
15506PB	POLISHED BRASS	
15506WH	WHITE (shown)	
15506OB	OIL-RUBBED BRONZE	



EYEBALL • 50W | R20/PAR20

Item NO.	Description	Dimensions
15507BK	BLACK (shown)	OD: 6 1/2"
15507PB	POLISHED BRASS	
15507WH	WHITE (shown)	



SHOWER TRIM • 40W | A19 1X13W PL

Item NO.	Description	Dimensions
15509	WHITE (shown)	OD: 6 1/2"
15509OB	OIL-RUBBED BRONZE	

WET LOCATION RATED



SPLAY TRIM • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15510	WHITE	OD: 6 1/2"



BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15511BK	BLACK	OD: 6 1/2"
15511BZ	BRONZE (shown)	
15511WH	WHITE	
15511NK	NICKEL	
15511OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)	
15511OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)	



ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

TRIMS

FOR 15000, 15000R

REFLECTOR • 60W | A19

Item NO.	Description	Dimensions
15518BK	BLACK	OD: 6 1/2"
15518CL	CLEAR	
15518GD	GOLD (shown)	
15518WH	WHITE	
15518WHZ-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)	



SPLAY • 50W | R20/PAR20

Item NO.	Description	Dimensions
15550	WHITE	OD: 6 1/2"



CONE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15552	WHITE	OD: 6 1/2"



CONE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15553	BLACK	OD: 6 1/2"



CONE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15554	CLEAR	OD: 6 1/2"



CONE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15555	GOLD	OD: 6 1/2"



GIMBAL RING • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15558BK	BLACK (shown)	OD: 6 1/2"
15558WH	WHITE	



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

15006A
AIRTIGHT HOUSING

Suitable for direct contact with insulation

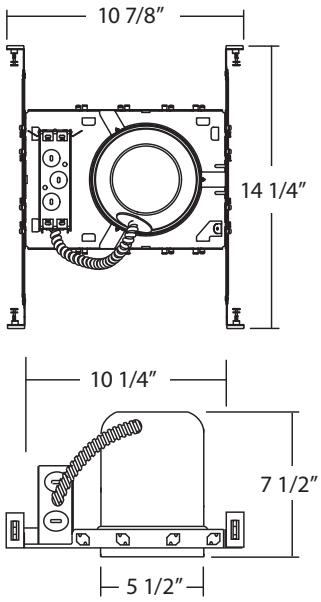

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

15006RA

REMODEL AIRTIGHT HOUSING

Suitable for direct contact with insulation

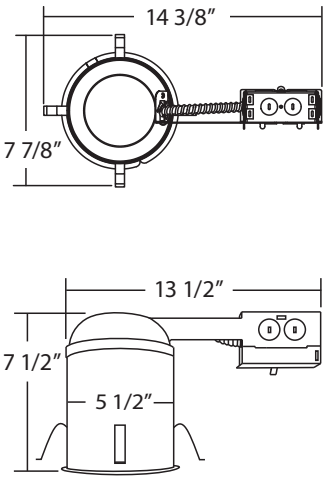

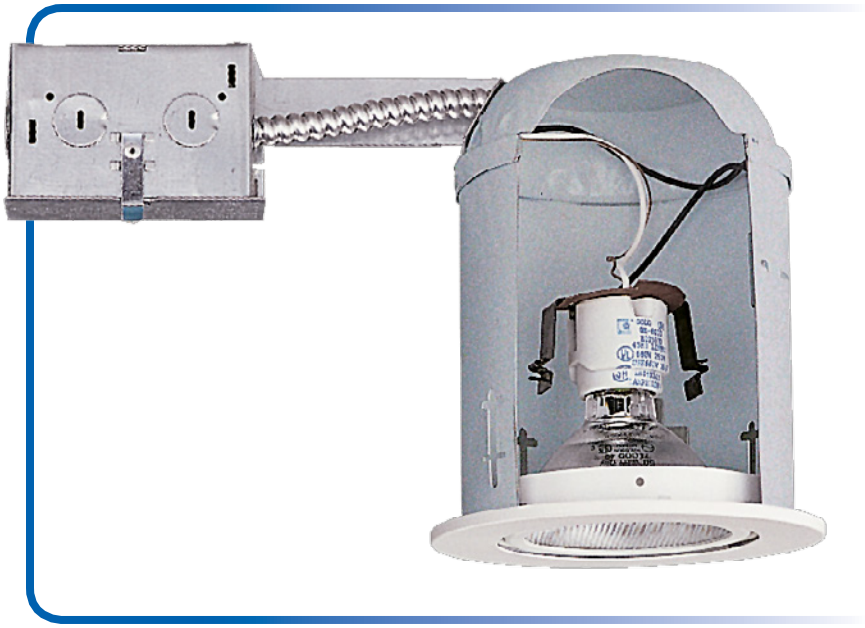

DESCRIPTION

Suitable for remodel construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
7 1/2" height allows use in 2" x 8" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS

FOR 15006A & 15006RA

FRESNEL SHOWER • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15502	WHITE	OD: 6 1/2"

WET LOCATION RATED



BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15504	BLACK	OD: 6 1/2"



EYEBALL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15506BK	BLACK	OD: 6 1/2"
15506PB	POLISHED BRASS	
15506WH	WHITE (shown)	
15506OB	OIL-RUBBED BRONZE	



EYEBALL • 50W | R20/PAR20

Item NO.	Description	Dimensions
15507BK	BLACK (shown)	OD: 6 1/2"
15507PB	POLISHED BRASS	
15507WH	WHITE (shown)	



SHOWER TRIM • 40W | A19 1X13W PL

Item NO.	Description	Dimensions
15509	WHITE (shown)	OD: 6 1/2"
15509OB	OIL-RUBBED BRONZE	

WET LOCATION RATED



SPLAY TRIM • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15510	WHITE	OD: 6 1/2"



BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15511BK	BLACK	OD: 6 1/2"
15511BZ	BRONZE (shown)	
15511WH	WHITE	
15511NK	NICKEL	
15511OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)	
15511OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)	



COMMERCIAL AND RESIDENTIAL DOWNLIGHTING

ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

TRIMS

FOR 15006A & 15006RA

REFLECTOR • 60W | A19

Item NO.	Description	Dimensions
15518BK	BLACK	OD: 6 1/2"
15518CL	CLEAR	
15518GD	GOLD (shown)	
15518WH	WHITE	
15518OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)	



SPLAY • 50W | R20/PAR20

Item NO.	Description	Dimensions
15550	WHITE	OD: 6 1/2"



CONE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15552	WHITE	OD: 6 1/2"



CONE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15553	BLACK	OD: 6 1/2"



CONE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15554	CLEAR	OD: 6 1/2"



CONE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15555	GOLD	OD: 6 1/2"



GIMBAL RING • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15558BK	BLACK (shown)	OD: 6 1/2"
15558WH	WHITE	



ABZ Aged Bronze | BK Black | BZ Bronze | CH Chrome | GD Gold | NK Nickel | OB Oil-Rubbed Bronze | PB Polished Brass | PW Pewter

15014A
AIRTIGHT SHALLOW HOUSING

Suitable for direct contact with insulation

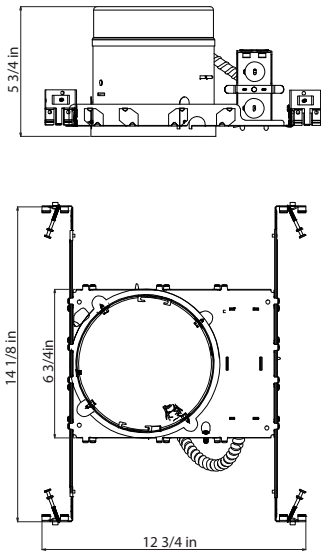

DESCRIPTION
Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.

HOUSING
Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
5 3/4" height allows use in 2" x 6" joist construction.

PLASTER FRAME
Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX
Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS
Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS
UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS
FOR 15014A

EYEBALL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
15506BK	BLACK	OD: 6 1/2"
15506PB	POLISHED BRASS	
15506WH	WHITE (shown)	
15506OB	OIL-RUBBED BRONZE	



SHALLOW CONE BAFFLE • 75W | PAR30L | 50W | PAR30S

Item NO.	Description	Dimensions
15512WH	WHITE	OD: 6 1/2"



DOME SHOWER TRIM • 40W | A19 | 1X13W PL

Item NO.	Description	Dimensions
15517WH	WHITE	OD: 6 3/4"

WET LOCATION RATED



OPEN TRIM • 50W | PAR30S

Item NO.	Description	Dimensions
15519WH	WHITE	OD: 6 1/2"



COMMERCIAL AND RESIDENTIAL DOWNLIGHTING

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

17000
UNIVERSAL HOUSING

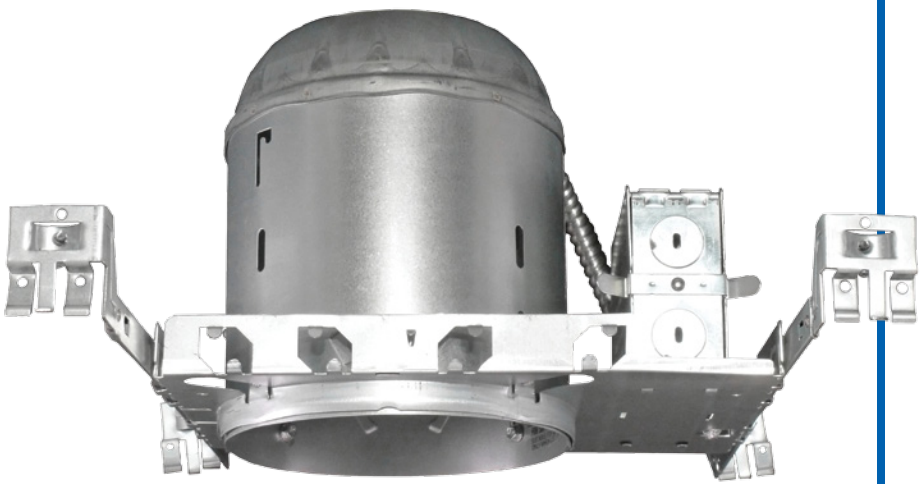

Insulation must be kept a minimum of 3" from housing

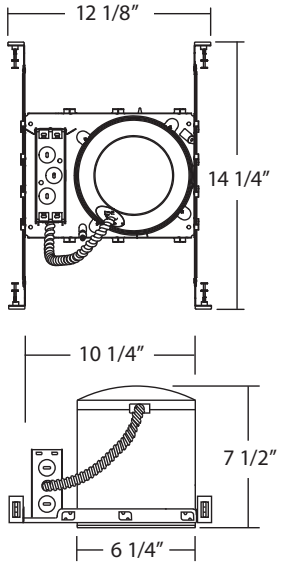

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

NICOR FASTENER

DIMMABLE PRODUCT ORDERING CHART SEE PAGE page 92

17001R
REMODEL HOUSING

Insulation must be kept a minimum of 3" from housing

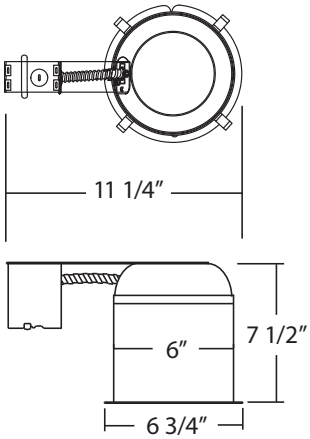

DESCRIPTION
Suitable for remodel construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
7 1/2" height allows use in 2" x 8" joist construction.

JUNCTION BOX
Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS
UL damp location
UL feed-through
CUL

c UL us LISTED

NICOR FASTENER

TRIMS
FOR 17000 & 17001R

OPEN TRIM • 150W | PAR38/BR40

Item NO.	Description	Dimensions
17501BZ	BRONZE	OD: 8"
17501PW	PEWTER	
17501PB	POLISHED BRASS	
17501OB	OIL-RUBBED BRONZE	
17501WH	WHITE (shown)	



LEXAN SHOWER | FRESNEL LENS • 60W | A19

Item NO.	Description	Dimensions
17502BZ	BRONZE (shown)	OD: 8"
17502OB	OIL-RUBBED BRONZE	
17502WH	WHITE (WITH METAL TRIM RING)	
	ALSO AVAILABLE	
17572	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED



BAFFLE • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17503	BLACK	OD: 8"
17503SP	SINGLE PIECE	





BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17504	BLACK	OD: 8"
17504SP	SINGLE PIECE	



LEXAN SHOWER | ALBALITE LENS • 60W | A19

Item NO.	Description	Dimensions
17505BZ	BRONZE	OD: 8"
17505NK	NICKEL	
17505OB	OIL-RUBBED BRONZE	
17505WH	WHITE (WITH METAL TRIM RING) (shown)	
	ALSO AVAILABLE	
17575	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED



EYEBALL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17506BZ	BRONZE	OD: 8"
17506NK	NICKEL (shown)	
17506PB	POLISHED BRASS	
17506OB	OIL-RUBBED BRONZE	
17506WH	WHITE	



ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

TRIMS

FOR 17000 & 17001R

EYEBALL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17508BZ	BRONZE	OD: 8"
17508NK	NICKEL	
17508PB	POLISHED BRASS	
17508PW	PEWTER	
17508OB	OIL-RUBBED BRONZE	
17508WH	WHITE (shown)	



LEXAN SHOWER | DROP OPAL • 60W | A19

Item NO.	Description	Dimensions
17509	WHITE (WITH METAL TRIM RING)	OD: 8"
	ALSO AVAILABLE	
17579	WHITE (WITH PLASTIC RING)	

WET LOCATION RATED



BAFFLE • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17510BZ	BRONZE	OD: 8"
17510OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING) (shown)	
17510OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)	
17510	WHITE	
17510SP	WHITE- SINGLE PIECE (OD: 7 1/2")	



BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17511BZ	BRONZE (shown)	OD: 8"
17511NK	NICKEL	
17511OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)	
17511OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)	
17511	WHITE	
17511SP	WHITE-SINGLE PIECE	
17511SPBK	BLACK-SINGLE PIECE NEW	



SPECULAR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17513	GOLD (shown)	OD: 7"



SPECULAR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17514	BLACK	OD: 7"



ABZ Aged Bronze | BK Black | BZ Bronze | CH Chrome | GD Gold | NK Nickel | OB Oil-Rubbed Bronze | PB Polished Brass | PW Pewter

NICOR® Shining Brighter™

TRIMS

FOR 17000 & 17001R

SPECULAR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17515	CLEAR	OD: 7"



REGRESSED EYEBALL/BLACK BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17516	WHITE	OD: 7 1/8" ADJUSTABLE UP TO 30⁰



WALL WASH • 60W | A19

Item NO.	Description	Dimensions
17517	WHITE	OD: 8"



SPECULAR CONE • 60W | A19

Item NO.	Description	Dimensions
17518CL	CLEAR (shown)	OD: 7"
17518WH	WHITE	



REGRESSED EYEBALL/WHITE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17519	WHITE	OD: 7 1/8" ADJUSTABLE UP TO 30⁰



REFLECTOR/BLACK BAFFLE • 60W | A19

Item NO.	Description	Dimensions
17520CL	CLEAR (shown)	OD: 7 1/8"
17520CLWH	CLEAR (WHITE/BAFFLE)	



PIN HOLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17521	WHITE	OD: 8"



BAFFLE/FRESNEL LENS • 60W | A19

Item NO.	Description	Dimensions
17522BK	BLACK (shown)	OD: 7 1/8"
17522WH	WHITE	



BAFFLE/ALBALITE LENS • 60W | A19

Item NO.	Description	Dimensions
17523BK	BLACK (WHITE RING)	OD: 7"
17523WH	WHITE (shown)	



ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

TRIMS

FOR 17000 & 17001R

EYEBALL/BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17526BK	BLACK	OD: 8″
17526OB	OIL-RUBBED BRONZE	ADJUSTABLE UP TO 30°
17526WH	WHITE (shown)	



WALL WASH/BLACK BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17527	WHITE	OD: 7 1/4″



OPEN SPLAY TRIM • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17545NK	NICKEL	OD: 8″
17545OB	OIL-RUBBED BRONZE	
17545WH	WHITE (shown)	



Note: Single piece

CONE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17550ABZ	BRONZE	OD: 7 1/2″
17550A	WHITE	AIRTIGHT
17550OB	OIL-RUBBED BRONZE (shown)	
17550ABK	BLACK NEW	
17550ANK	NICKEL NEW	



CONE BAFFLE (WET LOCATION) • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17550ABKWL	BLACK	OD: 7 1/2″
17550ANKWL	NICKEL	AIRTIGHT
17550AOBWL	OIL-RUBBED BRONZE (SHOWN)	
17550AWL	WHITE	

WET LOCATION RATED



CONE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17550ACLP	WHITE	OD: 7 1/2″
		AIRTIGHT



CONE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17551A	BLACK	OD: 7 1/2″
		AIRTIGHT



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

TRIMS
FOR 17000 & 17001R

CONE REFLECTOR • 90W | BR40/PAR38

Item NO.	Description	Dimensions
17552A	CLEAR	OD: 7″ AIRTIGHT



CONE REFLECTOR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17553A	GOLD	OD: 7″ AIRTIGHT



RIBBED REFLECTOR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17554	CLEAR	OD: 7 3/4″



RIBBED REFLECTOR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17555	GOLD	OD: 7 3/4″



ADJUSTABLE REFLECTOR GIMBAL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17556BK	BLACK (shown)	OD: 7 1/4″
17556BFLB	BLACK BAFFLE	ADJUSTABLE UP TO 30°
17556BFLW	WHITE BAFFLE	
17556CL	CLEAR	
17556GD	GOLD	



ADJUSTABLE REFLECTOR GIMBAL • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17557BK	BLACK (shown)	OD: 7 1/4″
17557BFLB	BLACK BAFFLE	ADJUSTABLE UP TO 30°
17557BFLW	WHITE BAFFLE	
17557CL	CLEAR	
17557GD	GOLD	



GIMBAL RING • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17558CL	CLEAR	OD: 8″
17558GD	GOLD	ADJUSTABLE UP TO 30°
17558NK	NICKEL (shown)	
17558OB	OIL-RUBBED BRONZE	
17558WH	WHITE	



ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

TRIMS

FOR 17000 & 17001R

WALL WASH • 50W | R20/PAR20

Item NO.	Description	Dimensions
17559BK	BLACK	OD: 8″
17559WH	WHITE (shown)	



WALL WASH • 50W | R20/PAR30

Item NO.	Description	Dimensions
17560WH	WHITE	OD: 8″



OPEN TRIM/SOCKET BRACKET • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17561	WHITE	OD: 8″



OPEN TRIM/SOCKET BRACKET • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17562	WHITE	OD: 8″



COLOR TABLE

BK	BLACK
BZ	BRONZE
CL	CLEAR
GD	GOLD
OB	OIL-RUBBED BRONZE
NK	NICKEL
WH	WHITE

ABZ *Aged Bronze* | **BK** *Black* | **BZ** *Bronze* | **CH** *Chrome* | **GD** *Gold* | **NK** *Nickel* | **OB** *Oil-Rubbed Bronze* | **PB** *Polished Brass* | **PW** *Pewter*

NICOR® Shining Brighter™

17002A
AIRTIGHT HOUSING

Suitable for direct contact with insulation

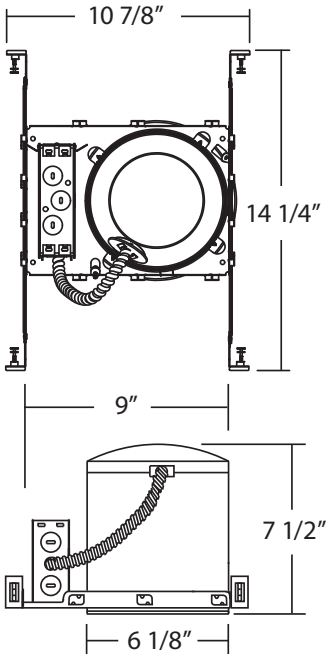

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.

HOUSING

Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Washington State Energy Code approved to meet restricted airflow requirements.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Note: Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS
FOR 17002A

LEXAN SHOWER | FRESNEL LENS • 60W | A19

Item NO.	Description
17502BZ	BRONZE (shown)
17502OB	OIL-RUBBED BRONZE
17502WH	WHITE (WITH METAL TRIM RING)
	ALSO AVAILABLE
17572	WHITE (WITH PLASTIC TRIM RING)

Dimensions: OD: 8"

WET LOCATION RATED



BAFFLE • 150W | BR40/PAR38

Item NO.	Description
17503	BLACK
17503SP	SINGLE PIECE

Dimensions: OD: 8"





BAFFLE • 75W | BR30/PAR30

Item NO.	Description
17504	BLACK
17504SP	SINGLE PIECE

Dimensions: OD: 8"



LEXAN SHOWER | ALBALITE LENS • 60W | A19

Item NO.	Description
17505BZ	BRONZE
17505NK	NICKEL
17505OB	OIL-RUBBED BRONZE
17505WH	WHITE (WITH METAL TRIM RING) (shown)
	ALSO AVAILABLE
17575	WHITE (WITH PLASTIC TRIM RING)

Dimensions: OD: 8"

WET LOCATION RATED



EYEBALL • 75W | BR30/PAR30

Item NO.	Description
17506BZ	BRONZE
17506NK	NICKEL (shown)
17506PB	POLISHED BRASS
17506OB	OIL-RUBBED BRONZE
17506WH	WHITE

Dimensions: OD: 8"



EYEBALL • 75W | BR30/PAR30

Item NO.	Description
17508BZ	BRONZE
17508NK	NICKEL
17508PB	POLISHED BRASS
17508PW	PEWTER
17508OB	OIL-RUBBED BRONZE
17508WH	WHITE (shown)

Dimensions: OD: 8"



LEXAN SHOWER | DROP OPAL • 60W | A19

Item NO.	Description
17509	WHITE (WITH METAL TRIM RING)
	ALSO AVAILABLE
17579	WHITE (WITH PLASTIC RING)

Dimensions: OD: 8"

WET LOCATION RATED



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

TRIMS
FOR 17002A

BAFFLE • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17510BZ	BRONZE	OD: 8"
17510OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)	
17510OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)	
17510	WHITE (shown)	
17510SP	WHITE- SINGLE PIECE (OD: 7 1/2")	



BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17511BZ	BRONZE	OD: 8"
17511NK	NICKEL (shown)	
17511OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)	
17511OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)	
17511	WHITE	
17511SP	WHITE-SINGLE PIECE	
17511SPBK	BLACK-SINGLE PIECE NEW	



SPECULAR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17513	GOLD (shown)	OD: 7"



SPECULAR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17514	BLACK	OD: 7"



SPECULAR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17515	CLEAR	OD: 7"



REGRESSED EYEBALL/BLACK BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17516	WHITE	OD: 7 1/8" ADJUSTABLE UP TO 30⁰



WALL WASH • 60W | A19

Item NO.	Description	Dimensions
17517	WHITE	OD: 8"



ABZ *Aged Bronze* | ***BK*** *Black* | ***BZ*** *Bronze* | ***CH*** *Chrome* | ***GD*** *Gold* | ***NK*** *Nickel* | ***OB*** *Oil-Rubbed Bronze* | ***PB*** *Polished Brass* | ***PW*** *Pewter*

TRIMS
FOR 17002A

WALL WASH • 60W | A19

Item NO.	Description	Dimensions
17517	WHITE	OD: 8"



SPECULAR CONE • 60W | A19

Item NO.	Description	Dimensions
17518CL	CLEAR (shown)	OD: 7"
17518WH	WHITE	



REGRESSED EYEBALL/WHITE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17519	WHITE	OD: 7 1/8" ADJUSTABLE UP TO 30°



REFLECTOR/BLACK BAFFLE • 60W | A19

Item NO.	Description	Dimensions
17520CL	CLEAR (shown)	OD: 7 1/8"
17520CLWH	CLEAR (WHITE/BAFFLE)	



PIN HOLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17521	WHITE	OD: 8"



BAFFLE/FRESNEL LENS • 60W | A19

Item NO.	Description	Dimensions
17522BK	BLACK (shown)	OD: 7 1/8"
17522WH	WHITE	



BAFFLE/ALBALITE LENS • 60W | A19

Item NO.	Description	Dimensions
17523BK	BLACK (WHITE RING)	OD: 7"
17523WH	WHITE (shown)	



EYEBALL/BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17526BK	BLACK/BLACK BAFFLE(shown)	OD: 8"
17526OB	OIL-RUBBED BRONZE	ADJUSTABLE UP TO 30°
17526WH	WHITE	



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

TRIMS
FOR 17002A

WALL WASH/BLACK BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17527	WHITE	OD: 7 1/4"



OPEN SPLAY TRIM • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17545NK	NICKEL	OD: 8"
17545A	WHITE	



Note: Single piece

CONE BAFFLE • 90W | BR40/PAR38

Item NO.	Description	Dimensions
17548A	WHITE	OD: 8" AIRTIGHT



Note: Single piece

CONE BAFFLE • 90W | BR40/PAR38

Item NO.	Description	Dimensions
17549A	BLACK	OD: 8" AIRTIGHT



Note: Single piece

CONE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17550ABZ	BRONZE	OD: 7 1/2" AIRTIGHT
17550A	WHITE	
17550OB	OIL-RUBBED BRONZE (shown)	
17550ABK	BLACK NEW	
17550ANK	NICKEL NEW	



CONE BAFFLE (WET LOCATION) • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17550ABKWL	BLACK	OD: 7 1/2" AIRTIGHT
17550ANKWL	NICKEL	
17550AOBWL	OIL-RUBBED BRONZE (SHOWN)	
17550AWL	WHITE	

WET LOCATION RATED



REFLECTOR CONE • 75W | R30/PAR30

Item NO.	Description	Dimensions
17580	White	OD: 8"



ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

TRIMS
FOR 17002A

CONE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17550ACLP	WHITE	OD: 7 1/2″ AIRTIGHT



CONE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17551A	BLACK	OD: 7 1/2″ AIRTIGHT



CONE REFLECTOR • 90W | BR40/PAR38

Item NO.	Description	Dimensions
17552A	CLEAR	OD: 7″ AIRTIGHT



CONE REFLECTOR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17553A	GOLD	OD: 7″ AIRTIGHT



RIBBED REFLECTOR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17554	CLEAR	OD: 7 3/4″



RIBBED REFLECTOR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17555	GOLD	OD: 7 3/4″



ADJUSTABLE REFLECTOR GIMBAL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17556BK	BLACK (shown)	OD: 7 1/4″
17556BFLB	BLACK BAFFLE	ADJUSTABLE UP TO 30°
17556BFLW	WHITE BAFFLE	
17556CL	CLEAR	
17556GD	GOLD	



ABZ *Aged Bronze* | **BK** *Black* | **BZ** *Bronze* | **CH** *Chrome* | **GD** *Gold* | **NK** *Nickel* | **OB** *Oil-Rubbed Bronze* | **PB** *Polished Brass* | **PW** *Pewter*

TRIMS
FOR 17002A

GIMBAL RING • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17558CL	CLEAR	OD: 8″
17558GD	GOLD	ADJUSTABLE UP TO 30°
17558NK	NICKEL (shown)	
17558OB	OIL-RUBBED BRONZE	
17558WH	WHITE	



WALL WASH • 50W | R20/PAR20

Item NO.	Description	Dimensions
17559BK	BLACK	OD: 8″
17559WH	WHITE (shown)	



WALL WASH • 50W | R20/PAR30

Item NO.	Description	Dimensions
17560WH	WHITE	OD: 8″



OPEN TRIM/SOCKET BRACKET • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17562	WHITE	OD: 8″



LEXANSHOWER/ALBALITE LENS • 40W | A19

Item NO.	Description	Dimensions
17567	WHITE	OD: 8″

WET LOCATION RATED



LEXANSHOWER/DROP OPAL • 40W | A19

Item NO.	Description	Dimensions
17568	WHITE	OD: 8″

WET LOCATION RATED



LEXANSHOWER/FRESNEL LENS • 40W | A19

Item NO.	Description	Dimensions
17566	WHITE	OD: 8″

WET LOCATION RATED



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

New products and catalog updates are just a click away at **nicorlighting.com**

17002ANB

NON-BRACKET AIRTIGHT HOUSING

Suitable for direct contact with insulation

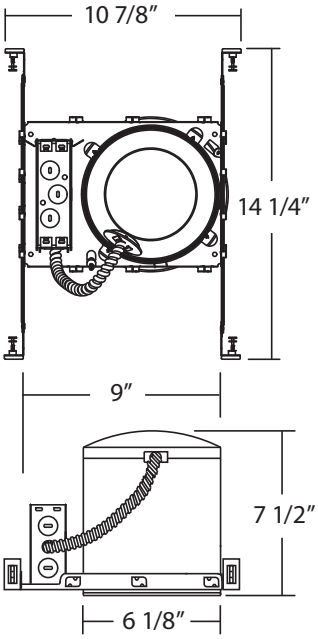

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.

HOUSING

Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Washington State Energy Code approved to meet restricted airflow requirements.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Facilitates socket installation in fixed-socket trims.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation.
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS
FOR 17002ANB

EYEBALL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17506BZ	BRONZE	OD: 8"
17506NK	NICKEL (shown)	
17506PB	POLISHED BRASS	
17506OB	OIL-RUBBED BRONZE	
17506WH	WHITE	



REGRESSED EYEBALL/BLACK BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17516	WHITE	OD: 7 1/8" ADJUSTABLE UP TO 30⁰



REGRESSED EYEBALL/WHITE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17519	WHITE	OD: 7 1/8" ADJUSTABLE UP TO 30⁰



EYEBALL/BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17526BK	BLACK/BLACK BAFFLE	OD: 8"
17526OB	OIL-RUBBED BRONZE	ADJUSTABLE UP TO 30°
17526WH	WHITE (shown)	



Note: Single piece

CONE BAFFLE • 90W | BR40/PAR38

Item NO.	Description	Dimensions
17548A	WHITE	OD: 8" AIRTIGHT



Note: Single piece

CONE BAFFLE • 90W | BR40/PAR38

Item NO.	Description	Dimensions
17549A	BLACK	OD: 8" AIRTIGHT



Note: Single piece

CONE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17550ABZ	BRONZE	OD: 7 1/2" AIRTIGHT
17550A	WHITE	
17550OB	OIL-RUBBED BRONZE (shown)	
17550ABK	BLACK	
17550ANK	NICKEL	



ABZ Aged Bronze | BK Black | BZ Bronze | CH Chrome | GD Gold | NK Nickel | OB Oil-Rubbed Bronze | PB Polished Brass | PW Pewter

NICOR® Shining Brighter™

TRIMS
FOR 17002ANB

CONE BAFFLE (WET LOCATION) • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17550ABKWL	BLACK	OD: 7 1/2"
17550ANKWL	NICKEL	AIRTIGHT
17550AOBWL	OIL-RUBBED BRONZE (SHOWN)	
17550AWL	WHITE	

WET LOCATION RATED



CONE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17550ACLP	WHITE	OD: 7 1/2"
		AIRTIGHT



CONE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17551A	BLACK	OD: 7 1/2"
		AIRTIGHT



CONE REFLECTOR • 90W | BR40/PAR38

Item NO.	Description	Dimensions
17552A	CLEAR	OD: 7"
		AIRTIGHT



CONE REFLECTOR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17553A	GOLD	OD: 7"
		AIRTIGHT



ADJUSTABLE REFLECTOR GIMBAL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17556BK	BLACK (shown)	OD: 7 1/4"
17556BFLB	BLACK BAFFLE	ADJUSTABLE UP TO 30°
17556BFLW	WHITE BAFFLE	
17556CL	CLEAR	
17556GD	GOLD	



GIMBAL RING • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17558CL	CLEAR	OD: 8"
17558GD	GOLD	ADJUSTABLE UP TO 30°
17558NK	NICKEL (shown)	
17558OB	OIL-RUBBED BRONZE	
17558WH	WHITE	



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

TRIMS
FOR 17002ANB

OPEN TRIM/SOCKET BRACKET • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17562	WHITE	OD: 8″



LEXANSHOWER/ALBALITE LENS • 40W | A19

Item NO.	Description	Dimensions
17567	WHITE	OD: 8″

WET LOCATION RATED



LEXANSHOWER/DROP OPAL • 40W | A19

Item NO.	Description	Dimensions
17568	WHITE	OD: 8″

WET LOCATION RATED



LEXANSHOWER/FRESNEL LENS • 40W | A19

Item NO.	Description	Dimensions
17566	WHITE	OD: 8″

WET LOCATION RATED



COMMERCIAL AND RESIDENTIAL DOWNLIGHTING

ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

NICOR® Shining Brighter™

17004
SHALLOW HOUSING

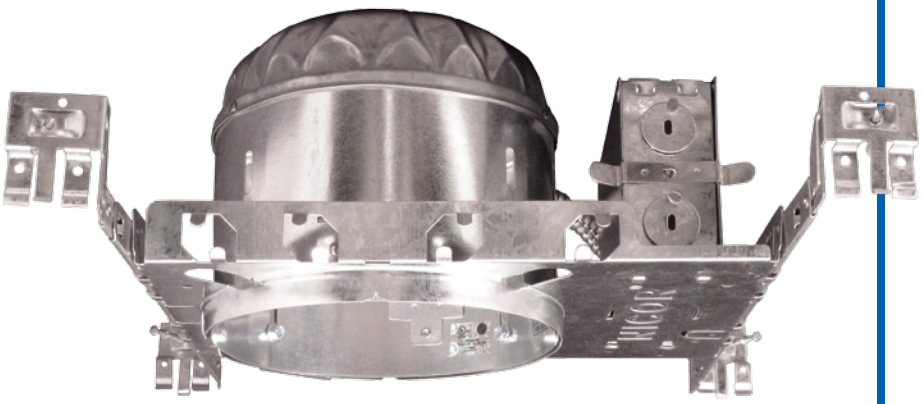

Insulation must be kept a minimum of 3" from housing

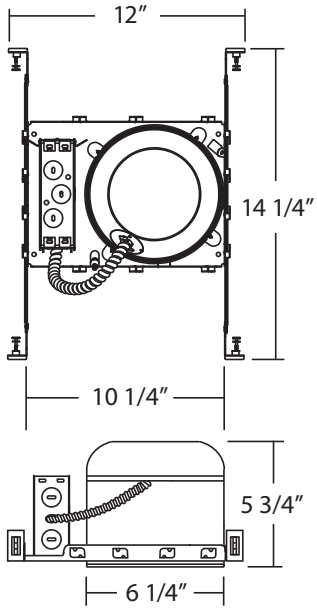

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
5 3/4" height allows use in 2" x 6" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

NICOR FASTENER

17004R
REMODEL SHALLOW HOUSING

Insulation must be kept a minimum of 3" from housing

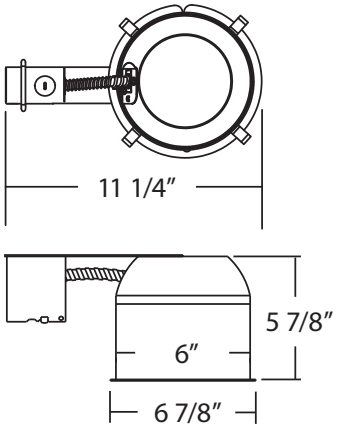

DESCRIPTION
Suitable for remodel construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
5 7/8" height allows use in 2" x 6" joist construction.

JUNCTION BOX
Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS
UL damp location
UL feed-through
CUL

c UL us LISTED

NICOR FASTENER

TRIMS
FOR 17004 & 17004R

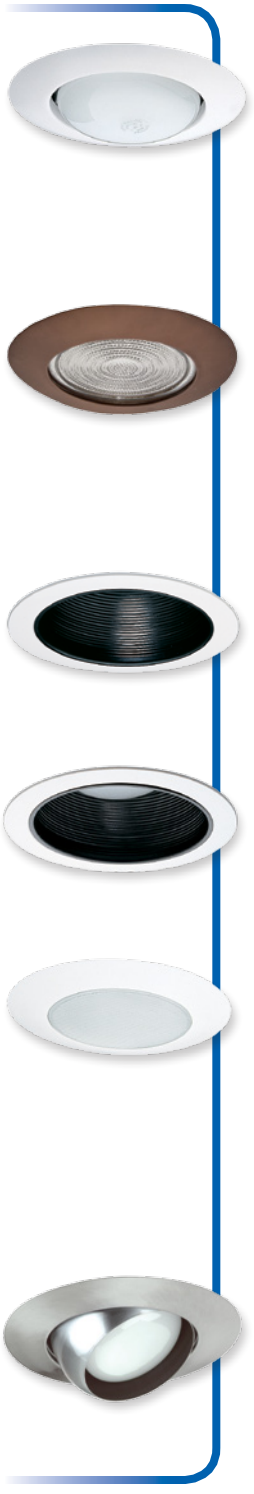

OPEN TRIM • 150W | PAR38/BR40

Item NO.	Description	Dimensions
17501BZ	BRONZE	OD: 8"
17501PW	PEWTER	
17501PB	POLISHED BRASS	
17501OB	OIL-RUBBED BRONZE	
17501WH	WHITE (shown)	



LEXAN SHOWER | FRESNEL LENS • 60W | A19

Item NO.	Description	Dimensions
17502BZ	BRONZE (shown)	OD: 8"
17502OB	OIL-RUBBED BRONZE	
17502WH	WHITE (WITH METAL TRIM RING)	
	ALSO AVAILABLE	
17572	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED



BAFFLE • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17503	BLACK	OD: 8"
17503SP	SINGLE PIECE	



BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17504	BLACK	OD: 8"
17504SP	SINGLE PIECE	



LEXAN SHOWER | ALBALITE LENS • 60W | A19

Item NO.	Description	Dimensions
17505BZ	BRONZE	OD: 8"
17505NK	NICKEL	
17505OB	OIL-RUBBED BRONZE	
17505WH	WHITE (WITH METAL TRIM RING) (shown)	
	ALSO AVAILABLE	
17575	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED



EYEBALL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17506BZ	BRONZE	OD: 8"
17506NK	NICKEL (shown)	
17506PB	POLISHED BRASS	
17506OB	OIL-RUBBED BRONZE	
17506WH	WHITE	



ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

TRIMS

FOR 17004 & 17004R

EYEBALL • 75W | BR30/PAR30

Item NO.	Description
17508BZ	BRONZE
17508NK	NICKEL
17508PB	POLISHED BRASS
17508PW	PEWTER
17508OB	OIL-RUBBED BRONZE
17508WH	WHITE (shown)

Dimensions: OD: 8″



LEXAN SHOWER | DROP OPAL • 60W | A19

Item NO.	Description
17509	WHITE (WITH METAL TRIM RING)
	ALSO AVAILABLE
17579	WHITE (WITH PLASTIC RING)

Dimensions: OD: 8″

WET LOCATION RATED



BAFFLE • 150W | BR40/PAR38

Item NO.	Description
17510BZ	BRONZE
17510OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)
17510OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)
17510	WHITE (shown)
17510SP	WHITE- SINGLE PIECE (OD: 7 1/2″)

Dimensions: OD: 8″



BAFFLE • 75W | BR30/PAR30

Item NO.	Description
17511BZ	BRONZE
17511NK	NICKEL (shown)
17511OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)
17511OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)
17511	WHITE
17511SP	WHITE-SINGLE PIECE
17511SPBK	BLACK-SINGLE PIECE NEW

Dimensions: OD: 8″



SPECULAR • 75W | BR30/PAR30

Item NO.	Description
17513	GOLD (shown)

Dimensions: OD: 7″



SPECULAR • 75W | BR30/PAR30

Item NO.	Description
17514	BLACK

Dimensions: OD: 7″



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

TRIMS

FOR 17004 & 17004R

SPECULAR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17515	CLEAR	OD: 7"



REGRESSED EYEBALL/BLACK BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17516	WHITE	OD: 7 1/8" ADJUSTABLE UP TO 30°



WALL WASH • 60W | A19

Item NO.	Description	Dimensions
17517	WHITE	OD: 8"



REGRESSED EYEBALL/WHITE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17519	WHITE	OD: 7 1/8" ADJUSTABLE UP TO 30°



REFLECTOR/BLACK BAFFLE • 60W | A19

Item NO.	Description	Dimensions
17520CL	CLEAR (shown)	OD: 7 1/8"
17520CLWH	CLEAR (WHITE/BAFFLE)	



PIN HOLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17521	WHITE	OD: 8"



BAFFLE/FRESNEL LENS • 60W | A19

Item NO.	Description	Dimensions
17522BK	BLACK (shown)	OD: 7 1/8"
17522WH	WHITE	



BAFFLE/ALBALITE LENS • 60W | A19

Item NO.	Description	Dimensions
17523BK	BLACK (WHITE RING)	OD: 7"
17523WH	WHITE (shown)	



ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

TRIMS

FOR 17004 & 17004R

EYEBALL/BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17526BK	BLACK/BLACK BAFFLE	OD: 8″
17526OB	OIL-RUBBED BRONZE	ADJUSTABLE UP TO 30°
17526WH	WHITE (shown)	



WALL WASH/BLACK BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17527	WHITE	OD: 7 1/4″



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

17014A
AIRTIGHT SHALLOW HOUSING

Suitable for direct contact with insulation

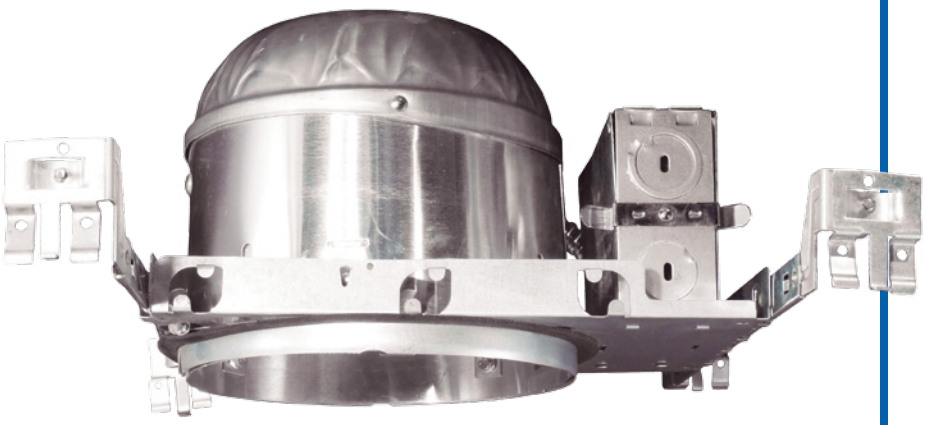

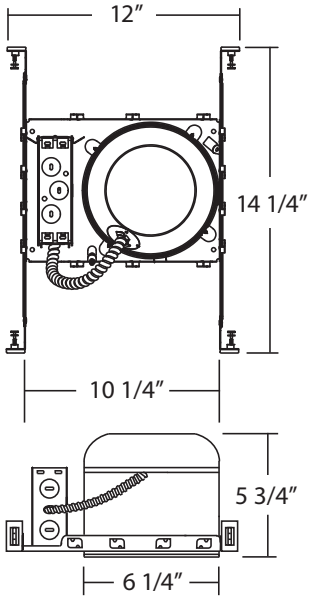

DESCRIPTION
Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.

HOUSING
Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
5 3/4" height allows use in 2" x 6" joist construction.

PLASTER FRAME
Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX
Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS
Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS
UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

17014AR

REMODEL AIRTIGHT SHALLOW HOUSING

Suitable for direct contact with insulation

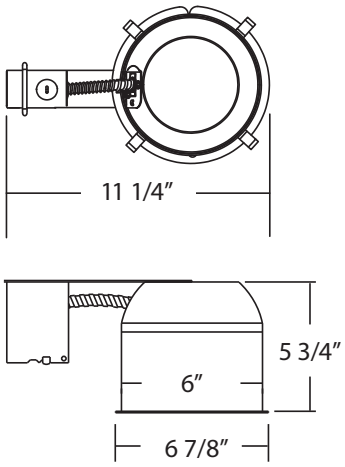

DESCRIPTION

Suitable for remodel construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
5 3/4" height allows use in 2" x 6" joist construction.
Will adjust to accommodate up to 1/2" of sheet rock.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS
FOR 17014A & 17014AR

LEXAN SHOWER | FRESNEL LENS • 60W | A19

Item NO.	Description	Dimensions
17502BZ	BRONZE (shown)	OD: 8"
17502OB	OIL-RUBBED BRONZE	
17502WH	WHITE (WITH METAL TRIM RING)	
	ALSO AVAILABLE	
17572	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED





BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17504	BLACK	OD: 8"
17504SP	SINGLE PIECE	



LEXAN SHOWER | ALBALITE LENS • 60W | A19

Item NO.	Description	Dimensions
17505BZ	BRONZE	OD: 8"
17505NK	NICKEL	
17505OB	OIL-RUBBED BRONZE	
17505WH	WHITE (WITH METAL TRIM RING) (shown)	
	ALSO AVAILABLE	
17575	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED



EYEBALL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17506BZ	BRONZE	OD: 8"
17506NK	NICKEL (shown)	
17506PB	POLISHED BRASS	
17506OB	OIL-RUBBED BRONZE	
17506WH	WHITE	



EYEBALL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17508BZ	BRONZE (shown)	OD: 8"
17508NK	NICKEL	
17508PB	POLISHED BRASS	
17508PW	PEWTER	
17508OB	OIL-RUBBED BRONZE	
17508WH	WHITE	



LEXAN SHOWER | DROP OPAL • 60W | A19

Item NO.	Description	Dimensions
17509	WHITE (WITH METAL TRIM RING)	OD: 8"
	ALSO AVAILABLE	
17579	WHITE (WITH PLASTIC RING)	

WET LOCATION RATED



ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

TRIMS

FOR 17014A & 17014AR

BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17511BZ	BRONZE	OD: 8"
17511NK	NICKEL (shown)	
17511OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)	
17511OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)	
17511	WHITE	
17511SP	WHITE-SINGLE PIECE	
17511SPBK	BLACK-SINGLE PIECE NEW	



SPECULAR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17513	GOLD (shown)	OD: 7"



SPECULAR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17514	BLACK	OD: 7"



SPECULAR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17515	CLEAR	OD: 7"



REGRESSED EYEBALL/BLACK BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17516	WHITE	OD: 7 1/8" ADJUSTABLE UP TO 30⁰



WALL WASH • 60W | A19

Item NO.	Description	Dimensions
17517	WHITE	OD: 8"



REGRESSED EYEBALL/WHITE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17519	WHITE	OD: 7 1/8" ADJUSTABLE UP TO 30⁰



REFLECTOR/BLACK BAFFLE • 60W | A19

Item NO.	Description	Dimensions
17520CL	CLEAR (shown)	OD: 7 1/8"
17520CLWH	CLEAR (WHITE/BAFFLE)	



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

TRIMS
FOR 17014A & 17014AR

PIN HOLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17521	WHITE	OD: 8″



BAFFLE/FRESNEL LENS • 60W | A19

Item NO.	Description	Dimensions
17522BK	BLACK (shown)	OD: 7 1/8″
17522WH	WHITE	



BAFFLE/ALBALITE LENS • 60W | A19

Item NO.	Description	Dimensions
17523BK	BLACK (WHITE RING)	OD: 7″
17523WH	WHITE (shown)	



EYEBALL/BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17526BK	BLACK/BLACK BAFFLE	OD: 8″
17526OB	OIL-RUBBED BRONZE	ADJUSTABLE UP TO 30°
17526WH	WHITE (shown)	



WALL WASH/BLACK BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17527	WHITE	OD: 7 1/4″



REFLECTOR CONE • 75W | R30/PAR30

Item NO.	Description	Dimensions
17580	White	OD: 8″



Helpful Hints: All IC housings can be used in direct contact with insulation. If you are planning to use cellulose/ wet spray type insulation, call the factory for the recommended housing.

ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

17009A
AIRTIGHT HOUSING

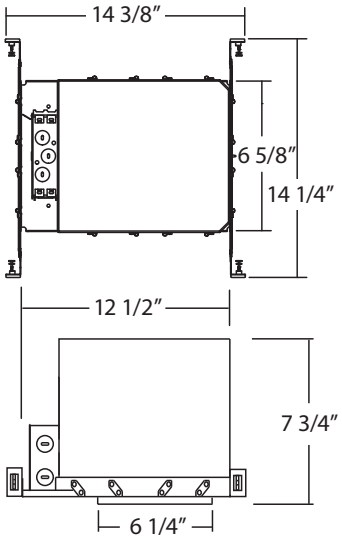

Suitable for direct contact with insulation

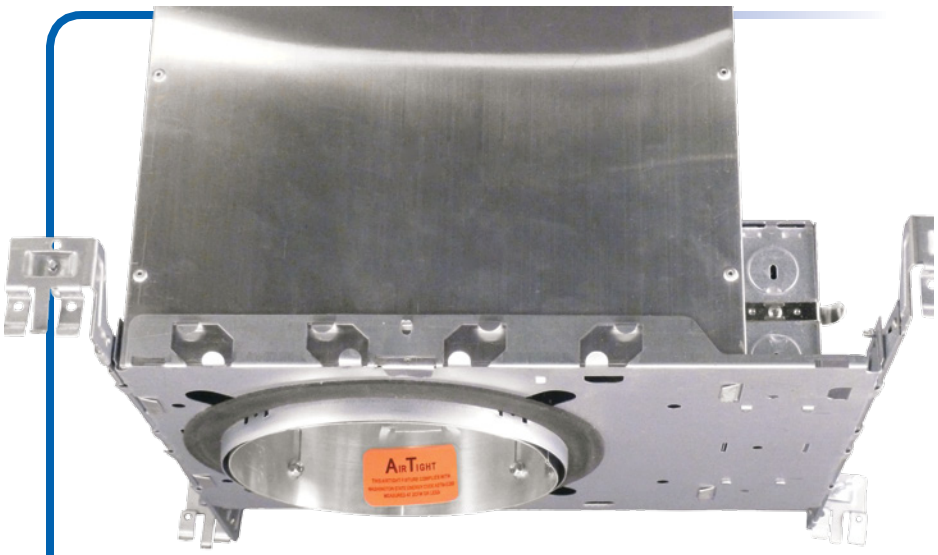

DESCRIPTION
Suitable for new construction in residential and commercial applications.
Rated for 100W MAX.
IC rated. Suitable for direct contact with insulation.

HOUSING
Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
7 3/4" height allows use in 2" x 8" joist construction.

PLASTER FRAME
Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX
Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS
Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS
UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS
FOR 17009A

OPEN TRIM • 150W | PAR38/BR40

Item NO.	Description	Dimensions
17501BZ	BRONZE	OD: 8"
17501PW	PEWTER	
17501PB	POLISHED BRASS	
17501OB	OIL-RUBBED BRONZE	
17501WH	WHITE (shown)	



LEXAN SHOWER | FRESNEL LENS • 60W | A19

Item NO.	Description	Dimensions
17502BZ	BRONZE (shown)	OD: 8"
17502OB	OIL-RUBBED BRONZE	
17502WH	WHITE (WITH METAL TRIM RING)	
	ALSO AVAILABLE	
17572	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED



BAFFLE • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17503	BLACK	OD: 8"
17503SP	SINGLE PIECE	





BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17504	BLACK	OD: 8"
17504SP	SINGLE PIECE	



LEXAN SHOWER | ALBALITE LENS • 60W | A19

Item NO.	Description	Dimensions
17505BZ	BRONZE	OD: 8"
17505NK	NICKEL	
17505OB	OIL-RUBBED BRONZE	
17505WH	WHITE (WITH METAL TRIM RING) (shown)	
	ALSO AVAILABLE	
17575	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED



EYEBALL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17506BZ	BRONZE	OD: 8"
17506NK	NICKEL (shown)	
17506PB	POLISHED BRASS	
17506OB	OIL-RUBBED BRONZE	
17506WH	WHITE	



EYEBALL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17508BZ	BRONZE	OD: 8"
17508NK	NICKEL (shown)	
17508PB	POLISHED BRASS	
17508PW	PEWTER	
17508OB	OIL-RUBBED BRONZE	
17508WH	WHITE	



ABZ Aged Bronze | **BK** Black | **BZ** Bronze | **CH** Chrome | **GD** Gold | **NK** Nickel | **OB** Oil-Rubbed Bronze | **PB** Polished Brass | **PW** Pewter

TRIMS
FOR 17009A

LEXAN SHOWER | DROP OPAL • 60W | A19

Item NO.	Description	Dimensions
17509	WHITE (WITH METAL TRIM RING)	OD: 8"
	ALSO AVAILABLE	
17579	WHITE (WITH PLASTIC RING)	

WET LOCATION RATED



BAFFLE • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17510BZ	BRONZE	OD: 8"
17510OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)	
17510OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING) (shown)	
17510	WHITE	
17510SP	WHITE- SINGLE PIECE (OD: 7 1/2")	



BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17511BZ	BRONZE	OD: 8"
17511NK	NICKEL (shown)	
17511OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZR RING)	
17511OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)	
17511	WHITE	
17511SP	WHITE-SINGLE PIECE	
17511SPBK	BLACK-SINGLE PIECE NEW	



SPECULAR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17513	GOLD (shown)	OD: 7"



SPECULAR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17514	BLACK	OD: 7"



SPECULAR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17515	CLEAR	OD: 7"



REGRESSED EYEBALL/BLACK BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17516	WHITE	OD: 7 1/8" ADJUSTABLE UP TO 30°



ABZ Aged Bronze | BK Black | BZ Bronze | CH Chrome | GD Gold | NK Nickel | OB Oil-Rubbed Bronze | PB Polished Brass | PW Pewter

NICOR® Shining Brighter™

TRIMS
FOR 17009A

WALL WASH • 60W | A19

Item NO.	Description	Dimensions
17517	WHITE	OD: 8"



SPECULAR CONE • 60W | A19

Item NO.	Description	Dimensions
17518CL	CLEAR (shown)	OD: 7"
17518WH	WHITE	



REGRESSED EYEBALL/WHITE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17519	WHITE	OD: 7 1/8" ADJUSTABLE UP TO 30⁰



REFLECTOR/BLACK BAFFLE • 60W | A19

Item NO.	Description	Dimensions
17520CL	CLEAR (shown)	OD: 7 1/8"
17520CLWH	CLEAR (WHITE/BAFFLE)	



PIN HOLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17521	WHITE	OD: 8"



BAFFLE/FRESNEL LENS • 60W | A19

Item NO.	Description	Dimensions
17522BK	BLACK (shown)	OD: 7 1/8"
17522WH	WHITE	



BAFFLE/ALBALITE LENS • 60W | A19

Item NO.	Description	Dimensions
17523BK	BLACK (WHITE RING)	OD: 7"
17523WH	WHITE (shown)	



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

TRIMS
FOR 17009A

EYEBALL/BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17526BK	BLACK/BLACK BAFFLE	OD: 8″
17526OB	OIL-RUBBED BRONZE	ADJUSTABLE UP TO 30°
17526WH	WHITE (shown)	



WALL WASH/BLACK BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17527	WHITE	OD: 7 1/4″



OPEN SPLAY TRIM • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17545NK	NICKEL	OD: 8″
17545A	WHITE	



Note: Single piece

CONE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17550ABZ	BRONZE	OD: 7 1/2″
17550A	WHITE	AIRTIGHT
17550OB	OIL-RUBBED BRONZE (shown)	
17550ABK	BLACK NEW	
17550ANK	NICKEL NEW	



CONE BAFFLE (WET LOCATION) • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17550ABKWL	BLACK	OD: 7 1/2″
17550ANKWL	NICKEL	AIRTIGHT
17550AOBWL	OIL-RUBBED BRONZE (SHOWN)	
17550AWL	WHITE	

WET LOCATION RATED



CONE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17550ACLP	WHITE	OD: 7 1/2″
		AIRTIGHT



CONE BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17551A	BLACK	OD: 7 1/2″
		AIRTIGHT



ABZ Aged Bronze | BK Black | BZ Bronze | CH Chrome | GD Gold | NK Nickel | OB Oil-Rubbed Bronze | PB Polished Brass | PW Pewter

NICOR® Shining Brighter™

TRIMS
FOR 17009A

CONE REFLECTOR • 90W | BR40/PAR38

Item NO.	Description	Dimensions
17552A	CLEAR	OD: 7″
		AIRTIGHT



CONE REFLECTOR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17553A	GOLD	OD: 7″
		AIRTIGHT



RIBBED REFLECTOR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17554	CLEAR	OD: 7 3/4″



RIBBED REFLECTOR • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17555	GOLD	OD: 7 3/4″



ADJUSTABLE REFLECTOR GIMBAL • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17556BK	BLACK (shown)	OD: 7 1/4″
17556BFLB	BLACK BAFFLE	ADJUSTABLE UP TO 30°
17556BFLW	WHITE BAFFLE	
17556CL	CLEAR	
17556GD	GOLD	



GIMBAL RING • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17558CL	CLEAR	OD: 8″
17558GD	GOLD	ADJUSTABLE UP TO 30°
17558NK	NICKEL (shown)	
17558OB	OIL-RUBBED BRONZE	
17558WH	WHITE	



WALL WASH • 50W | R20/PAR20

Item NO.	Description	Dimensions
17559BK	BLACK (shown)	OD: 8″
17559WH	WHITE	



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

TRIMS
FOR 17009A

WALL WASH • 50W | R20/PAR30

Item NO.	Description	Dimensions	
17560WH	WHITE	OD: 8"	



OPEN TRIM/SOCKET BRACKET • 75W | BR30/PAR30

Item NO.	Description	Dimensions	
17562	WHITE	OD: 8"	



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW
Aged Bronze	Black	Bronze	Chrome	Gold	Nickel	Oil-Rubbed Bronze	Polished Brass	Pewter

NICOR® Shining Brighter™

17020A
SLOPE CEILING HOUSING

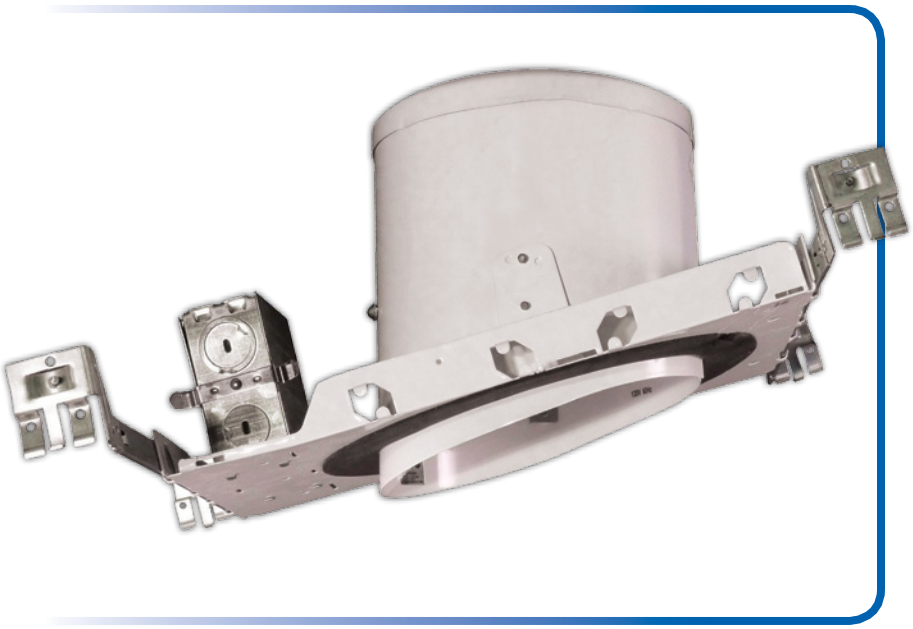

Insulation must be kept a minimum of 3" from housing

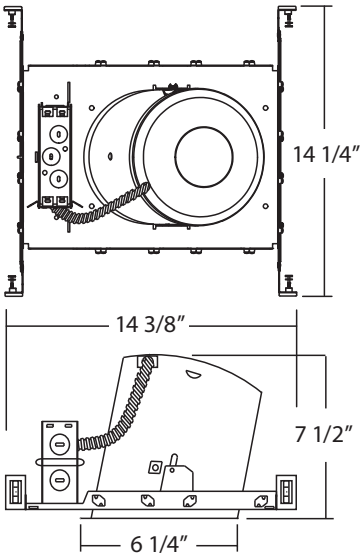

DESCRIPTION

Suitable for new construction in residential and commercial applications.
Designed for slope ceiling installation for ceilings from 2/12 to 6/12 pitch. The socket pivots to allow the lamp to be aimed straight down regardless of ceiling pitch.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

17020RA

REMODEL SLOPE CEILING HOUSING

Insulation must be kept a minimum of 3" from housing

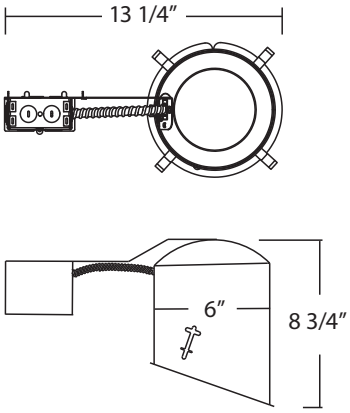

DESCRIPTION

Suitable for new construction in residential and commercial applications.
Designed for slope ceiling installation for ceilings from 2/12 to 6/12 pitch. The socket pivots to allow the lamp to be aimed straight down regardless of ceiling pitch.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
8 3/4" height allows use in 2" x 8" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS

FOR 17020A, 17020RA

BAFFLE • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17711	WHITE	OD: 8″
17711OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZE RING)	
17711OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING) (shown)	



SPECULAR • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17715CL	CLEAR (shown)	OD: 8″
17715GD	GOLD	



EYEBALL/BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17526BK	BLACK	OD: 8″
17526OB	OIL-RUBBED BRONZE	ADJUSTABLE UP TO 30°
17526WH	WHITE (shown)	



BAFFLE • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17704	BLACK	OD: 8″



SLOPE CONVERSION CHART

Slope	2/12	3/12	4/12	5/12	6/12
Degrees	*10*	*14*	*18.5*	*22.5*	*26.5*
Slope	7/12	8/12	9/12	10/12	11/12
Degrees	*30*	*33.5*	*37*	*40*	*42.5*

ABZ *Aged Bronze* | **BK** *Black* | **BZ** *Bronze* | **CH** *Chrome* | **GD** *Gold* | **NK** *Nickel* | **OB** *Oil-Rubbed Bronze* | **PB** *Polished Brass* | **PW** *Pewter*

17022A
SLOPE CEILING HOUSING

Suitable for direct contact with insulation

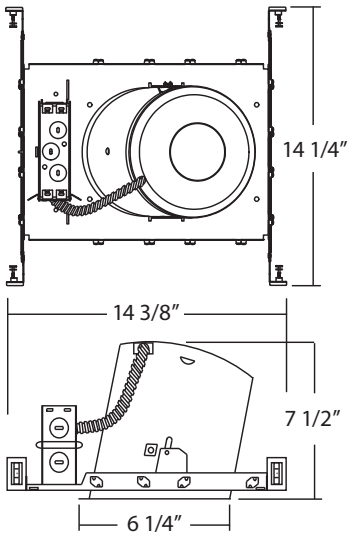

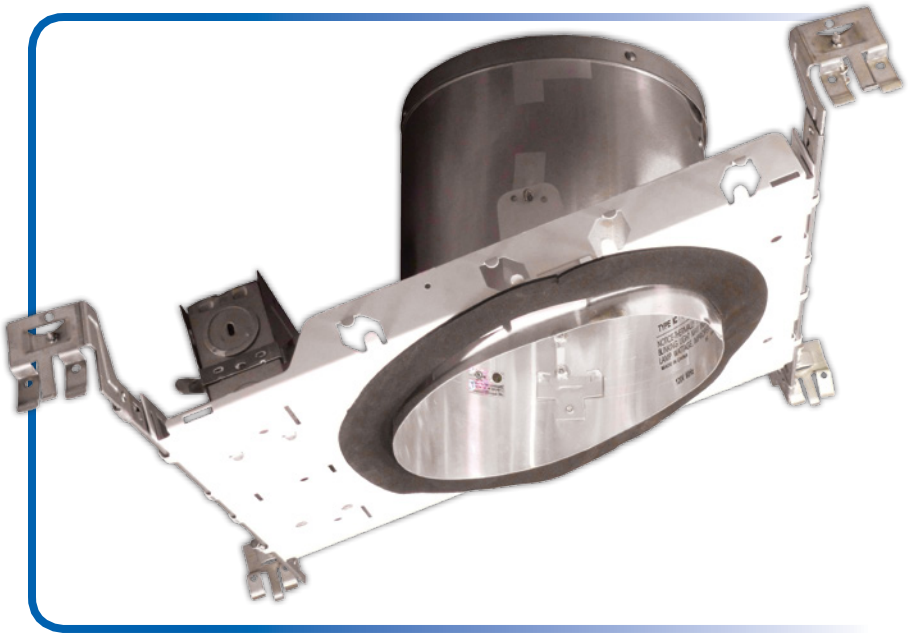

DESCRIPTION
Suitable for new construction in residential and commercial applications.
Designed for slope ceiling installation for ceilings from 2/12 to 6/12 pitch. The socket pivots to allow the lamp to be aimed straight down regardless of ceiling pitch.
IC rated. Suitable for direct contact with insulation.

HOUSING
Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
7 1/2" height allows use in 2" x 8" joist construction.

PLASTER FRAME
Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX
Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS
Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS
UL listed for direct contact with insulation.
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

NICOR Shining Brighter™

17022RA

REMODEL SLOPE CEILING HOUSING

Suitable for direct contact with insulation

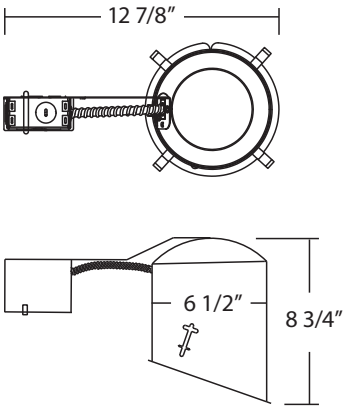

DESCRIPTION

Suitable for remodel construction in residential and commercial applications.
Designed for slope ceiling installation for ceilings from 2/12 to 6/12 pitch. The socket pivots to allow the lamp to be aimed straight down regardless of ceiling pitch.
IC rated. Suitable for direct contact with insulation.

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
8 3/4" height allows use in 2" x 8" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL listed for direct contact with insulation.
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS

FOR 17022A, 17023A & 17022RA

BAFFLE • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17711	WHITE	OD: 8″
17711OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZE RING)	
17711OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING) (shown)	



SPECULAR • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17715CL	CLEAR (shown)	OD: 8″
17715GD	GOLD	



EYEBALL/BAFFLE • 75W | BR30/PAR30

Item NO.	Description	Dimensions
17526BK	BLACK	OD: 8″
17526OB	OIL-RUBBED BRONZE	ADJUSTABLE UP TO 30°
17526WH	WHITE (shown)	



BAFFLE • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17704	BLACK	OD: 8″



SLOPE CONVERSION CHART

Slope	2/12	3/12	4/12	5/12	6/12
Degrees	*10*	*14*	*18.5*	*22.5*	*26.5*
Slope	7/12	8/12	9/12	10/12	11/12
Degrees	*30*	*33.5*	*37*	*40*	*42.5*

ABZ *Aged Bronze* | **BK** *Black* | **BZ** *Bronze* | **CH** *Chrome* | **GD** *Gold* | **NK** *Nickel* | **OB** *Oil-Rubbed Bronze* | **PB** *Polished Brass* | **PW** *Pewter*

NICOR® Shining Brighter™

17025SSA

SUPER-SLOPED CEILING AIRTIGHT HOUSING

Suitable for direct contact with insulation

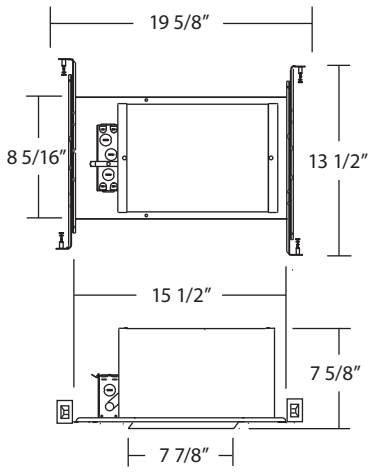

DESCRIPTION

Suitable for new construction in residential and commercial applications.
Designed for slope ceiling installation for ceilings from 7/12 to 12/12 pitch. The socket pivots to allow the lamp to be aimed straight down regardless of ceiling pitch.
IC rated. Suitable for direct contact with insulation.
150 watt maximum lamp rating

HOUSING

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
7 5/8" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

17026SSRA

SUPER-SLOPED CEILING REMODEL HOUSING

INSULATION MUST BE KEPT A MINIMUM OF 3" FROM HOUSING

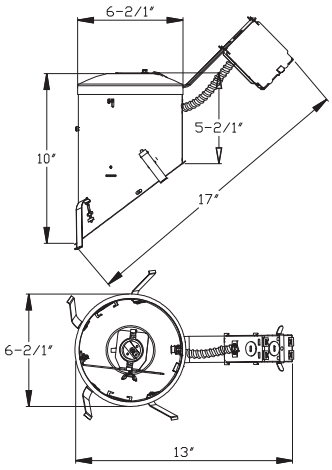

DESCRIPTION

Suitable for new construction in residential and commercial applications.
Designed for slope ceiling installation for ceilings from 7/12 to 12/12 pitch. The socket pivots to allow the lamp to be aimed straight down regardless of ceiling pitch.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
Adjustable socket bracket assures proper and consistent lamp positioning.
8 3/4" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS

FOR 17025SSA & 17026SSRA

SUPER SLOPE BAFFLE • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17730BK-WH	BLACK (WITH WHITE TRIM RING)	OD: 9 1/4"
17730OB-ABZ	OIL-RUBBED BRONZE (WITH AGED BRONZE TRIM RING)	
17730OB	OIL-RUBBED BRONZE (WITH OB TRIM RING)	
17730WH	WHITE (WITH WHITE TRIM RING) (shown)	



SUPER SLOPE REFLECTOR CONE • 150W | BR40/PAR38

Item NO.	Description	Dimensions
17731BK-WH	BLACK (WITH WHITE TRIM RING)	OD: 9 1/4"
17731CL-WH	CLEAR (WITH WHITE TRIM RING) (shown)	
17731WH	WHITE (WITH WHITE TRIM RING)	



SUPER SLOPE SHOWER TRIM • 50W | BR30/PAR30 - FOR IC 17025SSA • 75W | A19/PAR30 - FOR 17026SSRA

Item NO.	Description	Dimensions
17733BK-WH	BLACK (WITH WHITE TRIM RING)	OD: 9"
17733OB-ABZ	OIL-RUBBED BRONZE (WITH AGED BRONZE TRIM RING)	
17733OB	OIL-RUBBED BRONZE (WITH OB TRIM RING)	
17733WH	WHITE (WITH WHITE TRIM RING) (shown)	



SLOPE CONVERSION CHART

Slope	2/12	3/12	4/12	5/12	6/12
Degrees	*10*	*14*	*18.5*	*22.5*	*26.5*
Slope	7/12	8/12	9/12	10/12	11/12
Degrees	*30*	*33.5*	*37*	*40*	*42.5*

Sloped recessed fixtures allow for a lamp to be positioned straight down from pitched ceiling applications. Available in IC and NON-IC. New construction or remodel installations.

ABZ *Aged Bronze* | **BK** *Black* | **BZ** *Bronze* | **CH** *Chrome* | **GD** *Gold* | **NK** *Nickel* | **OB** *Oil-Rubbed Bronze* | **PB** *Polished Brass* | **PW** *Pewter*

17800
SQUARE HOUSING

Insulation must be kept a minimum of 3" from housing

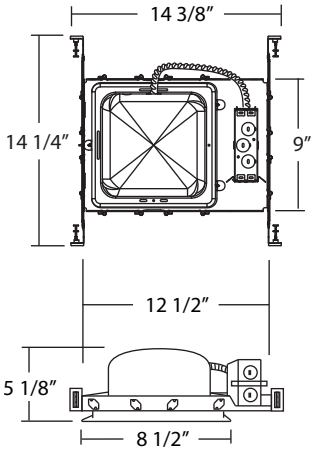

Shown complete with trim, sold separately.

DESCRIPTION

Suitable for new construction in residential and commercial applications.
A square housing for use with up to 100W A19 lamps.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Aluminum construction provides greater heat dissipation.
Integral thermal protector guards against improper lamping and misuse of insulation materials.
5 1/8" height allows use in 2" x 6" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

Trim Option
17800CG Cover and glass as shown in picture.

c UL us LISTED

NICOR FASTENER

13000
UNIVERSAL HOUSING

Insulation must be kept a minimum of 3" from housing

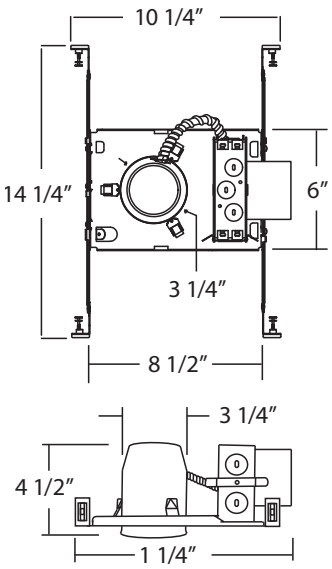

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Transformer includeds integral thermal protector guards against improper lamping and misuse of insulation materials.
Use low voltage 20W - 50W MR-16 or JC type lamps (12V) (not included).
Class H 50W transformer, step down from 120V to 12V.
Use dimmers specifically designed for low voltage magnetic transformers.
4 1/2" height allows use in 2" x 6" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box. Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

NICOR FASTENER

13000R
REMODEL HOUSING

Insulation must be kept a minimum of 3" from housing

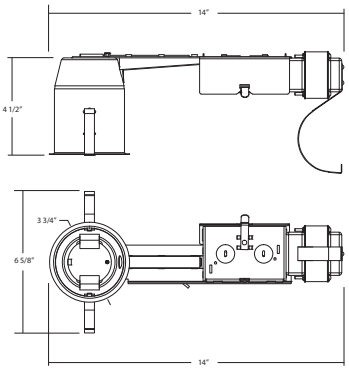

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Transformer includes integral thermal protector guards against improper lamping and misuse of insulation materials.
Use low voltage 20W - 50W MR-16 or JC type lamps (12V) (not included).
Class H 50W transformer, step down from 120V to 12V.
Use dimmers specifically designed for low voltage magnetic transformers.
4 1/2" height allows use in 2" x 6" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.
LISTINGS
UL damp location
UL feed-through
CUL

c UL us LISTED

NICOR FASTENER

NICOR® Shining Brighter™

13102
UNIVERSAL HOUSING

Suitable for direct contact with insulation

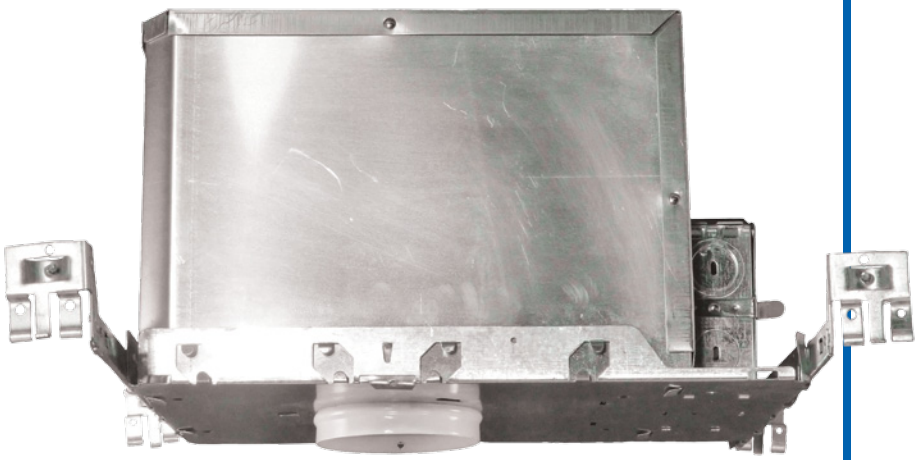

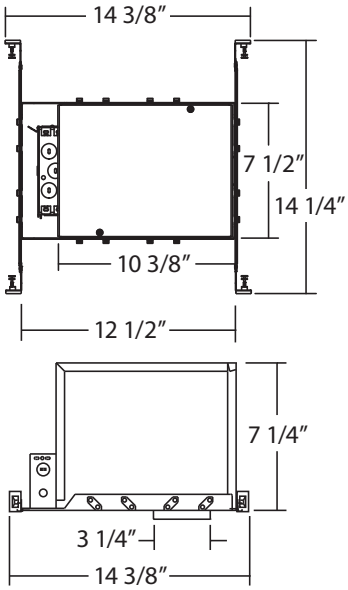

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.

HOUSING

Aluminum construction provides greater heat dissipation.
Transformer includes integral thermal protector guards against improper lamping and misuse of insulation materials.
Use low voltage 20W - 50W MR-16 or JC type lamps (12V) (not included).
Use dimmers specifically designed for low voltage magnetic transformers.
7 1/4" height allows use in 2'X8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation
UL damp location
UL feed-through
CUL

c UL us LISTED

NICOR FASTENER

TRIMS

FOR 13000, 13000R, & 13102

WALL WASH • 50W | 12V MR-16

Item NO.	Description	Dimensions
13001BK	BLACK	OD: 3 3/4"
13001CH	CROME (shown)	
13001GD	GOLD	
13001WH	WHITE	



BAFFLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
13002BK	BLACK (WHITE RING)	OD: 3 3/4"
13002OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZE RING) (shown)	
13002OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)	
13002WH	WHITE (WHITE RING)	



RIBBED REFLECTOR • 50W | 12V MR-16

Item NO.	Description	Dimensions
13003BK	BLACK	OD: 3 3/4"
13003WH	WHITE (shown)	



GIMBAL RING • 50W | 12V MR-16

Item NO.	Description	Dimensions
13007BK	BLACK	OD: 3 3/4"
13007CH	CHROME	
13007OB	OIL-RUBBED BRONZE	
13007WH	WHITE (shown)	



SLOTTED APERTURE • 50W | 12V MR-16

Item NO.	Description	Dimensions
13008BK	BLACK (shown)	OD: 3 3/4"
13008WH	WHITE	



REFLECTOR • 50W | 12V MR-16

Item NO.	Description	Dimensions
13025BK	BLACK	OD: 4"
13025GD	GOLD	
13025WH	WHITE	





DONUT GLASS • 50W | 12V MR-16

Item NO.	Description	Dimensions
13030PK	PINK (shown)	OD: 4 1/4"
13030BL	BLUE	



ABZ AGED BRONZE | BK BLACK | BZ BRONZE | CH CHROME | GD GOLD | NK NICKEL | OB OIL-RUBBED BRONZE | PB POLISHED BRASS | PW PEWTER | WHZ WHEAT HAZE

NICOR® Shining Brighter™

14000A
UNIVERSAL AIRTIGHT HOUSING

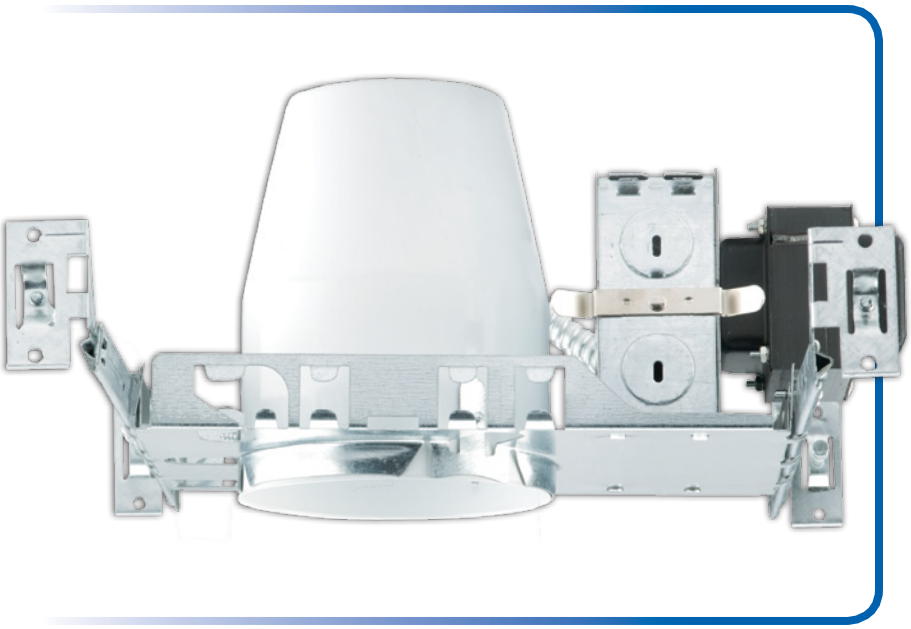

Insulation must be kept a minimum of 3" from housing

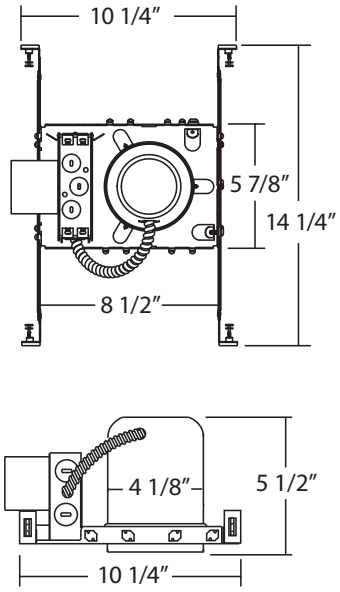

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Transformer includes integral thermal protector guards against improper lamping and misuse of insulation materials.
Use low voltage 20W - 50W MR-16 or JC type lamps (12V) (not included).
Class H 50W transformer, step down from 120V to 12V.
Use dimmers specifically designed for low voltage magnetic transformers.
5 1/2" height allows use in 2" x 6" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

14101AR

REMODEL AIRTIGHT HOUSING

Insulation must be kept a minimum of 3" from housing

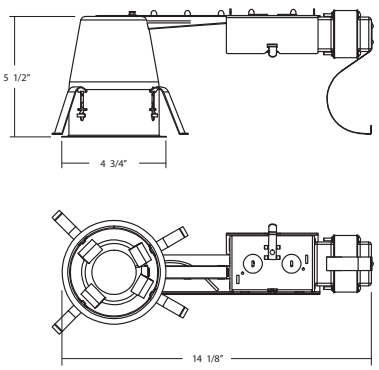

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Transformer includes integral thermal protector guards against improper lamping and misuse of insulation materials.
Use low voltage 20W - 50W MR-16 or JC type lamps (12V) (not included).
Class H 50W transformer, step down from 120V to 12V.
Use dimmers specifically designed for low voltage magnetic transformers.
5 1/2" height allows use in 2" x 6" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

14000AET

UNIVERSAL AIRTIGHT HOUSING (ELECTRONIC TRANSFORMER)

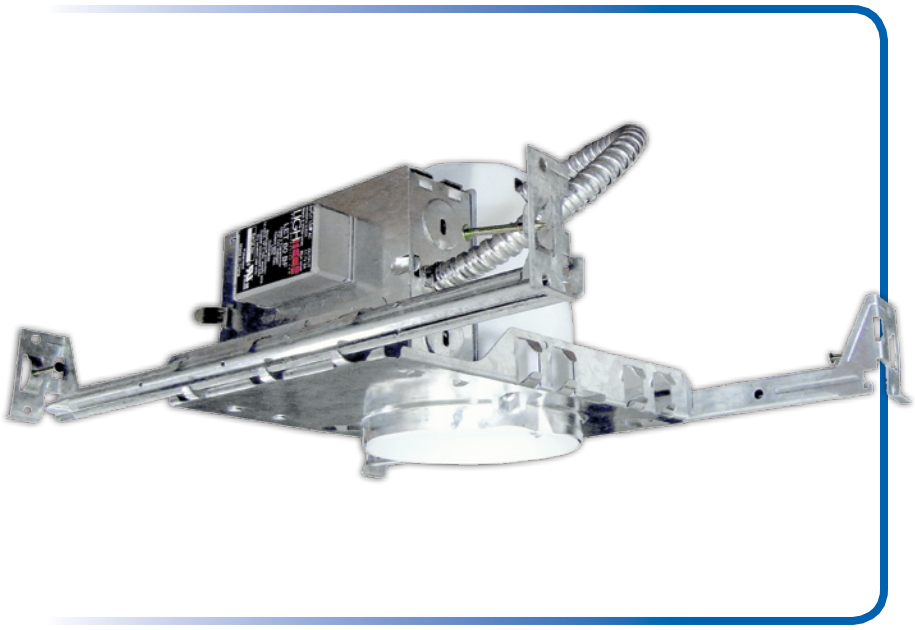

Insulation must be kept a minimum of 3" from housing

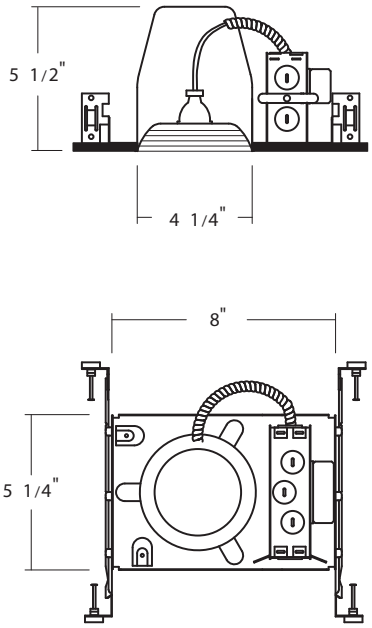

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Transformer includes integral thermal protector guards against improper lamping and misuse of insulation materials.
Use low voltage 20W - 50W MR-16 or JC type lamps (12V) (not included).
Class 2 50W electronic transformer, step down from 120V to 12V.
Use dimmers specifically designed for low voltage electronic transformers.
5 1/2" height allows use in 2" x 6" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

14101ARET

REMODEL AIRTIGHT HOUSING (ELECTRONIC TRANSFORMER)

Insulation must be kept a minimum of 3" from housing

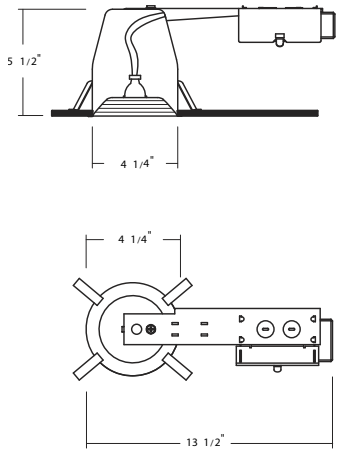

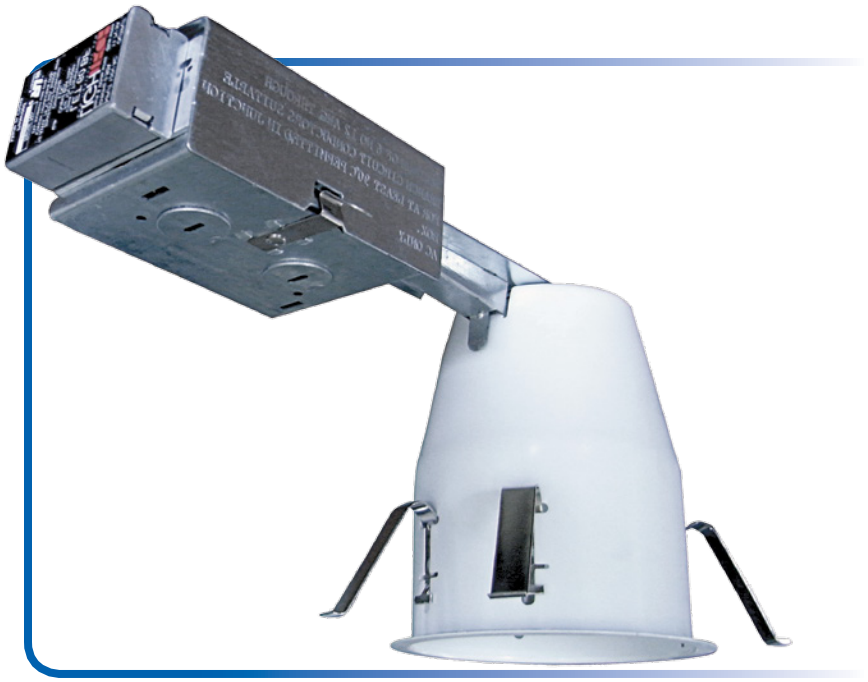

DESCRIPTION

Suitable for new construction in residential and commercial applications.
NON-IC. Insulation must be kept a minimum of 3" from housing.

HOUSING

Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Transformer includes integral thermal protector guards against improper lamping and misuse of insulation materials.
Use low voltage 20W - 50W MR-16 or JC type lamps (12V) (not included).
Class 2 50W electronic transformer, step down from 120V to 12V.
Use dimmers specifically designed for low voltage electronic transformers.
5 1/2" height allows use in 2" x 6" joist construction.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts.
Supplied with three push-in wire connectors.

LISTINGS

UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS

FOR 14000A, 14101AR, 14000AET, & 14101ARET

WALL WASH • 50W | 12V MR-16

Item NO.	Description	Dimensions
14001BK	BLACK	OD: 5″
14001WH	WHITE (shown)	



BAFFLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14002BK	BLACK (BLACK RING)	OD: 5″
14002BZ	BRONZE (WHITE RING)	
14002NK	NICKEL	
14002WH	WHITE (WHITE RING)	
14002OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZE RING)	
14002OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING) (shown)	



BAFFLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14003	BLACK	OD: 5″



SPECULAR • 50W | 12V MR-16

Item NO.	Description	Dimensions
14004	BLACK	OD: 5″



SPECULAR • 50W | 12V MR-16

Item NO.	Description	Dimensions
14005	CLEAR (shown)	OD: 5″
14020CL	CLEAR (WITH CHROME RING)	



EYEBALL/BAFFLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14006WH	WHITE (shown)	OD: 5″
14006OB	OIL-RUBBED BRONZE	
14006BK	BLACK	



SPECULAR • 50W | 12V MR-16

Item NO.	Description	Dimensions
14007	GOLD (shown)	OD: 5″
14020GD	CHROME (WITH GOLD RING)	



ABZ AGED BRONZE | BK BLACK | BZ BRONZE | CH CHROME | GD GOLD | NK NICKEL | OB OIL-RUBBED BRONZE | PB POLISHED BRASS | PW PEWTER | WHZ WHEAT HAZE

TRIMS

FOR 14000A, 14101AR, 14000AET, & 14101ARET

SLOTTED APERTURE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14008	POLISHED BRASS	OD: 5″



PIN HOLE/BLACK BAFFLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14009		OD: 5″



RETRACTABLE WALL WASH • 50W | 12V MR-16

Item NO.	Description	Dimensions
14011BZ	BRONZE	OD: 5″
14011CH	CHROME (shown)	
14011PB	POLISHED BRASS	
14011WH	WHITE	
14011OB	OIL-RUBBED BRONZE	



EYEBALL • 50W | 12V MR-16

Item NO.	Description	Dimensions
14015WH	WHITE	OD: 5″



WALL WASH • 50W | 12V MR-16

Item NO.	Description	Dimensions
14016WH	WHITE	OD: 5″
14016BK	BLACK	



PIN HOLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14019		OD: 5″



ABZ	BK	BZ	CH	GD	NK	OB	PB	PW	WHZ
AGED BRONZE	BLACK	BRONZE	CHROME	GOLD	NICKEL	OIL-RUBBED BRONZE	POLISHED BRASS	PEWTER	WHEAT HAZE

TRIMS

FOR 14000A, 14101AR, 14000AET, & 14101ARET

ADJUSTABLE DROP SPOT • 50W | 12V MR-16

Item NO.	Description	Dimensions
14021	WHITE	OD: 5″



LO-VOLT SQUARE TRIM/BAFFLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14022BK	BLACK	OD: 5″
14022NK	NICKEL	
14022OB	OIL-RUBBED BRONZE	
14022WH	WHITE (shown)	



LO-VOLT SQUARE TRIM/BAFFLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14023BK	BLACK	OD: 5″
14023NK	NICKEL	
14023OB	OIL-RUBBED BRONZE	
14023WH	WHITE (shown)	



SHOWER TRIM • 50W | 12V MR-16

Item NO.	Description	Dimensions
14509WH	WHITE	OD: 5″

WET LOCATION RATED



GIMBAL RING • 50W | 12V MR-16

Item NO.	Description	Dimensions
14558WH	WHITE	OD: 5″



Wet Location: Many NICOR trims are designed specifically for wet locations such as in showers or over tubs. Lamps are concealed behind a lens or diffuser. Portions of the fixture that are exposed to water vapor are manufactured of non-conductive and non-corrosive materials. Wet Location fixtures are well suited for outdoor porches and breezeways, too.

ABZ AGED BRONZE | BK BLACK | BZ BRONZE | CH CHROME | GD GOLD | NK NICKEL | OB OIL-RUBBED BRONZE | PB POLISHED BRASS | PW PEWTER | WHZ WHEAT HAZE

14102A
UNIVERSAL AIRTIGHT HOUSING

Suitable for direct contact with insulation

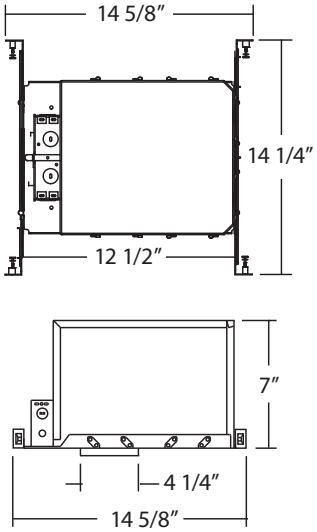

DESCRIPTION
Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.

HOUSING
Aluminum construction provides greater heat dissipation.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Washington State Energy Code approved to meet restricted airflow requirements.
Transformer includes integral thermal protector guards against improper lamping and misuse of insulation materials.
Use low voltage 20W - 50W MR-16 or JC type lamps (12V) (not included).
Class H 50W transformer, step down from 120V to 12V.
Use dimmers specifically designed for low voltage magnetic transformers.
7" height allows use in 2" x 8" joist construction.

PLASTER FRAME
Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX
Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS
Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS
UL listed for direct contact with insulation.
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

NICOR Shining Brighter™

14102AET

UNIVERSAL AIRTIGHT HOUSING (ELECTRONIC TRANSFORMER)

Suitable for direct contact with insulation

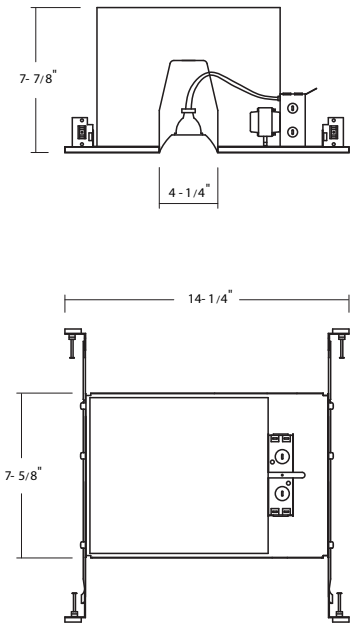

DESCRIPTION

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.

HOUSING

Aluminum construction provides greater heat dissipation.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Washington State Energy Code approved to meet restricted airflow requirements.
Transformer includes integral thermal protector guards against improper lamping and misuse of insulation materials.
Use low voltage 20W - 50W MR-16 or JC type lamps (12V) (not included).
Class 2 50W electronic transformer, step down from 120V to 12V.
Use dimmers specifically designed for low voltage magnetic transformers.
7" height allows use in 2" x 8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist.
Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

LISTINGS

UL listed for direct contact with insulation.
UL damp location
UL feed-through
CUL

c UL us LISTED

AIRTIGHT HOUSING

NICOR FASTENER

TRIMS

FOR 14102A & 14102AET

WALL WASH • 50W | 12V MR-16

Item NO.	Description	Dimensions
14001BK	BLACK	OD: 5″
14001WH	WHITE (shown)	



BAFFLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14002BK	BLACK (BLACK RING)	OD: 5″
14002BZ	BRONZE (WHITE RING)	
14002NK	NICKEL	
14002WH	WHITE (WHITE RING) (shown)	
14002OB-ABZ	OIL-RUBBED BRONZE (AGED BRONZE RING)	
14002OB-OB	OIL-RUBBED BRONZE (OIL-RUBBED BRONZE RING)	



BAFFLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14003	BLACK	OD: 5″



SPECULAR • 50W | 12V MR-16

Item NO.	Description	Dimensions
14004	BLACK	OD: 5″



SPECULAR • 50W | 12V MR-16

Item NO.	Description	Dimensions
14005	CLEAR	OD: 5″
14020CL	CLEAR (WITH CHROME RING)	



EYEBALL/BAFFLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14006WH	WHITE (shown)	OD: 5″
14006OB	OIL-RUBBED BRONZE	
14006BK	BLACK	



SPECULAR • 50W | 12V MR-16

Item NO.	Description	Dimensions
14007	GOLD (shown)	OD: 5″
14020GD	CHROME (WITH GOLD RING)	



ABZ AGED BRONZE | BK BLACK | BZ BRONZE | CH CHROME | GD GOLD | NK NICKEL | OB OIL-RUBBED BRONZE | PB POLISHED BRASS | PW PEWTER | WHZ WHEAT HAZE

TRIMS

FOR 14102A & 14102AET

SLOTTED APERTURE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14008	POLISHED BRASS	OD: 5″



PIN HOLE/BLACK BAFFLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14009		OD: 5″



RETRACTABLE WALL WASH • 50W | 12V MR-16

Item NO.	Description	Dimensions
14011BZ	BRONZE	OD: 5″
14011CH	CHROME (shown)	
14011PB	POLISHED BRASS	
14011WH	WHITE	
14011OB	OIL-RUBBED BRONZE	



EYEBALL • 50W | 12V MR-16

Item NO.	Description	Dimensions
14015WH	WHITE	OD: 5″



WALL WASH • 50W | 12V MR-16

Item NO.	Description	Dimensions
14016WH	WHITE	OD: 5″
14016BK	BLACK	



PIN HOLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14019		OD: 5″



ABZ AGED BRONZE | BK BLACK | BZ BRONZE | CH CHROME | GD GOLD | NK NICKEL | OB OIL-RUBBED BRONZE | PB POLISHED BRASS | PW PEWTER | WHZ WHEAT HAZE

TRIMS

FOR 14102A & 14102AET

ADJUSTABLE DROP SPOT • 50W | 12V MR-16

Item NO.	Description	Dimensions
14021	WHITE	OD: 5"



LO-VOLT SQUARE TRIM/BAFFLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14022BK	BLACK	OD: 5"
14022NK	NICKEL	
14022OB	OIL-RUBBED BRONZE	
14022WH	WHITE (shown)	



LO-VOLT SQUARE TRIM/BAFFLE • 50W | 12V MR-16

Item NO.	Description	Dimensions
14023BK	BLACK	OD: 5"
14023NK	NICKEL	
14023OB	OIL-RUBBED BRONZE	
14023WH	WHITE (shown)	



SHOWER TRIM • 50W | 12V MR-16

Item NO.	Description	Dimensions
14509WH	WHITE	OD: 5"

WET LOCATION RATED



GIMBAL RING • 50W | 12V MR-16

Item NO.	Description	Dimensions
14558WH	WHITE	OD: 5"



GU10 WHIP • GU10 | 120V MR-16

Item NO.	Description	Dimensions
GU10WHIP	TO FIELD CONVERT 4" LINE VOLTAGE PAR20/R20 HOUSING TO 120V MR-16 GU10 LAMP.	MAX WATTAGE PER TRIM AND HOUSING COMBO

ABZ AGED BRONZE | BK BLACK | BZ BRONZE | CH CHROME | GD GOLD | NK NICKEL | OB OIL-RUBBED BRONZE | PB POLISHED BRASS | PW PEWTER | WHZ WHEAT HAZE

NICOR® Shining Brighter™

19199
MR-16 RETROFIT KIT

NICOR's 120V retrofit kit allows the use of MR-16 lamps in existing 6" downlights.
120V MR-16 lamps provide precise beam control, crisp light, small size and longer life at an affordable price.
Conversion is quick and easy, and no tools are required.
Regular incandescent dimmer can be used.
Lamp not included.

19200
MR-16 RETROFIT KIT

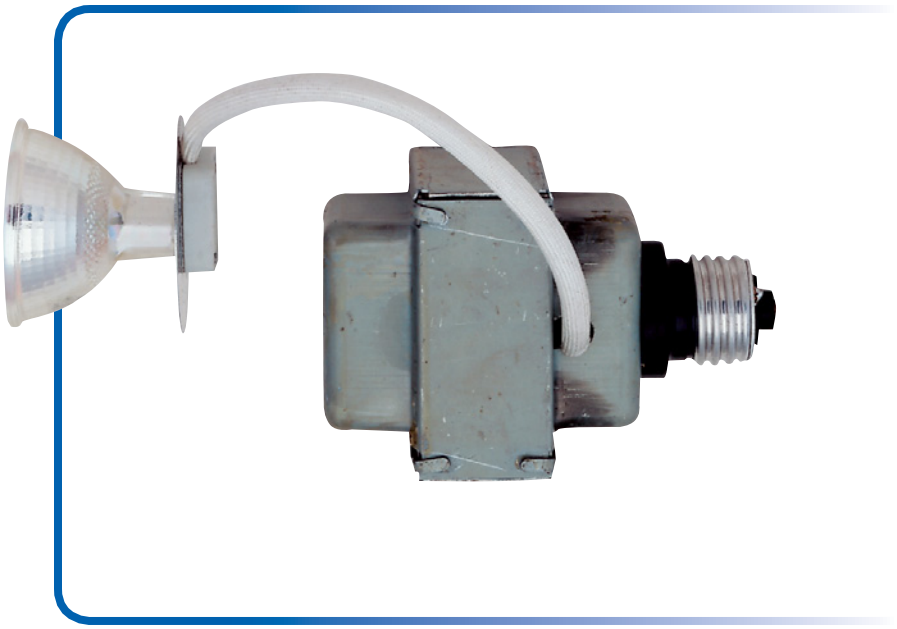

NICOR's 12V retrofit kit allows the use of MR-16 lamps in existing 6" downlights. Needs a 12 Volt MR-16 50W lamp.
12V MR-16 lamps provide precise beam control, crisp light, small size and longer life at an affordable price.
Conversion is quick and easy, and no tools are required.
Use dimmers specifically designed for low voltage magnetic transformers.
Lamp not included.

TRIMS
FOR 19199 & 19200

BAFFLE/MR-16 GIMBAL • 50W | 120V MR-16

Item NO.	Description	Dimensions
17528BK	BLACK (shown)	OD: 8"
17528WH	WHITE	



REFLECTOR/MR-16 GIMBAL • 50W | 120V MR-16

Item NO.	Description	Dimensions
17529CL	CLEAR	OD: 8"
17529GD	GOLD (shown)	



EYEBALL/BAFFLE • 50W | 120V MR-16

Item NO.	Description	Dimensions
17530CL	CLEAR (shown)	OD: 8"



BAFFLE • 50W | 120V MR-16

Item NO.	Description	Dimensions
17531BK	BLACK	OD: 8"
17531WH	WHITE (shown)	



PINHOLE TRIM • 50W | 120V MR-16

Item NO.	Description	Dimensions
17532	WHITE	OD: 8"



PINHOLE/BAFFLE • 50W | 120V MR-16

Item NO.	Description	Dimensions
17533BK	BLACK (shown)	OD: 8"
17533WH	WHITE	



REGRESSED EYEBALL • 50W | 120V MR-16

Item NO.	Description	Dimensions
17534BK	BLACK	OD: 8"
17534WH	WHITE (shown)	



ABZ AGED BRONZE | BK BLACK | BZ BRONZE | CH CHROME | GD GOLD | NK NICKEL | OB OIL-RUBBED BRONZE | PB POLISHED BRASS | PW PEWTER | WHZ WHEAT HAZE

TRIMS
FOR 19199 & 19200

WHITE EYEBALL/BAFFLE • 50W | 120V MR-16

Item NO.	Description	Dimensions
17535BK	BLACK (shown)	OD: 8"
17535WH	WHITE	



BAFFLE IN BAFFLE • 50W | 120V MR-16

Item NO.	Description	Dimensions
17536BK	BLACK	OD: 8"
17536WH	WHITE (shown)	



ADJUSTABLE DROP SPOT • 50W | 120V MR-16

Item NO.	Description	Dimensions
17539BK	BLACK	OD: 8"
17539WH	WHITE (shown)	



IC and IC Airtight Fixtures If lighting fixtures are being installed in an insulated attic area, choose IC (Insulated Ceiling), or IC Airtight fixtures.
IC fixtures allow for uninterrupted insulation around the fixture. IC Airtight fixtures seal all openings between attic spaces above and heated/air conditioned living spaces below.
Standard recessed housings allow 5.0 cubic ft. per minute of air leakage to escape into unconditioned spaces. Airtight fixtures prevent this leakage by sealing all air pathways between living areas and attic spaces.
Sealed housings can be completely covered in insulation. Additional benefits include reduced sound transmission between rooms, reduced heating and air conditioning bills, prevention of moisture damage to ceilings, and elimination of drafts for greater comfort.

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW	WHZ
AGED BRONZE	BLACK	BRONZE	CHROME	GOLD	NICKEL	OIL-RUBBED BRONZE	POLISHED BRASS	PEWTER	WHEAT HAZE

19201
DOUBLE TWIN COMPACT KIT

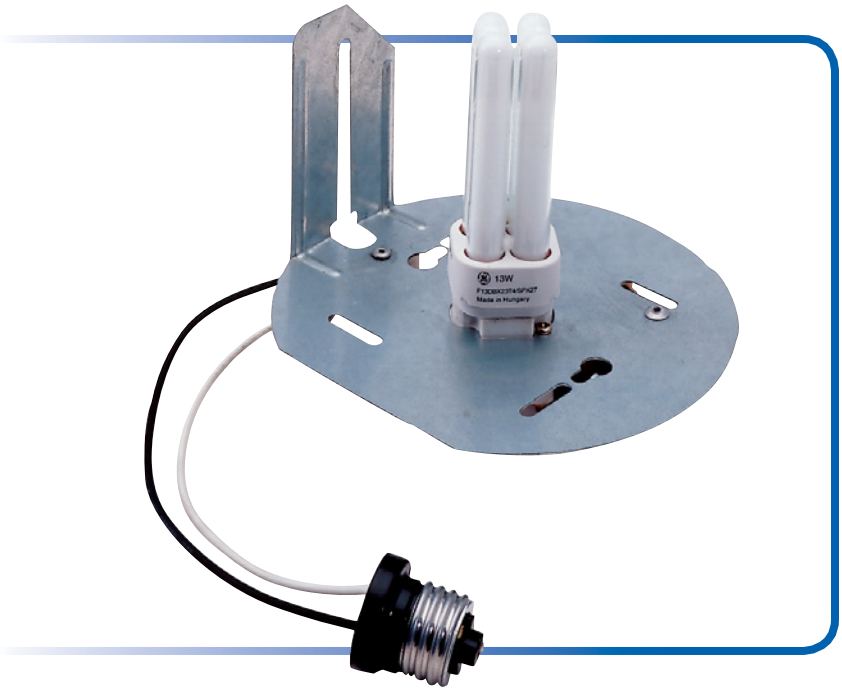

NICOR's retrofit kit allows the use of compact fluorescent lamps in existing 6" downlights.
Built-in ballast.
One 13W double twin tube, Gx23 (not included).
Conversion is quick and easy, and no tools are required.
120V Magnetic ballast.
Will not work with sloped cans.

TRIMS
FOR 19201

LEXAN SHOWER/ FRESNEL LENS • 1X13W | GX23-2

Item NO.	Description	Dimensions
17502BZ	BRONZE (shown)	OD: 8"
17502OB	OIL-RUBBED BRONZE	
17502	WHITE (WITH METAL TRIM RING)	
	ALSO AVAILABLE	
17572WH	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED



LEXAN SHOWER/ FRESNEL LENS • 1X13W | GX23-2

Item NO.	Description	Dimensions
17505BZ	BRONZE (shown)	OD: 8"
17505NK	NICKEL	
17505OB	OIL-RUBBED BRONZE	
17505	WHITE (WITH METAL TRIM RING)	
	ALSO AVAILABLE	
17572WH	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED



SPECUALR • 1X13W | GX23-2

Item NO.	Description	Dimensions
17507BK	BLACK	OD: 7"
17507CL	CLEAR (shown)	
17507GD	GOLD	
17507WH	WHITE	



LEXAN DROP OPAL • 1X13W | GX23-2

Item NO.	Description	Dimensions
17509	WHITE (WITH METAL TRIM RING) (shown)	OD: 8"
	ALSO AVAILABLE	
17579WH	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED



SPECUALR REFLECTOR • 1X13W | GX23-2

Item NO.	Description	Dimensions
17518CL	CLEAR (shown)	OD: 7"
17518WH	WHITE	



REFLECTOR/BAFFLE • 1X13W | GX23-2

Item NO.	Description	Dimensions
17520CL	CLEAR (shown)	OD: 7 1/4"
17520CLWH	CLEAR (WHITE/BAFFLE)	



BAFFLE/FRESNEL LENS • 1X13W | GX23-2

Item NO.	Description	Dimensions
17522BK	BLACK	OD: 7 1/4"
17522WH	WHITE (shown)	



ABZ AGED BRONZE | BK BLACK | BZ BRONZE | CH CHROME | GD GOLD | NK NICKEL | OB OIL-RUBBED BRONZE | PB POLISHED BRASS | PW PEWTER | WHZ WHEAT HAZE

NICOR® Shining Brighter™

BAFFLE/ALBALITE LENS • 1X13W | GX23-2

Item NO.	Description	Dimensions
17523BK	BLACK (shown)	OD: 7"
17523WH	WHITE	



RIBBED REFLECTOR • 1X13W | GX23-2

Item NO.	Description	Dimensions
17554	CLEAR	OD: 7 3/4"



RIBBED REFLECTOR • 1X13W | GX23-2

Item NO.	Description	Dimensions
17555	GOLD	OD: 7 3/4"



BAFFLE/FROSTED GLASS LENS • 1X13W | GX23-2

Item NO.	Description	Dimensions
17563WH	WHITE	OD: 7"



Helpful Hints: *By replacing a 60W "A" lamp with a MAXCOR™ LED lamp, your energy savings can be 71-75%. And LED's can last as much as seven years with not need for a bulb change.*

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW	WHZ
AGED BRONZE	BLACK	BRONZE	CHROME	GOLD	NICKEL	OIL-RUBBED BRONZE	POLISHED BRASS	PEWTER	WHEAT HAZE

19202
DOUBLE TWIN COMPACT KIT

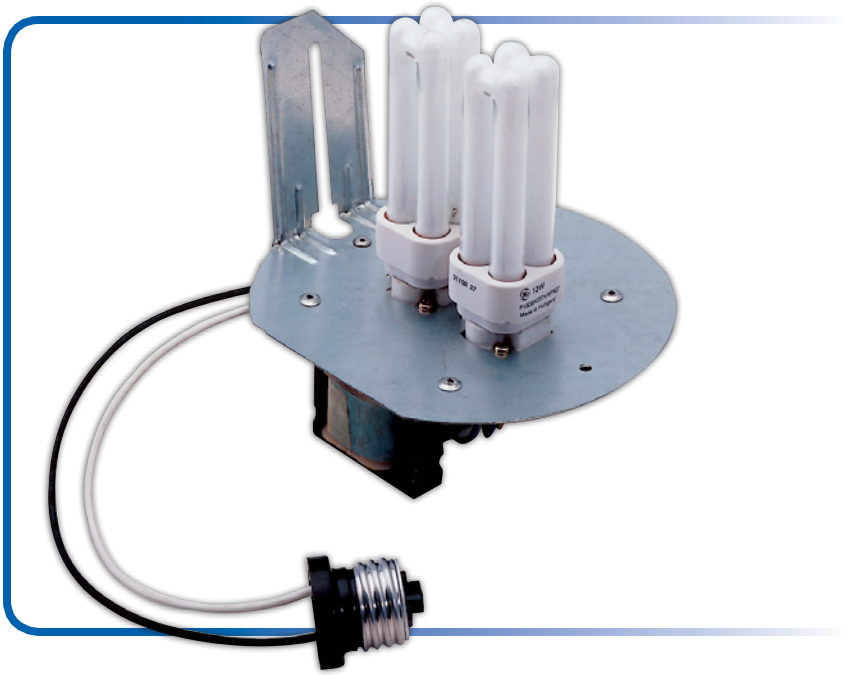

NICOR's retrofit kit allows the use of compact fluorescent lamps in existing 6" downlights.
Built-in ballast.
Two 13W double twin tubes, Gx23 (not included).
Conversion is quick and easy, and no tools are required.
120V Magnetic ballast.
Will not work with sloped cans.

TRIMS
FOR 19202

LEXAN SHOWER/ FRESNEL LENS • 1X13W | GX23-2

Item NO.	Description	Dimensions
17502BZ	BRONZE (shown)	OD: 8"
17502OB	OIL-RUBBED BRONZE	
17502	WHITE (WITH METAL TRIM RING)	
	ALSO AVAILABLE	
17572WH	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED



LEXAN SHOWER/ FRESNEL LENS • 1X13W | GX23-2

Item NO.	Description	Dimensions
17505BZ	BRONZE (shown)	OD: 8"
17505NK	NICKEL	
17505OB	OIL-RUBBED BRONZE	
17505	WHITE (WITH METAL TRIM RING)	
	ALSO AVAILABLE	
17572WH	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED



SPECUALR • 1X13W | GX23-2

Item NO.	Description	Dimensions
17507BK	BLACK	OD: 7"
17507CL	CLEAR (shown)	
17507GD	GOLD	
17507WH	WHITE	



LEXAN DROP OPAL • 1X13W | GX23-2

Item NO.	Description	Dimensions
17509	WHITE (WITH METAL TRIM RING) (shown)	OD: 8"
	ALSO AVAILABLE	
17579WH	WHITE (WITH PLASTIC TRIM RING)	

WET LOCATION RATED



BAFFLE/FRESNEL LENS • 1X13W | GX23-2

Item NO.	Description	Dimensions
17522BK	BLACK	OD: 7 1/4"
17522WH	WHITE (shown)	



ABZ AGED BRONZE | BK BLACK | BZ BRONZE | CH CHROME | GD GOLD | NK NICKEL | OB OIL-RUBBED BRONZE | PB POLISHED BRASS | PW PEWTER | WHZ WHEAT HAZE

TRIMS
FOR 19202

BAFFLE/ALBALITE LENS • 1X13W | GX23-2

Item NO.	*Description*	*Dimensions*
17523BK	BLACK (shown)	OD: 7″
17523WH	WHITE	



RIBBED REFLECTOR • 1X13W | GX23-2

Item NO.	*Description*	*Dimensions*
17554	CLEAR	OD: 7 3/4″



RIBBED REFLECTOR • 1X13W | GX23-2

Item NO.	*Description*	*Dimensions*
17555	GOLD	OD: 7 3/4″



Wet Location *Many NICOR® trims are designed specifically for wet locations such as in showers or over tubs. Lamps are concealed behind a lens or diffuser. Portions of the fixture that are exposed to water vapor are manufactured of non-conductive and non-corrosive materials. Wet Location fixtures are well suited for outdoor porches and breezeways, too.*

ABZ	BK	BZ	CH	GD	NK	OB	PB	PW	WHZ
AGED BRONZE	BLACK	BRONZE	CHROME	GOLD	NICKEL	OIL-RUBBED BRONZE	POLISHED BRASS	PEWTER	WHEAT HAZE

NICOR® Shining Brighter™

LAMP PERFORMANCE

MR16 20W 12 DEGREE SPOT



Distance to Plane	Initia Nadir Footcandles	Beam Diameter
6'0"	98.0	2'0"
8'0"	54.0	2'0"
10'0"	37.0	3'0"
12'0"	22.0	3'0"

MR16 20W 36 DEGREE FLOOD



Distance to Plane	Initia Nadir Footcandles	Beam Diameter
4'0"	240.0	1'6"
6'0"	220.0	2'0"
8'0"	160.0	2'0"
10'0"	100.0	3'0"
12'0"	80.0	4'0"

MR16 50W 12 NARROW SPOT



Distance to Plane	Initia Nadir Footcandles	Beam Diameter
4'0"	240.0	1'6"
6'0"	220.0	2'0"
8'0"	160.0	2'0"
10'0"	100.0	3'0"
12'0"	80.0	4'0"

MR16 50W 36 DEGREE FLOOD



Distance to Plane	Initial Nadir Footcandles	Beam Diameter
4'0"	220.0	3'0"
6'0"	100.0	4'0"
8'0"	60.0	5'0"
10'0"	36.0	7'0"
12'0"	24.0	9'0"

PAR20 50W SPOT



Distance to Plane	Initial Nadir Footcandles	Beam Diameter
4'0"	200.0	2'0"
6'0"	120.0	2'6"
8'0"	90.0	3'0"
10'0"	50.0	4'0"
12'0"	35.0	4'6"

PAR20 50W FLOOD



Distance to Plane	Initial Nadir Footcandles	Beam Diameter
4'0"	80.0	3'0"
6'0"	38.0	5'0"
8'0"	20.0	6'0"
10'0"	13.0	8'0"
12'0"	9.0	9'0"

PAR30 75W NARROW SPOT



Distance to Plane	Initial Nadir Footcandles	Beam Diameter
4'0"	240.0	2'0"
6'0"	220.0	3'0"
8'0"	200.0	3'6"
10'0"	110.0	4'0"
12'0"	80.0	5'0"

PAR30 75W FLOOD



Distance to Plane	Initial Nadir Footcandles	Beam Diameter
4'0"	190.0	3'0"
6'0"	90.0	5'0"
8'0"	50.0	6'0"
10'0"	30.0	7'6"
12'0"	18.0	9'0"

PAR38 100W SPOT



Distance to Plane	Initial Nadir Footcandles	Beam Diameter
4'0"	260.0	2'0"
6'0"	220.0	2'6"
8'0"	200.0	3'0"
10'0"	130.0	4'0"
12'0"	90.0	5'0"

PAR38 100W FLOOD



Distance to Plane	Initial Nadir Footcandles	Beam Diameter
4'0"	160.0	3'0"
6'0"	120.0	4'0"
8'0"	65.0	6'0"
10'0"	46.0	7'0"
12'0"	30.0	9'0"

PAR38 150W SPOT



Distance to Plane	Initial Nadir Footcandles	Beam Diameter
4'0"	300.0	2'0"
6'0"	260.0	2'6"
8'0"	200.0	3'0"
10'0"	130.0	4'0"
12'0"	90.0	5'0"

PAR38 150W FLOOD



Distance to Plane	Initial Nadir Footcandles	Beam Diameter
4'0"	200.0	3'0"
6'0"	120.0	5'0"
8'0"	65.0	6'0"
10'0"	52.0	7'6"
12'0"	30.0	9'0"

65BR30 FL



Distance to Plane	Initial Nadir Footcandles	Beam Diameter
4'6"	38	4'0"
5'6"	25	5'0"
6'6"	18	5'6"
8'0"	12	7'0"
10'0"	8	9'0"
12'0"	5	10'6"

LAMP PERFORMANCE

























Incandescent Wattage	CFL Equivalent Wattage	Lumens
60W	13-14W	800-900
75W	19-20W	1100-1300
100W	23W	1600-1700
150W	30W	2000-2200
200W	40W	3000

HOUSING ACCESSORIES

10030
SOCKET EXTENDER

17201
COIL SPRING FOR RECESSED TRIMS

17202
V-SPRING FOR RECESSED TRIMS

17204
120 VOLT SOCKET STRING

17207
6" BLANK-UP KIT

17200HB
NICOR HANGER BAR W/ GRID CLIP



17208
24" C-CHANNEL BAR-HANGER

17205WH
6" WHITE TRIM RING 1/2" WIDE

17205WH
Also Available:
17205CH CHROME
17205BK BLACK
17205OB OIL-RUBBED BRONZE
17205PB POLISHED BRASS

17206WH
6" WHITE TRIM RING 1" WIDE

17206WH
Also Available:
17206CH CHROME
17206BK BLACK
17206PB POLISHED BRASS

17999
HOLE CUTTER

17206WH
Also Available:
17999B1 DRYWALL BLADE
17999B2 METAL BLADE
17999BB BALANCE BARS (4)
17999C CHIP BOWL
17999D DRILL BIT
17999R ADJUSTING ROD
17999T TRAVERSE AXLE
17999U UPRIGHT AXLE



GU10WHIP
TO FIELD CONVERT 4" LINE VOLTAGE

17050
FIRE-RATED RECESSED LIGHT ENCLOSURE

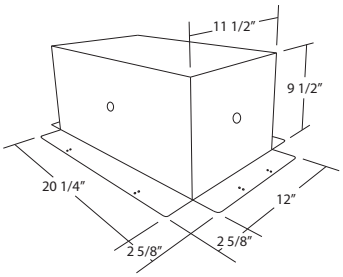

Recessed housing not included.

DESCRIPTION

Architects, specifiers and installers can easily maintain the integrity of fire-rated ceilings for one hour with this enclosure for recessed lights.

INSTALLATION

Using this fire-rated enclosure, recessed lights can be installed in a fraction of the time that it would take to hand-build an enclosure. Once you fasten the four screws, your enclosure is ready to go. Simply install your light and you're on to the next one. You'll reduce time and labor costs while ensuring compliance to building codes.

FEATURES

Fits both 16" and 24" on-center applications; one size fits most applications.
Attaches quickly with drywall screws, saving time and labor.
Features four knockouts for wiring flexibility with easy access from any direction.
Provides sound reduction.
Stores and transports easily with tapered design.
Maintains vapor barrier integrity to meet new airtight building codes.
Maintenance free.
Can be used on either interior or exterior applications.
Can be used with either non IC-rated or IC-rated fixtures.
Maintains air space even when using blown-in insulation to eliminate light fixture cycling.
Affixed directly to the structure.
No product modifications required; reduces risk of incorrect product installation or movement during or after construction.

SPECIFICATIONS

Flanges: 2 5/8" wide for easy mounting.
Material: Corrosion-resistant metal.
Internal Dimensions: 20-1/8" L x 12" W x 9-1/2" D
Stackable and packed 6 per case for easy shipping and handling.

LISTINGS

IC rated
ETL listed

Residential LED
Add a touch of class to any home with our affordable energy saving LED lighting solutions.

15710
LED STEP LIGHT

FEATURES

Natural 3000K light
50,000 hour rated lamp life.
120V/1.2W
Approved for wet location applications.
Installs quickly in standard single gang switch box.
Can be used for residential or commercial application.
Shipped with two paint-able faceplates for vertical or horizontal applications.
UL/CUL listed

ALSO AVAILABLE: *15710HRC WHITE HORIZONTAL REPLACEMENT COVER*

15710VRC WHITE VERTICAL REPLACEMENT COVER

c UL us LISTED

Can be used for T24 California Title 24 High Energy Compliant

WET LOCATION RATED

15803L
LED STEP LIGHT

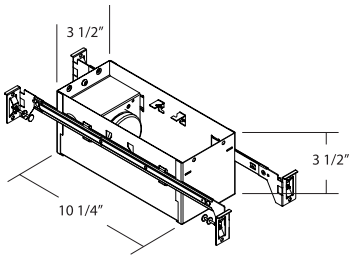

MAXCOR™

FEATURES

18 pcs for total of 2.7W
Color temperature 3000K CRI 65
120V input into wiring compartment
IC rated; suitable for direct contact with insulation
Damp location listed when used with 15811
Wet location listed when used with 15810, 15812 or 15813

15810 GLASS COVER

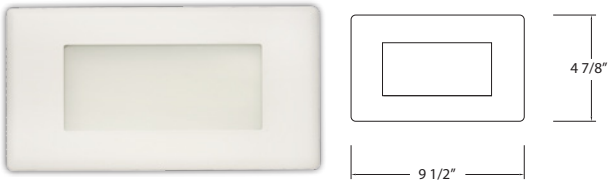

15811 LOUVERED COVER

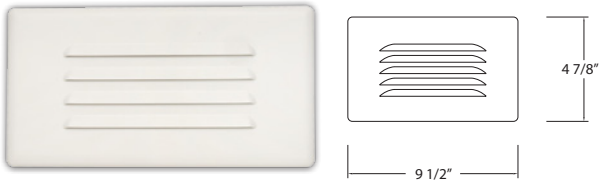

15812 TEXTURED GLASS COVER

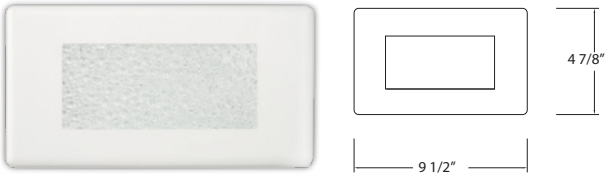

15813 TEXTURED FROSTED GLASS COVER

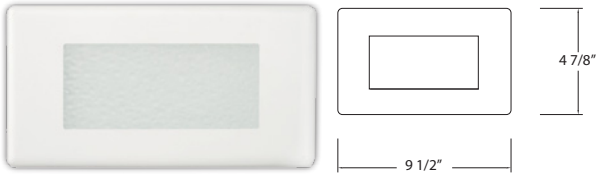

c UL us LISTED

MAXCOR™

LED Undercabinet

NEW & IMPROVED

Energy efficient
Long 50,000 hour life - 10X longer than halogen
No nuisance lamps to replace

Ultra-cool operation
Eliminates heat on counter tops and in cabinets associated with halogen lamps

Warm color (2700 K)
Provides rich, dramatic color rendering

Designer finishes
Oil-rubbed bronze, Nickel, Black, White

Five convenient sizes
Common industry lengths

Long-lasting, energy efficient, and cool!

1 Energy-saving LED lights provide warm color

2 120V line voltage–no transformer

3 Low 1" deep profile conceals fixture out of view

4 High/Low/Off rocker switch allows the proper light intensity for the task

5 Hard-wire connections

6 Hinged wire trough allows ample connections space and easy closure

7 Captive mounting screws speed fixture mounting

LED UNDERCABINETS

NK Nickel



MAXCOR™

FEATURES

120V line voltage fixture
Low profile (1" deep)
Hard-wire connections
Four finishes available (white, black, nickel and oil-rubbed bronze)
Rocker switch High - Low - Off
Hinged Wireway cover
Warm color (2700 K)

BK Black

OB Oil-rubbed bronze

WH White

ORDERING

PRODUCT NO.	*DIMENSIONS*
NUC-2-08-BK	8"L X 3 1/2"W X 1 1/8"H
NUC-2-08-NK	8"L X 3 1/2"W X 1 1/8"H
NUC-2-08-OB	8"L X 3 1/2"W X 1 1/8"H
NUC-2-08-WH	8"L X 3 1/2"W X 1 1/8"H
NUC-2-12-BK	12 1/2"L X 3 1/2"W X 1 1/8"H
NUC-2-12-NK	12 1/2"L X 3 1/2"W X 1 1/8"H
NUC-2-12-OB	12 1/2"L X 3 1/2"W X 1 1/8"H
NUC-2-12-WH	12 1/2"L X 3 1/2"W X 1 1/8"H
NUC-2-21-BK	21 1/2"L X 3 1/2"W X 1 1/8"H
NUC-2-21-NK	21 1/2"L X 3 1/2"W X 1 1/8"H
NUC-2-21-OB	21 1/2"L X 3 1/2"W X 1 1/8"H
NUC-2-21-WH	21 1/2"L X 3 1/2"W X 1 1/8"H
NUC-2-30-BK	30"L X 3 1/2"W X 1 1/8"H
NUC-2-30-NK	30"L X 3 1/2"W X 1 1/8"H
NUC-2-30-OB	30"L X 3 1/2"W X 1 1/8"H
NUC-2-30-WH	30"L X 3 1/2"W X 1 1/8"H
NUC-2-40-BK	40"L X 3 1/2"W X 1 1/8"H
NUC-2-40-NK	40"L X 3 1/2"W X 1 1/8"H
NUC-2-40-OB	40"L X 3 1/2"W X 1 1/8"H
NUC-2-40-WH	40"L X 3 1/2"W X 1 1/8"H

COLOR TABLE

BK	Black
OB	Oil-rubbed Bronze
NK	Nickel
WH	White

c UL us LISTED

INDOOR LED SURFACE MOUNTS

30032-LED-NK-30K
7" Wall Sconce

120V/12W
3000 K, 80 CRI, 720 Lumens
Nickel Finish, Frosted Glass
7.0" x 10.5" x 4.0"

30033-LED-NK-30K
7" Wall Sconce

120V~277V/24W
3000 K, 80 CRI, 1200 Lumens
Nickel Finish, Frosted Acrylic
7.0" x 10.5" x 4.0"

30035-LED-NK-30K
10" Wall Sconce

120V/12W
3000 K, 80 CRI, 720 Lumens
Nickel Finish, Alabaster Glass
10.3" x 11.5 "x 4.0"

30104-LED-OB-30K
11" Wall Sconce

120V~277V/24W
3000 K, 80 CRI, 1400 Lumens
Oil-Rubbed Bronze Finish, Frosted Acrylic
10.7" x 11.5" x 4.7"

32103-LED-NK-50K
Vanity Sconce
120V~277V/24W
5000 K, 80 CRI, 1400 Lumens
Nickel Finish, Frosted Acrylic
24.5" x 6"x 5.9"

Also Available:

32105-LED-NK-50K	*31W, 1600 Lumen, 36.5"L*
32106-LED-NK-50K	*48W, 2800 Lumen, 48.5"L*

All are also Available in fluorescent. See page 249

MAXCOR™

LED CEILING FIXTURE

120V~277
4100 K, 80 CRI
Nickel Finish, Frosted Acrylic

FEATURES

Die-formed cold rolled steel frame
Mounts flush to ceiling
(Pendant mounting option available)
ETL Certified

ORDERING

PRODUCT NO.	*WATTS*	*LUMENS*	*DIMENSIONS (OD X H)*
30014-LED-NK-41K	23W	1150	14.2″ x 4.0″
30016-LED-NK-41K	32W	1700	16.0″ x 4.4″
30018-LED-NK-41K	32W	1700	17.8″ x 4.4″
30014-PLED-NK-41K*	23W	1150	14.2″ x 10.0″
30016-PLED-NK-41K*	32W	1700	16.0″ x 10.0″
30018-PLED-NK-41K*	32W	1700	17.8″ x 10.0″

**Includes pendant mounting adapter*

Also Available in fluorescent. See page 250

OUTDOOR LED SURFACE MOUNTS

34031-LED-BK-50K
10.5" Wall Mount

120V/15W
5000 K, 900 Lumens
Black Finish, Frosted Polycarbonate
10.5" x 7.5" x 3.7"

Polycarbonate body

34082-LED-BK-50K
10" Wall Mount

120V/15W
5000 K, 900 Lumens
Black Finish, Frosted Polycarbonate
9.8" x 7.8" x 4.4"

Die-cast aluminum with powder coat finish

34098-LED-BK-50K
12" Wall Mount

120V~277V/15W
5000 K, 900 Lumens
Black Finish, Frosted Polycarbonate
12.3" x 10.1" x 4.8"

Die-cast aluminum with powder coat finish

MAXCOR™

All are also Available in fluorescent. See page 251

OUTDOOR LED SURFACE MOUNTS

30001-LED-WH-50K

14″ Ceiling Mount

120V~277V/21W
5000 K, 1200 Lumens
White Finish, Opal Polycarbonate
14.2″ x 4.0″

Polycarbonate housing and shade

34121-LED-BK-50K

13″ Ceiling Mount

120V~277V/21W
5000 K, 1200 Lumens
Black Finish, Frosted Polycarbonate
12.6″ x 3.0″

Die-cast aluminum with powder coat finish

All are also Available in fluorescent. See page 252

New products and catalog updates are just a click away at **nicorlighting.com**

Residential Indoor Conventional
Classical accent and task lighting that adds a touch of elegance and comfort to any room of your home.

10364EB

1-LAMP 8W · T5

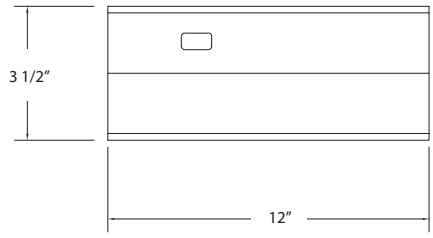

FEATURES

Slim 1" height
Rapid-start electronic ballast
Steel housing with acrylic lens
120V AC, 60Hz operation
Conduit connector for Romex cable included, or use 3/8" conduit
On/off switch included
Cool-white lamp included (4100K)

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

10365EB

1-LAMP 13W · T5

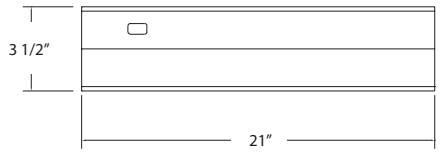

FEATURES

Slim 1" height
Rapid-start electronic ballast
Steel housing with acrylic lens
120V AC, 60Hz operation
Conduit connector for Romex cable included, or use 3/8" conduit
On/off switch included
Cool-white lamp included (4100K)

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

10366EB
2-LAMP 8W · T5

FEATURES
Slim 1″ height
Rapid-start electronic ballast
Steel housing with acrylic lens
120V AC, 60Hz operation
Conduit connector for Romex cable included, or use 3/8″ conduit
On/off switch included
Cool-white lamp included (4100K)



10367EB
2-LAMP 8W+13W · T5

FEATURES
Slim 1″ height
Rapid-start electronic ballast
Steel housing with acrylic lens
120V AC, 60Hz operation
Conduit connector for Romex cable included, or use 3/8″ conduit
On/off switch included
Cool-white lamp included (4100K)



10368EB
2-LAMP 13W · T5

FEATURES
Slim 1″ height
Rapid-start electronic ballast
Steel housing with acrylic lens
120V AC, 60Hz operation
Conduit connector for Romex cable included, or use 3/8″ conduit
On/off switch included
Cool-white lamp included (4100K)



10350
LINE VOLTAGE XENON



FEATURES

No transformers; 120V line voltage xenon fixture
Xenon lamps (120V, 20W bi-pin) included
Low profile (1 1/4" deep)
Integrated individual chrome lamp reflectors provide even light distribution
Easy, tool-free lamp replacement
Hard-wire connections
Three-level (high/low/off) switch included
Four finishes available (white, black, pewter and oil-rubbed bronze)
Four sizes (8", 12 1/2", 21 1/2" and 30")
Dimmable with use of standard incandescent dimmer

BK Black

OB Oil-rubbed bronze

PW Pewter

WH White

c UL us LISTED

ORDERING

PRODUCT NO.	*LAMP*	*DIMENSIONS*
10350BK	1 X 20W	8"L X 3 1/2"W X 1 1/4"H
10350OB	1 X 20W	8"L X 3 1/2"W X 1 1/4"H
10350PW	1 X 20W	8"L X 3 1/2"W X 1 1/4"H
10350WH	1 X 20W	8"L X 3 1/2"W X 1 1/4"H
10351BK	2 X 20W	12 1/2"L X 3 1/2"W X 1 1/4"H
10351OB	2 X 20W	12 1/2"L X 3 1/2"W X 1 1/4"H
10351PW	2 X 20W	12 1/2"L X 3 1/2"W X 1 1/4"H
10351WH	2 X 20W	12 1/2"L X 3 1/2"W X 1 1/4"H
10352BK	3 X 20W	21 1/2"L X 3 1/2"W X 1 1/4"H
10352OB	3 X 20W	21 1/2"L X 3 1/2"W X 1 1/4"H
10352PW	3 X 20W	21 1/2"L X 3 1/2"W X 1 1/4"H
10352WH	3 X 20W	21 1/2"L X 3 1/2"W X 1 1/4"H
10353BK	4 X 20W	30"L X 3 1/2"W X 1 1/4"H
10353OB	4 X 20W	30"L X 3 1/2"W X 1 1/4"H
10353PW	4 X 20W	30"L X 3 1/2"W X 1 1/4"H
10353WH	4 X 20W	30"L X 3 1/2"W X 1 1/4"H

COLOR TABLE

BK	Black
OB	Oil-rubbed Bronze
PW	Pewter
WH	White

NICOR® Shining Brighter™

10392EB
4' 1-LAMP · 32W

FEATURES

1X 32W T8 lamp
Easy surface-mount installation
Heavy 20 gauge steel construction
Energy-saving electronic ballast (120V)
Three push-in wire connectors ease installation

Also available:
10391EB 3' 1-lamp strip light – 25W T8
10390EB 2' 1-lamp strip light – 17W T8
20392EBHPF 120/277V 1-lamp – 32WT8
WG-1LT85 Wire guard 4' - 1 Lamp



10395EB
4' 2-LAMP · 32W

FEATURES

2X 32W T8 lamps
Easy surface-mount installation
Heavy 20 gauge steel construction
Energy-saving electronic ballast (120V)
Three push-in wire connectors ease installation

Also available:
10394EB 3' 2-lamp strip light – 25W T8
10393EB 2' 2-lamp strip light – 17W T8
20395EBHPF 120/277V 2-lamp – 32WT8
WG-2LT85 Wire guard 4' - 2 Lamp



REFLECTOR
4' REFLECTOR KIT

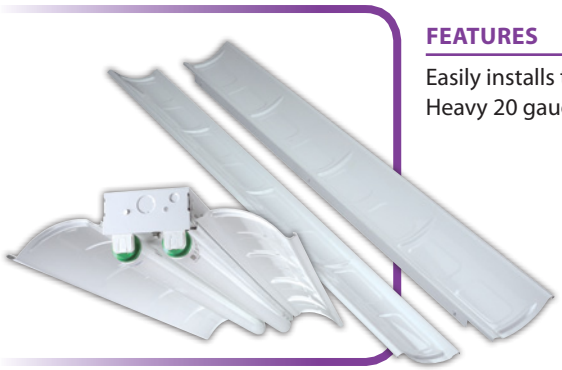

FEATURES

Easily installs to any NICOR 4' strip light
Heavy 20 gauge steel construction

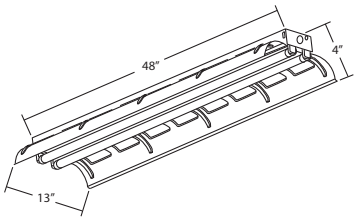

20392EBHPF

4′ 1-LAMP · 32W

FEATURES

1X 32W T8 lamp
Easy surface-mount installation
Heavy 20 gauge steel construction
Energy-saving HPF electronic ballast (120/277V)
Three push-in wire connectors ease installation

Also Available
WG-1LT85 Wire guard 4′ - 1Lite

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

UNIVERSAL INPUT 120-277V BALLAST



20395EBHPF

4′ 2-LAMP · 32W

FEATURES

2X 32W T8 lamp
Easy surface-mount installation
Heavy 20 gauge steel construction
Energy-saving HPF electronic ballast (120/277V)
Three push-in wire connectors ease installation

Also Available
WG-2LT85 Wire guard 4′ - 2Lite

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

UNIVERSAL INPUT 120-277V BALLAST



REFLECTOR

4′ REFLECTOR KIT

FEATURES

Easily installs to any NICOR 4′ strip light
Heavy 20 gauge steel construction

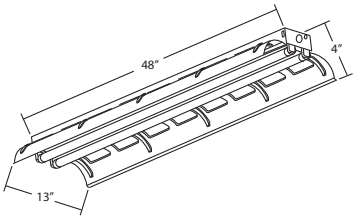

NICOR® Shining Brighter™

20396EB
4-LAMP STRIP LIGHT

FEATURES

4X F32W T8 lamps (tandem)
Easy surface mount application
Heavy 20 gauge steel construction
Energy saving 120/277V HPF electronic ballast
High light output and increased lamp life
Push-in wire connectors for quick and safe installation

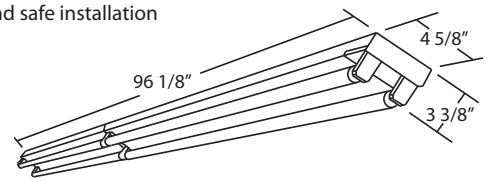

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

20397EB
2-LAMP STRIP LIGHT

FEATURES

2X F96 87W T8 HO lamps
Easy surface mount application
Heavy 20 gauge steel construction
Energy saving 120/277V electronic ballast
High light output and increased lamp life
Push-in wire connectors for quick and safe installation

Also Available
WG-2LT85 Wire guard for 4' - 2L strips only

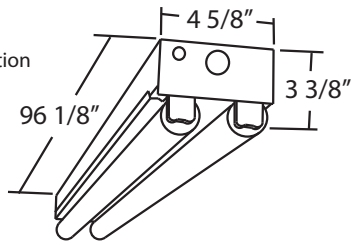

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

20342
3-LAMP INDUSTRIAL STRIP LIGHT

FEATURES

3X 32W T8 lamps (not included)
Wire guard and chain mounting kit included
Heavy 20 gauge steel construction
120/277V universal input ballast
High-power factor
Push-in wire connectors for quick and safe installation

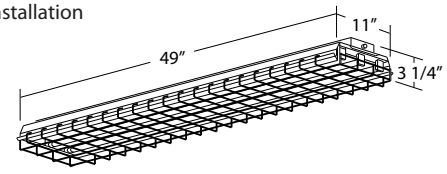

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

10359EB

2-LAMP · 32W

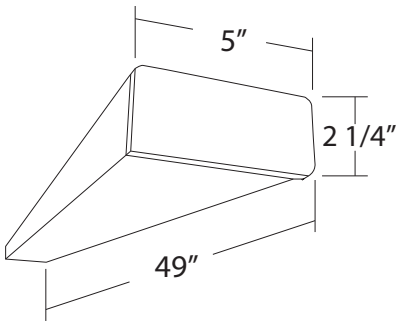

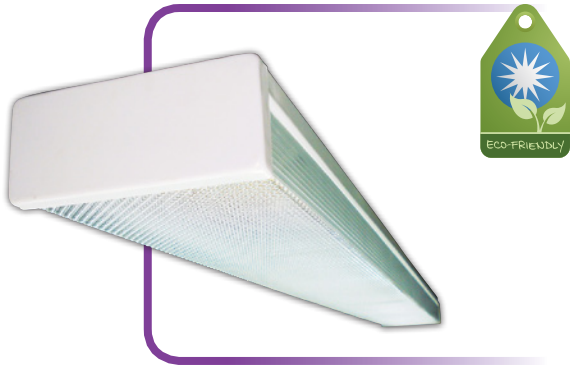

ENERGY STAR · Can be used for T24 California Title 24 High Energy Compliant · c UL us LISTED

FEATURES

2X 32W T8 lamps
Easy surface-mount installation
Heavy 20 gauge steel construction
Clear prismatic acrylic lens blocks 80% of U.V. at 400nm
Energy-saving electronic ballast (120V)

10369EB

2-LAMP · 17W

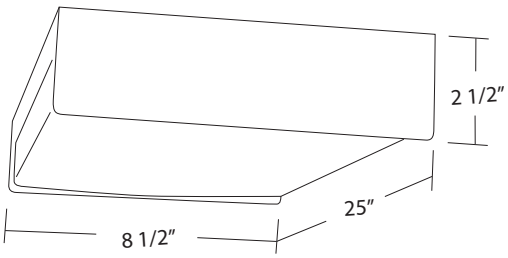

ENERGY STAR · Can be used for T24 California Title 24 High Energy Compliant · c UL us LISTED

FEATURES

2X 17W T8 lamps
Easy surface-mount installation
Heavy 20 gauge steel construction
Clear prismatic acrylic lens blocks 80% of U.V. at 400nm
Energy-saving electronic ballast (120V)
Three push-in wire connectors ease installation

10370EB
2-LAMP · 32W

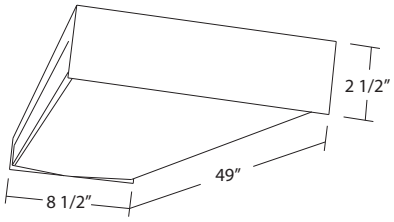

FEATURES

2X 32W T8 lamps
Easy surface-mount installation
Heavy 20 gauge steel construction
Clear prismatic acrylic lens blocks 80% of U.V. at 400nm
Energy-saving electronic ballast (120V)
Three push-in wire connectors ease installation

Also available: 20370EBHPF 120/277V HPF electronic ballast

10374EB
4-LAMP · 32W

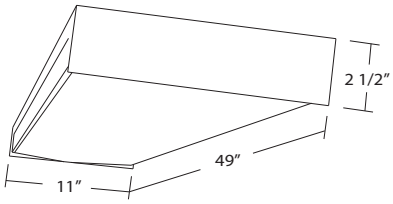

FEATURES

4X 32W T8 lamps
Easy surface-mount installation
Heavy 20 gauge steel construction
Clear prismatic acrylic lens blocks 80% of U.V. at 400nm
Energy-saving electronic ballast (120V)
Three push-in wire connectors ease installation

Also available: 20374EBHPF 120/277V HPF electronic ballast

20370EBHPF

2-LAMP · 32W

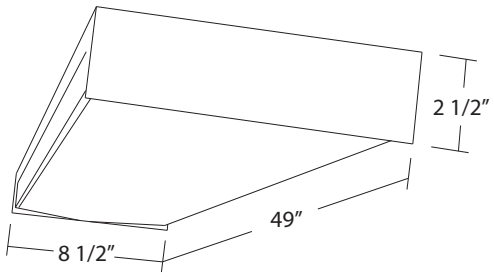

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

UNIVERSAL INPUT 120-277V BALLAST

FEATURES

2X 32W T8 lamps
Easy surface-mount installation
Heavy 20 gauge steel construction
Clear prismatic acrylic lens blocks 80% of U.V. at 400nm
Energy-saving HPF electronic ballast (120/277V)
Three push-in wire connectors ease installation

20374EBHPF

4-LAMP · 32W

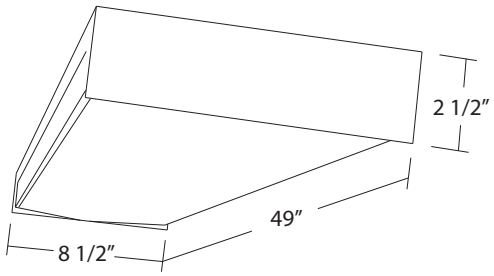

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

UNIVERSAL INPUT 120-277V BALLAST

FEATURES

4X 32W T8 lamps
Easy surface-mount installation
Heavy 20 gauge steel construction
Clear prismatic acrylic lens blocks 80% of U.V. at 400nm
Energy-saving HPF electronic ballast (120/277V)
Three push-in wire connectors ease installation

10371WHEB
2-LAMP · 17W

FEATURES

2X 17W T8 lamps
Easy surface-mount installation
Heavy 20 gauge steel construction
White Euro-style acrylic lens blocks
80% of U.V. at 400nm
Energy-saving electronic ballast (120V)
Three push-in wire connectors ease installation

Also available:
10371PWEB pewter endcap

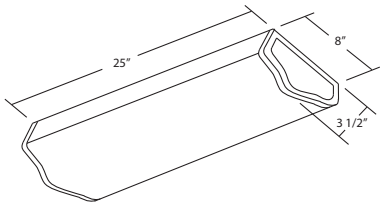

ENERGY STAR · Can be used for T24 California Title 24 High Energy Compliant · c UL us LISTED

10372WHEB
2-LAMP · 32W

FEATURES

2X 32W T8 lamps
Easy surface-mount installation
Heavy 20 gauge steel construction
White Euro-style acrylic lens blocks
80% of U.V. at 400nm
Energy-saving electronic ballast (120V)
Three push-in wire connectors ease installation

Also available:
10372PWEB pewter endcap

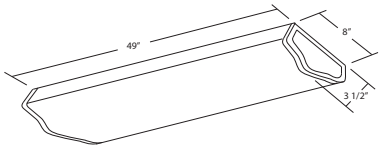

ENERGY STAR · Can be used for T24 California Title 24 High Energy Compliant · c UL us LISTED

10375WHEB
4-LAMP · 32W

FEATURES

4X 32W T8 lamps
Easy surface-mount installation
Heavy 20 gauge steel construction
White Euro-style acrylic lens blocks
80% of U.V. at 400nm
Energy-saving electronic ballast (120V)
Three push-in wire connectors ease installation

Also available:
10375PWEB pewter endcap

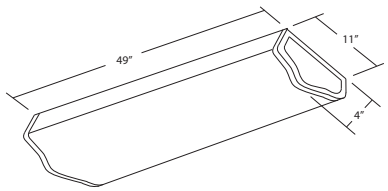

ENERGY STAR · Can be used for T24 California Title 24 High Energy Compliant · c UL us LISTED

The Dream Cloud

Streamlined, durable, and energy efficient!

1. Exclusive NICOR® Lens Lock™ secures lens in place, even on sloped ceilings
2. Quick connect, push-in wire connectors provide fast no-twist connections, positive electrical contact and easy daisy-chain wiring capability
3. ENERGY STAR-rated electronic ballast
4. Damage-resistant acrylic lens blocks 80% of ultraviolet radiation at 400nm

10376EB
2-LAMP · 17W

FEATURES
2X 17W T8 lamps
Heavy 20 gauge steel construction
White cloud design acrylic lens blocks
80% of U.V. at 400nm
Energy-saving electronic ballast (120V)
Three push-in wire connectors ease installation
NICOR Lens-Lock™ secures lens in place even on sloped ceilings
Damage-resistant lens
Easy surface-mount installation

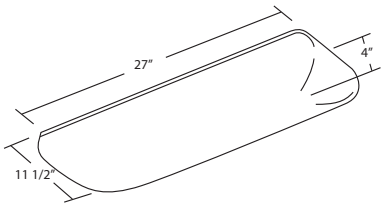

ENERGY STAR · Can be used for T24 California Title 24 High Energy Compliant · c UL us LISTED · NICOR LENS-LOCK™

10377EB
2-LAMP · 32W

FEATURES
2X 32W T8 lamps
Heavy 20 gauge steel construction
White cloud design acrylic lens blocks
80% of U.V. at 400nm
Energy-saving electronic ballast (120V)
Three push-in wire connectors ease installation
NICOR Lens-Lock™ secures lens in place even on sloped ceilings
Damage-resistant lens
Easy surface-mount installation

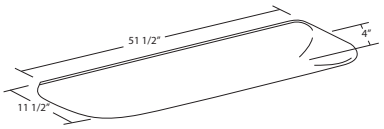

ENERGY STAR · Can be used for T24 California Title 24 High Energy Compliant · c UL us LISTED · NICOR LENS-LOCK™

10373EB
4-LAMP · 32W

FEATURES
4X 32W T8 lamps
Heavy 20 gauge steel construction
White cloud design acrylic lens blocks
80% of U.V. at 400nm
Energy-saving electronic ballast (120V)
Three push-in wire connectors ease installation
NICOR Lens-Lock™ secures lens in place even on sloped ceilings
Damage-resistant lens
Easy surface-mount installation

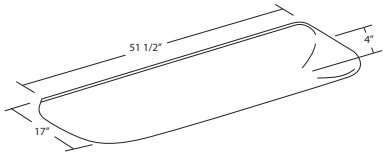

ENERGY STAR · Can be used for T24 California Title 24 High Energy Compliant · c UL us LISTED · NICOR LENS-LOCK™

10341
11″ MUSHROOM

2X13W CFQ lamps included
120V electronic ballast
11 1/2″W x 3 1/2″H

10342
11″ DRUM

2X13W CFQ lamps included
120V electronic ballast
11 1/2″W x 3 1/2″H

10343
14″ MUSHROOM

2X13W CFQ lamps included
120V electronic ballast
14″W x 4″H

10344
14″ DRUM

2X13W CFQ lamps included
120V electronic ballast
14″W x 4″H

10345
17″ MUSHROOM

32+40W T9 Circline lamp included
120V electronic ballast
17 1/2″W x 4 1/2″H

10346
17″ DRUM

32+40W T9 Circline lamp included
120V electronic ballast
17 1/2″W x 4 1/2″H

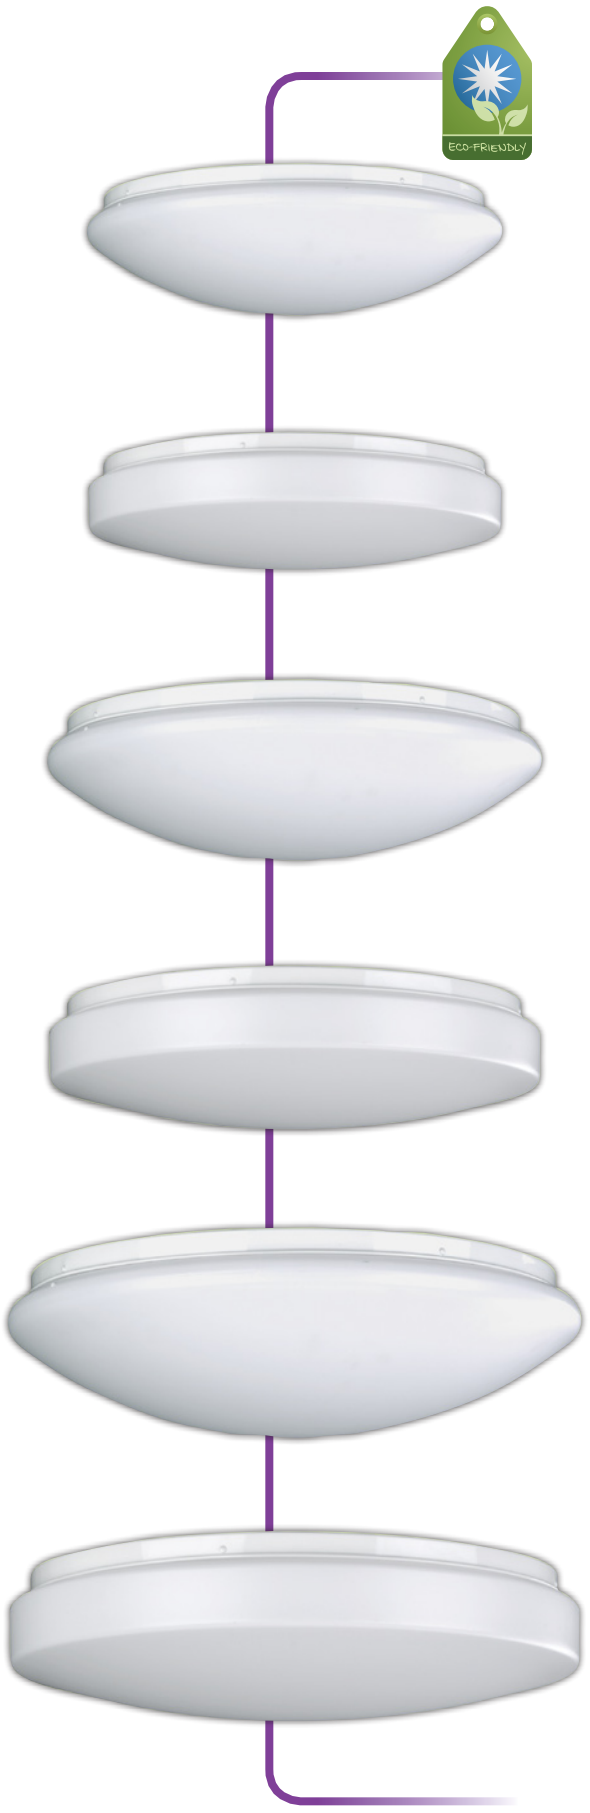

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

NICOR® Shining Brighter™

15700
STAIRWAY LIGHT W/ LOUVERED COVER

FEATURES

Lamp type A19/40W
Thermally protected • IC rated-damp location listed
Housing: W 4.5" X L 8.5" X D 3.5"
Trim: W 5.75" X L 9.5"
UL/CUL listed.



c UL us LISTED

15701
FLUORESCENT STAIRWAY LIGHT W/ LOUVERED COVER

FEATURES

Lamp type 9W PL
Thermally protected • IC rated-damp location listed
Housing: W 4.5" X L 8.5" X D 3.5"
Trim: W 5.75" X L 9.5"
UL/CUL listed.



c UL us LISTED

15702
STAIRWAY LIGHT W/ GLASS COVER

FEATURES

Lamp type A19/40W
Thermally protected • IC rated-damp location listed
Housing: W 4.5" X L 8.5" X D 3.5"
Trim: W 5.75" X L 9.5"
UL/CUL listed.



c UL us LISTED

15703
FLUORESCENT STAIRWAY LIGHT W/ GLASS COVER

FEATURES

Lamp type 9W PL
Thermally protected • IC rated-damp location listed
Housing: W 4.5" X L 8.5" X D 3.5"
Trim: W 5.75" X L 9.5"
UL/CUL listed.



c UL us LISTED

15800
INCANDESCENT STEP LIGHT

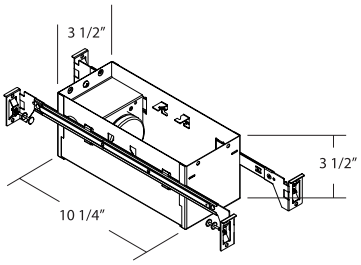

FEATURES

A19/40W lamp
Thermally protected
120V input into wiring compartment
IC rated at 25W, suitable for direct contact with insulation; at 40W it is UL listed but will be NON-IC, insulation must be kept a minimum of 3" from housing
Damp location listed
Lamp not included

c UL us LISTED

15810
GLASS COVER

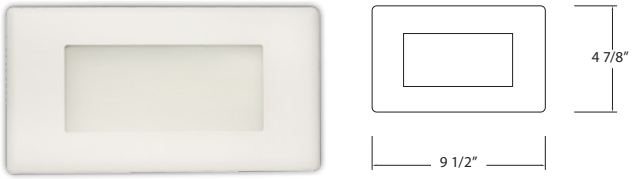

15811
LOUVERED COVER

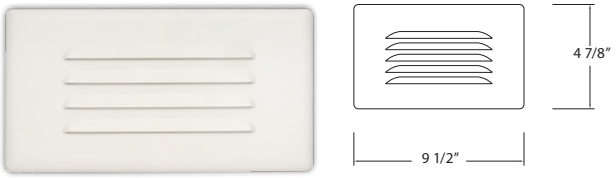

15812
TEXTURED GLASS COVER

15813
TEXTURED FROSTED GLASS COVER

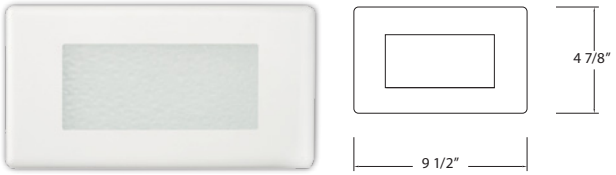

15801
FLUORESCENT STEP LIGHT

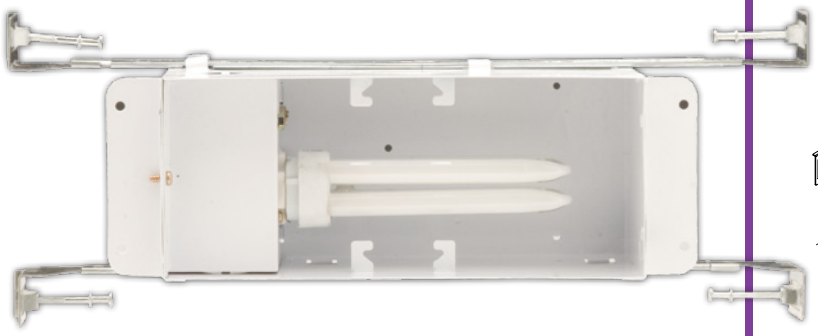

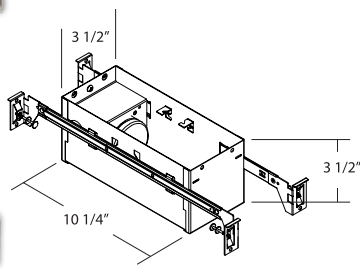

FEATURES

13W CFL G-23
Thermally protected
120V input into wiring compartment
IC rated at 9W, suitable for direct contact with insulation; at 13W it is UL listed but will be NON-IC, insulation must be kept a minimum of 3" from housing
Damp location listed
Lamp not included

Helpful Hint: By replacing a 60W "A" lamp with a compact fluorescent lamp, your energy savings can be 71-75%. Plus, compact fluorescent lamps last 10-13 times longer.

c UL us LISTED

15810
GLASS COVER

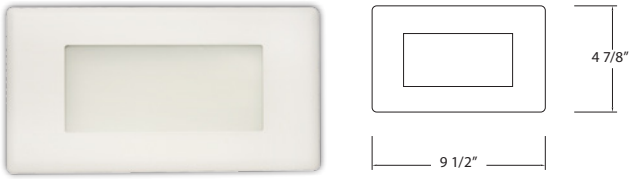

15811
LOUVERED COVER

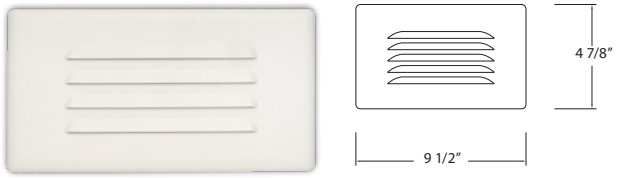

15812
TEXTURED GLASS COVER

15813
TEXTURED FROSTED GLASS COVER

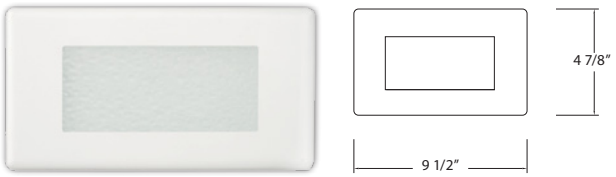

12018WH

12018
GIMBAL RING

150W Max • PAR38
5"D X 6 3/8"L
120 VAC

c UL us LISTED

12018BK

12018BZ

12018NK



12021WH

12021
GIMBAL RING

50W Max • PAR20
2 3/4"D X 3 3/4"L
120 VAC

c UL us LISTED

12018BK

12018BZ

12018NK



12022WH

12022
GIMBAL RING

75W Max • PAR30
3 5/8"D X 4 1/8"L
120 VAC

c UL us LISTED

12022BK

12022BZ

12022NK



12023BK

12023
GIMBAL RING

50W Max • PAR20
2 3/4"D X 3 3/4"L
120 VAC

c UL us LISTED



NICOR® Shining Brighter™

10393WH

10393
HALOGEN PAR FIXTURE

50W Max • R20/PAR20
3 1/2"D X 5"L
120 VAC



c UL us LISTED

10403WH

10403
STEP CYLINDER • WHITE BAFFLE

50W Max • R20/PAR20
3 1/2"D X 5 1/4"L
120 VAC

10403BZ 10403NK



c UL us LISTED

10405WH

10405
STEP CYLINDER • WHITE BAFFLE

75W Max • BR30/PAR30
4 1/2"D X 6 1/2"L
120 VAC



c UL us LISTED

12040WH

12040
LINE VOLTAGE HEAD

75W • 120V/MR16
2 1/4"D X 2 1/2"L
120 VAC



c UL us LISTED

10427WH

10427

ROUND BACK CYLINDER • WHITE BAFFLE STEM MOUNT

75W Max • BR30/PAR30
4 1/2"D X 7"L
120 VAC



c UL us LISTED

10303WH

10303

STEP CYLINDER

50W Max • R20/PAR20
3 1/2"D X 5 1/4"L
120 VAC



c UL us LISTED

10304BK

10304

UNIVERSAL LAMPHOLDER

150W Max • R, BR, or PAR Type
2"D X 4 3/4"L
120 VAC



c UL us LISTED

10305BZ

10305

STEP CYLINDER

75W Max • BR30/PAR30
4 1/2"D X 6 1/2"L
120 VAC

10305BK *10305NK* *10305WH*



c UL us LISTED

10327NKST

10327
ROUND BACK CYLINDER
STEM MOUNT

75W Max • BR30/PAR30
4 1/2"D X 7"L
120 VAC



10327BKST 10327BZST 10305WHST



c UL us LISTED

10328WH

10328
ROUND BACK CYLINDER

150W Max • BR40/PAR38
6"D X 8"L
120 VAC



c UL us LISTED

10426WH

10426
ROUND BACK CYLINDER • WHITE BAFFLE

50W Max • R20/PAR20
3 1/2"D X 6"L
120 VAC

10426BZ 10426NK



c UL us LISTED

10427WH

10427
ROUND BACK CYLINDER • WHITE BAFFLE

75W Max • BR30/PAR30
4 1/2"D X 7"L
120 VAC



c UL us LISTED

10413WH

10413
FLAT BACK CYLINDER • WHITE BAFFLE

50W Max • R20/PAR20
3 1/2"D X 6"L
120 VAC

c UL us LISTED



10415WH

10415
FLAT BACK CYLINDER • WHITE BAFFLE

75W Max • BR30/PAR30
4 1/2"D X 7"L
120 VAC

c UL us LISTED



10326WH

10326
ROUND BACK CYLINDER

50W Max • R20/PAR20
3 1/2"D X 6"L
120 VAC

c UL us LISTED



10327WH

10327
ROUND BACK CYLINDER

75W Max • BR30/PAR30
4 1/2"D X 7"L
120 VAC

10327BK *10327BZ* *10327NK*

c UL us LISTED



10308WH

10308
HALOGEN PAR FIXTURE

50W Max • PAR20
3 1/2"D X 4"L
120 VAC



c UL us LISTED

10313WH

10313
FLAT BACK CYLINDER

50W Max • R20/PAR20
3 1/2"D X 6"L
120 VAC

10313BZ

10313NK



c UL us LISTED

10315NK

10315
FLAT BACK CYLINDER

75W Max • BR30/PAR30
4 1/2"D X 7"L
120 VAC

10315BK

10315BZ

10315WH



c UL us LISTED

12019WH

12019
UNIVERSAL LAMPHOLDER

150W Max • R, BR, OR, PAR Type
2"D X 4"L
120 VAC



c UL us LISTED

12001WH

12001
LOW VOLTAGE HEAD

50W • 12V/MR16
2 1/4"D X 3"L
Transformer Included

12001BK



c UL us LISTED



12007WH

12007
LOW VOTAGE HEAD

50W • 12V/MR16
2 1/4"D X 2"L
Transformer Included

12007BK 12007BZ 12007NK



c UL us LISTED

12037BK

12037
LOW VOLTAGE BARN DOOR

50W • 12V/MR16
3"D X 4"L
Transformer Included



c UL us LISTED

12038WH

12038
LOW VOLTAGE HEAD

50W • 12V/MR16
2 1/4"D X 2 1/2"L
Transformer Included



c UL us LISTED

12055WH

12055
LOW VOLTAGE HEAD

50W • 12V/MR16
2 1/2"D X 4"L
Transformer Included

12055BK



c UL us LISTED

12630WH

12630
LOW VOLTAGE MESH

50W • 12V/MR16
2 3/4"D X 3"L
Transformer Included

12630BK



c UL us LISTED

WE'RE LISTENING. NICOR WELCOMES YOUR COMMENTS AND SUGGESTIONS. TELL US WHAT YOU THINK OF OUR PRODUCTS AND SERVICE. NICOR ALWAYS OFFERS YOU HIGH-QUALITY PRODUCTS WITH INNOVATIVE FEATURES CONTRACTORS WANT AT A FAIR PRICE.

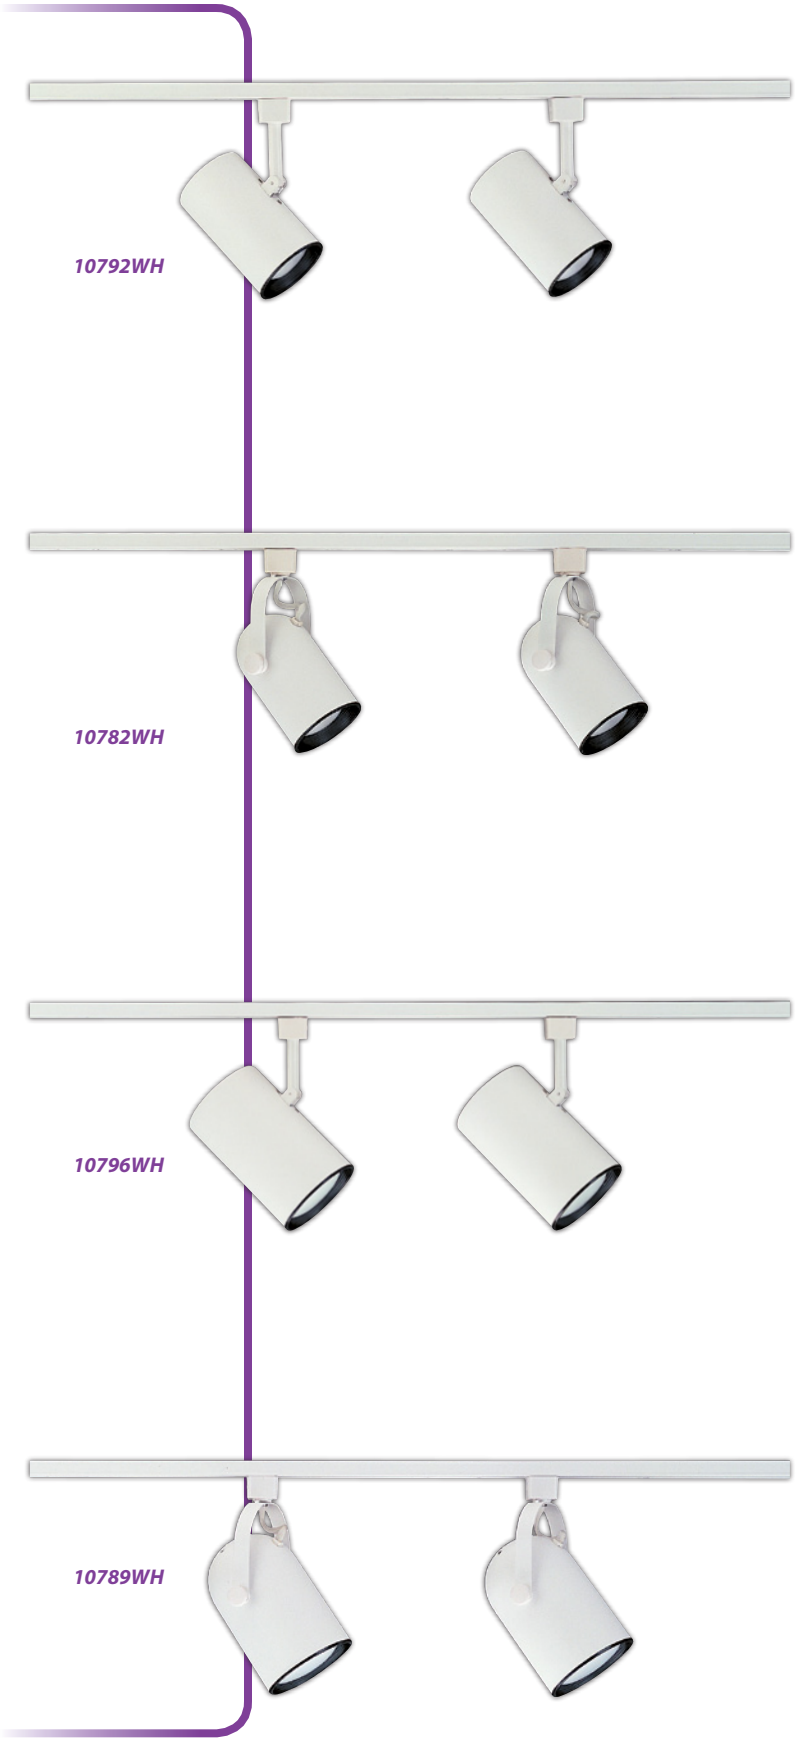

10792
2 LIGHT 2'TRACK PACK
BLACK BAFFLE

50W Max • 2 R20/PAR20
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

10782
2 LIGHT 2'TRACK PACK
BLACK BAFFLE

50W Max • 2 BR30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

10796
2 LIGHT 2'TRACK PACK
BLACK BAFFLE

75W Max • 2 BR30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

10789
2 LIGHT 2'TRACK PACK
BLACK BAFFLE

75W Max • 2 BR30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

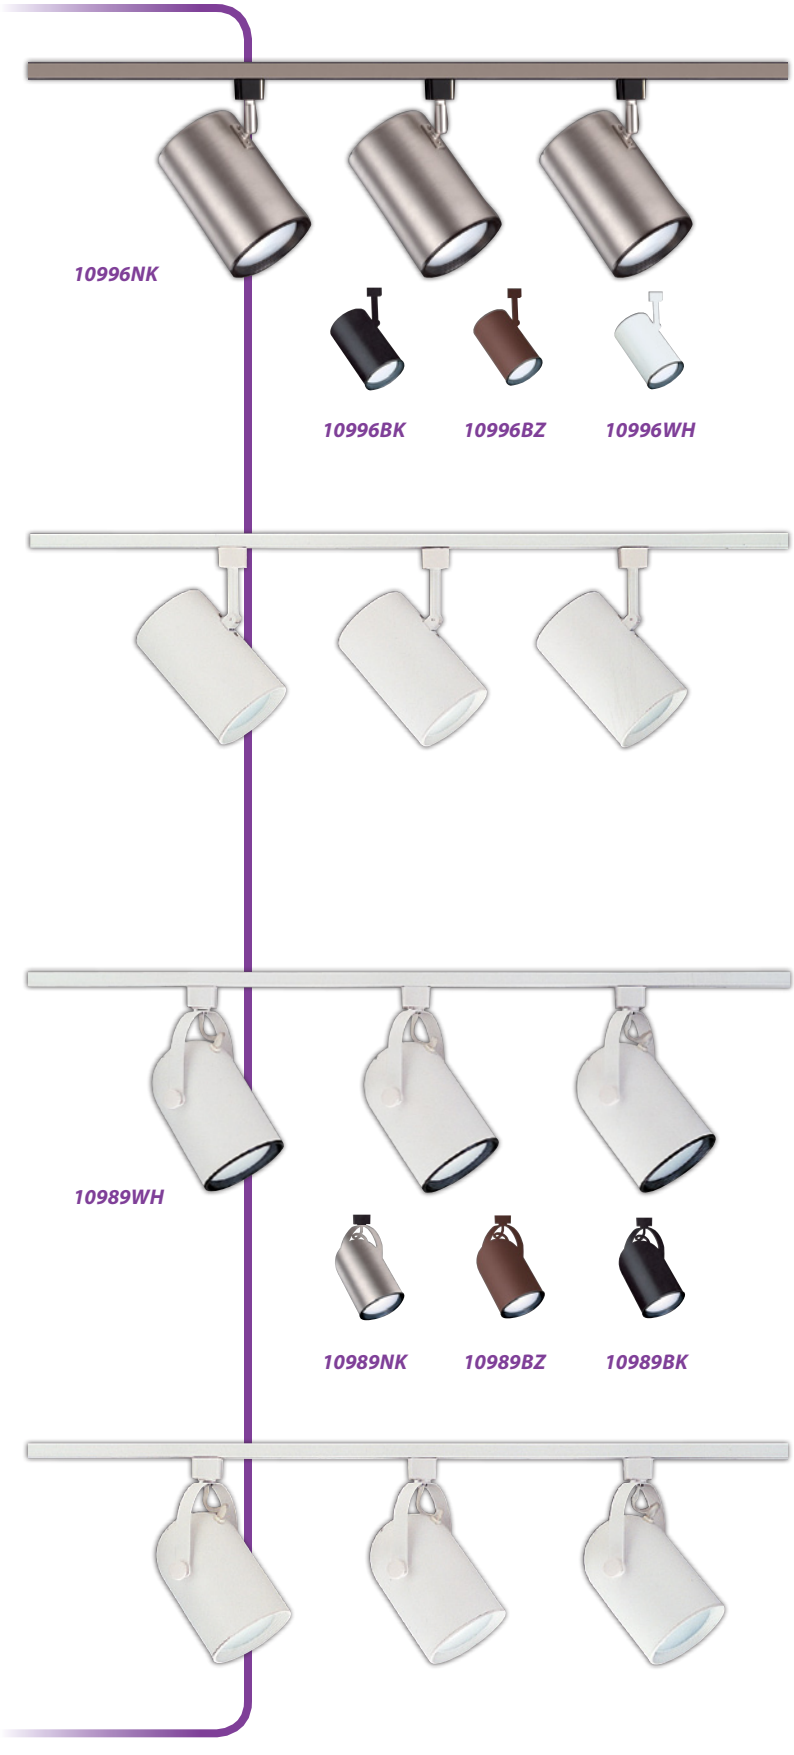

10996
3 LIGHT 4'TRACK PACK
BLACK BAFFLE

75W Max • 3 R30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

10996WHBF
3 LIGHT 4'TRACK PACK
WHITE BAFFLE

75W Max • 3 R30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

10989
3 LIGHT 4'TRACK PACK
BLACK BAFFLE

75W Max • 3 R30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

10989WHBF
3 LIGHT 4'TRACK PACK
WHITE BAFFLE

75W Max • 3 R30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

10989
3 LIGHT 4'TRACK PACK
BLACK BAFFLE • STEM MOUNT

75W Max • 3 R30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

10989WHBFST
3 LIGHT 4'TRACK PACK
WHITE BAFFLE • STEM MOUNT

75W Max • 3 R30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

10997
3 LIGHT 4'TRACK PACK
BLACK BAFFLE

75W Max • 3 R30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

10997WHBF
3 LIGHT 4'TRACK PACK
WHITE BAFFLE

75W Max • 3 R30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

NICOR® Shining Brighter™

11000WH

11000
3 LIGHT 4'TRACK PACK

3 • 50W MR-16
With floating feed and mounting hardware
120 VAC

c UL us LISTED

11001WH

11001BK

11001BZ

11001NK

11001
3 LIGHT 4'TRACK PACK

3 • 50W MR-16
With floating feed and mounting hardware
120 VAC

c UL us LISTED

11004WH

11004NK

11004
3 LIGHT 4'TRACK PACK

3 • 75W PAR30
With floating feed and mounting hardware
120 VAC

c UL us LISTED

10996WH4HEAD

4 LIGHT 4'TRACK PACK
BLACK BAFFLE

75W Max • 4 BR30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

10989NK4HEAD *10989BZ4HEAD* *10989BK4HEAD*

10989WH4HEAD

4 LIGHT 4'TRACK PACK
BLACK BAFFLE

75W Max • 4 BR30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

10989WHST4HEAD

4 LIGHT 4'TRACK PACK
BLACK BAFFLE • STEM MOUNT

75W Max • 4 BR30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

10997WH4HEAD

4 LIGHT 4'TRACK PACK
BLACK BAFFLE

75W Max • 4 BR30/PAR30
With floating feed and mounting hardware
Lamps not included
120 VAC

c UL us LISTED

NICOR® Shining Brighter™

LINEAR TRACK

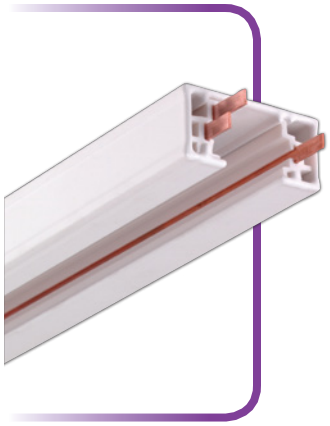

3 WIRE SURFACE TRACK SECTIONS

20 AMP MAX.

10002BK (2' Black)
10002NK (2' Brushed Nickel)
10002WH (2'White)

10004BK (4' Black)
10004NK (4' Brushed Nickel)
10004WH (4'White)

10006BK (6' Black)
10006NK (6' Brushed Nickel)
10006WH (6'White)

10008BK (8' Black)
10008NK (8' Brushed Nickel)
10008WH (8'White)

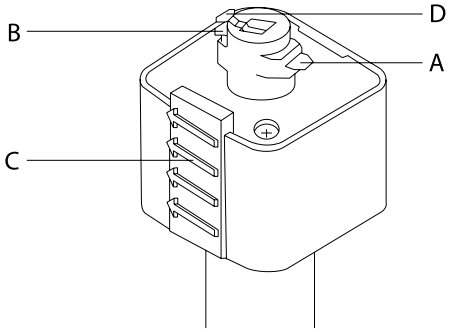

A. Copper contacts provide the best electrical conductivity possible.

B. True, positive electrical ground.

C. Spring-loaded positive latch with embossed polarity arrows secures track fixtures to track.

D. Positive (hot) conductor.

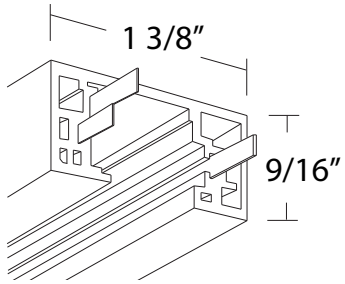

HOW TO USE FIXTURES IN A TRACK

All NICOR track lights have three contacts in the base that engage conductors within the track. NICOR track has one conductor for neutral, one for positive and one for ground.

STEP 1

Identify the positive conductor on the fixture.



STEP 2

Insert into track and turn positive conductor from the track head to the positive conductor on track.



STEP 3

Release the spring-loaded positive latch with embossed polarity arrows to secure the track heads to the track.



TRACK SYSTEM INSTALLATION

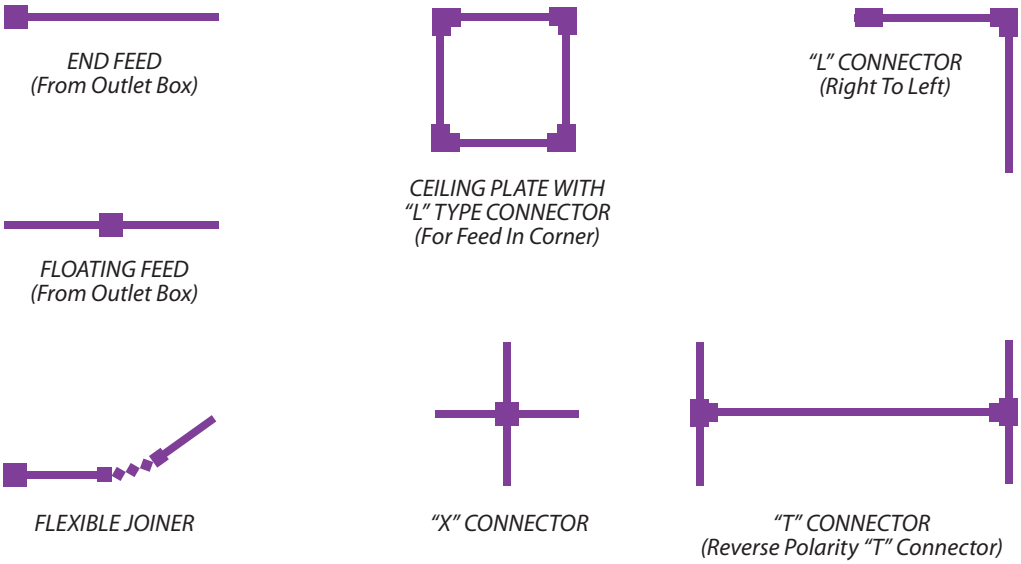

TRACK ACCESSORIES

10010
BAFFLE • R20

10010WH
Also Available:
10010BK

10011
BAFFLE • R30

10011WH
Also Available:
10011BK

10012
BAFFLE • PAR38/BR30

10012WH
Also Available:
10012BK

10021
LIVE END FEED W/ COVER

c UL us LISTED

10021WH
Also Available:
10021BK
10021NK

10022
CORD & PLUG CONNECTOR
Comes with 15' three-wire cord

Includes:
Surface wire retainers and in-line switch

c UL us LISTED



10022WH
Also Available:
10022BK



10023WH
Also Available:
10023BK



10024WH
Also Available:
10024BK



10025WH
Also Available:
10025BK



10026WH
Also Available:
10026BK

10029WH
Also Available:
10029BK
10029NK

10023
MINIATURE STRAIGHT CONNECTOR
Joins two track sections end to end

c UL us LISTED

10024
"L" CONNECTOR • FEED & OUTLET BOX
Joins two track sections to make a 90° angle or a straight run

c UL us LISTED

10025
"T" CONNECTOR
Joins three track sections for outlet box feed: 10019 (Outlet box cover) also required

c UL us LISTED

10026
"X" CONNECTOR
Joins four track sections at 90° angles for outlet box feed: 10019 (Outlet box cover) also required

c UL us LISTED

10029
FLOATING ELECTRICAL FEED
Permits mounting on any track under outlet box.

Includes: Floating connector and outlet box cover/plus extra track dead end

c UL us LISTED

NICOR® Shining Brighter™

TRACK ACCESSORIES

10034
CONDUIT ADAPTER FEED
For use with surface conduit fitter

c UL us LISTED

10034WH
Also Available:
10034BK

10020
WIRE WAY COVER
For pendant stem kits

c UL us LISTED

10020WH
Also Available:
10020BK

10034WHR
CONDUIT ADAPTER FEED (REVERSE POLARITY)
For special application use with surface conduit where reverse polarity is required • accepts 1/2" size conduit fitter

c UL us LISTED

Also Available:
10034BKR
(Reverse Polarity)

10040
MONO-POINT ADAPTER
All track fixtures may be used for direct connection to outlet box
OD: 4" Depth: 3/4"

c UL us LISTED

10040WH
Also Available:
10040BK

10019
OUTLET BOX COVER

c UL us LISTED

10019WH
Also Available:
10019BK

10035
TRACK CONTINUATION KIT
Allows a track layout to continue around physical obstructions includes one left & one right conduit end feed

c UL us LISTED



10035WH
Also Available:
10035BK

10042
MONO-POINT ADAPTER ROUND
All track fixtures may be used for direct connection to outlet box

c UL us LISTED

10042WH
Also Available:
10042BK

10038
LIVE END FEED CONNECTOR
Feed Track from above with flexible conduit/BX/ETC./or end feed in pendant systems • Uses standard 1/2" connector

c UL us LISTED

10022WH
Also Available:
10022BK

10050
FIXTURE ADAPTER
For supporting and wiring chain hung fixtures

Max weight: 15 lbs.

c UL us LISTED

10050WH
Also Available:
10050BK

TRACK ACCESSORIES

10052
SUSPENSION HOOK
Non-Electric

Max weight: 15 lbs.

c UL us LISTED

10052WH
Also Available:
10052BK

10065
RIGID CEILING PENDANT STEM KIT
Provides mechanical support for track

c UL us LISTED

10065WH12
Also Available:
10065BK12 (12" Black)
10065WH24 (24" White)
10065BK24 (24" Black)
10065WH36 (36" White)
10065BK36 (36" Black)
10065WH48 (48" White)

10055
ACCORDIAN ADJUSTABLE JOINER
Joins two track sections
Can flex to 90° angle to left/ right/up/or down

c UL us LISTED



10055WH
Also Available:
10055BK

10060
T-BAR PENDANT STEM KIT
Provides mechanical support for track

c UL us LISTED

10060WH12 (12" White)
10060BK12 (12" Black)
10060WH24 (24" White)
10060BK24 (24" Black)
10060WH36 (36" White)
10060BK36 (36" Black)
10060WH48 (48" White)

10212
LINE VOLTAGE EXTENSION WAND
Suspends 120V track lights from track
Track head not included

c UL us LISTED

10212WH
Also Available:
10212BK (12")
10218WH (18")
10218BK (18")
10224WH (24")
10224BK (24")
10236WH (36")
10236BK (36")
10248WH (48")
10248BK(48")

10066
PENDANT STEM THREADED COUPLING

c UL us LISTED

10066WH
Also Available:
10066BK (Black)

10081
END CAP

c UL us LISTED

10081WH
Also Available:
10081BK (Black)

INDOOR SURFACE MOUNTS

30032-FL-NK
9" Wall Sconce

120V/2x13W GU24
Nickel Finish, Frosted Glass
8.5" x 10.5" x 4.0"

30033-FL-NK
7" Wall Sconce

2x13W GU24
Nickel Finish, Frosted Acrylic
7.0" x 10.5" x 4.0"

30035-FL-NK
10" Wall Sconce

2x13W GU24
Nickel Finish, Alabaster Glass
10.3" x 11.5 "x 4.0"

30104-FL-OB
11" Wall Sconce

2x13W GU24
Bronze Finish, Frosted Acrylic
10.7" x 11.5" x 4.7"

32103-FL-NK
Vanity Sconce

2xF17T8, 17W
Nickel Finish, Frosted Acrylic
24.5" x 6"x 5.9"

Also Available:
32105-FL-NK
32106-FL-NK

2xF25T8, 25W, 36.5"L
2xF32T8, 32W, 48.5"L

All are also available in LED. See page 210

INDOOR SURFACE MOUNTS

CEILING FIXTURE

120V
Nickel Finish, Frosted Acrylic

FEATURES

Die-formed cold rolled steel frame
Mounts flush to ceiling
(Pendant mounting option available)
CUL Listed

ORDERING

PRODUCT NO.	*LAMP*	*DIMENSIONS (OD X H)*
30014-FL-NK	2x13W GU24	14.2″ x 4.0″
30016-FL-NK	2X18W GU24	16.0″ x 4.4″
30018-FL-NK	2X26W GU24	17.8″ x 4.4″
30014-PFL-NK*	2X13W GU24	14.2″ x 10.0″
30016-PFL-NK*	2X18W GU24	16.0″ x 10.0″
30018-PFL-NK*	2X26W GU24	17.8″ x 10.0″

**Includes pendant mounting adapter*

Also available in LED. See page 211

ENERGY STAR

c UL us LISTED

NICOR® Shining Brighter™

OUTDOOR SURFACE MOUNTS

34031-FL-BK
10.5″ Wall Mount

1x18W GU24
Black Finish, Frosted Polycarbonate
10.5″ x 7.5″ x 3.7″

Polycarbonate body

c UL us LISTED

34082-FL-BK
10″ Wall Mount

1x18W GU24
Black Finish, Frosted Polycarbonate
9.8″ x 7.8″ x 4.4″

Die-cast aluminum with powder coat finish

c UL us LISTED ENERGY STAR

34098-FL-BK
12″ Wall Mount

1x18W GU24
Black Finish, Frosted Polycarbonate
12.3″ x 10.1″ x 4.8″

Die-cast aluminum with powder coat finish

c UL us LISTED ENERGY STAR

34122-FL-BK
12″ Wall Mount

2x13W GU24
Black Finish, Frosted Polycarbonate
12.6″ x 3.0″

Die-cast aluminum with powder coat finish

c UL us LISTED

All are also available in LED. See page 212

OUTDOOR SURFACE MOUNTS

30001-FL-WH

14" Ceiling Mount

2x13W GU24
White Finish, Opal Polycarbonate
11" x 3.7"

Polycarbonate housing and shade

c UL us LISTED

34121-FL-BK

13" Ceiling Mount

2x13W GU24
Black Finish, Frosted Polycarbonate
12.6" x 3.0"

Die-cast aluminum with powder coat finish

c UL us LISTED

All are also available in LED. See page 213

OUTDOOR WALL PACKS

20330
WALL PACK

1 X 18W PLC
Energy-saving cool white (4100 K) lamp included
120V Electronic ballast
Black finish plastic base
Acrylic lens

c UL us LISTED — WET LOCATION RATED WL



20331
WALL PACK

1 X 13W PLC
Energy-saving cool white (4100 K) lamp included
120V Electronic ballast
White finish steel base
Acrylic lens

c UL us LISTED — WET LOCATION RATED WL



20332
WALL PACK

1 X 18W PLC
Energy-saving cool white (4100 K) lamp included
120V Electronic ballast
White finish steel base
Acrylic lens

c UL us LISTED — WET LOCATION RATED WL

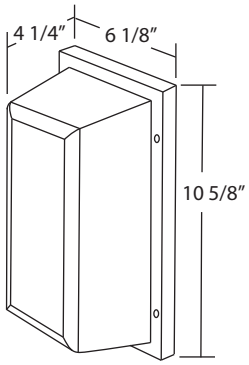

20333
WALL PACK

2 X 13W PLC
Energy-saving cool white (4100 K) lamp included
120V Electronic ballast
White finish steel base
Acrylic lens

c UL us LISTED — WET LOCATION RATED WL

20335
WALL PACK

2 X 18W PLC
Energy-saving cool white (4100 K) lamp included
120V Electronic ballast
White finish steel base
Acrylic lens

c UL us LISTED — WET LOCATION RATED WL

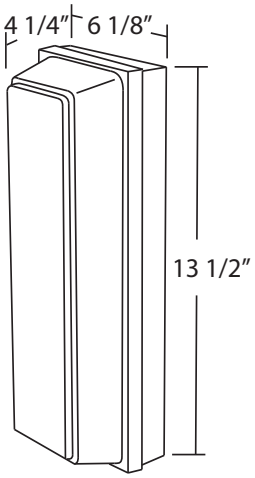

11111 BLACK • 11112 WHITE • 11118 BRONZE

150W PAR38/ BR40 · SINGLE CONE



c UL us LISTED

WET LOCATION RATED WL

11511 BLACK • 11512 WHITE • 11518 BRONZE

50W PAR20 · SINGLE CYLINDER



c UL us LISTED

WET LOCATION RATED WL

11711 BLACK • 11712 WHITE • 11718 BRONZE

75W PAR30 · SINGLE CYLINDER



c UL us LISTED

WET LOCATION RATED WL

11521 BLACK • 11528 BRONZE • 11522 WHITE

2 X 50W PAR20 · DOUBLE CYLINDER



c UL us LISTED

WET LOCATION RATED

11721 BLACK • 11728 BRONZE • 11722 WHITE

2 X 75W BR30 · DOUBLE CYLINDER



c UL us LISTED

WET LOCATION RATED

11721 BLACK • 11728 BRONZE • 11122 WHITE

2 X 150W PAR38/BR40 · DOUBLE CONE



c UL us LISTED

WET LOCATION RATED

50102BK • 50102WH • 50102BA

2 X 75W R30 · UP-DOWN



4.5″W x 12″H x 7″E
Convex Lens

50102BK BLACK

50102WH WHITE

50102BA ARCHITECTURAL BRONZE

c UL us LISTED

WET LOCATION RATED WL

50132BK • 50132WH • 50132BA

2 X 150W R40/PAR38 · UP-DOWN

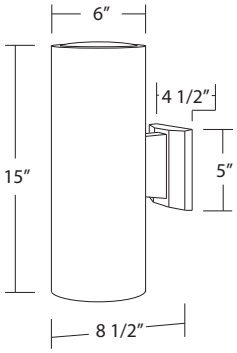

6″W x 15″H x 8.5″E
Convex Lens

50132BK BLACK

50132WH WHITE

50132BA ARCHITECTURAL BRONZE

c UL us LISTED

WET LOCATION RATED WL

50101BA • 50101WH • 50101BK

75W R30 · DOWN LIGHT

50101BK BLACK

50101WH WHITE

50101BA ARCHITECTURAL BRONZE

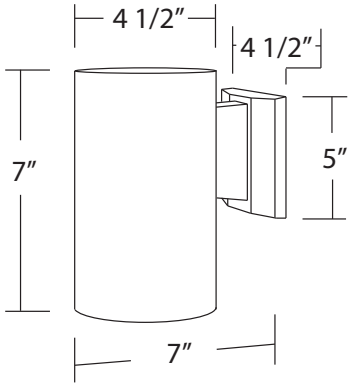

4.5″W x 7″H x 7″E

c UL us LISTED

WET LOCATION RATED

50131BA • 50131WH • 50131BK

2 X 150W R40/PAR38 · UP-DOWN

50131BK BLACK

50131WH WHITE

50131BA ARCHITECTURAL BRONZE

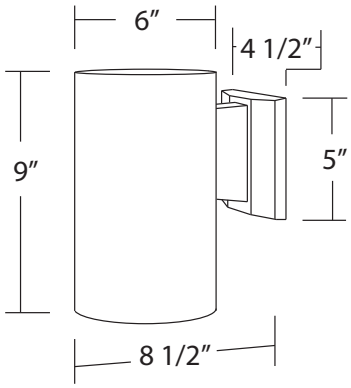

6″W x 9″H x 8.5″E

c UL us LISTED

WET LOCATION RATED

New products and catalog updates are just a click away at **nicorlighting.com**

Specialty Conventional
The finishing touches to complement your lighting and even take your energy savings to the next level.

PrimeChime

For the first time, everything is together in one unit!

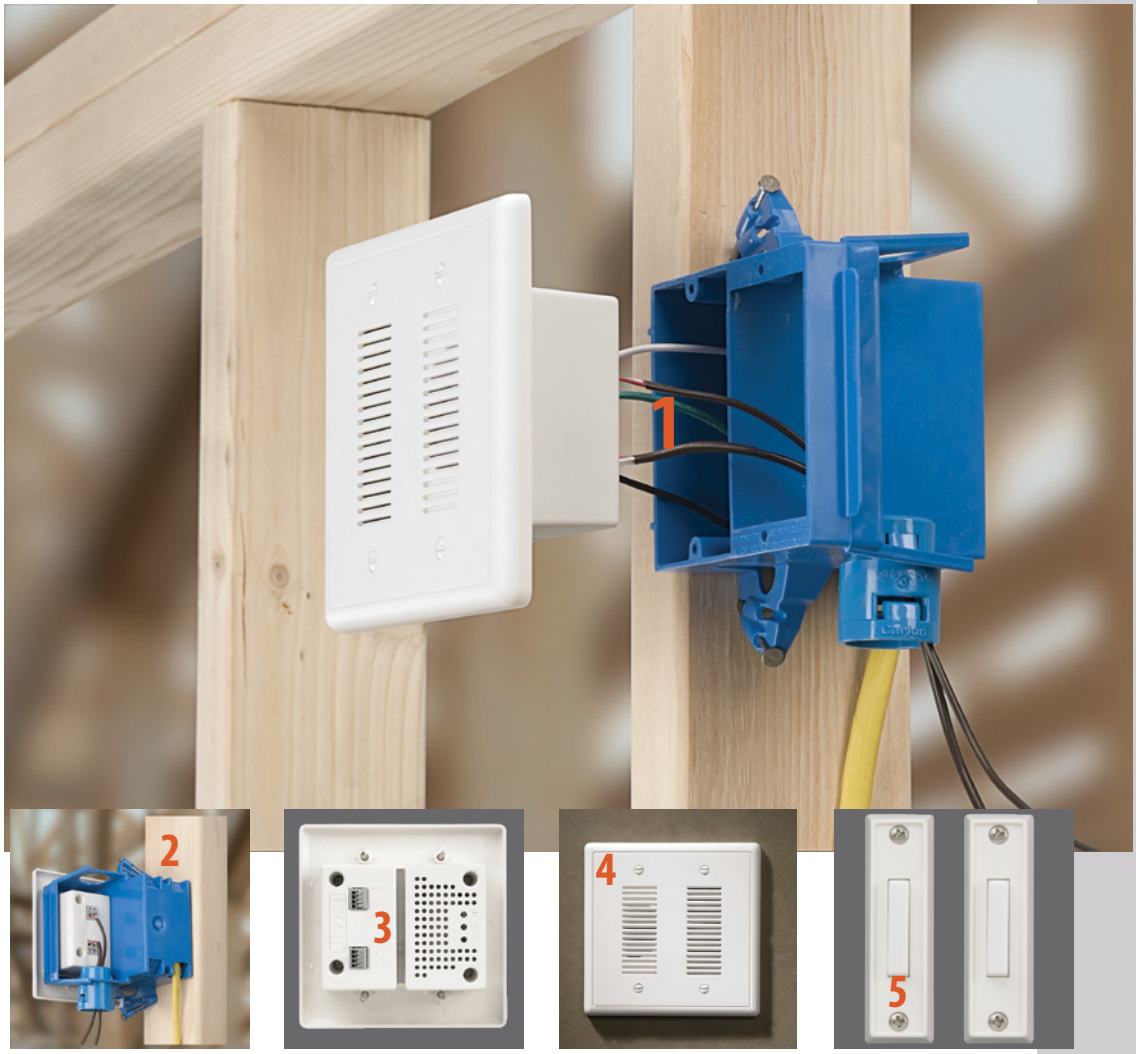

1 PrimeChime combines line and low voltage in a single unit

2 PrimeChime installs directly into a standard dual voltage wall box

3 Easy to daisy-chain multiple chimes

4 Elegant, paintable flush-mounted cover

5 Two lighted doorbell buttons included

Virtually eliminates call-backs!

18888 • 18888SB

PRIME CHIME, PRIME CHIME WITH STUCCO BUTTON

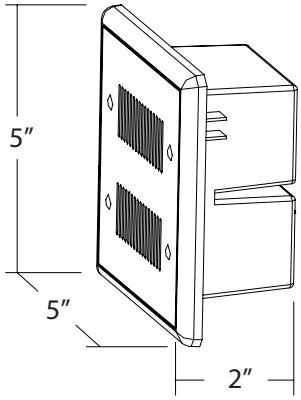

FEATURES

120VAC/60Hz in, 9VAC/500mA out
Installs quickly into a standard two-gang dual-voltage wall box.
Combines line voltage and low voltage in a single unit.
Daisy chain capability (up to four Prime Chimes).
Recessed mounting.
Paintable faceplate.
Two different chime sounds for front and back doors.
Two lighted rectangle doorbell buttons.

OPTIONS

DBBK	Black Lighted Deco-Button
DBWH	White Lighted Deco-Button
DBNK	Brushed Nickel Lighted Deco-Button
DBCO	Brushed Copper Lighted Deco-Button
ECSBAB	Antique Brass Stucco Button
ECSBARCHBZ	Architectural Bronze Stucco Button
ECSBNK	Nickel Stucco Button
ECSBPB	Polished Brass Stucco Button
ECSBWH	White Stucco Button

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

18001
DELUXE TWO DOOR CHIME KIT
White entrance chime with two rectangular lighted push buttons and one 16 volt 10VA transformer

c UL us LISTED

18001SB
DELUXE TWO DOOR CHIME KIT
White entrance chime and one round stucco button and one 16 volt 10VA transformer

c UL us LISTED



18002
ONE DOOR ENTRANCE CHIME KIT
White entrance chime with one rectangular unlighted push-button and one 16 volt 10VA transformer

c UL us LISTED

18002LRD
ONE DOOR ENTRANCE CHIME KIT
White entrance chime and one round lighted push-button and one 16 volt 10VA transformer

c UL us LISTED

18002LRT
ONE DOOR ENTRANCE CHIME KIT
White entrance chime and one rectangular lighted push-button and one 16 volt 10VA transformer

c UL us LISTED

NICOR® Shining Brighter™

LIGHTED DECO-BUTTON

Item No.	Material	Color	
DBBK	Die-cast aluminum	Black	For Prime Chime only

LIGHTED DECO-BUTTON

Item No.	Material	Color	
DBWH	Die-cast aluminum	White	For Prime Chime only

LIGHTED DECO-BUTTON

Item No.	Material	Color	
DBNK	Die-cast aluminum	Brushed Nickel	For Prime Chime only

LIGHTED DECO-BUTTON

Item No.	Material	Color	
DBCO	Die-cast aluminum	Brushed Copper	For Prime Chime only

LIGHTED ROUND PUSH-BUTTON

Item No.	Description
LRD	White

LIGHTED RECTANGULAR PUSH-BUTTON

Item No.	Description
LRT	White



LIGHTED STUCCO BUTTON

Item No.	Description	
ECSBPB	Polished Brass	For Prime Chime only
STUCCOBTN	Polished Brass	

LIGHTED STUCCO BUTTON

Item No.	Description	
ECSBWH	White	For Prime Chime only
STUCCOBTNWH	White	

LIGHTED STUCCO BUTTON

Item No.	Description	
ECSBNK	Nickel	For Prime Chime only
STUCCOBTNNK	Nickel	

LIGHTED STUCCO BUTTON

Item No.	Description	
ECSBAB	Antique Brass	For Prime Chime only
STUCCOBTNAB	Antique Brass	



LIGHTED STUCCO BUTTON

Item No.	Description	
ECSBARCHBZ	Architectural Bronze	For Prime Chime only
STUCCOBTNBZ	Architectural Bronze	

18011
MEDIUM CERAMIC BASE
Mounting screws included
Nickel plated brass screw shell
Fits 3 1/4" or 4" outlet box
Up to 660W, 250V



c UL us LISTED

18012
MEDIUM CERAMIC BASE
WITH PULL CHAIN
Mounting screws included
Nickel plated brass screw shell
Fits 3 1/4" or 4" outlet box
Up to 660W, 250V



c UL us LISTED

18013
MEDIUM CERAMIC BASE
WITH PULL CHAIN
Mounting screws included
Nickel plated brass screw shell
Fits 3 1/4" or 4" outlet box
Up to 660W, 250V



c UL us LISTED

18014
MEDIUM BAKELITE BASE
WITH PULL CHAIN
Mounting screws included
Nickel plated brass screw shell
Fits 3 1/4" or 4" outlet box
Up to 660W, 250V



c UL us LISTED

18015
MEDIUM BAKELITE BASE
WITH PULL CHAIN
Mounting screws included
Nickel plated brass screw shell
Fits 3 1/4" or 4" outlet box
Up to 660W, 250V



c UL us LISTED

OS150

OCCUPANCY SENSOR • PASSIVE INFRARED WALL SWITCH

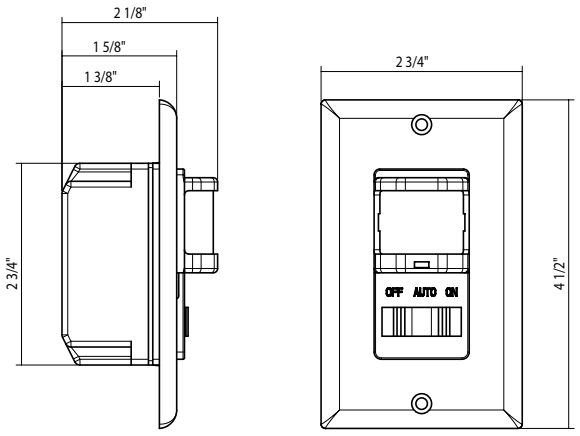

OS150WH
Also Available:
OS150IV (Ivory)

MAXCOR™

FEATURES

Installs quickly in a standard single gang switch box.
Turns lights On/Off automatically.
Manual On/Off setting allows use as a regular switch.
Time delay Off setting is adjustable from 15 seconds to 30 minutes.
Adjustable sensitivity settings.
Face plate included.
Two year warranty.

RATING

Incandescent: 500W @ 120VAC
Fluorescent: 500VA @ 120VAC
Motor: 1/8HP @ 120VAC

ORDERING INFORMATION

OS150WH WHITE
OS150IV IVORY

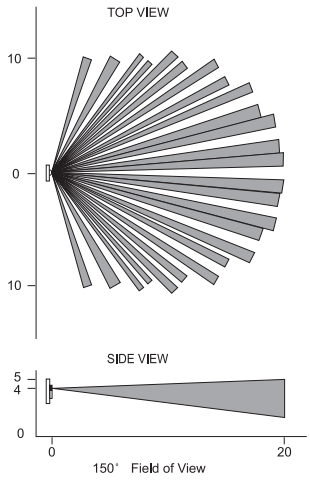

COVERAGE
150 degree, 450sqft

c UL us LISTED

NICOR® Shining Brighter™

OS150B

OCCUPANCY SENSOR • PASSIVE INFRARED WALL SWITCH

MAXCOR™

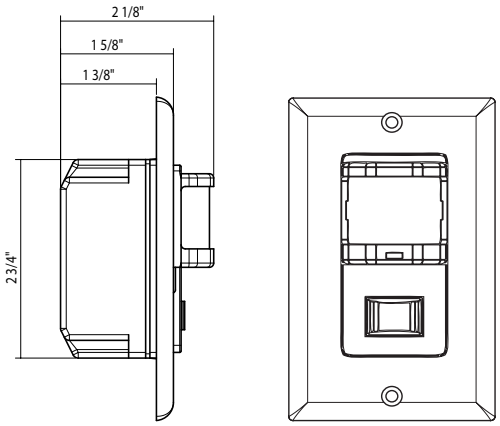

OS150B-WH
Also Available:
OS150B-IV (Ivory)

FEATURES

150° field of view
Turns lights On/Off automatically
Time delay Off, adjustable from 15 seconds to 30 minutes
Adjustable sensitivity settings
Adjustable ambient light level setting
Standard decorator wall plate included
Two year warranty.

RATING

Incandescent: 500W @ 120VAC
Fluorescent: 500VA @ 120VAC
Motor: 1/8HP @ 120VAC

TYPICAL APPLICATIONS

Bedrooms, bathrooms, laundry rooms, closets, garages, kitchens, home offices

ORDERING INFORMATION

OS150B-WH WHITE
OS150B-IV IVORY

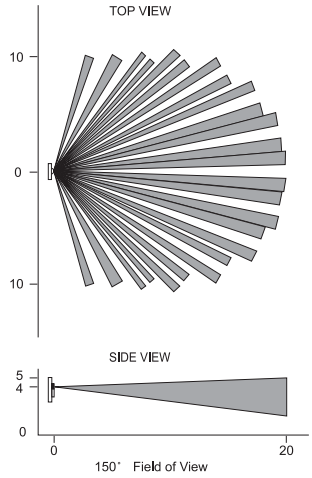

COVERAGE
150 degree, 450sqft

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

VS150

VACANCY SENSOR • PASSIVE INFRARED WALL SWITCH

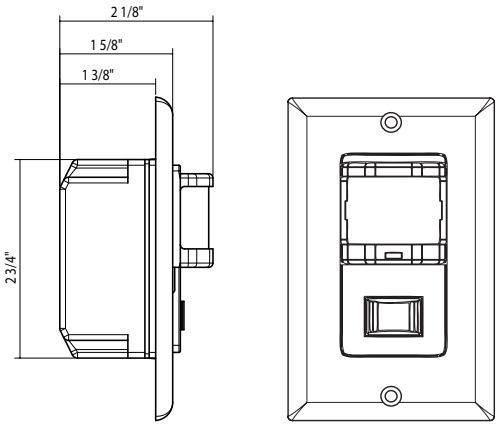

VS150-WH
Also Available:
VS150-IV (Ivory)

MAXCOR™

FEATURES

150° field of view
Manual "On" only
Automatic Off after time-delay or turn off manually
Time delay Off, adjustable from 15 seconds to 30 minutes
Adjustable sensitivity settings
Adjustable ambient light level setting
Standard decorator wall plate included
Two year warranty.

RATING

Incandescent: 500W @ 120VAC
Fluorescent: 500VA @ 120VAC
Motor: 1/8HP @ 120VAC

TYPICAL APPLICATIONS

Bedrooms, bathrooms, laundry rooms, closets, garages, kitchens, home offices

ORDERING INFORMATION

VS150-WH WHITE
VS150-IV IVORY

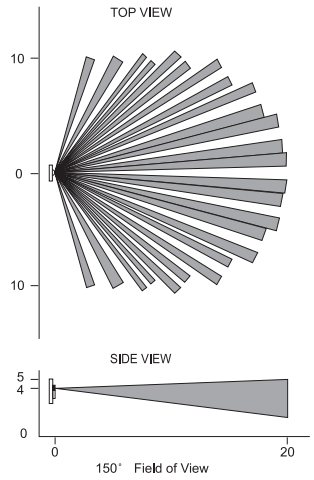

COVERAGE
150 degree, 450sqft

Can be used for T24 California Title 24 High Energy Compliant

FC

c UL us LISTED

DOS180

OCCUPANCY • VACANCY SENSOR • PASSIVE INFRARED WALL SWITCH

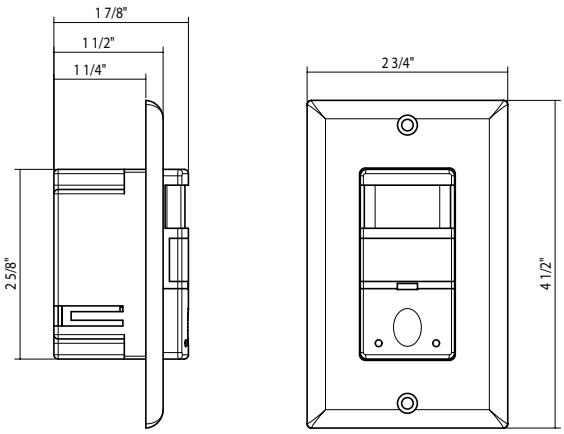

DOS180-WH
Also Available:
DOS180-IV (Ivory)

FEATURES

180° field of view
Turns lights On/Off automatically
Built-in On/Off push-button
Built-in OCC/VAC slide button offers manual or auto on, always turns lights off automatically
Time delay Off setting, adjustable from 15 seconds to 30 minutes
Zero crossing function
Adjustable sensitivity settings
Adjustable ambient light level setting
Standard decorator wall plate included
Two year warranty

RATING

Incandescent: 800W @ 120VAC
Fluorescent: 800VA @ 120VAC
Motor: 1/4HP @ 120VAC

TYPICAL APPLICATIONS

Bedrooms, bathrooms, laundry rooms, closets, garages, kitchens, home offices

ORDERING INFORMATION

DOS180-WH WHITE
DOS180-IV IVORY

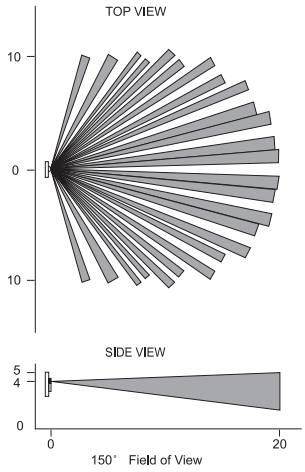

COVERAGE
180 degree, 1200 sqft
Best: 320 sqft
Regular: 800 sqft
Maximum: 1200 sqft

Can be used for T24 California Title 24 High Energy Compliant

C UL US LISTED

DOS180-120-277

OCCUPANCY • VACANCY SENSOR • PASSIVE INFRARED WALL SWITCH
MULTI-VOLTAGE

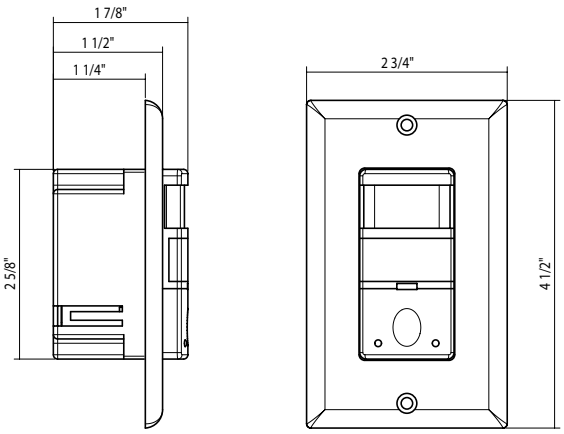

DOS180-120-277-WH
Also Available:
DOS180-120-277-IV (Ivory)

MAXCOR™

FEATURES

180° field of view
Operates at 120~277V
Turns lights On/Off automatically
Built-in On/Off push-button
Built-in OCC/VAC slide button offers manual or auto on, always turns lights off automatically
Time delay Off setting, adjustable from 15 seconds to 30 minutes
Zero crossing function
Adjustable sensitivity settings
Adjustable ambient light level setting
Standard decorator wall plate included
Two year warranty

RATING

Incandescent: 800W @ 120VAC
Fluorescent: 800VA @ 120VAC, 1600VA @ 277VAC
Motor: 1/4HP @ 120VAC

TYPICAL APPLICATIONS

Bedrooms, bathrooms, laundry rooms, closets, garages, kitchens, home offices

ORDERING INFORMATION

DOS180-120-277-WH WHITE
DOS180-120-277-IV IVORY

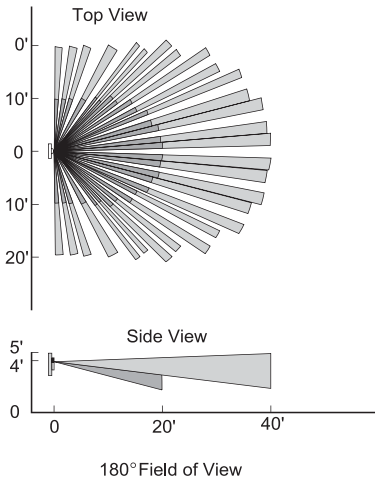

180° Field of View

COVERAGE
180 degree, 1200 sqft
Best: 320 sqft
Regular: 800 sqft
Maximum: 1200 sqft

Can be used for T24 California Title 24 High Energy Compliant

LISTED

SPECIALTY CONVENTIONAL

NICOR® Shining Brighter™

DOS180NL

OCCUPANCY • VACANCY SENSOR • PASSIVE INFRARED WALL SWITCH WITH NIGHT LIGHT

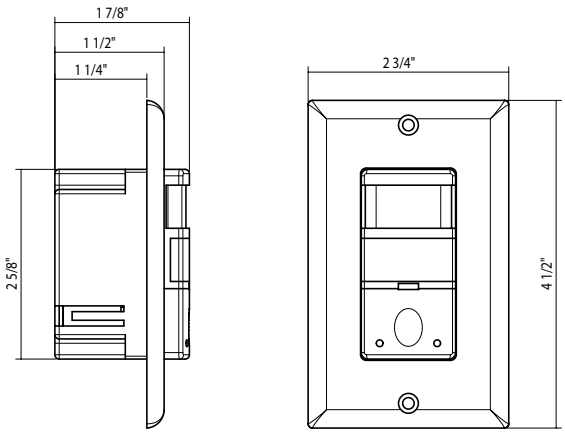

DOS180NL-WH
Also Available:
DOS180NL-IV (Ivory)

FEATURES

180° field of view
Operates at 120~277V
Turns lights On/Off automatically
Built-in On/Off push-button
Built-in OCC/VAC slide button offers manual or auto on, always turns lights off automatically
Time delay Off setting, adjustable from 15 seconds to 30 minutes
Built-in night light
Zero crossing function
Adjustable sensitivity settings
Adjustable ambient light level setting
Standard decorator wall plate included
Two year warranty

RATING

Incandescent: 800W @ 120VAC
Fluorescent: 800VA @ 120VAC, 1600VA @ 277VAC
Motor: 1/4HP @ 120VAC

TYPICAL APPLICATIONS

Bedrooms, bathrooms, laundry rooms, closets, garages, kitchens, home offices

ORDERING INFORMATION

DOS180NL-WH WHITE
DOS180NL-IV IVORY

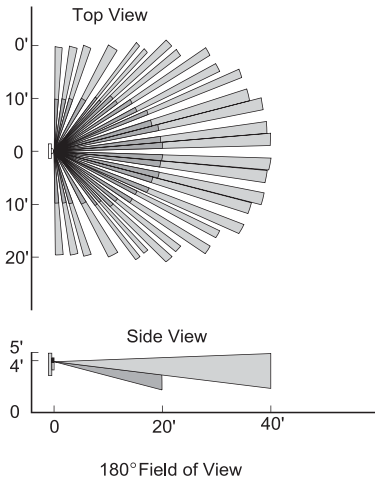

COVERAGE
180 degree, 1200 sqft
Best: 320 sqft
Regular: 800 sqft
Maximum: 1200 sqft

Can be used for T24 California Title 24 High Energy Compliant

LISTED

DOS180LP

OCCUPANCY • VACANCY SENSOR • PASSIVE INFRARED WALL SWITCH
NO NEUTRAL REQUIRED

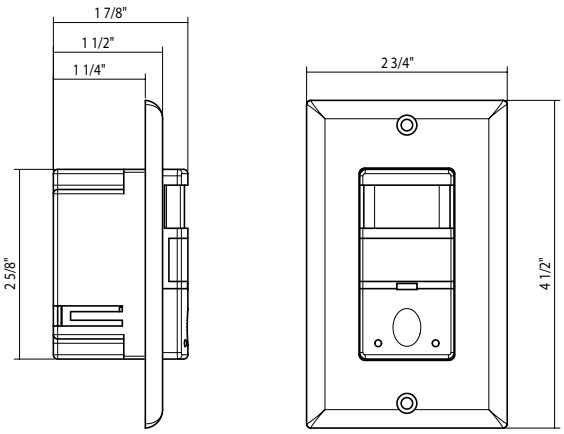

DOS180LP-WH
Also Available:
DOS180LP-IV (Ivory)

MAXCOR™

FEATURES

180° field of view
Low power. No neutral wire required. No minimum load required.
Operates at 120~277V
Controls two separate loads. Bi-level wiring Turns lights On/Off automatically
Built-in On/Off push-button
Built-in OCC/VAC slide button offers manual or auto on, always turns lights off automatically
Time delay Off setting, adjustable from 15 seconds to 30 minutes
Zero crossing function
Adjustable sensitivity settings
Standard decorator wall plate included
Two year warranty

RATING

Incandescent: 800W @ 120VAC
Fluorescent: 800VA @ 120VAC, 1600VA @ 277VAC
Motor: 1/4HP @ 120VAC

TYPICAL APPLICATIONS

Bedrooms, bathrooms, laundry rooms, closets, garages, kitchens, home offices

ORDERING INFORMATION

DOS180LP-WH WHITE
DOS180LP-IV IVORY

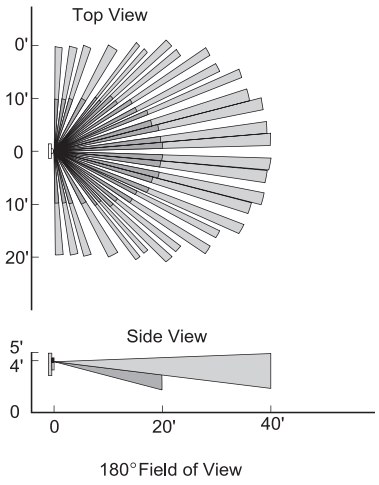

180° Field of View

COVERAGE
180 degree, 1200 sqft
Best: 320 sqft
Regular: 800 sqft
Maximum: 1200 sqft

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

NICOR® Shining Brighter™

DOS180LP-D

OCCUPANCY • VACANCY SENSOR • PASSIVE INFRARED WALL SWITCH
DUAL RELAY

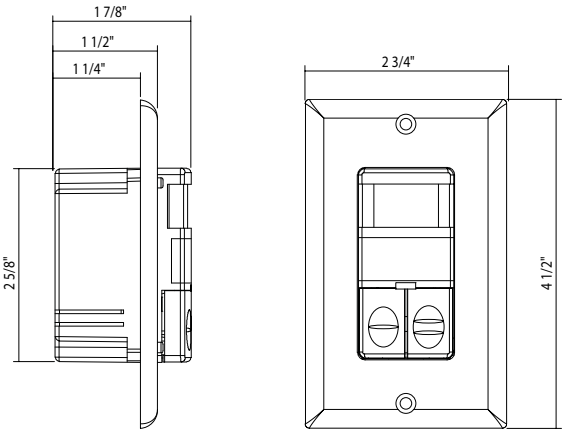

DOS180LP-D-WH
Also Available:
DOS180LP-D-IV (Ivory)

FEATURES

180° field of view
Low power. No neutral wire required. No minimum load required.
Operates at 120~277V
Controls two separate loads. Bi-level wiring
Turns lights On/Off automatically
Built-in On/Off push-button
Built-in OCC/VAC slide button offers manual or auto on, always turns lights off automatically
Time delay Off setting, adjustable from 15 seconds to 30 minutes
Zero crossing function
Adjustable sensitivity settings
Standard decorator wall plate included
Two year warranty.

RATING

Incandescent: 800W @ 120VAC
Fluorescent: 800VA @ 120VAC, 1600VA @ 277VAC
Motor: 1/4HP @ 120VAC

TYPICAL APPLICATIONS

Bedrooms, bathrooms, laundry rooms, closets, garages, kitchens, home offices

ORDERING INFORMATION

DOS180LP-D-WH WHITE
DOS180LP-D-IV IVORY

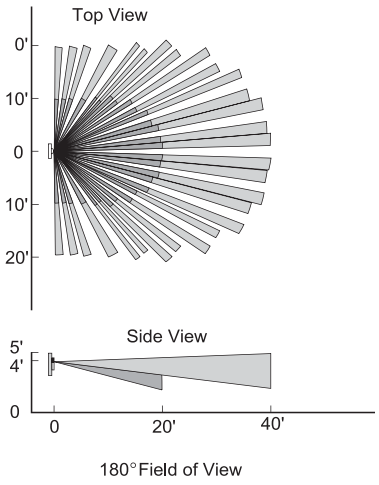

COVERAGE
180 degree, 1200 sqft
Best: 320 sqft
Regular: 800 sqft
Maximum: 1200 sqft

Can be used for T24 California Title 24 High Energy Compliant

C UL US LISTED

MTOS180

OCCUPANCY • VACANCY SENSOR
MULTI-TECHNOLOGY WALL SWITCH

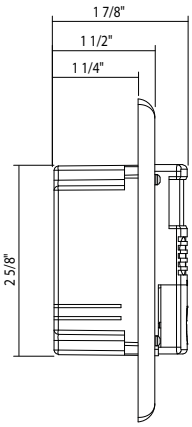

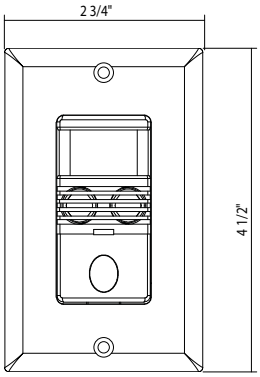

MTOS180-WH
Also Available:
MTOS180-IV (Ivory)

MAXCOR™

FEATURES

180° field of view
Operates at 120~277V
Combines passive infrared and ultrasonic technologies
Time delay Off setting, adjustable from 15 seconds to 30 minutes
Turns lights On/Off automatically
Manual or automatic on option. Always automatic off
"Walk-through" sensing mode increases energy savings by turning lights Off shortly after momentary occupancy
Adjustable sensitivity settings
Adjustable ambient light level setting
Standard decorator wall plate included
Two year warranty.

RATING

Incandescent: 800W @ 120VAC
Fluorescent: 800VA @ 120VAC, 1600VA @ 277VAC
Motor: 1/4HP @ 120VAC

TYPICAL APPLICATIONS

Bedrooms, bathrooms, laundry rooms, closets, garages, kitchens, home offices

ORDERING INFORMATION

MTOS180-WH WHITE
MTOS180-IV IVORY

180° Field-of-view(Horizontal)



180° Field-of-view(Vertical)



COVERAGE
180 degree, 1200sqft

c UL us LISTED

NICOR® Shining Brighter™

COS360 • COS360L

OCCUPANCY SENSOR • PASSIVE INFRARED CEILING MOUNTED
LINE VOLTAGE, LOW VOLTAGE

MAXCOR™

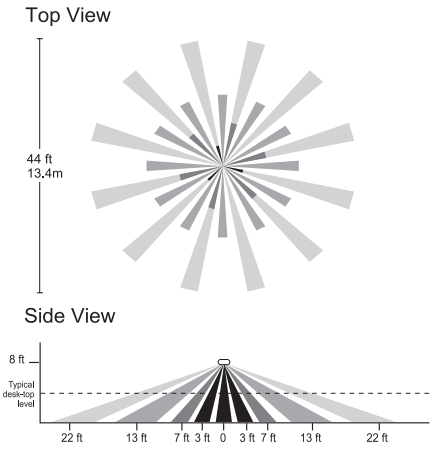

COVERAGE
360 degree, 1200 sqft

FEATURES *(COS360)*

360° field of view, 1200 sq. ft. coverage area
Line voltage (no power pack need), 120~277V
Simple, easy installation
Adjustable time delay
Multi-level, fresnel lens offers superior occupancy detection
Adjustable sensitivity setting
Adjustable ambient light level setting
Walk-through sensing mode
Standard decorator trim plate included
Two year warranty

RATING

Incandescent: 800W @ 120VAC
Fluorescent: 800VA @ 120VAC, 1600VA @ 277VAC
Resistive: 800W @ 120VAC
Motor: 1/4HP @ 120VAC

TYPICAL APPLICATIONS

Storage areas, small bathrooms, copy rooms, computer rooms, conference rooms, classrooms, warehouses

ORDERING INFORMATION

COS360 White

FEATURES *(COS360L)*

360° field of view, 1200 sq. ft. coverage area
Low voltage (power pack needed. Item# PP24)
Simple, easy installation
Adjustable time delay
Multi-level, fresnel lens offers superior occupancy detection
Adjustable sensitivity setting
Adjustable ambient light level setting
Walk-through sensing mode
Standard decorator trim plate included
Two year warranty

RATING

Input Voltage: 24VDC
Consumption: 9mA
Incandescent: 800W @ 120VAC
Fluorescent: 800VA @ 120VAC, 1600VA @ 277VAC
Resistive: 800W @ 120VAC
Power Supply: PP24 Power Pack

TYPICAL APPLICATIONS

Storage areas, small bathrooms, copy rooms, computer rooms, conference rooms, classrooms, warehouses

ORDERING INFORMATION

COS360L White
PP24 White *(powers up to six COS360L sensors)*

Can be used for T24 California Title 24 High Energy Compliant

FC

c UL us LISTED

HBOS360

OCCUPANCY SENSOR • PASSIVE INFRARED HIGH BAY MOUNT
LINE VOLTAGE

High View *Low View*

MAXCOR™

FEATURES

360° field of view, 2800 sq. ft. coverage area
Line Voltage (no power pack needed), 120~277V
Simple, easy installation
Adjustable time delay
Multi-level, fresnel lens offers superior occupancy detection
Adjustable sensitivity setting
Adjustable ambient light level setting
Two lenses included
Two year warranty

RATING

Input Voltage: 120-277VAC, 50/60Hz
Consumption: 9mA
Incandescent/Tungsten: 800W @ 120VAC, 50/60Hz
Fluorescent/Ballast: 800VA @ 120VAC, 1600VA @ 277VAC, 50/60Hz
Motor: 1/4HP @ 120VAC
No minimum load required

TYPICAL APPLICATIONS

Warehouses, manufacturing, high ceilings

ORDERING INFORMATION

HBOS360 White

High View

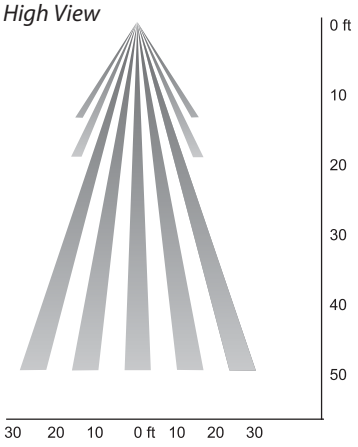

COVERAGE
High view: 360 degree, 2800 sqft

Low View



COVERAGE
Low view: 360 degree, 1200 sqft

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

NICOR® Shining Brighter™

Industrial

No nonsense lighting for no nonsense work places.

Aluminator

Unique aluminum construction for maximum heat dissipation

All Aluminum
- Slim, lightweight body made entirely of aluminum to maximize heat dissipation

Huge energy savings
- Efficient electronic high-output ballast
- Long-lasting T5HO and T8 lamps
- Meets utility rebate efficiency standards

Fast, easy installation
- Top ballast access speeds maintenance
- V-shaped hooks and chain mounting kit included
- Quick connect plugs
- Knockouts for pendant stem installation

Built to last
- Warranted for five years at 55˚C
- Three years at 65˚C

Fits nearly every commercial or Industrial application

Available options
- 95% Miro-4 reflector
- Wire guard
- Door frame with non-destructible PC lens
- Motion sensor activation
- 4100K lamps
- Power cord

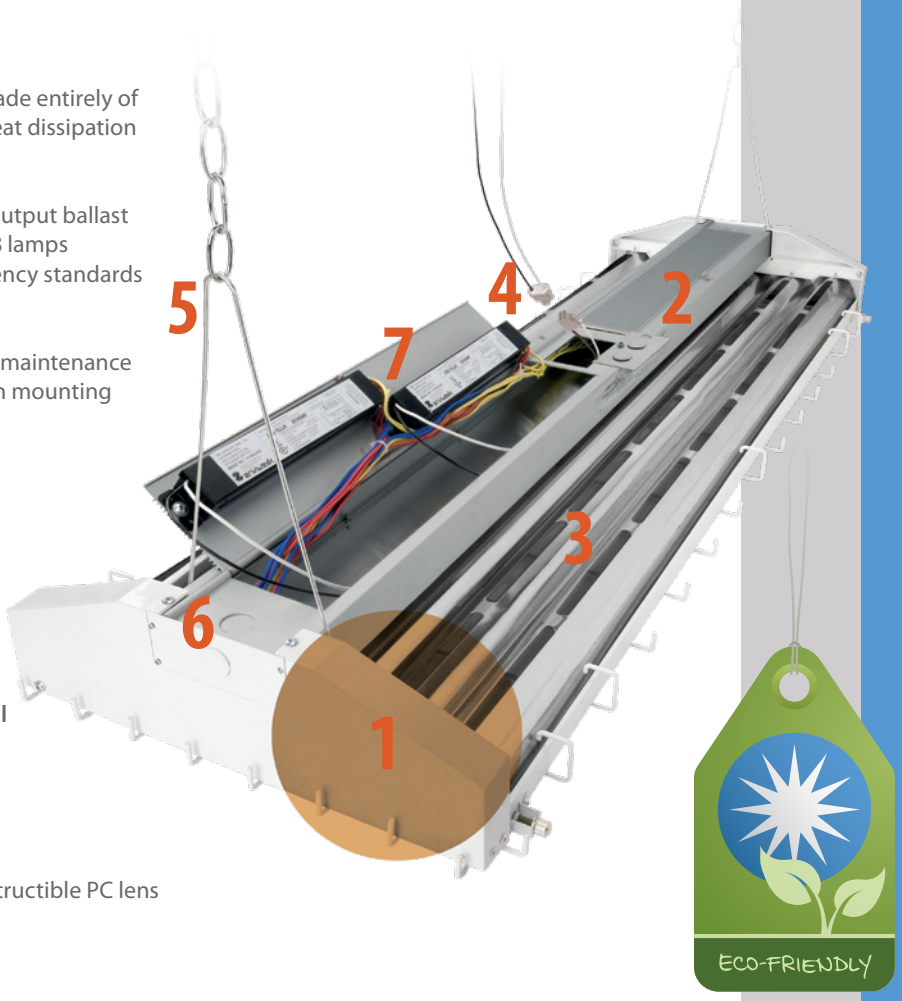

1. Aluminum body construction dissipates heat three times better than steel to extend ballast life
2. Tool-less hinged ballast covers provide quick maintenance access without removing lamps
3. Apertured reflector provides uplight component to reduce direct glare
4. Quick connect plugs meet NEC code fixture disconnect requirements for less workspace interruption
5. V-shaped hooks and chain mounting kit included
6. Mounting plate knockouts for pendant mount (easy one-for-one fixture replacement)
7. Universal multi-volt 120-277V ballasts

20550-120-277V • 20552-120-277V

4-LAMP T8, 6-LAMP T8 *(Lamps not included)*

20550-120-277V

F4LDFLT8
Optional lens (not included)
20550-120-277V-4100K
(includes lamps)

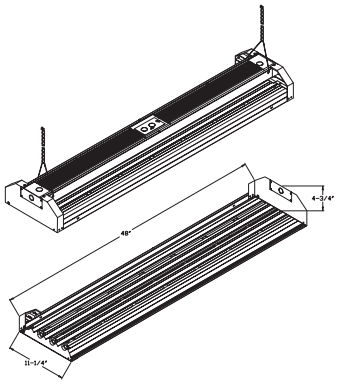

20552-120-277V

F6LDFLT8
Optional lens (not included)
20552-120-277V-4100K
(includes lamps)

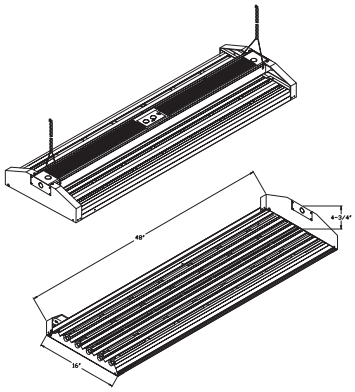

FEATURES

Linear fluorescent high-bay for high-mounting height in industrial or retail applications.
Multi-lamp ballast design provides uniform illumination and dependable light output.
T8 lamp/ballast system provides instant start and instant re-strike as well as high CRI and various chromatic lamp choices.
Riveted end plates increase housing rigidity and integrity.
Two access doors with captive knurled screws for tool-less entry open 180˚ to expose attached ballasts.
Die-formed aluminum (G320) reflector designed for maximum 86% reflectivity, secured to housing with fasteners.
Die formed aluminum construction dissipates heat away from ballast to extend life.
Slotted reflector moves heat away from lamps and provides uplight component.
Class P, 60Hz high-power factor ballasts. Ballast factor of 1.15 120-277V or 480V Universal input Electronic Ballast.
Includes quick connect plugs which comply with NEC 410.73(G) and CEC 30-308(4) requirements during ballast disconnect for maintenance safety and reduced service disruption.
Terminal blocks facilitate secure connections between ballasts and supply wiring.
Pressure-lock lampholders for secure lamp installation.
Includes heavy-gauge chain mounting kit.
Lamps not included.

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

UNIVERSAL INPUT 120-277V BALLAST

20546-120-277V • 20547-120-277V

4-LAMP T5HO, 6-LAMP T5HO *(Lamps not included)*

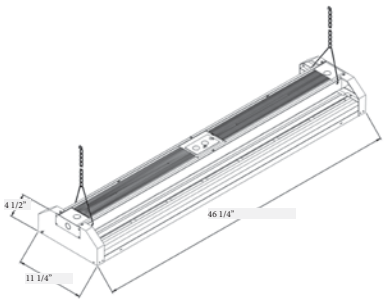

20546-120-277V

F4LDFLT5
Optional lens (not included)
20546-120-277V-4100K
(includes lamps)
20546WG-120-277V
(includes wire guard)

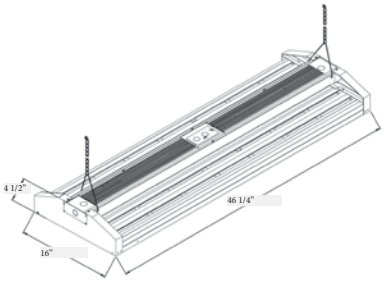

20547-120-277V

F6LDFLT5
Optional lens (not included)
20547-120-277V-4100K
(includes lamps)

FEATURES

Linear fluorescent high-bay for high-mounting height in industrial or retail applications.
Multi-lamp ballast design provides uniform illumination and dependable light output.
T5HO lamp/ballast system provides instant start and instant re-strike as well as high CRI and various chromatic lamp choices.
Riveted end plates increase housing rigidity and integrity.
Two access doors with captive knurled screws for tool-less entry open 180˚ to expose attached ballasts.
Die-formed aluminum (G320) reflector designed for maximum 86% reflectivity, secured to housing with fasteners.
Die formed aluminum construction dissipates heat away from ballast to extend life.
Slotted reflector moves heat away from lamps and provides uplight component.
Class P, 60Hz high-power factor ballasts. Ballast factor of 1.15 120-277V or 480V Universal input Electronic Ballast.
Includes quick connect plugs which comply with NEC 410.73(G) and CEC 30-308(4) requirements during ballast disconnect for maintenance safety and reduced service disruption.
Terminal blocks facilitate secure connections between ballasts and supply wiring.
Pressure-lock lampholders for secure lamp installation.
Includes heavy-gauge chain mounting kit.
Lamps not included.

Also available:
20546-347/480V
4-lamp T5 with 480V ballast
20546-347/480V-4100K
(Includes Lamps)

20547-347/480V
6-lamp T5 with 480V ballast
20547-347/480V-4100K
(Includes Lamps)

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

UNIVERSAL INPUT 120-277V BALLAST

20548-120-277V • 20549-120-277V

4-LAMP T5HO W/ MIRO4 REFLECTOR, 6-LAMP T5HO W/ MIRO4 REFLECTOR *(Lamps not included)*

20548-120-277V

20548-120-277V-4100K
(includes lamps)
20548WG-120-277V
(includes wire guard)

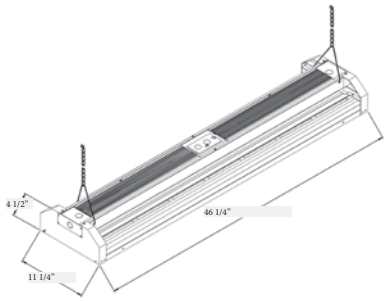

20549-120-277V

20549-120-277V-4100K
(includes lamps)

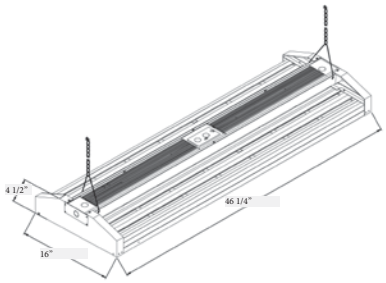

FEATURES

Linear fluorescent high-bay for high-mounting height in industrial or retail applications.
Multi-lamp ballast design provides uniform illumination and dependable light output.
T5HO lamp/ballast system provides instant start and instant re-strike as well as high CRI and various chromatic lamp choices.
Riveted end plates increase housing rigidity and integrity.
Two access doors with captive knurled screws for tool-less entry open 180˚ to expose attached ballasts.
Die-formed aluminum (G320) reflector designed for maximum 86% reflectivity, secured to housing with fasteners.
Die formed aluminum construction dissipates heat away from ballast to extend life.
Slotted reflector moves heat away from lamps and provides uplight component.
Class P, 60Hz high-power factor ballasts. Ballast factor of 1.15 120-277V or 480V Universal input Electronic Ballast.
Includes quick connect plugs which comply with NEC 410.73(G) and CEC 30-308(4) requirements during ballast disconnect for maintenance safety and reduced service disruption.
Terminal blocks facilitate secure connections between ballasts and supply wiring.
Pressure-lock lampholders for secure lamp installation.
Includes heavy-gauge chain mounting kit.
Lamps not included.

Also available:
20548-347-480V
(4-lamp T5 w/ 480V ballast)
20548-347-480V-4100K
(includes lamps)

20549-347/480V
6-lamp T5 with 480V ballast
20549-347/480V-4100K
(Includes Lamps)

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

UNIVERSAL INPUT 120-277V BALLAST

F4LWG-T8
4-LAMP T8 STEEL WIRE GUARD

F4LWG-T5
4-LAMP T5 STEEL WIRE GUARD

F6LWG-T8
6-LAMP T8 STEEL WIRE GUARD

F6LWG-T5
6-LAMP T5 STEEL WIRE GUARD

OPTIONAL WIRE GUARDS

F4LWG-T8 Wire guard for 20550
F4LWG-T5 Wire guard for 20546
F6LWG-T8 Wire guard for 20552
F6LWG-T5 Wire guard for 20547
F4LDFL-T8 4-Lamp door frame/lens for 20550
F4LDFL-T5 4-Lamp door frame/lens for 20546
F6LDFL-T8 6-Lamp door frame/lens for 20552
F6LDFL-T5 6-Lamp door frame/lens for 20547

OPTIONAL LAMPS

T8 and T5 lamps are available in 4100K and 5000K temperatures.
Other Kelvin temperatures available on special orders, contact NICOR® sales for more information.

POWER CORDS

HC8120 120V 8 ft. 18/3 power cord w/ NEMA L515P plug
HC8277 277V 8 ft. 18/3 power cord w/ NEMA L715P plug

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

UNIVERSAL INPUT 120-277V BALLAST

No-hassle High-bay

Reliable lighting, easy installation, and effortless maintenance

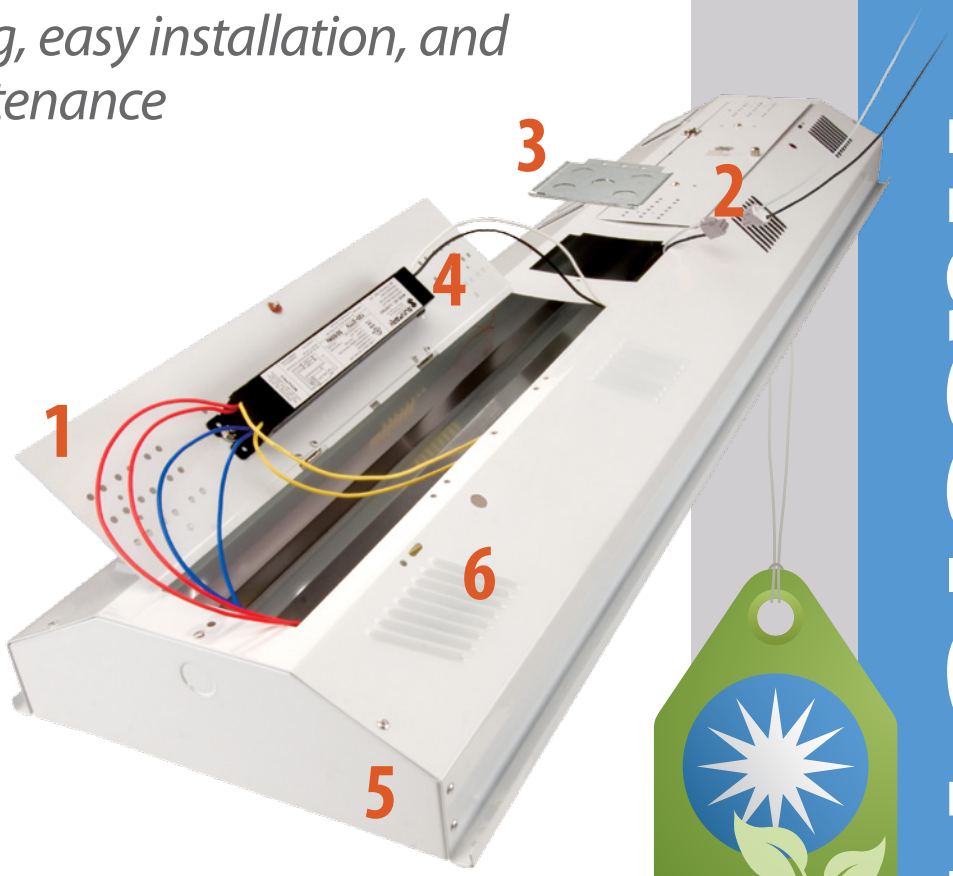

1 Top ballast access with captive knurled screw for fast, easy maintenance without removing lamps

2 Quick connect plug is NEC 410.73(G) and CEC 30-308(4) compliant

3 Access plate with five knockouts to facilitate through-wiring

4 Multi-voltage (120-277) ballasts

5 Heavy-gauge housing assembled with rivets for increased rigidity

6 Housing vents for heat dissipation resulting in improved lamp/ballast performance

20344-120-277V • 20345-120-277V

4-LAMP T8, 6-LAMP T8 *(Lamps not included)*

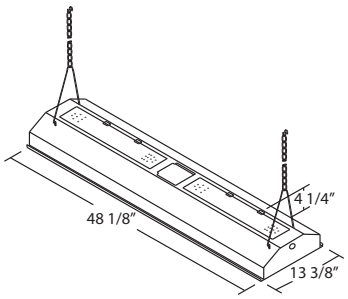

20344-120-277V

20344-120-277V-4100K
(includes lamps)

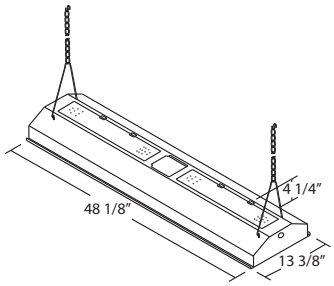

20345-120-277V

20345-120-277V-4100K
(includes lamps)

FEATURES

Linear fluorescent high-bay for high-mounting height industrial or retail applications.
Multi-lamp ballast design provides uniform illumination and dependable light output.
T8 lamp/ballast system provides instant start and instant re-strike as well as high CRI and various chromatic lamp choices.
Die-formed heavy 20 gauge steel housing construction.
Riveted end plates increase housing rigidity and integrity.
Multiple vents aid lamp/ballast heat dissipation.
Two access doors with captive knurled screws for tool-less entry open 180˚ to expose attached ballasts.
Die-formed aluminum (G320) reflector designed for maximum 86% reflectivity. Secured to housing with fasteners.
Class P, 60Hz high-power factor ballasts.
Ballast factor of 1.15 120-277V Universal ballast.
Includes quick connect plugs which comply with NEC 410.73(G) and CEC 30-308(4) requirements during ballast disconnect for maintenance safety and reduced service disruption.
Terminal blocks facilitate secure connections between ballasts and supply wiring.
Pressure-lock lampholders for secure lamp installation.
Includes heavy-gauge chain mounting kit.
Lamps not included.

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

UNIVERSAL INPUT 120-277V BALLAST

NICOR® Shining Brighter™

20346-120-277V • 20552-120-277V

4-LAMP T5HO, 6-LAMP T5HO *(Lamps not included)*

20346-120-277V

20346-120-277V-4100K
(includes lamps)
20346WG-120-277
(includes wire guard)
20346WG-120-277V-4100K
(includes wire guard and lamps)

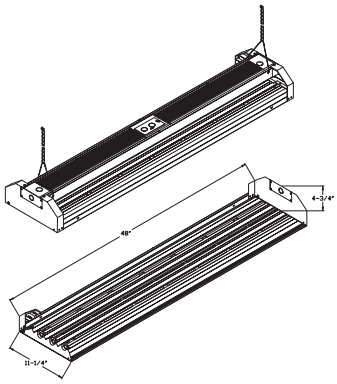

20347-120-277V

20347-120-277V-4100K
(includes lamps)

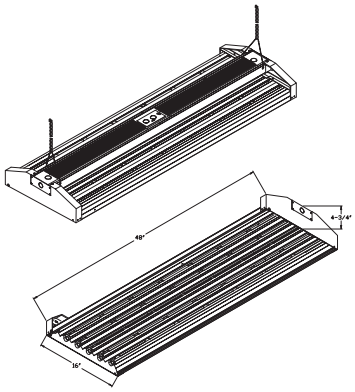

FEATURES

Linear fluorescent high-bay for high-mounting height in industrial or retail applications.
Multi-lamp ballast design provides uniform illumination and dependable light output.
T5HO lamp/ballast system provides instant start and instant re-strike as well as high CRI and various chromatic lamp choices.
Riveted end plates increase housing rigidity and integrity.
Two access doors with captive knurled screws for tool-less entry open 180˚ to expose attached ballasts.
Die-formed aluminum (G320) reflector designed for maximum 86% reflectivity, secured to housing with fasteners.
Die formed aluminum construction dissipates heat away from ballast to extend life.
Slotted reflector moves heat away from lamps and provides uplight component.
Class P, 60Hz high-power factor ballasts. Ballast factor of 1.15 120-277V or 480V
Universal input Electronic Ballast.
Includes quick connect plugs which comply with NEC 410.73(G) and CEC 30-308(4) requirements during ballast disconnect for maintenance safety and reduced service disruption.
Terminal blocks facilitate secure connections between ballasts and supply wiring.
Pressure-lock lampholders for secure lamp installation.
Includes heavy-gauge chain mounting kit.
Lamps not included.

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

UNIVERSAL INPUT 120-277V BALLAST

WG4T8
4-LAMP T8 STEEL WIRE GUARD

WG4T5
4-LAMP T5 STEEL WIRE GUARD

WG6T8
6-LAMP T8 STEEL WIRE GUARD

WG6T5
6-LAMP T5 STEEL WIRE GUARD

OPTIONAL WIRE GUARDS
WG4T8 Wire guard for 20344 4T8 Highbay
WG6T8 Wire guard for 20345 6T8 Highbay
WG4T5 Wire guard for 20346 4T5 Highbay
WG6T5 Wire guard for 20347 6T5 Highbay

OPTIONAL LAMPS
T8 and T5 lamps are available in 4100K and 5000K temperatures.
Other Kelvin temperatures available on special orders, contact NICOR sales for more information.

POWER CORDS
HC8120 120V 8 ft. 18/3 power cord w/ NEMA L515P plug
HC8277 277V 8 ft. 18/3 power cord w/ NEMA L715P plug

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

UNIVERSAL INPUT 120-277V BALLAST

NICOR® Shining Brighter™

20854-120-277V • 20856-120-277V

4-LAMP T5HO, 6-LAMP T5HO *(Lamps not included)*

20854-120-277V

20854-120-277V-4100K
(includes lamps)

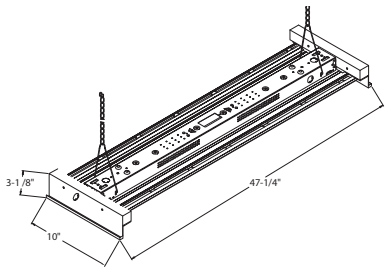

20856-120-277V

20856-120-277V-4100K
(includes lamps)

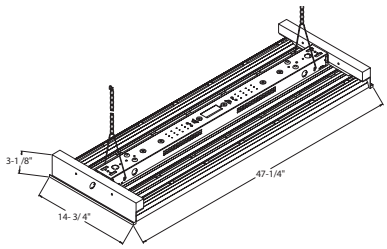

FEATURES

Linear fluorescent high-bay for high-mounting height in industrial or retail applications.
Multi-lamp ballast design provides uniform illumination and dependable light output.
T5HO lamp/ballast system provides instant start and instant re-strike as well as high CRI and various chromatic lamp choices.
20 gauge steel housing with durable powder coat finish to resist corrosion.
Open design improves thermal operation and ballast life.
Apertured reflector provides up-light component and removes heat.
Die-formed aluminum (G320) reflector designed for maximum 86% reflectivity, secured to housing with fasteners.
Class P, 60Hz high-power factor ballasts.
Ballast factor of 1.0 Universal 120-277V ballast.
Includes quick connect plugs which comply with NEC 410.73(G) and CEC 30-308(4) requirements during ballast disconnect for maintenance safety and reduced service disruption.
Pressure-lock lamp holders for secure lamp installation.
Includes heavy-gauge chain mounting kit.
Lamps not included.

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

UNIVERSAL INPUT 120-277V BALLAST

20858-120-277V

8-LAMP T5HO *(Lamps not included)*

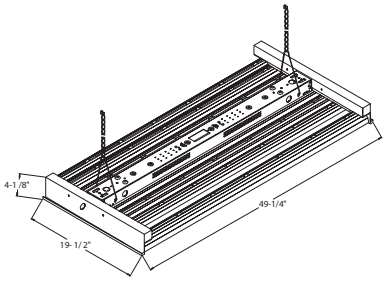

20858-120-277V

20858-120-277V-4100K
(includes lamps)

ECO-FRIENDLY

ECO-BAY WIRE GUARDS

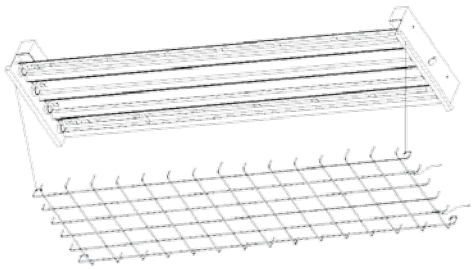

WGECO-4T5
Wire guard for 20854-120-277v
WGECO-6T5
Wire guard for 20856-120-277v
WGECO-8T5
Wire guard for 20858-120-277v

FEATURES

Linear fluorescent high-bay for high-mounting height in industrial or retail applications.
Multi-lamp ballast design provides uniform illumination and dependable light output.
T5HO lamp/ballast system provides instant start and instant re-strike as well as high CRI and various chromatic lamp choices.
20 gauge steel housing with durable powder coat finish to resist corrosion.
Open design improves thermal operation and ballast life.
Apertured reflector provides up-light component and removes heat.
Die-formed aluminum (G320) reflector designed for maximum 86% reflectivity, secured to housing with fasteners.
Class P, 60Hz high-power factor ballasts.
Ballast factor of 1.0 Universal 120-277V ballast.
Includes quick connect plugs which comply with NEC 410.73(G) and CEC 30-308(4) requirements during ballast disconnect for maintenance safety and reduced service disruption.
Pressure-lock lamp holders for secure lamp installation.
Includes heavy-gauge chain mounting kit.
Lamps not included.

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

UNIVERSAL INPUT 120-277V BALLAST

POWER CORDS

HC8120 120V 8 ft. 18/3 power cord w/ NEMA L515P plug
HC8277 277V 8 ft. 18/3 power cord w/ NEMA L715P plug

NICOR® Shining Brighter™

HBOS360

OCCUPANCY SENSOR • PASSIVE INFRARED HIGH BAY MOUNT
LINE VOLTAGE

Low View *High View*

MAXCOR™

FEATURES

360° field of view, 2800 sq. ft. coverage area
Line Voltage (no power pack needed), 120~277V
Simple, easy installation
Adjustable time delay
Multi-level, fresnel lens offers superior occupancy detection
Adjustable sensitivity setting
Adjustable ambient light level setting
Two lenses included
Two year warranty

RATING

Input Voltage: 120-277VAC, 50/60Hz
Consumption: 9mA
Incandescent/Tungsten: 800W @ 120VAC, 50/60Hz
Fluorescent/Ballast: 800VA @ 120VAC, 1600VA @ 277VAC, 50/60Hz
Motor: 1/4HP @ 120VAC
No minimum load required

TYPICAL APPLICATIONS

Warehouses, manufacturing, high ceilings

ORDERING INFORMATION

HBOS360 White

High View

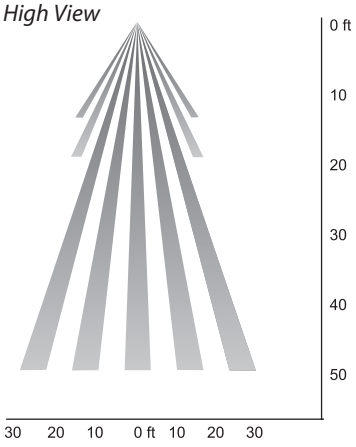

COVERAGE
High view: 360 degree, 2800 sqft

Low View



COVERAGE
Low view: 360 degree, 1200 sqft

Can be used for T24 California Title 24 High Energy Compliant

c UL us LISTED

INDUSTRIAL

FLUORESCENT HIGH BAY ADVANTAGES

- Uniform illumination in the space both horizontally and vertically without the "pooling" associated with HID high bay fixtures
- Instant On provides safe, immediate light without downtime for fixture warm up and restrike
- Environmentally friendly lamps are low mercury and TCLP compliant
- Improved illumination with consistent light output over the full life of the lamps
- Higher color rendering provides a more natural indoor environment and higher perceived light levels
- Occupancy sensor options offer additional energy savings and control

Annual Energy Costs

in dollars

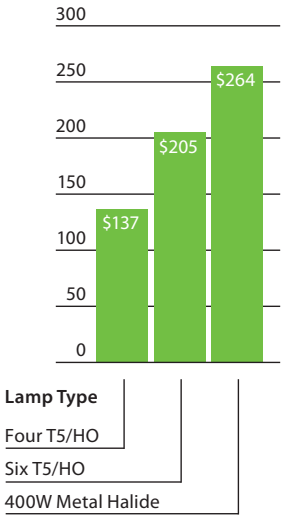

Watts Input

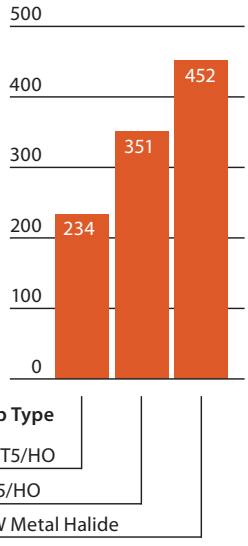

Lumen Maintenance

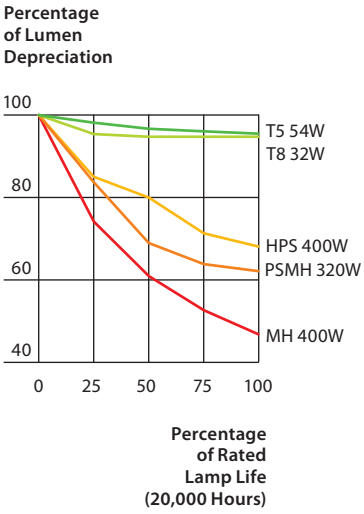

20338
1-LAMP OUTDOOR LIGHT



Lamp	1 X 32W T8 (not included)
Ballast	120-277V Universal input high-power factor
Dimensions	50 3/8"L X 4"W X 4 3/8"E
Finish	Clear lens with olive gray housing
Material	Polycarbonate plastic

Can be used for T24 California Title 24 High Energy Compliant

WET LOCATION RATED

20339
1-LAMP OUTDOOR LIGHT

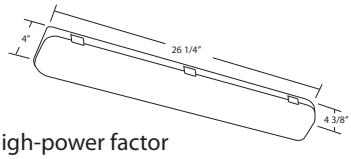

Lamp	1 X 17W T8 (not included)
Ballast	120-277V Universal input high-power factor
Dimensions	26 1/4"L X 4"W X 4 3/8"E
Finish	Clear lens with olive gray housing
Material	Polycarbonate plastic

Can be used for T24 California Title 24 High Energy Compliant

WET LOCATION RATED

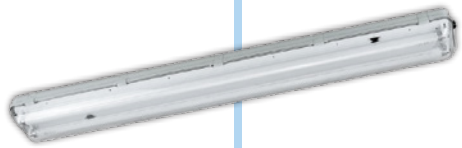

20340
2-LAMP OUTDOOR LIGHT



Lamp	2 X 32W T8 (not included)
Ballast	120-277V Universal input high-power factor
Dimensions	51 3/8"L X 6"W X 4 3/8"E
Finish	Clear lens with olive gray housing
Material	Polycarbonate plastic

Can be used for T24 California Title 24 High Energy Compliant

WET LOCATION RATED

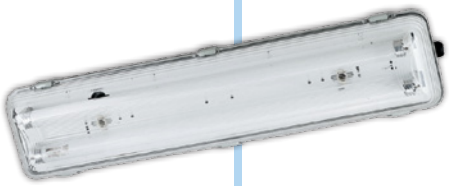

20341
2-LAMP OUTDOOR LIGHT

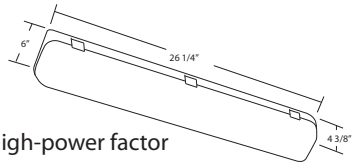

Lamp	2 X 17W T8 (not included)
Ballast	120-277V Universal input high-power factor
Dimensions	26 1/4"L X 6"W X 4 3/8"E
Finish	Clear lens with olive gray housing
Material	Polycarbonate plastic

Can be used for T24 California Title 24 High Energy Compliant

WET LOCATION RATED

Never leave the lights on again.

On average you can reduce energy usage by as much as 45% with **MAXCOR™** Motion Sensors.

Visit www.nicorlighting.com for more info.

MAXCOR™

Emergency • Exit
Lighting that you don't want to have to think about, but is there when you need it.

EMERGENCY • EXIT

18200 • 18202

EXIT SIGN, AC-ONLY EXIT SIGN

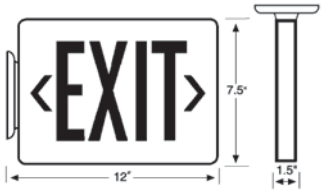

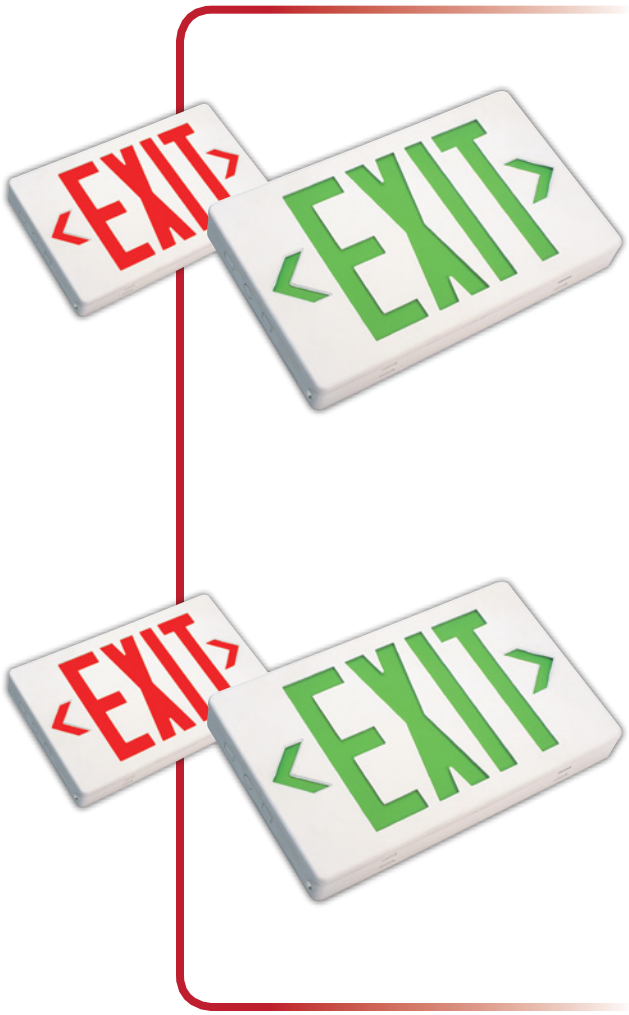

FEATURES

Completely self-contained, fully automatic operation.
Compact, low-profile design in neutral finish.
Automatic low-voltage disconnect (LVD).
120 or 277 VAC operation.
V-O flame-retardant, high impact, thermoplastic housing.
Power-on LED indicator light and push-to-test switch.
Energy consumption: 3.2W for red letters, 3.8W for green.
LED lamp life of 25 + years.
Universal mounting canopy for side or top installation.

18200 ONLY

Larger Ni-Cad emergency battery for remote capacity.
Damp location listed.

18200 ORDERING

Item NO.	*Housing Color*	*Lettering Color*	*No. Faceplates*	*Remote Capable*
18200	White	Red	2	No
18200RB	Black	Red	2	No
18200RWR	White	Red	2	Yes
18200RBR	Black	Red	2	Yes
18200GREEN	White	Green	2	No
18200GB	Black	Green	2	No
18200GWR	White	Green	2	Yes
18200GBR	Black	Green	2	Yes

18202 ORDERING

Item NO.	*Housing Color*	*Lettering Color*	*No. Faceplates*
18202	White	Red	2
18202GREEN	White	Green	2
18202RB	Black	Red	2
18202GB	Black	Green	2

18200NY

NEW YORK APPROVED • STEEL HOUSING • AC-ONLY OR BATTERY BACKUP

FEATURES

AC only or self-powered models.
120/277 VAC operation.
Long-life, energy-saving LED technology.
Power-on LED indicator light and push-to-test switch.
Rugged 20-gauge steel construction.
Universal canopy included.
Universal knockout chevrons.

ORDERING

Item NO.	Housing Color	Lettering Color	No. Faceplates	Operation	Number of Heads
18201NYDRB	Black	Red	2	AC - Only	0
18203NYDRB	Black	Red	2	Battery Backup	0
18201NYDRB2H	Black	Red	2	AC - Only	2
18203NYDRB2H	Black	Red	2	Battery Backup	2
18201NYDRB3H	Black	Red	2	AC - Only	3
18203NYDRB3H	Black	Red	2	Battery Backup	3
18201NYDRW	White	Red	2	AC - Only	0
18203NYDRW	White	Red	2	Battery Backup	0
18201NYDRW2H	White	Red	2	AC - Only	2
18203NYDRW2H	White	Red	2	Battery Backup	2
18201NYDRW3H	White	Red	2	AC - Only	3
18203NYDRW3H	White	Red	2	Battery Backup	3
18201NYSDRB	Black	Red	1 or 2	AC - Only	0
18203NYSDRB	Black	Red	1 or 2	Battery Backup	0
18201NYSDRB2H	Black	Red	1 or 2	AC - Only	2
18203NYSDRB2H	Black	Red	1 or 2	Battery Backup	2
18201NYSDRB3H	Black	Red	1 or 2	AC - Only	3
18203NYSDRB3H	Black	Red	1 or 2	Battery Backup	3
18201NYSDRW	White	Red	1 or 2	AC - Only	0
18203NYSDRW	White	Red	1 or 2	Battery Backup	0
18201NYSDRW2H	White	Red	1 or 2	AC - Only	2
18203NYSDRW2H	White	Red	1 or 2	Battery Backup	2
18201NYSDRW3H	White	Red	1 or 2	AC - Only	3
18203NYSDRW3H	White	Red	1 or 2	Battery Backup	3
18201NYSRB	Black	Red	1	AC - Only	0
18203NYSRB	Black	Red	1	Battery Backup	0
18201NYSRB2H	Black	Red	1	AC - Only	2
18203NYSRB2H	Black	Red	1	Battery Backup	2
18201NYSRB3H	Black	Red	1	AC - Only	3
18203NYSRB3H	Black	Red	1	Battery Backup	3
18201NYSRW	White	Red	1	AC - Only	0
18203NYSRW	White	Red	1	Battery Backup	0
18201NYSRW2H	White	Red	1	AC - Only	2
18203NYSRW2H	White	Red	1	Battery Backup	2
18201NYSRW3H	White	Red	1	AC - Only	3
18203NYSRW3H	White	Red	1	Battery Backup	3

c UL us LISTED

INTERTEK ETL LISTED c us

18202NY

NEW YORK APPROVED • STEEL HOUSING • AC-ONLY

FEATURES

AC only or self-powered models.
120/277 VAC operation.
Long-life, energy-saving LED technology.
Power-on LED indicator light and push-to-test switch.
Rugged 20-gauge steel construction.
Universal canopy included.
Universal knockout chevrons.

ORDERING

Item NO.	*Housing Color*	*Lettering Color*	*No. Faceplates*
18202NYDGB	Black	Green	2
18202NYDGW	White	Green	2
18202NYDRB	Black	Red	2
18202NYDRW	White	Red	2
18202NYSDGB	Black	Green	1 or 2
18202NYSDGW	White	Green	1 or 2
18202NYSDRB	Black	Red	1 or 2
18202NYSDRW	White	Red	1 or 2
18202NYSGB	Black	Green	1
18202NYSGW	White	Green	1
18202NYSRB	Black	Red	1
18202NYSRW	White	Red	1

18202

CHICAGO APPROVED • STEEL HOUSING • AC-ONLY OR BATTERY BACKUP

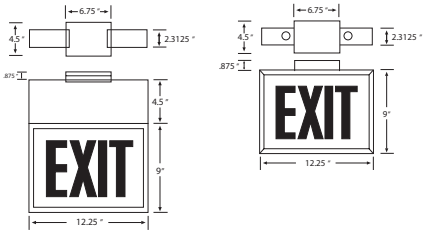

FEATURES

Chicago-approved emergency lighting.
Durable steel housing.
Universal mounting canopy included.
Long-life Ni-Cad battery.
Single face.

ORDERING

Item NO.	Housing Color	Lettering Color	No. Faceplates	Directional Arrows	Operation
18200CHDDA	White	Red	2	Double	Battery Backup
18202CHDDA	White	Red	2	Double	AC-Only
18200CHDLA	White	Red	2	Left	Battery Backup
18202CHDLA	White	Red	2	Left	AC-Only
18200CHDNA	White	Red	2	None	Battery Backup
18202CHDNA	White	Red	2	None	AC-Only
18200CHDRA	White	Red	2	Right	Battery Backup
18202CHDRA	White	Red	2	Right	AC-Only
18200CHSDA	White	Red	1	Double	Battery Backup
18202CHSDA	White	Red	1	Double	AC-Only
18200CHSLA	White	Red	1	Left	Battery Backup
18202CHSLA	White	Red	1	Left	AC-Only
18200CHSNA	White	Red	1	None	Battery Backup
18202CHSNA	White	Red	1	None	AC-Only
18200CHSRA	White	Red	1	Right	Battery Backup
18202CHSRA	White	Red	1	Right	AC-Only

FOR ADDITIONAL FACE PLATES PLEASE ORDER

Item NO.	Directional Arrows
CHIGLSDA	Double
CHIGLSLA	Left
CHIGLSNA	None
CHIGLSRA	Right

c UL us LISTED

INTERTEK ETL LISTED c us

18285

BATTERY BACKUP • PIVOTING FEATURES

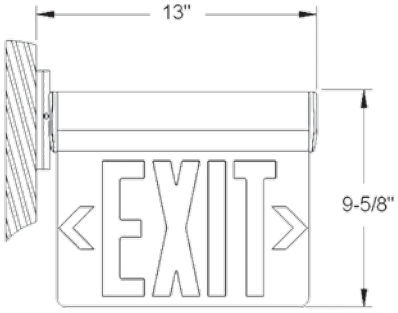

FEATURES

Compact and decorative design.
Aluminum housing with high grade acrylic panel.
Exit Pivots for wall, ceiling, sloped ceiling or high ceiling with tilt angle.
Removable directional indicators.
Letters 6" height with 3/4" stroke.
Single or double face configuration.
Provided with plastic canopy for universal (wall, end or ceiling) mounting.
Available for pendant mounting.
120-277VAC dual voltage operation.
Low energy consumption.
LED indicator light and test switch.
LED lamps are operating in normal (AC input) and emergency (DC input) modes.
Nickel-Cadmium battery delivers more than 3 hours capacity to emergency lamps.
24 hours recharge after 90 minutes discharge.
Low voltage battery disconnection - preventing deep discharge damage to the battery.

ORDERING

Item NO.	Trim Color
RELALTRIM	Aluminum
RELBKTRIM	Black
RELWHTRIM	White
RELHOUSING	N/A

ORDERING

Item NO.	Housing Color	Background Color	Lettering Color	No. Faceplates
18285DGMA	Aluminum	Mirror	Green	2
18285DGMB	Black	Mirror	Green	2
18285DGMW	White	Mirror	Green	2
18285DGWA	Aluminum	White	Green	2
18285DGWB	Black	White	Green	2
18285DGWW	White	White	Red	2
18285DRMA	Aluminum	Mirror	Red	2
18285DRMB	Black	Mirror	Red	2
18285DRMW	White	Mirror	Red	2
18285DRWA	Aluminum	White	Red	2
18285DRWB	Black	White	Red	2
18285DRWW	White	White	Red	2
18285SGCA	Aluminum	Clear	Green	1
18285SGCB	Black	Clear	Green	1
18285SGCW	White	Clear	Green	1
18285SGMA	Aluminum	Mirror	Green	1
18285SGMB	Black	Mirror	Green	1
18285SGMW	White	Mirror	Green	1
18285SGWA	Aluminum	White	Green	1
18285SGWB	Black	White	Green	1
18285SGWW	White	White	Green	1
18285SRCA	Aluminum	Clear	Red	1
18285SRCB	Black	Clear	Red	1
18285SRCW	White	Clear	Red	1
18285SRMA	Aluminum	Mirror	Red	1
18285SRMB	Black	Mirror	Red	1
18285SRMW	White	Mirror	Red	1
18285SRWA	Aluminum	White	Red	1
18285SRWB	Black	White	Red	1
18285SRWW	White	White	Red	1

18290

AC-ONLY • PIVOTING FEATURES

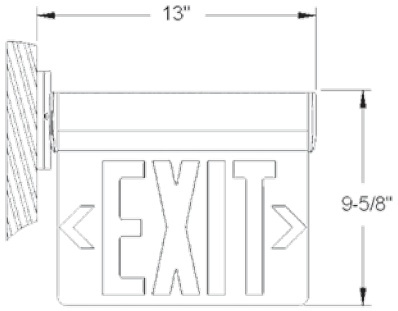

FEATURES

Compact and decorative design.
Aluminum housing with high grade acrylic panel.
Exit Pivots for wall, ceiling, sloped ceiling or high ceiling with tilt angle.
Removable directional indicators.
Letters 6" height with 3/4" stroke.
Single or double face configuration.
Provided with plastic canopy for universal (wall, end or ceiling) mounting.
Available for pendant mounting.
120-277VAC dual voltage operation.
Low energy consumption.
LED lamps are operating in normal (AC input) modes.
AC only. No battery backup.

ORDERING

Item NO.	Trim Color
RELALTRIM	Aluminum
RELBKTRIM	Black
RELWHTRIM	White
RELHOUSING	N/A

ORDERING

Item NO.	Housing Color	Background Color	Lettering Color	No. Faceplates
18290DGMA	Aluminum	Mirror	Green	2
18290DGMB	Black	Mirror	Green	2
18290DGMW	White	Mirror	Green	2
18290DGWA	Aluminum	White	Green	2
18290DGWB	Black	White	Green	2
18290DGWW	White	White	Red	2
18290DRMA	Aluminum	Mirror	Red	2
18290DRMB	Black	Mirror	Red	2
18290DRMW	White	Mirror	Red	2
18290DRWA	Aluminum	White	Red	2
18290DRWB	Black	White	Red	2
18290DRWW	White	White	Red	2
18290SGCA	Aluminum	Clear	Green	1
18290SGCB	Black	Clear	Green	1
18290SGCW	White	Clear	Green	1
18290SGMA	Aluminum	Mirror	Green	1
18290SGMB	Black	Mirror	Green	1
18290SGMW	White	Mirror	Green	1
18290SGWA	Aluminum	White	Green	1
18290SGWB	Black	White	Green	1
18290SGWW	White	White	Green	1
18290SRCA	Aluminum	Clear	Red	1
18290SRCB	Black	Clear	Red	1
18290SRCW	White	Clear	Red	1
18290SRMA	Aluminum	Mirror	Red	1
18290SRMB	Black	Mirror	Red	1
18290SRMW	White	Mirror	Red	1
18290SRWA	Aluminum	White	Red	1
18290SRWB	Black	White	Red	1
18290SRWW	White	White	Red	1

18300

EDGE-LIT LED • RECESSED MOUNT

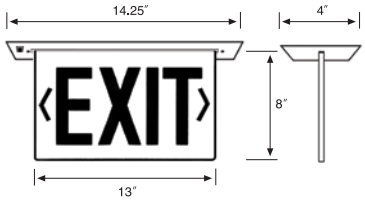

FEATURES

Compact, low profile design.
Energy consumption of less than 3 watts for AC only and less than 5 watts for battery backup units.
Emergency battery backup model (EM) is completely self-contained.
In-field-installable directional indicators.
Standard AC and emergency units available.
AC on indicator light and test switch (EM units only).
Sealed lead battery on emergency (EM) units.
120/277V operation.

ORDERING

Item NO.	*Trim Plate Finish*	*Lettering Color*	*No. Faceplates*
18300SGA	Anodized Aluminum	Green on Clear	1
18300DGA	Anodized Aluminum	Green on Clear	2
18300SGB	Black	Green on Clear	1
18300DGB	Black	Green on Clear	2
18300SGW	White	Green on Clear	1
18300DGW	White	Green on Clear	2
18300SGMA	Anodized Aluminum	Green on Mirror	1
18300DGMA	Anodized Aluminum	Green on Mirror	2
18300SGMB	Black	Green on Mirror	1
18300DGMB	Black	Green on Mirror	2
18300SGMW	White	Green on Mirror	1
18300DGMW	White	Green on Mirror	2
18300SGWA	Anodized Aluminum	Green on White	1
18300DGWA	Anodized Aluminum	Green on White	2
18300SGWB	Black	Green on White	1
18300DGWB	Black	Green on White	2
18300SGWW	White	Green on White	1
18300DGWW	White	Green on White	2
18300SRA	Anodized Aluminum	Red on Clear	1
18300DRA	Anodized Aluminum	Red on Clear	2
18300SRB	Black	Red on Clear	1
18300DRB	Black	Red on Clear	2
18300SRW	White	Red on Clear	1
18300DRW	White	Red on Clear	2
18300SRWA	Anodized Aluminum	Red on White	1
18300DRWA	Anodized Aluminum	Red on White	2
18300SRWB	Black	Red on White	1
18300DRWB	Black	Red on White	2
18300SRWW	White	Red on White	1
18300DRWW	White	Red on White	2

c UL us LISTED

INTERTEK ETL LISTED c us

NICOR® Shining Brighter™

18301

EDGE-LIT LED • SURFACE MOUNT • BATTERY BACKUP

WALL MOUNT

SIDE MOUNT

CEILING MOUNT

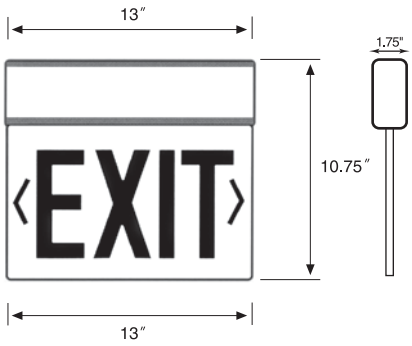

ORDERING

Item NO.	Trim Plate Finish	Lettering Color	No. Faceplates
18301SGA	Anodized Aluminum	Green on Clear	1
18301DGA	Anodized Aluminum	Green on Clear	2
18301SGB	Black	Green on Clear	1
18301DGB	Black	Green on Clear	2
18301SGW	White	Green on Clear	1
18301DGW	White	Green on Clear	2
18301SGMA	Anodized Aluminum	Green on Mirror	1
18301DGMA	Anodized Aluminum	Green on Mirror	2
18301SGMB	Black	Green on Mirror	1
18301DGMB	Black	Green on Mirror	2
18301SGMW	White	Green on Mirror	1
18301DGMW	White	Green on Mirror	2
18301SGWA	Anodized Aluminum	Green on White	1
18301DGWA	Anodized Aluminum	Green on White	2
18301SGWB	Black	Green on White	1
18301DGWB	Black	Green on White	2
18301SGWW	White	Green on White	1
18301DGWW	White	Green on White	2
18301SRA	Anodized Aluminum	Red on Clear	1
18301DRA	Anodized Aluminum	Red on Clear	2
18301SRB	Black	Red on Clear	1
18301DRB	Black	Red on Clear	2
18301SRW	White	Red on Clear	1
18301DRW	White	Red on Clear	2
18301SRMA	Anodized Aluminum	Red on Mirror	1
18301DRMA	Anodized Aluminum	Red on Mirror	2
18301SRMB	Black	Red on Mirror	1
18301DRMB	Black	Red on Mirror	2
18301SRMW	White	Red on Mirror	1
18301DRMW	White	Red on Mirror	2
18301SRWA	Anodized Aluminum	Red on White	1
18301DRWA	Anodized Aluminum	Red on White	2
18301SRWB	Black	Red on White	1
18301DRWB	Black	Red on White	2
18301SRWW	White	Red on White	1
18301DRWW	White	Red on White	2

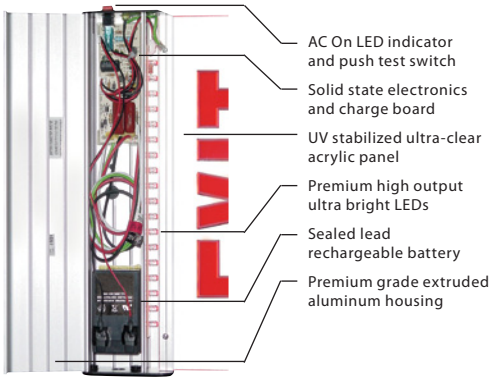

c UL us LISTED

INTERTEK ETL LISTED c US

18302

EDGE-LIT SMALL LED • RECESSED MOUNT

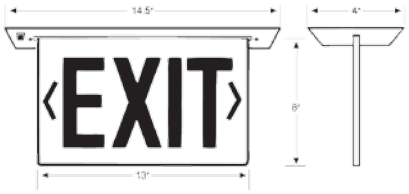

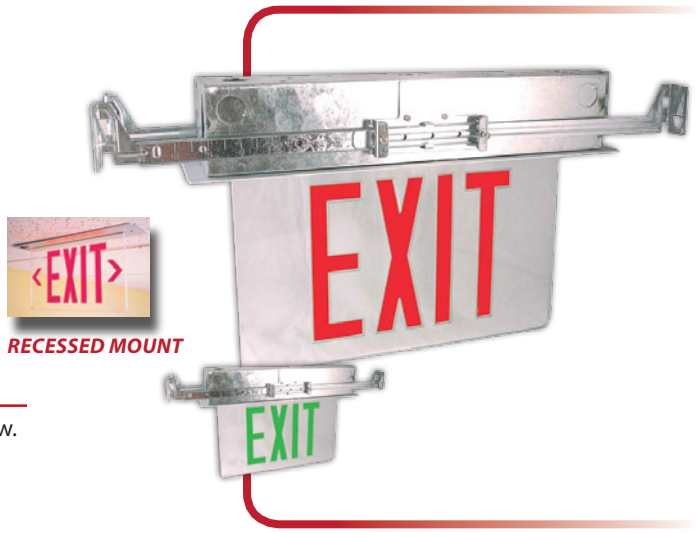

RECESSED MOUNT

FEATURES

Easily detachable for maintenance: serviceable from below.
Compact, low-profile design.
Energy consumption of less than 3 watts for AC only and less than 5 watts for battery backup units.
Emergency backup model (EM) is completely self-contained.
Infield install-able directional indicators.
Standard AC and emergency units available.
AC on indicator light and test switch (EM units only).
Ni-Cad battery on emergency (EM) units.
120-277V operation. Recessed mount.

ORDERING

Item NO.	*Trim Plate Finish*	*Lettering Color*	*No. Faceplates*	*Operation*
18302DGMA	Anodized Aluminum	Green on Mirror	2	Battery Backup
18302DGMB	Black	Green on Mirror	2	Battery Backup
18302DGMW	White	Green on Mirror	2	Battery Backup
18302SGMA	Anodized Aluminum	Green on Mirror	1	Battery Backup
18302SGMB	Black	Green on Mirror	1	Battery Backup
18302SGMW	White	Green on Mirror	1	Battery Backup
18302DRMA	Anodized Aluminum	Red on Mirror	2	Battery Backup
18302DRMB	Black	Red on Mirror	2	Battery Backup
18302DRMW	White	Red on Mirror	2	Battery Backup
18302SRMA	Anodized Aluminum	Red on Mirror	1	Battery Backup
18302SRMB	Black	Red on Mirror	1	Battery Backup
18302SRMW	White	Red on Mirror	1	Battery Backup
18302DGCA	Anodized Aluminum	Green on Clear	2	Battery Backup
18302DGCB	Black	Green on Clear	2	Battery Backup
18302DGCW	White	Green on Clear	2	Battery Backup
18302SGCA	Anodized Aluminum	Green on Clear	1	Battery Backup
18302SGCB	Black	Green on Clear	1	Battery Backup
18302SGCW	White	Green on Clear	1	Battery Backup
18302DRCA	Anodized Aluminum	Red on Clear	2	Battery Backup
18302DRCB	Black	Red on Clear	2	Battery Backup
18302DRCW	White	Red on Clear	2	Battery Backup
18302SRCA	Anodized Aluminum	Red on Clear	1	Battery Backup
18302SRCB	Black	Red on Clear	1	Battery Backup
18302SRCW	White	Red on Clear	1	Battery Backup

c UL us LISTED

INTERTEK ETL LISTED c us

NICOR® Shining Brighter™

18300NY • 18301NY

NEW YORK APPROVED • EDGE-LIT LED • RECESSED MOUNT,
NEW YORK APPROVED • EDGE-LIT LED • SURFACE MOUNT

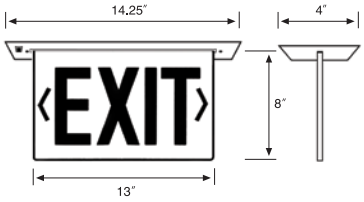



RECESSED MOUNT



WALL MOUNT

SIDE MOUNT

CEILING MOUNT

18300NY ORDERING

Item NO.	*Trim Plate Finish*	*Lettering Color*	*No. Faceplates*
18300NYSRA	Anodized Aluminum	Red on Clear	1
18300NYDRA	Anodized Aluminum	Red on Clear	2
18300NYSRB	Black	Red on Clear	1
18300NYDRB	Black	Red on Clear	2
18300NYSRW	White	Red on Clear	1
18300NYDRW	White	Red on Clear	2

18301NY ORDERING

Item NO.	*Trim Plate Finish*	*Lettering Color*	*No. Faceplates*
18301NYSRA	Anodized Aluminum	Red on Clear	1
18301NYDRA	Anodized Aluminum	Red on Clear	2
18301NYSRB	Black	Red on Clear	1
18301NYDRB	Black	Red on Clear	2
18301NYSRW	White	Red on Clear	1
18301NYDRW	White	Red on Clear	2

FEATURES

Easily detachable for maintenance: serviceable from below.
Compact, low-profile design.
Energy consumption of less than 3 watts for AC only and less than 5 watts for battery backup units.
Emergency backup model (EM) is completely self-contained.
Infield install-able directional indicators.
Standard AC and emergency units available.
AC on indicator light and test switch (EM units only).
Ni-Cad battery on emergency (EM) units.
120-277V operation.

18300NY ONLY

Compact, low profile design.
Sealed lead battery on emergency (EM) units.
120/277V operation.

c UL us LISTED

INTERTEK ETL LISTED c US

18303

EDGE-LIT SMALL LED • SURFACE MOUNT • AC-ONLY

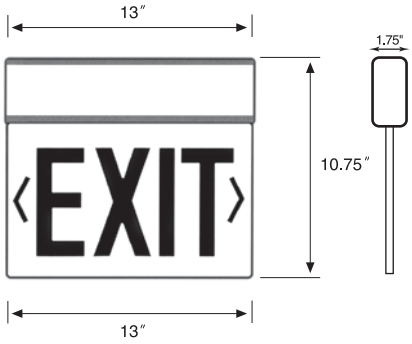

SIDE MOUNT

CEILING MOUNT

WALL MOUNT

FEATURES

Easily detachable for maintenance: serviceable from below.
Compact, low-profile design.
Energy consumption of less than 3 watts for AC only and less than 5 watts for battery backup units.
Emergency backup model (EM) is completely self-contained.
Infield install-able directional indicators.
Standard AC and emergency units available.
AC on indicator light and test switch (EM units only).
Ni-Cad battery on emergency (EM) units.
120-277V operation.

ORDERING

Item NO.	*Trim Plate Finish*	*Lettering Color*	*No. Faceplates*	*Operation*
18303DGMA	Anodized Aluminum	Green on Mirror	2	AC-Only
18303DGMB	Black	Green on Mirror	2	AC-Only
18303DGMW	White	Green on Mirror	2	AC-Only
18303SGMA	Anodized Aluminum	Green on Mirror	1	AC-Only
18303SGMB	Black	Green on Mirror	1	AC-Only
18303SGMW	White	Green on Mirror	1	AC-Only
18303DRMA	Anodized Aluminum	Red on Mirror	2	AC-Only
18303DRMB	Black	Red on Mirror	2	AC-Only
18303DRMW	White	Red on Mirror	2	AC-Only
18303SRMA	Anodized Aluminum	Red on Mirror	1	AC-Only
18303SRMB	Black	Red on Mirror	1	AC-Only
18303SRMW	White	Red on Mirror	1	AC-Only
18303DGCA	Anodized Aluminum	Green on Clear	2	AC-Only
18303DGCB	Black	Green on Clear	2	AC-Only
18303DGCW	White	Green on Clear	2	AC-Only
18303SGCA	Anodized Aluminum	Green on Clear	1	AC-Only
18303SGCB	Black	Green on Clear	1	AC-Only
18303SGCW	White	Green on Clear	1	AC-Only
18303DRCA	Anodized Aluminum	Red on Clear	2	AC-Only
18303DRCB	Black	Red on Clear	2	AC-Only
18303DRCW	White	Red on Clear	2	AC-Only
18303SRCA	Anodized Aluminum	Red on Clear	1	AC-Only
18303SRCB	Black	Red on Clear	1	AC-Only
18303SRCW	White	Red on Clear	1	AC-Only

c UL us LISTED

INTERTEK ETL LISTED c us

NICOR® Shining Brighter™

18304

CAST ALUMINUM AC-ONLY OR BATTERY BACKUP

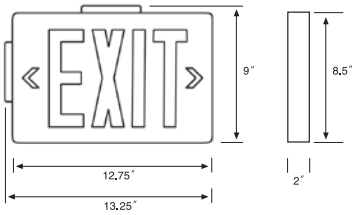

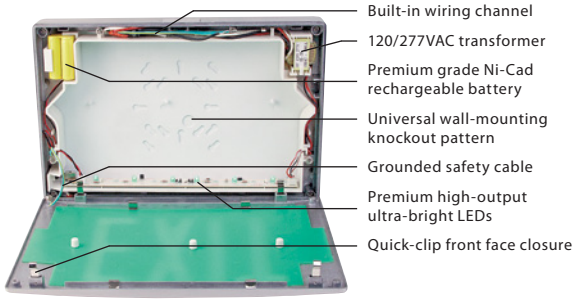

FEATURES

AC-only or self-powered models.
120/277 VAC operation.
Long-life, energy-saving LED technology.
Universal canopy included.
Curved face design.
Spec grade.
Universal knockout chevrons.

Please see following page for ordering information

DC
SDT
c UL us LISTED
INTERTEK ETL CM c LISTED us

18304
ORDERING INFORMATION

18304 ORDERING

Item NO.	Housing Color	Face Color	Lettering Color	No. Faceplates	Operation
18304AA	Brushed Aluminum	Brushed Aluminum	Red	1	Battery Backup
18305AA	Brushed Aluminum	Brushed Aluminum	Green	1	Battery Backup
18306AA	Brushed Aluminum	Brushed Aluminum	Red	1	AC-Only
18307AA	Brushed Aluminum	Brushed Aluminum	Green	1	AC-Only
18304AB	Brushed Aluminum	Black	Red	1	Battery Backup
18305AB	Brushed Aluminum	Black	Green	1	Battery Backup
18306AB	Brushed Aluminum	Black	Red	1	AC-Only
18307AB	Brushed Aluminum	Black	Green	1	AC-Only
18304AW	Brushed Aluminum	White	Red	1	Battery Backup
18305AW	Brushed Aluminum	White	Green	1	Battery Backup
18306AW	Brushed Aluminum	White	Red	1	AC-Only
18307AW	Brushed Aluminum	White	Green	1	AC-Only
18304BA	Black	Brushed Aluminum	Red	1	Battery Backup
18305BA	Black	Brushed Aluminum	Green	1	Battery Backup
18306BA	Black	Brushed Aluminum	Red	1	AC-Only
18307BA	Black	Brushed Aluminum	Green	1	AC-Only
18304BB	Black	Black	Red	1	Battery Backup
18305BB	Black	Black	Green	1	Battery Backup
18306BB	Black	Black	Red	1	AC-Only
18307BB	Black	Black	Green	1	AC-Only
18304BW	Black	White	Red	1	Battery Backup
18305BW	Black	White	Green	1	Battery Backup
18306BW	Black	White	Red	1	AC-Only
18307BW	Black	White	Green	1	AC-Only
18304WA	White	Brushed Aluminum	Red	1	Battery Backup
18305WA	White	Brushed Aluminum	Green	1	Battery Backup
18306WA	White	Brushed Aluminum	Red	1	AC-Only
18307WA	White	Brushed Aluminum	Green	1	AC-Only
18304WB	White	Black	Red	1	Battery Backup
18305WB	White	Black	Green	1	Battery Backup
18306WB	White	Black	Red	1	AC-Only
18307WB	White	Black	Green	1	AC-Only
18304WW	White	White	Red	1	Battery Backup
18305WW	White	White	Green	1	Battery Backup
18306WW	White	White	Red	1	AC-Only
18307WW	White	White	Green	1	AC-Only

ORDERING

Item NO.	Trim Color	Lettering Color
CALPLATEGA	Brushed Aluminum	Green
CALPLATERA	Brushed Aluminum	Red
CALPLATEGB	Black	Green
CALPLATERB	Black	Red
CALPLATEGW	White	Green
CALPLATERW	White	Red

NICOR® Shining Brighter™

18304NY

NY APPROVED • ALUMINUM HOUSING • AC-ONLY OR BATTERY BACKUP



FEATURES

AC only or self-powered models.
120/277 VAC operation.
Long-life, energy-saving LED technology.
Universal canopy included.
Curved face design.
Spec grade.
Universal knockout chevrons.

18304 ORDERING

Item NO.	*Housing Color*	*Face Color*	*Lettering Color*	*No. Faceplates*	*Operation*
18304NYAA	Brushed Aluminum	Brushed Aluminum	Red	1	Battery Backup
18306NYAA	Brushed Aluminum	Brushed Aluminum	Red	1	AC-Only
18304NYAB	Brushed Aluminum	Black	Red	1	Battery Backup
18306NYAB	Brushed Aluminum	Black	Red	1	AC-Only
18304NYAW	Brushed Aluminum	White	Red	1	Battery Backup
18306NYAW	Brushed Aluminum	White	Red	1	AC-Only
18304NYBA	Black	Brushed Aluminum	Red	1	Battery Backup
18306NYBA	Black	Brushed Aluminum	Red	1	AC-Only
18304NYBB	Black	Black	Red	1	Battery Backup
18306NYBB	Black	Black	Red	1	AC-Only
18304NYBW	Black	White	Red	1	Battery Backup
18306NYBW	Black	White	Red	1	AC-Only
18304NYWA	White	Brushed Aluminum	Red	1	Battery Backup
18306NYWA	White	Brushed Aluminum	Red	1	AC-Only
18304NYWB	White	Black	Red	1	Battery Backup
18306NYWB	White	Black	Red	1	AC-Only
18304NYWW	White	White	Red	1	Battery Backup
18306NYWW	White	White	Red	1	AC-Only

ORDERING

Item NO.	*Trim Color*	*Lettering Color*
CALPLATENYRA	Brushed Aluminum	Red
CALPLATENYRB	Black	Red
CALPLATENYRW	White	Red

SDT

c UL us LISTED

18400

STEEL HOUSING • 6" LETTER • AC-ONLY OR BATTERY BACKUP

FEATURES

AC only or self-powered models.
120/277 VAC operation.
Long-life, energy-saving LED technology.
Power-on LED indicator light and push-to-test switch.
Rugged 20-gauge steel construction.
Universal canopy included.
Universal knockout chevrons.

ORDERING

Item NO.	*Housing Color*	*Lettering Color*	*No. Faceplates*	*Operation*
18400SGB	Black	Green	1	Battery Backup
18402SGB	Black	Green	1	AC-Only
18400DGB	Black	Green	2	Battery Backup
18402DGB	Black	Green	2	AC-Only
18400SGW	White	Green	1	Battery Backup
18402SGW	White	Green	1	AC-Only
18400DGW	White	Green	2	Battery Backup
18402DGW	White	Green	2	AC-Only
18400SRB	Black	Red	1	Battery Backup
18402SRB	Black	Red	1	AC-Only
18400DRB	Black	Red	2	Battery Backup
18402DRB	Black	Red	2	AC-Only
18400SRW	White	Red	1	Battery Backup
18402SRW	White	Red	1	AC-Only
18400DRW	White	Red	2	Battery Backup
18402DRW	White	Red	2	AC-Only

c UL us LISTED

INTERTEK ETL LISTED c us

NICOR® Shining Brighter™

18600
ADJUSTABLE THERMOPLASTIC MICRO

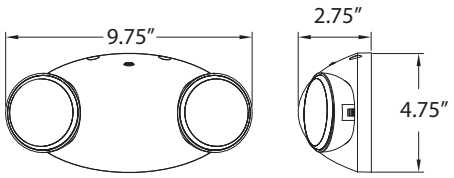

FEATURES

LED expected life is more than 10 years
Injection-molded, high impact, UV-stabilized, UL 94 V-0 Thermoplastic
Snap-together construction speeds installation
Universal mounting plate with quick-connect feature
Available in standard, high output, and high output remote capable
Full adjustable glare-free lighting heads
White housing is standard, with an optional black housing available
Dual-voltage input 120V or 277V AC operation
Emergency unit provided with test switch, status indicator, and rechargeable battery
Maintenance-free, Ni-Cad batteries provide 90 minutes of emergency power
Damp location listed
5 year warranty

ORDERING

Item NO.	*Housing Color*	*Options*
18600BKS	Black	Standard
18600BKH	Black	High Output
18600BKHRC	Black	High Output, Remote Capable
18600WHS	White	Standard
18600WHH	White	High Output
18600WHHRC	White	High Output, Remote Capable

c UL us LISTED

18601
ADJUSTABLE THERMOPLASTIC COMBO

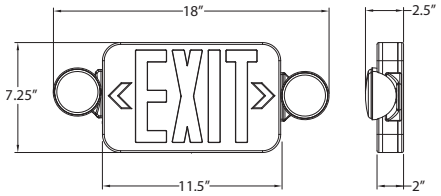

FEATURES

Long life, energy saving LED lamps
Injection molded, high impact, thermoplastic construction in black or white finishes
Snap-fit faceplate installs without the use of tools
Field replaceable chevron directional indicator knockouts
Integral wiring channels to facilitate installation
Universal mounting pattern knockout in backplate for J-box mounting
Available in standard, high output, and high output remote capable
Dual voltage 120/277 VAC operation
Maintenance-free sealed nickel cadmium battery
Fully adjustable glare free lighting heads
Unit provided with test switch, status indicator, and rechargeable Ni-Cad battery
Damp location listed

ORDERING

Item NO.	*Housing Color*	*Lettering Color*	*No. Faceplates*	*Operation*
18601BKGSS	Black	Green	1	Standard
18601BKGDS	Black	Green	2	Standard
18601BKRSS	Black	Red	1	Standard
18601BKRDS	Black	Red	2	Standard
18601BKGSH	Black	Green	1	High Output
18601BKGDH	Black	Green	2	High Output
18601BKRSH	Black	Red	1	High Output
18601BKRDH	Black	Red	2	High Output
18601BKGSHRC	Black	Green	1	High Output, Remote Capable
18601BKGDHRC	Black	Green	2	High Output, Remote Capable
18601BKRSHRC	Black	Red	1	High Output, Remote Capable
18601BKRDHRC	Black	Red	2	High Output, Remote Capable
18601WHGSS	White	Green	1	Standard
18601WHGDS	White	Green	2	Standard
18601WHRSS	White	Red	1	Standard
18601WHRDS	White	Red	2	Standard
18601WHGSH	White	Green	1	High Output
18601WHGDH	White	Green	2	High Output
18601WHRSH	White	Red	1	High Output
18601WHRDH	White	Red	2	High Output
18601WHGSHRC	White	Green	1	High Output, Remote Capable
18601WHGDHRC	White	Green	2	High Output, Remote Capable
18601WHRSHRC	White	Red	1	High Output, Remote Capable
18601WHRDHRC	White	Red	2	High Output, Remote Capable

c UL us LISTED

NICOR® Shining Brighter™

18150
EMERGENCY LIGHTING

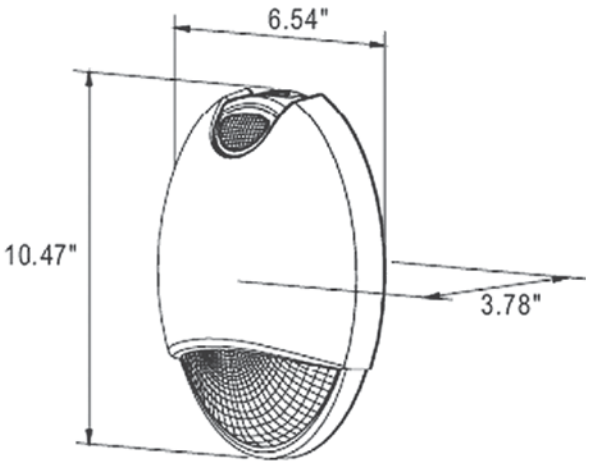

BK

BZ

NK

WH

A

B

G

W

Also available: Black, Bronze, Nickel, and White finishes. Lighting in many different LED colors. (Please see ordering chart on following pages).

FEATURES

Low-profile, decorative die-cast emergency lighting fixture.
Standard powder-coated bronze finish.
Polycarbonate lens and mirrored reflector for maximum illumination.
Integrated test switch/pilot light.
6-Volt Ni-Cad battery standard.
Universal transformer for 120 or 277VAC @ 60Hz.
Two 6W Xenon lamps offer more light output than standard incandescent lamps.
Automatic, low-voltage disconnect (LVD).
Designed for wall mount or conduit through the top.
Standard operating temperature of 32˚F to 122˚F.
Cold weather (CW) option: operating temperature down to -28˚F.
Self-diagnostic models available.
ETL listed for wet location.
5-Year Manufacturer's Warranty.

Please see following page for ordering information

SDT

INTERTEK ETL LISTED c US

WET LOCATION RATED

18150
EMERGENCY LIGHTING

ORDERING

Item NO.	Housing Color	LED Color	Options
18150BKAPC	Black	Amber	Photocell
18150BKACWPC	Black	Amber	Cold Weather / Photocell
18150BKASDTPC	Black	Amber	Self Diagnostic / Photocell
18150BKASDTCWPC	Black	Amber	Self Diagnostic / Cold Weather / Photocell
18150BKBLPC	Black	Blue	Photocell
18150BKBLCWPC	Black	Blue	Cold Weather / Photocell
18150BKBLSDTPC	Black	Blue	Self Diagnostic / Photocell
18150BKBLSDTCWPC	Black	Blue	Self Diagnostic / Cold Weather / Photocell
18150BKGPC	Black	Green	Photocell
18150BKGCWPC	Black	Green	Cold Weather / Photocell
18150BKGSDTPC	Black	Green	Self Diagnostic / Photocell
18150BKGSDTCWPC	Black	Green	Self Diagnostic / Cold Weather / Photocell
18150BKW	Black	White	
18150BKWCW	Black	White	Cold Weather
18150BKWSDT	Black	White	Self Diagnostic
18150BKWPC	Black	White	Photocell
18150BKWCWPC	Black	White	Cold Weather / Photocell
18150BKWSDTPC	Black	White	Self Diagnostic / Photocell
18150BKWSDTCWPC	Black	White	Self Diagnostic / Cold Weather / Photocell
18150BZAPC	Bronze	Amber	Photocell
18150BZACWPC	Bronze	Amber	Cold Weather / Photocell
18150BZASDTPC	Bronze	Amber	Self Diagnostic / Photocell
18150BZASDTCWPC	Bronze	Amber	Self Diagnostic / Cold Weather / Photocell
18150BZBLPC	Bronze	Blue	Photocell
18150BZBLCWPC	Bronze	Blue	Cold Weather / Photocell
18150BZBLSDTPC	Bronze	Blue	Self Diagnostic / Photocell
18150BZBLSDTCWPC	Bronze	Blue	Self Diagnostic / Cold Weather / Photocell
18150BZGPC	Bronze	Green	Photocell
18150BZGCWPC	Bronze	Green	Cold Weather / Photocell
18150BZGSDTPC	Bronze	Green	Self Diagnostic / Photocell
18150BZGSDTCWPC	Bronze	Green	Self Diagnostic / Cold Weather / Photocell
18150BZW	Bronze	White	
18150BZWCW	Bronze	White	Cold Weather
18150BZWSDT	Bronze	White	Self Diagnostic
18150BZWPC	Bronze	White	Photocell
18150BZWCWPC	Bronze	White	Cold Weather / Photocell
18150BZWSDTPC	Bronze	White	Self Diagnostic / Photocell
18150BZWSDTCWPC	Bronze	White	Self Diagnostic / Cold Weather / Photocell

NICOR® Shining Brighter™

18150
EMERGENCY LIGHTING

ORDERING

Item NO.	Housing Color	LED Color	Options
18150NKAPC	Nickel	Amber	Photocell
18150NKACWPC	Nickel	Amber	Cold Weather / Photocell
18150NKASDTPC	Nickel	Amber	Self Diagnostic / Photocell
18150NKASDTCWPC	Nickel	Amber	Self Diagnostic / Cold Weather / Photocell
18150NKBLPC	Nickel	Blue	Photocell
18150NKBLCWPC	Nickel	Blue	Cold Weather / Photocell
18150NKBLSDTPC	Nickel	Blue	Self Diagnostic / Photocell
18150NKBLSDTCWPC	Nickel	Blue	Self Diagnostic / Cold Weather / Photocell
18150NKGPC	Nickel	Green	Photocell
18150NKGCWPC	Nickel	Green	Cold Weather / Photocell
18150NKGSDTPC	Nickel	Green	Self Diagnostic / Photocell
18150NKGSDTCWPC	Nickel	Green	Self Diagnostic / Cold Weather / Photocell
18150NKW	Nickel	White	
18150NKWCW	Nickel	White	Cold Weather
18150NKWSDT	Nickel	White	Self Diagnostic
18150NKWPC	Nickel	White	Photocell
18150NKWCWPC	Nickel	White	Cold Weather / Photocell
18150NKWSDTPC	Nickel	White	Self Diagnostic / Photocell
18150NKWSDTCWPC	Nickel	White	Self Diagnostic / Cold Weather / Photocell
18150WHAPC	White	Amber	Photocell
18150WHACWPC	White	Amber	Cold Weather / Photocell
18150WHASDTPC	White	Amber	Self Diagnostic / Photocell
18150WHASDTCWPC	White	Amber	Self Diagnostic / Cold Weather / Photocell
18150WHBLPC	White	Blue	Photocell
18150WHBLCWPC	White	Blue	Cold Weather / Photocell
18150WHBLSDTPC	White	Blue	Self Diagnostic / Photocell
18150WHBLSDTCWPC	White	Blue	Self Diagnostic / Cold Weather / Photocell
18150WHGPC	White	Green	Photocell
18150WHGCWPC	White	Green	Cold Weather / Photocell
18150WHGSDTPC	White	Green	Self Diagnostic / Photocell
18150WHGSDTCWPC	White	Green	Self Diagnostic / Cold Weather / Photocell
18150WHW	White	White	
18150WHWCW	White	White	Cold Weather
18150WHWSDT	White	White	Self Diagnostic
18150WHWPC	White	White	Photocell
18150WHWCWPC	White	White	Cold Weather / Photocell
18150WHWSDTPC	White	White	Self Diagnostic / Photocell
18150WHWSDTCWPC	White	White	Self Diagnostic / Cold Weather / Photocell

18100 • 18102

EMERGENCY LIGHTING, COMPACT EMERGENCY LIGHTING



18100
Also Available:
18100BK (Black)



18102
Also Available:
18102BK (Black)

FEATURES

Completely self-contained, fully automatic operation.
Compact low-profile design in neutral finish.
Universal mounting plate w/ Quick Connect for rapid installation.
Push-to-test switch.
6-volt pure lead maintenance-free battery.
Environmentally-coated solid state charger.
Automatic low voltage disconnect (LVD).
Universal transformer for 120 or 277 VAC.
V-O flame retardant, high-impact thermoplastic housing.
Charge rate/power-on LED indicator light.
Damp location listed.
Operation time - 90 minutes.
Lamp - 2X5.4W.
Warranty - yes.

ORDERING

Item NO.	*Housing Color*
18100	White
18100BK	Black
18102	White
18102BK	Black

c UL us LISTED

INTERTEK ETL LISTED c us

NICOR® Shining Brighter™

18103 • 18104

EMERGENCY LIGHTING • MODERN DESIGN • REMOTE CAPABILITY,
EMERGENCY LIGHTING • REMOTE CAPABILITY



18103
Also Available:
18103BK (Black)



18104

FEATURES

Completely self-contained, fully automatic operation.
Compact low-profile design in neutral finish.
Universal mounting plate w/ Quick Connect for rapid installation.
Push-to-test switch.
6-volt pure lead maintenance-free battery.
Environmentally-coated solid state charger.
Automatic low voltage disconnect (LVD).
Universal transformer for 120 or 277 VAC.
V-O flame retardant, high-impact thermoplastic housing.
Charge rate/power-on LED indicator light.
Operation time - 90 minutes.
Maximum 4 heads at 5W for 90min.
Warranty - Yes.

ORDERING

Item NO.	*Housing Color*
18103	White
18103BK	Black
18103R	White (remote capable)
18104	White

c UL us LISTED

INTERTEK ETL LISTED c us

18110 • 18113
EMERGENCY LIGHTING

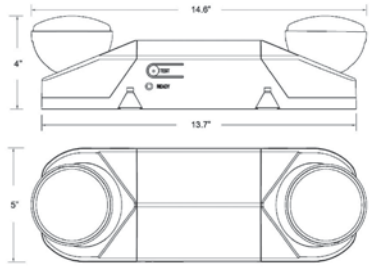

18110WH
Also Available:
18110BK (Black)

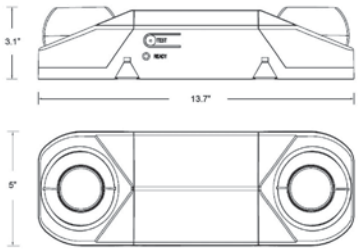

18113WH
Also Available:
18113BK (Black)
18113GYWL (Gray)

FEATURES

Incandescent 6V 5.4W lamps with PAR-type lamp heads.
6-Volt, sealed lead acid, rechargeable, maintenance-free battery.
Completely self-contained.
Fully automatic operation.
Compact, low-profile design.
Automatic, low-voltage disconnect (LVD).
Push-to-test switch.
Dual voltage, 120/277V operation.
Emergency operation 90 min.
Lamp wattage 2 X 5.4W.
UL listed for damp location.

18113NY ONLY
Ultra-bright MR-16 halogen lamps.
Compact, low-profile design.

ORDERING

Item NO.	*Battery*	*Lamp Wattage*	*Housing Color*	*Damp Location*	*Wet Location*	*Emergency Operation*
18113WH	6V Sealed lead acid	2 X 5.4W	White	Yes	No	90 min.
18113BK	6V Sealed lead acid	2 X 5.4W	Black	Yes	No	90 min.
18113GYWL	6V Sealed lead acid	2 X 7W	Gray	Yes	Yes	90 min.

c UL us LISTED

NICOR® Shining Brighter™

18130
SELF-LUMINOUS

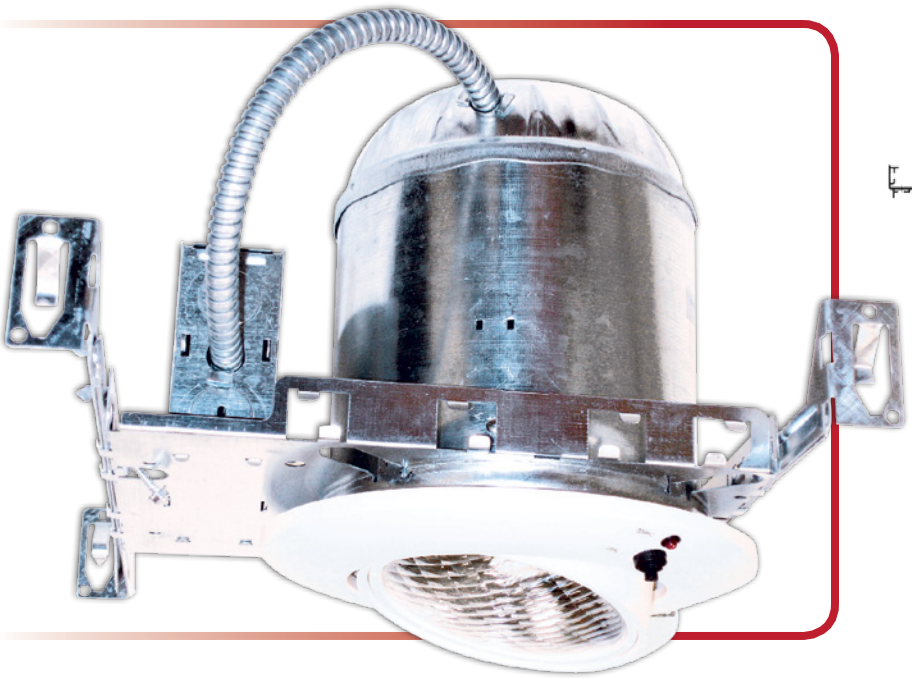

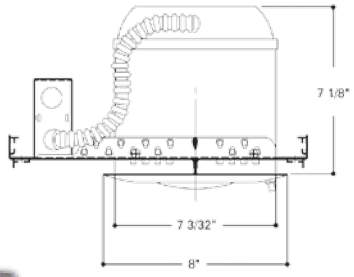

FEATURES

Completely self-contained.
Compact, flush mount design.
Mounting bar hangers included.
Push-to-test switch.
6-Volt, lead, maintenance-free battery.
Environmentally-coated, solid state charger.
Automatic, low voltage dieconect (LVD).
Universal transformer for 120 or 277 VAC.
Adjustable aiming angle.
Charge rate/power on LED indicator light.
Emergency operation: 90 Min +.
Lamp wattage: 8W Bi-Pin Halogen.
Battery voltage: 6V.

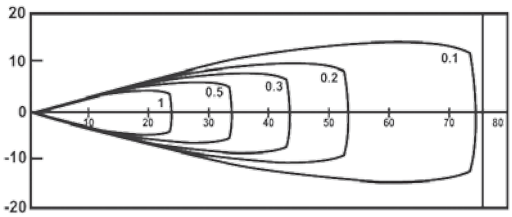

ORDERING

Item NO.	*Housing Color*
18130BK	Black
18130WH	White

c UL us LISTED

INTERTEK ETL CM LISTED c US

18201

EMERGENCY • EXIT LIGHTING COMBO

Heads rotate 180° + for maximum field flexibility

FEATURES

Universal mounting canopy for top installation.
6-volt pure lead, maintenance-free battery.
Push-to-test switch.
Automatic low-voltage disconnect (LVD).
120 or 277 VAC operation.
V-O flame-retardant, high impact, thermoplastic housing.
Fully adjustable glare-free lighting heads.
Energy consumption: >4W for red letters, >5W for green.
LED lamp life of 25 + years.
Larger emergency battery for remote capacity.
Damp location listed.

ORDERING

Item NO.	*Housing Color*	*Lettering Color*	*No. Faceplates*	*Remote Capable*
18201	White	Red	2	No
18201GREEN	White	Green	2	No
18201RWR	White	Red	2	Yes
18201GWR	White	Green	2	Yes
18201BKG	Black	Green	1	No
18201DGB	Black	Green	2	No
18201DGBR	Black	Green	2	Yes
18201DRB	Black	Red	2	No
18201DRBR	Black	Red	2	Yes

c UL us LISTED

INTERTEK ETL LISTED c us

NICOR® Shining Brighter™

18500
SELF-LUMINOUS



FEATURES

No electricity, no batteries.
Explosion-proof, weatherproof.
No maintenance.
Easy installation, no wiring.
Letter-shaped tubes emit best light in the industry.
Concealed mounting.
Suitable for floor proximity mounting.

ORDERING

Item NO.	Housing Color	Face Color	No. Faceplates	Life (in years)
18500SGB10	Black	Green	1	10
18500DGB10	Black	Green	2	10
18500SGC10	Chrome	Green	1	10
18500DGC10	Chrome	Green	2	10
18500SGW10	White	Green	1	10
18500DGW10	White	Green	2	10
18500SRB10	Black	Red	1	10
18500DRB10	Black	Red	2	10
18500SRC10	Chrome	Red	1	10
18500DRC10	Chrome	Red	2	10
18500SRW10	White	Red	1	10
18500DRW10	White	Red	2	10
18500SGB15	Black	Green	1	15
18500DGB15	Black	Green	2	15
18500SGC15	Chrome	Green	1	15
18500DGC15	Chrome	Green	2	15
18500SGW15	White	Green	1	15
18500DGW15	White	Green	2	15
18500SRB15	Black	Red	1	15
18500DRB15	Black	Red	2	15
18500SRC15	Chrome	Red	1	15
18500DRC15	Chrome	Red	2	15
18500SRW15	White	Red	1	15
18500DRW15	White	Red	2	15

c UL us LISTED

INTERTEK ETL LISTED c US

18105 • 18106

RECESSED EMERGENCY LIGHTING, WET LOCATION EMERGENCY LIGHTING

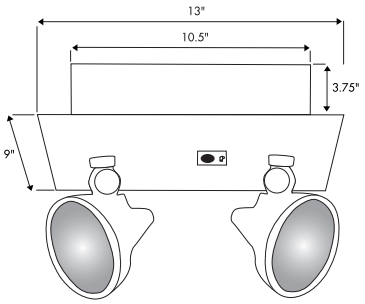

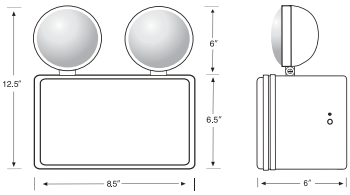

18105

18106

18105 FEATURES

Completely self-contained, compact flush-mount design.
Mounting hanger bars included.
Large battery for remote capacity standard.
Push-to-test switch.
6-volt pure lead maintenance-free battery.
Environmentally-coated solid state charger.
Automatic low voltage disconnect (LVD).
Universal transformer for 120 or 277 VAC.
V-O flame retardant, high-impact thermoplastic lighting heads.
Charge rate/power-on LED indicator light.

18106 FEATURES

Corrosion-resistant UV-stabilized ABS enclosure.
Dual 120 or 277 VAC input, field selectable.
Automatic brownout feature.
Solid-state charging circuit.
Solid-state line-latched low voltage disconnect provides 100% load disconnect protection to guard against battery deep discharge.
Short-circuit and overload protection on DC output circuit.
Sealed momentary test switch.
Sealed AC ready-light.

ORDERING

Item NO.	*Operation Time*	*Lamp Wattage*	*Remote Capable*	*Warranty*
18105	90 min. +	7.2W	Yes	Yes
18106	90 min.	2 X 7.2W	No	Yes
18106R	90 min.	2 X 7.2W	Yes	Yes

c UL us LISTED

INTERTEK ETL LISTED c us

WET LOCATION RATED

18106 Only

NICOR® Shining Brighter™

18107
HEAVY-DUTY EMERGENCY LIGHTING

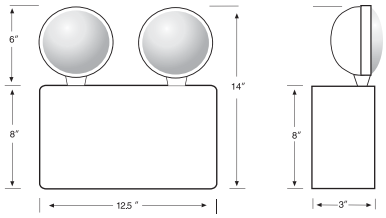

18107-6 6-volt

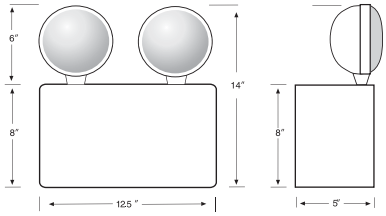

18107-12 12-volt

FEATURES

Compact low-profile design in neutral finish.
Push-to-test switch.
6-volt pure lead maintenance-free battery.
Side and top conduit knockouts.
Automatic low voltage disconnect (LVD).
Universal transformer for 120 or 277 VAC.
Fully adjustable glare-free lighting heads standard.
Charge rate/power-on LED indicator light.
Maximum 12 heads at 7.2W for 90min.
18107-6 Maximum 12 heads at 7.2W for 90min.
18107-12 Maximum 10 heads at 9W for 90min.

18107CH • 18107NY12

HEAVY-DUTY EMERGENCY LIGHTING • CHICAGO APPROVED,
HEAVY-DUTY EMERGENCY LIGHTING • NEW YORK APPROVED

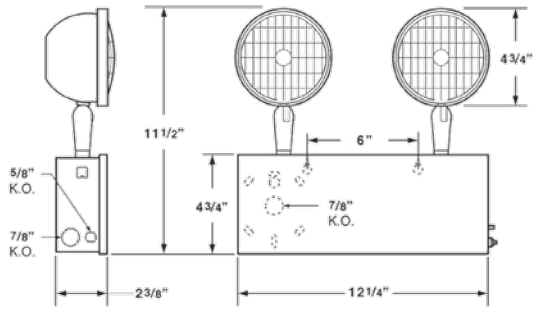

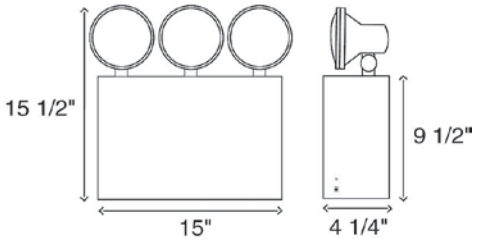

18107CH

18107NY12

18107CH FEATURES

Dual voltage 120VAC 60Hz / 277VAC 60Hz.
Brownout sensitivity.
Solid state charging circuit.
AC lockout (Line Latching).
Short circuit and overload protection on DC output.
Two High-intensity Tungsten Halogen Lamps, 6V 12W.
6-Volt operation.
Maintenance free.
Light gray durable metal housing.
Sealed momentary test switch.
Sealed AC Ready Light.
Emergency operation - 120 minutes with a 6V sealed lead calcium battery.

18107NY12 FEATURES

Heavy 20-gauge steel construction.
120/277 volt input standard.
Durable powder-coated white finish.
PAR 36 type lamp heads.
Low voltage disconnect.
Brownout protection standard.

c UL us LISTED

NICOR® Shining Brighter™

18113GYWL
EMERGENCY LIGHTING



FEATURES

Ultra-bright MR-16 halogen lamps.
6-Volt, sealed lead acid, rechargeable, maintenance-free battery.
Completely self-contained.
UL listed for wet location.
Automatic, low-voltage disconnect (LVD).
Push-to-test switch.
Dual 120/277VAC operation.
V-5 flame retardant.
High-impact resistant.

ORDERING

Item NO.	*Battery*	*Lamp Wattage*	*Housing Color*	*Damp Location*	*Wet Location*	*Emergency Operation*
18113GYWL	6V Sealed lead acid	2 X 7W	Gray	Yes	Yes	90 min.

c UL us LISTED

WET LOCATION RATED

18200W • 18201W • 18202W

AC-ONLY EMERGENCY LIGHTING

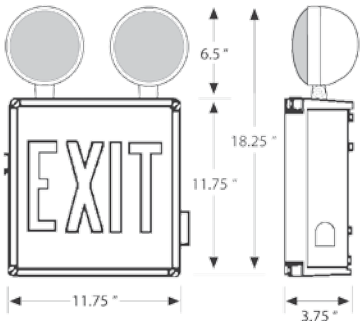

FEATURES

ABS, corrosion-resistant UV stabilized enclosure.
AC only or self-powered models.
Universal 120/277VAC operation.
Removable directional indicators.
Extremely low operating costs.
80-Year light source life expectancy.
Meets NFPA Life Safety 101, NEC, OSHA, local and state codes.
Wet location listed.

Wet Location. Many NICOR products are designed specifically for wet locations such as in showers or over tubs. Lamps are concealed behind a lens or diffuser. Portions of the fixture that are exposed to water vapor are manufactured of non-conductive and non-corrosive materials. Wet Location fixtures are well suited for outdoor porches and breezeways, too.

ORDERING

Item NO.	*Housing Color*	*Lettering Color*	*No. Faceplates*	*Emergency Operation*	*Lamp Type*
18200WLG	White	Green	1	90 Min.	LED
18200WLR	White	Red	1	90 Min.	LED
18201WLG	White	Green	1	90 Min.	LED/INC
18201WLR	White	Red	1	90 Min.	LED/INC
18202WLG	White	Green	1	No	LED
18202WLR	White	Red	1	No	LED

WET LOCATION RATED

NICOR® Shining Brighter™

REMOTE LAMP HEADS

ORDERING

Item NO.	*Heads*	*Volts*	*Watts*
RH1	1 Head	6V	5W
RH2	2 Heads	6V	5W
RH3	1 Head	6V	5W
RH4	1 Head	6V	9W
RH5	2 Heads	6V	5W
RH6	2 Heads	6V	9W
RH7	1 Head	12V	7.2W

Item NO.	*Heads*	*Volts*	*Watts*
RH8	1 Head	12V	12W
RH9	2 Heads	12V	7.2W
RH10	2 Heads	12V	12W
RH11	1 Head	6V	5W
RH12	1 Head	6V	9W
RH13	2 Heads	6V	5W
RH14	2 Heads	6V	9W

Item NO.	*Heads*	*Volts*	*Watts*
RH15	1 Head	12V	7.2W
RH16	1 Head	12V	12W
RH17	2 Heads	12V	7.2W
RH18	2 Heads	12V	12W
Weatherproof Outdoor			
RH-WP1	1 Head	6V	7.2W
RH-WP2	2 Heads	6V	7.2W

SHIELD GUARDS • WIRE GUARDS • LEDRETRO

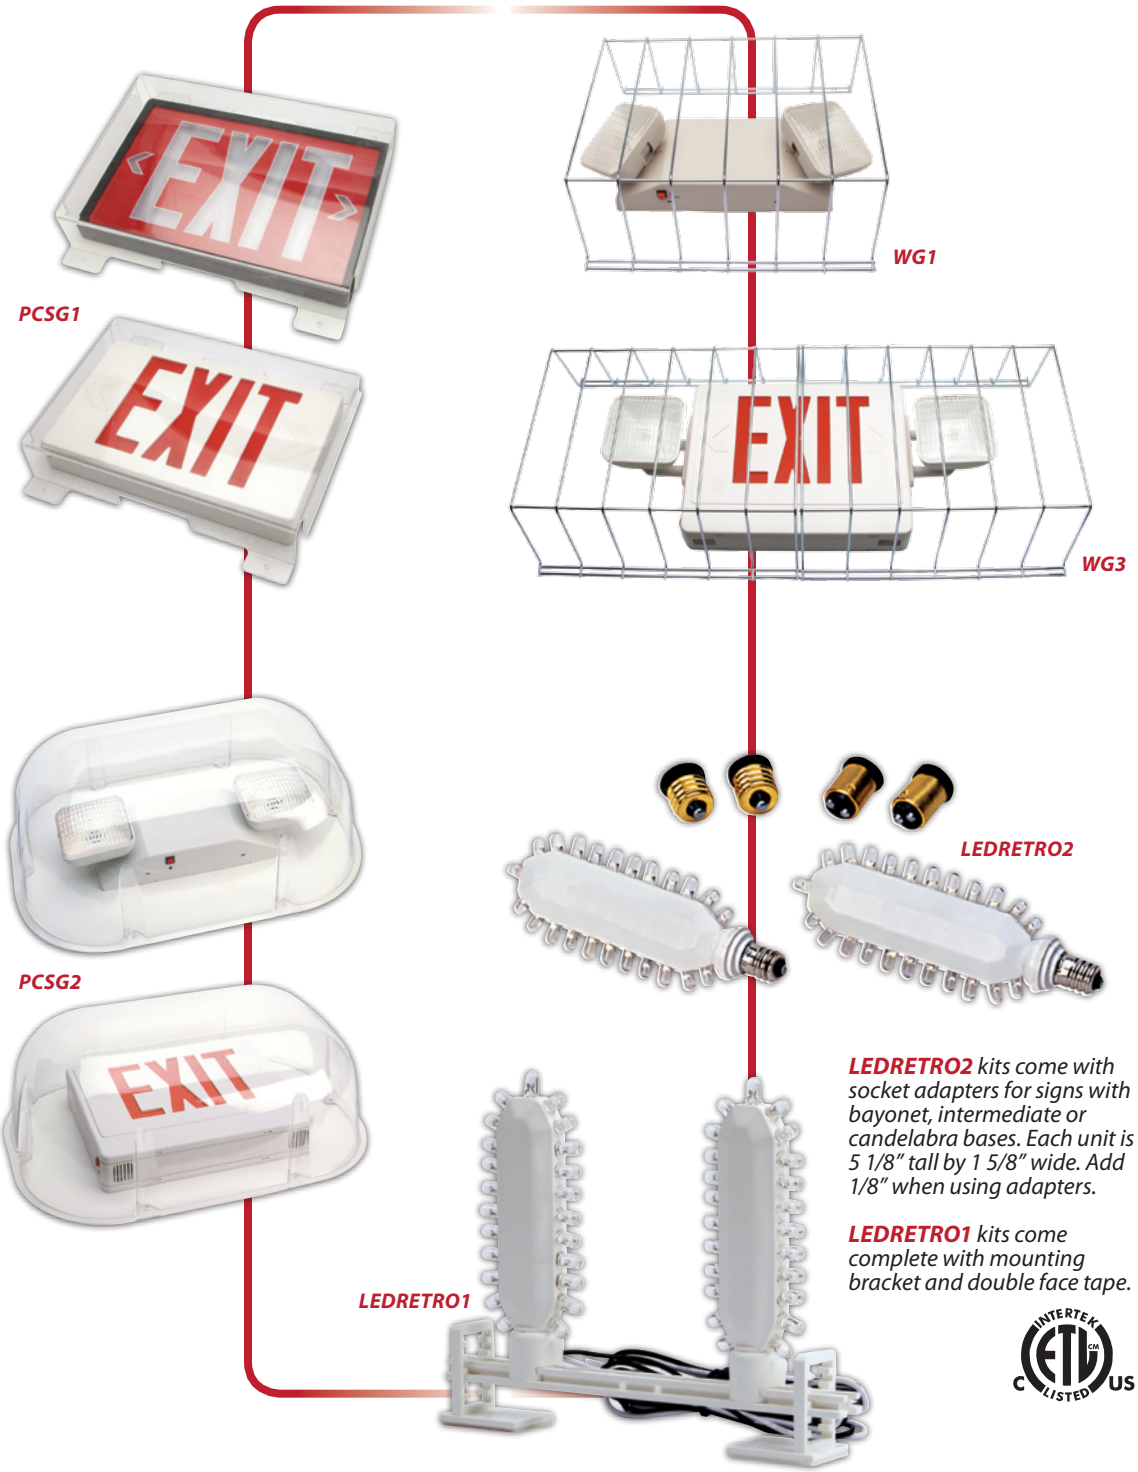

LEDRETRO2 *kits come with socket adapters for signs with bayonet, intermediate or candelabra bases. Each unit is 5 1/8″ tall by 1 5/8″ wide. Add 1/8″ when using adapters.*

LEDRETRO1 *kits come complete with mounting bracket and double face tape.*

ORDERING

Item NO.	Description	Dimensions
PCSG1	Polycarbonate Vandal/ Environmental Shield Guard	13.5″ X 15″ X 6″
PCSG2	Polycarbonate Vandal/ Environmental Shield Guard	13.5″ X 19″ X 8″
WG1	Wire Guard	13.5″ X 15″ X 6″
WG3	Wire Guard	13.5″ X 30″ X 6″

Item NO.	Installation	Watts per kit	Application
LEDRETRO1R	Hardwire	2.8W	120V or 277V
LEDRETRO1G	Hardwire	2.8W	120V or 277V
LEDRETRO2R	Screw-in	2.8W	120V
LEDRETRO2G	Screw-in	2.8W	120V

Ceiling Fans

NICOR's simple and elegant solution to help you get the most out of your heating and cooling.

Wobble-Free Fan

The NICOR® true-hang triple-lock system provides safe, wobble-free operation

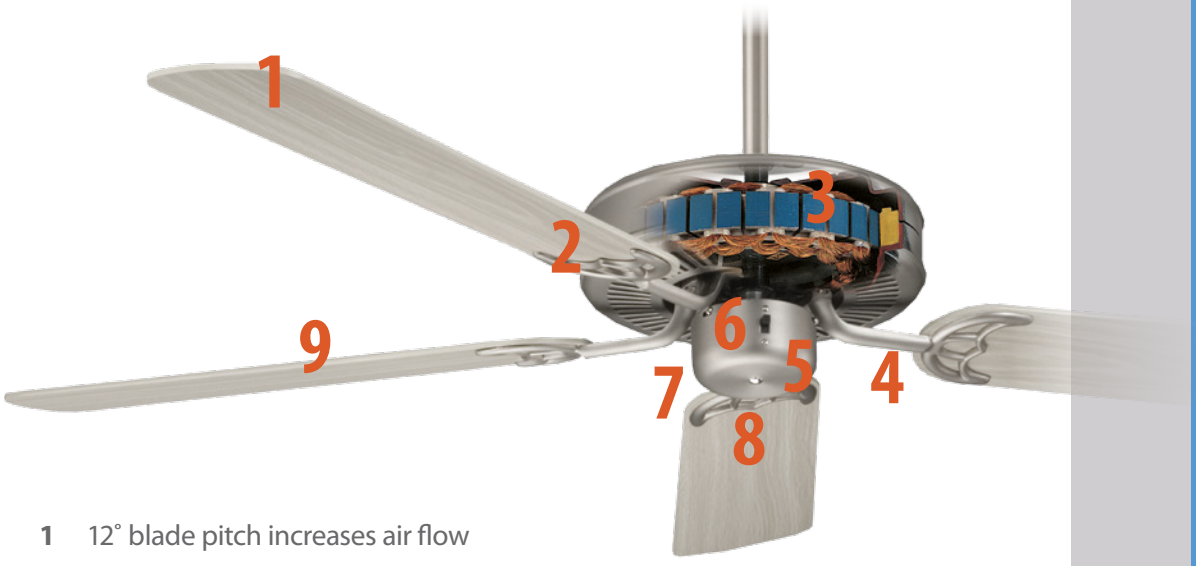

1. 12˚ blade pitch increases air flow
2. Invisible screw attachment
3. Powerful three-speed 16-pole silicone steel motor
4. High-quality zinc designer blade arms
5. Forward/reverse switch
6. Triple capacitor provides silent operation
7. Detachable switch housing
8. Light kit attachment
9. High-quality warp-resistant MDF blades

1. Universal mounting bracket
2. Positive position lock
3. Metal hanging ball with set screw
4. Dual-threaded downrod
5. Dual mount canopy
6. Locking pin
7. Coupler cover
8. Set screw

Masterbuilder

ES52MASWH

WHITE WITH WHITE BLADES, POLISHED BRASS SCREW ASSEMBLY

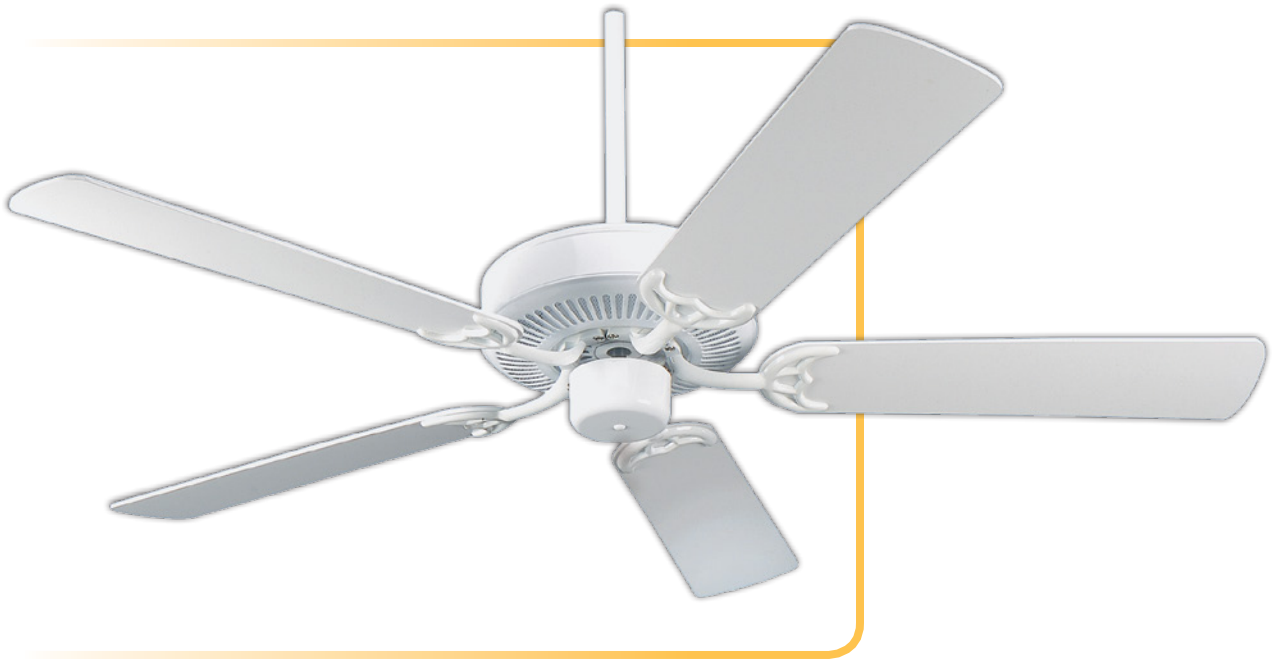

The Masterbuilder Series of ceiling fans represents the highest quality in product design while being priced to meet the builder fan market requirements. With features such as Premium Silicone Steel motor, Detachable Switch housings, and Premium Grade motor bearings offers an excellent value.

SPECIFICATIONS

Motor	153 x 14 (3-Speed/ Reversible)
Motor Material	Premium Silicone Steel
Bearings	Standard Grade
Poles	16
Blade Sweep	52"
Blades	5
Lead Wire	72"
Hanging System	Dual Mount
Blade Pitch	12°
Watts – Hi/Low	62/13 @ 120VAC
Amps – Hi/Low	.52/.24
RPM	185/80
Limited Lifetime Warranty	
UL Listed	

ENERGY STAR

Also available as non-Energy Star. Item # 52MASWH

CUL for Canadian installations is available for special order - Please contact NICOR for price and availability.

UL LISTED

ES52MASPW
PEWTER WITH SILVER OAK BLADES

ENERGY STAR

LISTED

CUL for Canadian installations is available for special order - Please contact NICOR for price and availability.

Also available as non-Energy Star. Item # 52MASPW

ES52MASPB
POLISHED BRASS WITH ROSEWOOD/ LIGHT OAK BLADES

ENERGY STAR

LISTED

CUL for Canadian installations is available for special order - Please contact NICOR for price and availability.

Also available as non-Energy Star. Item # 52MASPB

ES52MASWB
WEATHERED BRICK WITH WEATHERED PINE BLADES

ENERGY STAR

LISTED

CUL for Canadian installations is available for special order - Please contact NICOR for price and availability.

Also available as non-Energy Star. Item # 52MASWB

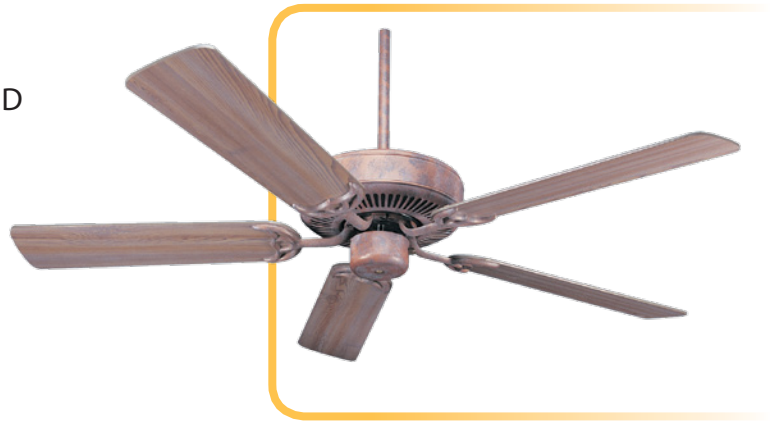

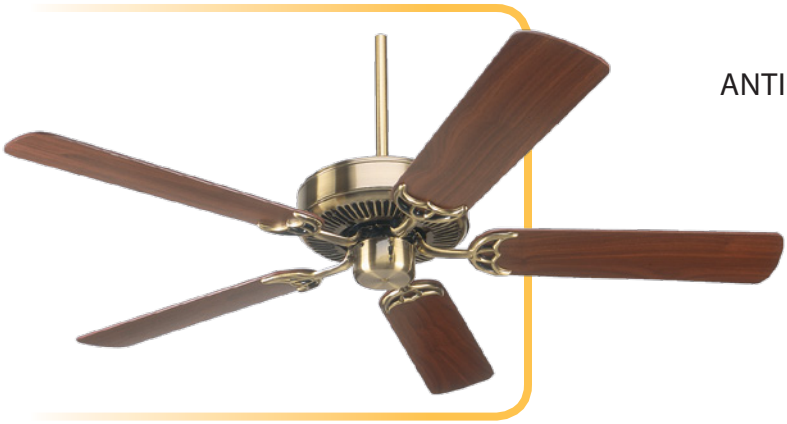

ES52MASAB

ANTIQUE BRASS WITH ROSEWOOD/LIGHT OAK BLADES

ENERGY STAR

CUL for Canadian installations is available for special order - Please contact NICOR for price and availability.

UL LISTED

Also available as non-Energy Star. Item # 52MASAB

ES52MASBKF

FLAT BLACK WITH FLAT BACK BLADES

ENERGY STAR

CUL for Canadian installations is available for special order - Please contact NICOR for price and availability.

UL LISTED

Also available as non-Energy Star. Item # 52MASBKF

ES52MASBZ

BRONZE WITH WEATHERED PINE BLADES

ENERGY STAR

CUL for Canadian installations is available for special order - Please contact NICOR for price and availability.

UL LISTED

Also available as non-Energy Star. Item # 52MASBZ

ES52MASWHB

WHITE/POLISHED BRASS WITH WHITE BLADES/POLISHED BRASS BLADE IRONS

ENERGY STAR

LISTED

CUL for Canadian installations is available for special order - Please contact NICOR for price and availability.

Also available as non-Energy Star. Item # 52MASWHB

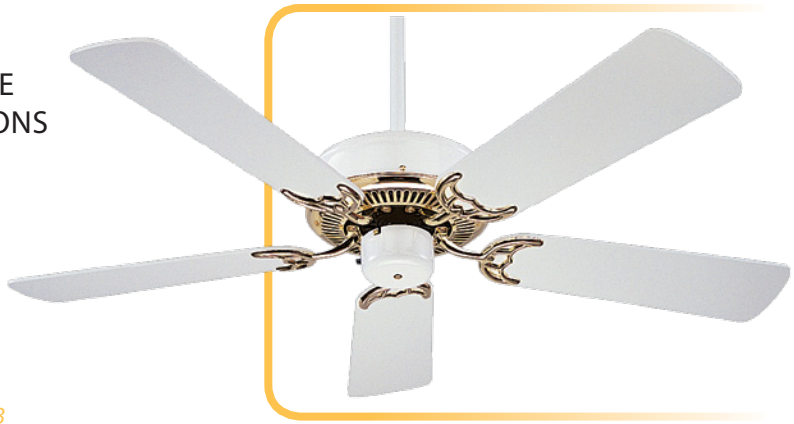

ES52MASWI

WROUGHT IRON WITH NATURAL WASHED PINE BLADES

ENERGY STAR

LISTED

CUL for Canadian installations is available for special order - Please contact NICOR for price and availability.

Also available as non-Energy Star. Item # 52MASWI

ES52MASOB

OIL-RUBBED BRONZE WITH ALDER BLADES

ENERGY STAR

LISTED

CUL for Canadian installations is available for special order - Please contact NICOR for price and availability.

Also available as non-Energy Star. Item # 52MASOB

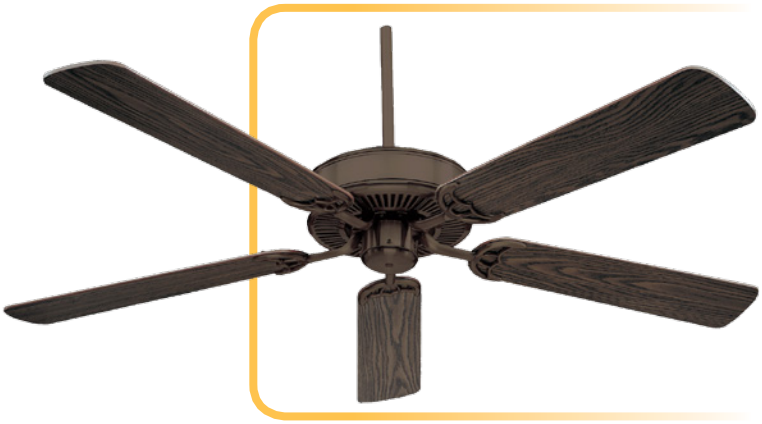

52HMASWH

WHITE WITH WHITE BLADES
POLISHED BRASS SCREW ASSEMBLY

52HMASAB

ANTIQUE BRASS WITH ROSEWOOD/
LIGHT OAK BLADES

SPECIFICATIONS

Motor	153 x 14 (3-Speed/ Reversible)
Motor Material	Premium Silicone Steel
Bearings	Standard Grade
Poles	16
Blade Sweep	52"
Blades	5
Lead Wire	24"
Hanging System	Flush Mount
Blade Pitch	12°
Watts – Hi/Low	60/11 @ 120VAC
Amps – Hi/Low	.52/.22
RPM	180/80
Limited Lifetime Warranty	
UL Listed	

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

UL LISTED

42MASAB

ANTIQUE BRASS WITH ROSEWOOD/LIGHT OAK BLADES

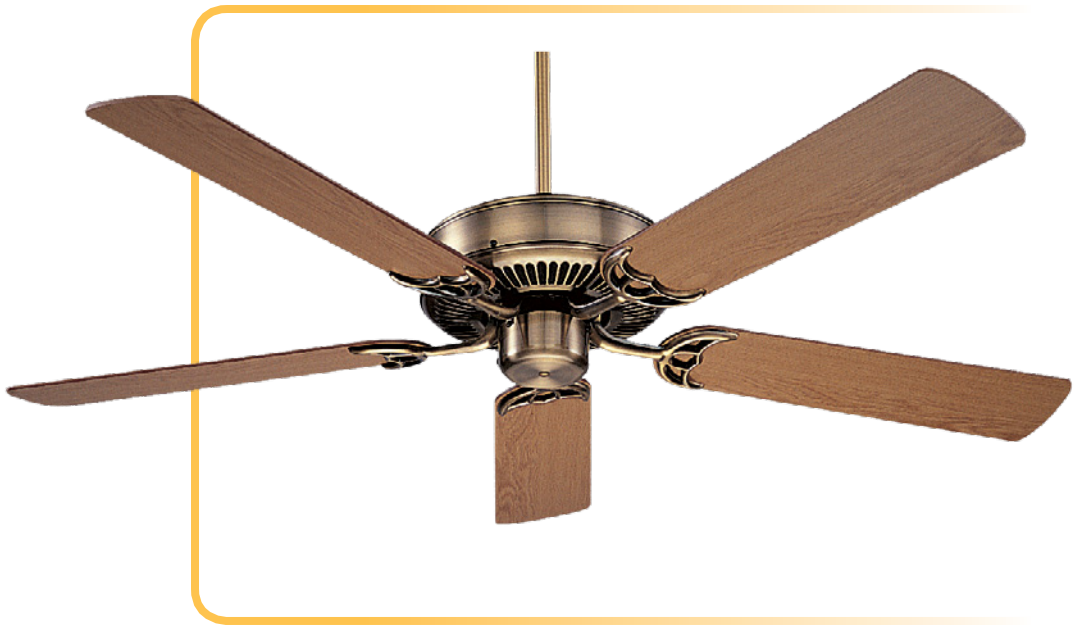

SPECIFICATIONS

Motor	153 x 8 (3-Speed /Reversible)
Motor Material	Premium Silicone Steel
Bearings	Standard Grade
Poles	16
Blade Sweep	42"
Blades	5
Lead Wire	72"
Hanging System	Dual Mount
Blade Pitch	12°
Watts – Hi/Low	50/11 @ 120VAC
Amps – Hi/Low	.43/.20
RPM	200/90
Limited Lifetime Warranty	
UL Listed	

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

LISTED

42MASPB

POLISHED BRASS WITH ROSEWOOD/
LIGHT OAK BLADES

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

LISTED

42MASWH

WHITE WITH WHITE BLADES
POLISHED BRASS SCREW ASSEMBLY

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

LISTED

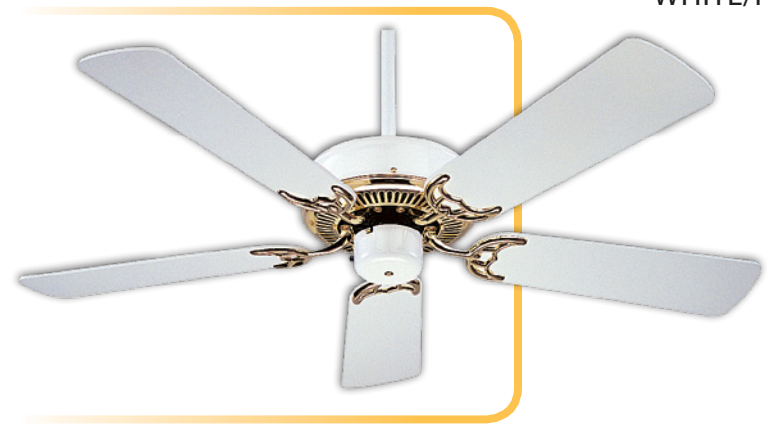

42MASWHB

WHITE/POLISHED BRASS WITH WHITE BLADES
POLISHED BRASS IRONS

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

LISTED

42HMASWH

WHITE WITH WHITE BLADES POLISHED BRASS SCREW ASSEMBLY

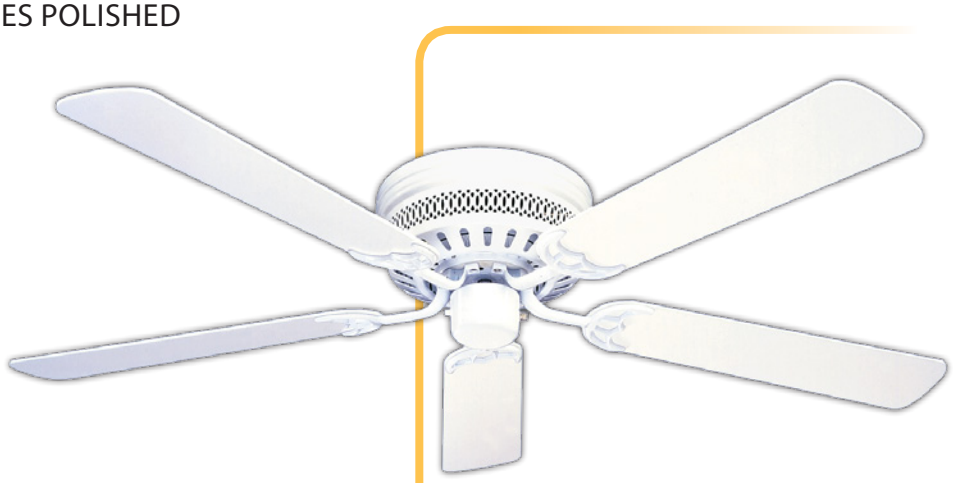

42HMASAB

ANTIQUE BRASS WITH ROSEWOOD/LIGHT OAK BLADES

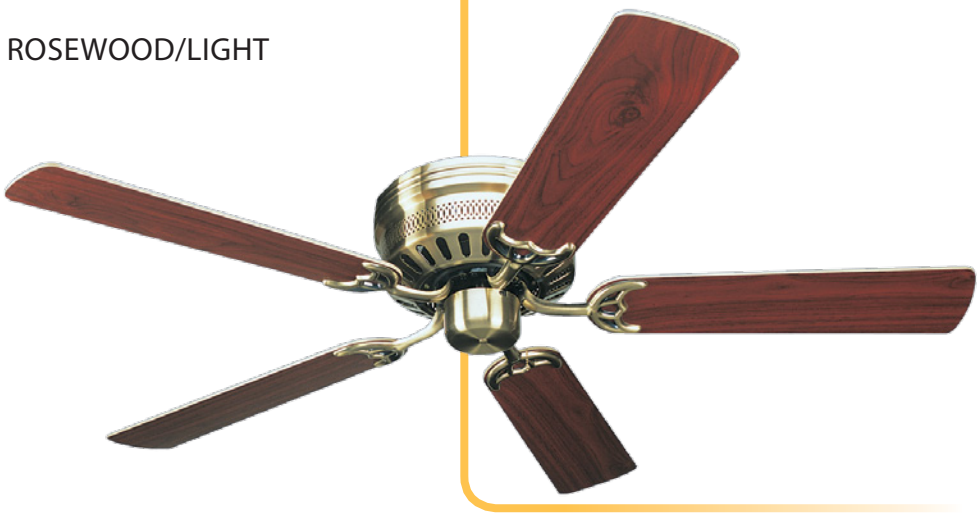

SPECIFICATIONS

Motor	153 x 8 (3-Speed/ Reversible)
Motor Material	Premium Silicone Steel
Bearings	Standard Grade
Poles	16
Blade Sweep	42"
Blades	5
Lead Wire	24"
Hanging System	Flush Mount
Blade Pitch	11°
Watts – Hi/Low	51/11 @ 120VAC
Amps – Hi/Low	.52/.22
RPM	200/90
Limited Lifetime Warranty	
UL Listed	

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

UL LISTED

52ASPWHLK
WHITE WITH WHITE BLADES

Light kit included with 3 light integral fitter and SG59 glass

The Aspen series offers a builder product with a different style as compared to the standard builder fan. The Aspen is delivered to you in one box with the light kit and glass included.

SPECIFICATIONS

Motor	153 x 15 (3-Speed /Reversible)
Motor Material	Premium Silicone Steel
Bearings	Premium Grade
Poles	16
Blade Sweep	52"
Blades	5
Lead Wire	72"
Hanging System	Stem
Blade Pitch	12°
Lamp Socket	E26 Base 60W max
Watts – Hi/Low	65/14 @ 120VAC
Amps – Hi/Low	.53/.25
RPM	180/80

Complete with light kit and coupler cover
Limited Lifetime Warranty
UL Listed

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

52ASPBZLK

SIENNA WASH WITH NATURAL WASHED PINE BLADES

3 light integral fitter and SG59 glass
Lamp socket E26 base 60W max

UL LISTED

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

52ASPSWLK

SIENNA WASH WITH NATURAL WASHED PINE BLADES

3 light integral fitter and SG59 glass
Lamp socket E26 base 60W max

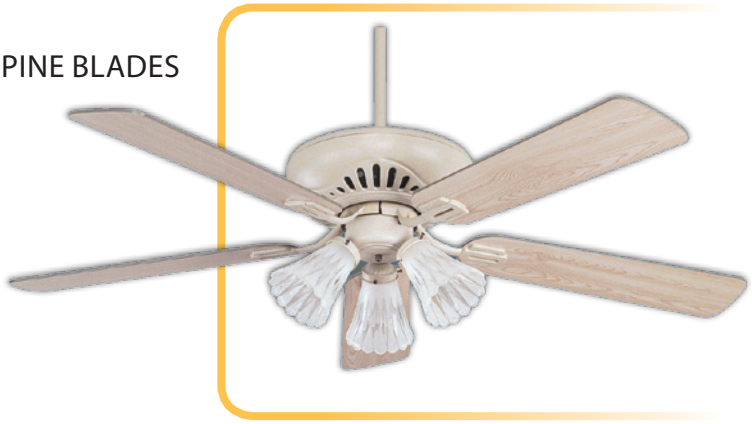

UL LISTED

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

52CHAPW
PEWTER WITH SILVER OAK BLADES

52CHAWB
WEATHERED BRICK WITH
WEATHERED PINE BLADES

The NICOR® Chateau Series has a new look. Powerful motor and designer features mean this upgrade to the Builder Series has been designed to circulate air and add to the aesthetics of any room design or application.

SPECIFICATIONS

Motor	172 x 14 (3-Speed/ Reversible)
Motor Material	Premium Silicone Steel
Bearings	Premium Grade
Poles	16
Blade Sweep	52″
Blades	5
Lead Wire	72″
Hanging System	Dual Mount
Blade Pitch	12°
Watts – Hi/Low	65/18 @ 120VAC
Amps – Hi/Low	.55/.30
RPM	175/70
Coupler Cover	
Limited Lifetime Warranty	
UL Listed	

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

UL LISTED

New products and catalog updates are just a click away at **nicorlighting.com**

52CONWHLK

CONTRACTOR WHITE WITH WHITE BLADES
CHROME SCREW ASSEMBLY

Light kit included with 4" fitter and 8" schoolhouse globe.

52CONPWLK

CONTRACTOR PEWTER WITH SILVER OAK BLADES
CHROME SCREW ASSEMBLY

Light kit included with 4" fitter and 8" schoolhouse globe.

The Contractor Series of ceiling fans from NICOR® provide a quality yet affordable solution to meeting your ceiling fan needs. All Contractor Series Fans that are shown can be sold with or without light kits. All of our light kits come in a uni-pack box that includes the light kit and glass, which simplifies the coordination of large projects.

SPECIFICATIONS

Motor	153 x 12 (3-Speed/ Reversible)
Motor Material	Standard Steel
Bearings	Standard Grade
Poles	16
Blade Sweep	52"
Blades	5
Lead Wire	54"
Hanging System	Dual Mount
Blade Pitch	11°
Lamp Socket	E12 Base 60W max *Also available: E26 base 1X13W* *Consult factory for availability*
Watts – Hi/Low	59/11 @ 120VAC
Amps – Hi/Low	.41/.22
RPM	175/75
Limited Lifetime Warranty	
UL Listed	

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

UL LISTED

52CONWH4SG9

CONTRACTOR WHITE WITH WHITE BLADES
CHROME SCREW ASSEMBLY

Light kit included with 4X40W Light fitter and 4-SG9 glass.

52CONPW4SG9

CONTRACTOR PEWTER WITH SILVER OAK BLADES
CHROME SCREW ASSEMBLY

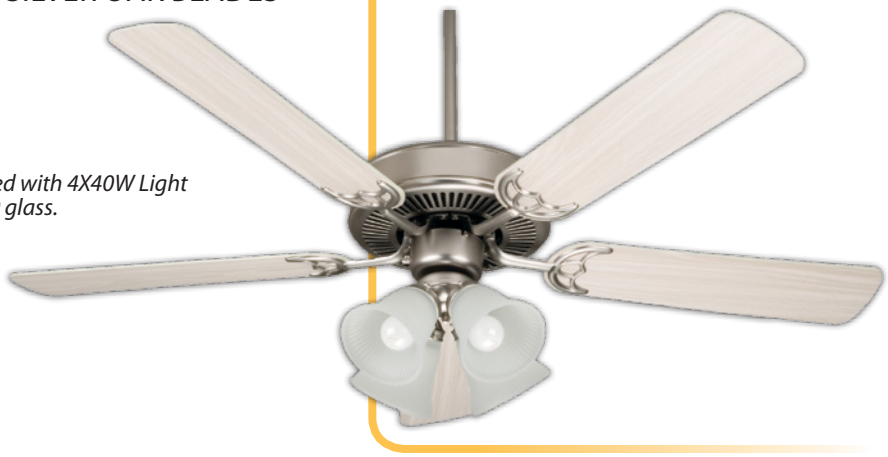

Light kit included with 4X40W Light fitter and 4-SG9 glass.

SPECIFICATIONS

Motor	153 x 12 (3-Speed/ Reversible)
Motor Material	Standard Steel
Bearings	Standard Grade
Poles	16
Blade Sweep	52"
Blades	5
Lead Wire	54"
Hanging System	Dual Mount
Blade Pitch	11°
Lamp Socket	E12 Base 4X40W *Also available: 13W CFL* *Consult factory for availability*
Watts – Hi/Low	59/11 @ 120VAC
Amps – Hi/Low	.41/.22
RPM	175/75
Limited Lifetime Warranty	
UL Listed	

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

UL LISTED

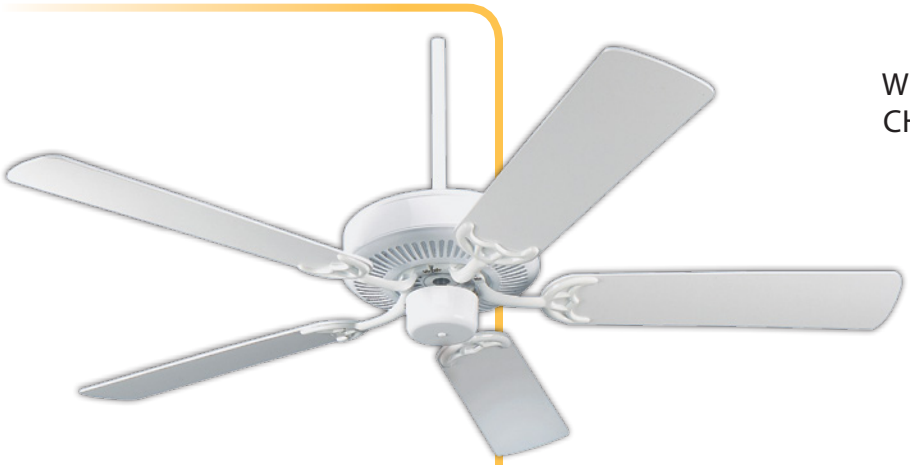

52CONWH

WHITE WITH WHITE BLADES
CHROME SCREW ASSEMBLY

52CONPW

PEWTER WITH SILVER OAK BLADES
CHROME SCREW ASSEMBLY

SPECIFICATIONS

Motor	153 x 12 (3-Speed/ Reversible)
Motor Material	Standard Steel
Bearings	Standard Grade
Poles	16
Blade Sweep	52"
Blades	5
Lead Wire	54"
Hanging System	Dual Mount
Blade Pitch	11°
Watts – Hi/Low	59/11 @ 120VAC
Amps – Hi/Low	.41/.22
RPM	175/75
Limited Lifetime Warranty	
UL Listed	

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

UL LISTED

52CONWH3SG9

CONTRACTOR WHITE WITH WHITE BLADES
CHROME SCREW ASSEMBLY

Light kit included with 3X60W fitter and 3-SG9 glass.

52CONPW3SG9

CONTRACTOR PEWTER WITH SILVER OAK BLADES
CHROME SCREW ASSEMBLY

Light kit included with 3X60W fitter and 3-SG9 glass.

SPECIFICATIONS

Motor	153 x 12 (3-Speed/ Reversible)
Motor Material	Standard Steel
Bearings	Standard Grade
Poles	16
Blade Sweep	52"
Blades	5
Lead Wire	54"
Hanging System	Dual Mount
Blade Pitch	11°
Lamp Socket	E12 Base 4X40W *Also available: 13W CFL* *Consult factory for availability*
Watts – Hi/Low	59/11 @ 120VAC
Amps – Hi/Low	.41/.22
RPM	175/75
Limited Lifetime Warranty	
UL Listed	

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

52HCONWHLK

HUGGER CONTRACTOR WHITE WITH WHITE BLADES
CHROME SCREW ASSEMBLY

Light kit included with 4" fitter and 8" schoolhouse globe.

SPECIFICATIONS

Motor	153 x 12 (3-Speed/ Reversible)
Motor Material	Standard Steel
Bearings	Standard Grade
Poles	16
Blade Sweep	52"
Blades	5
Lead Wire	24"
Hanging System	Flush Mount
Blade Pitch	11°
Lamp Socket	E12 Base
Watts – Hi/Low	64/11 @ 120VAC
Amps – Hi/Low	.54/.23
RPM	165/65
Limited Lifetime Warranty	
UL Listed	

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

UL LISTED

42CONWHLK

CONTRACTOR WHITE WITH WHITE BLADES
CHROME SCREW ASSEMBLY

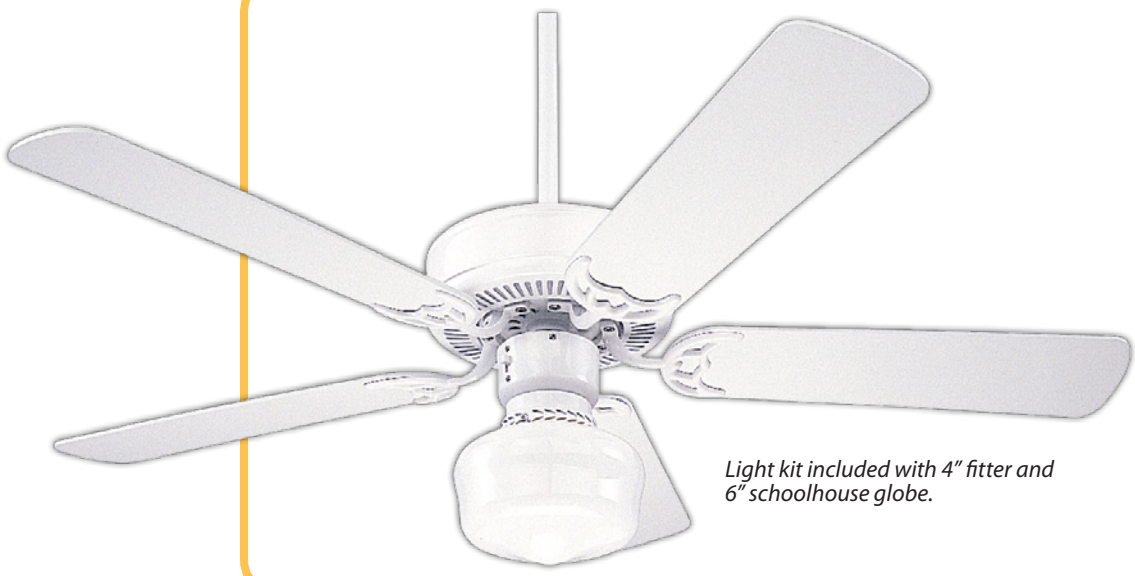

Light kit included with 4" fitter and 6" schoolhouse globe.

SPECIFICATIONS

Motor	153 x 8 (3-Speed/ Reversible)
Motor Material	Premium Silicone Steel
Bearings	Standard Grade
Poles	16
Blade Sweep	42"
Blades	5
Lead Wire	72"
Hanging System	Dual Mount
Blade Pitch	12°
Lamp Socket	E12 Base 60W max *Also available: E26 base 1X13W* *Consult factory for availability*
Watts – Hi/Low	48/10 @ 120VAC
Amps – Hi/Low	.39/.18
RPM	200/90
Limited Lifetime Warranty	
UL Listed	

The NICOR® true-hang triple-lock system provides safe, wobble-free fan operation.

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

UL LISTED

42HCONWHLK

HUGGER CONTRACTOR WHITE WITH WASHED OAK/ WHITE BLADES
CHROME SCREW ASSEMBLY

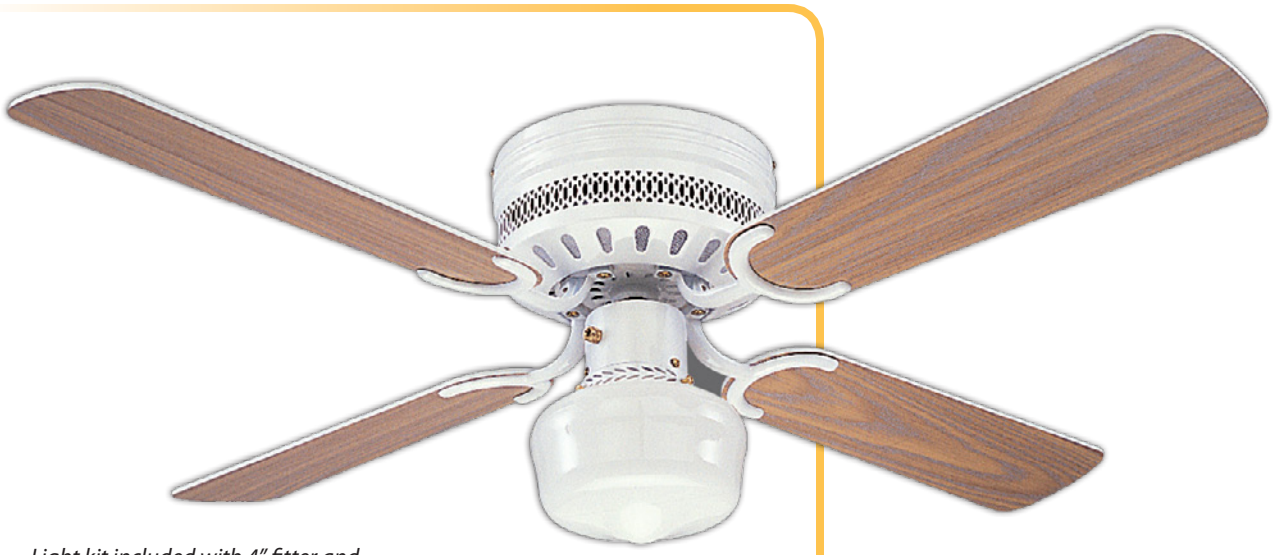

Light kit included with 4" fitter and 6" schoolhouse globe.

SPECIFICATIONS

Motor	153 x 8 (3-Speed/ Reversible)
Motor Material	Premium Silicone Steel
Bearings	Standard Grade
Poles	16
Blade Sweep	42"
Blades	4
Lead Wire	24"
Hanging System	Flush Mount
Blade Pitch	12°
Lamp Socket	E12 Base 60W max
Watts – Hi/Low	47.5/10.5 @ 120VAC
Amps – Hi/Low	.39/.19
RPM	200/90
Limited Lifetime Warranty	
UL Listed	

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

UL LISTED

52CONWHOUTDOOR

OUTDOOR CONTRACTOR WHITE WITH WHITE BLADES
CHROME SCREW ASSEMBLY

52CONBZOUTDOOR

OUTDOOR CONTRACTOR BRONZE WITH BEIGE BLADES

SPECIFICATIONS

Motor	153 x 14 (3-Speed/ Reversible)
Motor Material	Premium Silicone Steel
Bearings	Standard Grade
Poles	16
Blade Sweep	52″
Blades	5
Lead Wire	72″
Hanging System	Dual Mount
Blade Pitch	11°
Watts – Hi/Low	61.5/15 @ 120VAC
Amps – Hi/Low	.51/.22
RPM	185/85
ABS Blades	
Powder Coat Finish	
UL Listed	
Wet Location Listed	
Limited Lifetime Warranty	

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

UL LISTED

WET LOCATION RATED

56INDWH

WHITE WITH WHITE BLADES

The Industrial Series is designed for large open areas that require continual operation of the fan. Maximum air circulation is achieved through the large blade sweep and 188 x 12 motor to maximize RPMs.

SPECIFICATIONS

Motor	172 x 8 (1-Speed/ non-reversible)
Motor Material	Premium Silicone Steel
Bearings	Standard Grade
Poles	16
Blade Sweep	56″
Blades	3 - Metal
Lead Wire	42″
Hanging System	12" Stem Mount
Watts	60W @ 120VAC
Amps – Hi/Low	.52
RPM	300
15 Year Warranty	
UL Listed	

NOTE: Controller can only control one fan. Each fan must have its own controller.

CUL for Canadian installations is available for special order - Please contact NICOR® for price and availability.

LISTED

NL201BKF
2-LIGHT FIXTURE
10"W X 4 1/4"H

UL LISTED

NL201WH
2-LIGHT FIXTURE
10"W X 4 1/4"H

UL LISTED

NL201PW
2-LIGHT FIXTURE
10"W X 4 1/4"H

UL LISTED

Note: Please consult factory on availability, lamp type, and base type.

NL201WI
2-LIGHT FIXTURE
10"W X 4 1/4"H

UL LISTED

Note: Please consult factory on availability, lamp type, and base type.

NICOR® pledges to maintain a complete inventory for same day shipping from our distribution centers in Albuquerque, NM, Bensalem, PA, Detroit, MI, Houston, TX, Miami, FL, Nashville, TN, Ontario, CA, Syracuse, NY. You can be confident that your lighting and ceiling fan requirements will be handled professionally and efficiently. All of us at NICOR™ look forward to supporting you, our marketing partners.

NL181WB
2-LIGHT OUTDOOR FIXTURE
10"W X 6"H
No pull chain switch

LISTED

NL181WH
2-LIGHT OUTDOOR FIXTURE
10"W X 6"H
No pull chain switch

LISTED

NL182WH
1-LIGHT OUTDOOR FIXTURE
6"W X 5"H
No pull chain switch

LISTED

AB1
2-LIGHT ALABASTER FINISH BOWL
13"W X 6 1/2"H
No pull chain switch
Also available:
AB: Antique Brass (shown)
BK: Black, BR: Bronze,
OB: Oil-rubbed Bronze,
PW: Pewter, WH: White.
WI: Wrought Iron

LISTED

Note: Please consult factory on availability, lamp type, and base type.

4SP2BFK
4-LIGHT BULLET FIXTURE

LISTED

4SP2PB
4-LIGHT BULLET FIXTURE

LISTED

4SP2WH
4-LIGHT BULLET FIXTURE

LISTED

4SP2PW
4-LIGHT BULLET FIXTURE

LISTED

Note: Please consult factory on availability, lamp type, and base type.

F101BKF
1-LIGHT 4" FITTER

LISTED

F101WH
1-LIGHT 4" FITTER
F102WH (3 1/4" Fitter)

LISTED

F101BZ
1-LIGHT 4" FITTER

LISTED

F101WI
1-LIGHT 4" FITTER

LISTED

F101PW
1-LIGHT 4" FITTER

LISTED

Note: Please consult factory on availability, lamp type, and base type.



F101PB
1-LIGHT 4" FITTER

LISTED

Note: Please consult factory on availability, lamp type, and base type.

F301AB
3-LIGHT CLOSE IN FITTER
7"W X 3 1/2"H

LISTED

F301PW
3-LIGHT CLOSE IN FITTER
7"W X 3 1/2"H

LISTED

F301BKF
3-LIGHT CLOSE IN FITTER
7"W X 3 1/2"H

LISTED

F301WH
3-LIGHT CLOSE IN FITTER
7"W X 3 1/2"H

LISTED

F301BZ
3-LIGHT CLOSE IN FITTER
7"W X 3 1/2"H

LISTED

F301WI
3-LIGHT CLOSE IN FITTER
7"W X 3 1/2"H

LISTED

Note: Please consult factory on availability, lamp type, and base type.

F301PB
3-LIGHT CLOSE IN FITTER
7"W X 3 1/2"H

LISTED

Note: Please consult factory on availability, lamp type, and base type.

F403AB
4-LIGHT CLOSE IN FITTER
7"H X 3 1/2"H

LISTED

F403PW
4-LIGHT CLOSE IN FITTER
7"H X 3 1/2"H

LISTED

F403PB
4-LIGHT CLOSE IN FITTER
7"W X 3 1/2"H

LISTED

F403WH
4-LIGHT CLOSE IN FITTER
7"W X 3 1/2"H

LISTED

Note: Please consult factory on availability, lamp type, and base type.

ESF100WH
3-LIGHT CLOSE IN FITTER
13"W X 6 7/8"H
Includes GU24 lamp and SG09 fitter glass

(Shown in white)
Also Available:
ESF100OB *(Oil-Rubbed Bronze)*
ESF100PW *(Pewter)*

ENERGY STAR

LISTED

Note: Please consult factory on availability, lamp type, and base type.

NICOR® Shining Brighter™

CG1
4" FITTER
8"W X 6 1/4"H

CG15
3 1/4" FITTER
7"W X 4 1/2"H

CG20
3 1/4" FITTER
6"W X 5 1/8"H

SG1
2 1/4" FITTER
5"W X 4 1/4"H

SG2
2 1/4" FITTER
4 3/8"W X 5 1/4"H

SG3CAB
2 1/4" FITTER
4 7/8"W X 4 3/4"H

Note: Please consult factory on availability, lamp type, and base type.

SG3CPB
2 1/4" FITTER
4 7/8"W X 4 3/4"H

SG7
2 1/4" FITTER
5"W X 5 1/4"H

SG9
2 1/4" FITTER
4 1/2"W X 4 1/2"H

SG10
2 1/4" FITTER
4"W X 5"H

SG12
2 1/4" FITTER
4 1/2"W X 4 1/2"H

SG14
2 1/4" FITTER
3 7/8"W X 4 3/4"H

Note: Please consult factory on availability, lamp type, and base type.

SG29
2 1/4" FITTER
4"W X 3 3/8"H

SG46
2 1/4" FITTER
4 1/2"W X 5"H

SG48
2 1/4" FITTER
4 3/4"W X 4"H

SG52
2 1/4" FITTER
4 5/8"W X 4 1/4"H

SG53
2 1/4" FITTER
4 3/4"W X 4 7/8"H

Note: Please consult factory on availability, lamp type, and base type.

SG66
2 1/4" FITTER
4 3/4"W X 5"H

SG69
2 1/4" FITTER
4 3/4"W X 4"H

SG70
2 1/4" FITTER
4 1/4"W X 4 3/4"H

SG72
2 1/4" FITTER
5"W X 4 5/8"H

SG73
2 1/4" FITTER
5"W X 4 5/8"H

SG81
2 1/4" FITTER
4 5/8"W X 5 1/8"H

SG86
2 1/4" FITTER
4 1/2"W X 4 1/2"H

Note: Please consult factory on availability, lamp type, and base type.

FC1
4-SPEED ROTARY
Fan control

c UL us LISTED

FC2
3-SPEED SLIDE BAR
Fan control and light dimmer

c UL us LISTED

FC3
3-SPEED SLIDE BAR
Fan control

c UL us LISTED

FC4
3-SPEED ROTARY
Fan control with light switch

c UL us LISTED

Note: Please consult factory on availability, lamp type, and base type.

UR2
REMOTE FAN CONTROL
Control fan speed and light remotely. Transmitter and receiver.

UR4
3-SPEED • 2 WIRE
RF wall and variable light control transmitter and receiver

UR5
TRANSMITTER
For use with UR4

RECEIVER
SOLD WITH UR2 AND UR4

Note: Please consult factory on availability, lamp type, and base type.

DOWNROD SIZES 1/2" DIAMETER AVAILABLE IN THE FOLLOWING LENGTHS

	ER 12	ER 18	ER 24	ER 36	ER 48	ER 60	ER 72
AB	•	•	•	•	•	•	•
BK	•						•
BKF	•	•	•	•	•	•	•
BZ	•	•	•	•	•		•
PB	•	•	•	•	•		•
PW	•	•	•	•	•	•	
WB	•	•	•	•	•	•	•
WH	•	•	•	•	•	•	•
WI	•	•	•	•	•	•	•

FAN DIMENSIONS

Item NO.	Dimensions		
	A	B	C
42CON	9"	10.5"	9.5"
42HCON	9"	8.5"	5.5"
42HMAS	9"	8.5"	5.5"
42MAS	9"	10.5"	9.5"
52ASP/LK	13"	18"	13"
52CHA	12.5"	12"	11"
52CON	11"	11.5"	10.5"
52HCON	11"	7"	5.5"
52HMAS	11"	7"	5.5"
52MAS	11"	11.5"	10.5"
56IND	7.5"	19.5"	17.5"

DOWNRODS

White WH

Sienna Wash SW

Black BK

Flat Black BKF

Wrought Iron WI

Bronze BZ

Weathered Brick WB

Pewter PW

Polished Brass PB

Antique Brass AB

BLADES

White

White High Gloss

Black

Pewter

Light Oak

Washed Oak

Dark Walnut

Rosewood

Dark Oak High Gloss

Rosewood High Gloss

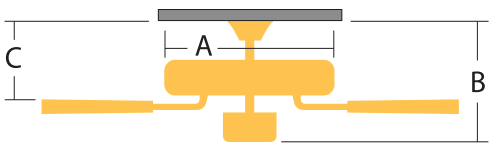

At the critical point of hanging bracket and fan, NICOR® double-threaded downrods provide for a secure connection, to help prevent wobble during fan operation.

NICOR® offers the above ten blade finishes that may be switched out on the following 52" and larger fans. Please specify the finish at the time of fan order. Contact your Customer Service Representative for any additional charges that may apply. Available on Aspen, Chateau, Contractor and Masterbuilder.

INDEX

Green text indicates a MAXCOR™ Product

4SP2BFK 351
4SP2PB 351
4SP2PW 351
4SP2WH 351
42CONWHLK 346
42HCONWHLK 347
42HMASAB 336
42HMASWH 336
42MASAB 334
42MASPB 335
42MASWH 335
42MASWHB 335
52ASPBZLK 338
52ASPSWLK 338
52ASPWHLK 337
52CHAPW 339
52CHAWB 339
52CONBZOUTDOOR 348
52CONPW 343
52CONPW3SG9 344
52CONPW4SG9 342
52CONPWLK 341
52CONWH 343
52CONWH3SG9 344
52CONWH4SG9 342
52CONWHLK 341
52CONWHOUTDOOR 348
52HCONWHLK 345
52HMASAB 333
52HMASWH 333
52MASAB 331
52MASBKF 331
52MASBZ 331
52MASOB 332
52MASPB 330
52MASPW 330
52MASWB 330
52MASWH 329
52MASWHB 332
52MASWI 332
56INDWH 349
500LFEB 90
500LFEBLP 90
650L2FEB 91
650L4FEB 91
700LFEB 90
800LFEBLP 91
1300LFEBLP 91
1400LFEB 90
3000LFEB 90
10002BK 245
10002NK 245
10002WH 245
10004BK 245
10004NK 245
10004WH 245
10006BK 245
10006NK 245
10006WH 245
10008BK 245
10008NK 245
10008WH 245
10010BK 246
10010WH 246
10011BK 246
10011WH 246
10012BK 246
10012WH 246
10019BK 247
10019WH 247
10020BK 247
10020WH 247
10021BK 246
10021NK 246
10021WH 246
10022BK 246, 247
10022WH 246, 247
10023BK 246
10023WH 246
10024BK 246
10024WH 246
10025BK 246
10025WH 246
10026BK 246
10026WH 246
10029BK 246
10029NK 246
10029WH 246
10030 203
10034BK 247
10034BKR 247
10034WH 247
10034WHR 247
10035BK 247
10035WH 247
10040BK 247
10040WH 247
10042BK 247
10042WH 247
10050BK 247
10050WH 247
10052BK 248
10052WH 248
10055BK 248
10055WH 248
10060BK12 248
10060BK24 248
10060BK36 248
10060WH12 248
10060WH36 248
10060WH48 248
10065BK12 248
10065BK24 248
10065BK36 248
10065WH12 248
10065WH24 248
10065WH36 248
10065WH48 248
10066BK 248
10066WH 248
10081BK 248
10081WH 248
10212BK 248
10212WH 248
10218BK 248
10218WH 248
10224BK 248
10224WH 248
10236BK 248
10236WH 248
10248BK 248
10248WH 248
10303WH 234
10304BK 234
10305BK 234
10305BZ 234
10305NK 234
10305WH 234
10305WHST 235
10308WH 237
10313BZ 237
10313NK 237
10313WH 237
10315BK 237
10315BZ 237
10315NK 237
10315WH 237
10326WH 236
10327BK 236
10327BKST 235
10327BZ 236
10327NK 236
10327NKST 235
10327WH 236
10328WH 235
10341 228
10342 228
10343 228
10344 228
10345 228
10346 228
10350BK 218
10350OB 218
10350PW 218
10350WH 218
10351BK 218
10351OB 218
10351PW 218
10351WH 218
10352BK 218
10352OB 218
10352PW 218
10352WH 218
10353BK 218
10353OB 218
10353PW 218
10353WH 218
10359EB 222
10364EB 216
10365EB 216
10366EB 217
10367EB 217
10368EB 217
10369EB 222
10370EB 223
10371PWEB 225
10371WHEB 225
10372PWEB 225
10372WHEB 225

INDEX

Green text indicates a MAXCOR™ Product

10373EB 227
10374EB 223
10375PWEB 225
10375WHEB 225
10376EB 227
10377EB 227
10390EB 219
10391EB 219
10392EB 219
10393EB 219
10393WH 233
10394EB 219
10395EB 219
10403BZ 233
10403NK 233
10403WH 233
10405WH 233
10413WH 236
10415WH 236
10426BZ 235
10426NK 235
10426WH 235
10427WH 234, 235
10782WH 240
10789WH 240
10792WH 240
10796WH 240
10989BK 241
10989BK4HEAD 244
10989BKST 242
10989BZ 241
10989BZ4HEAD 244
10989BZST 242
10989NK 241
10989NK4HEAD 244
10989NKST 242
10989WH 241
10989WH4HEAD 244
10989WHBF 241
10989WHBFST 242
10989WHST 242
10989WHST4HEAD 244
10996BK 241
10996BZ 241
10996NK 241
10996WH 241
10996WH4HEAD 244
10996WHBF 241
10997BK 242
10997BZ 242
10997NK 242
10997WH 242
10997WH4HEAD 244
10997WHBF 242
11000WH 243
11001BK 243
11001BZ 243
11001NK 243
11001WH 243
11004NK 243
11004WH 243
11111 254
11112 254
11118 254
11122 255
11511 254
11512 254
11518 254
11521 255
11522 255
11528 255
11711 254
11712 254
11718 254
11721 255
11722 255
11728 255
12001BK 238
12001WH 238
12007BK 238
12007BZ 238
12007NK 238
12007WH 238
12018BK 232
12018BZ 232
12018NK 232
12018WH 232
12019WH 237
12021WH 232
12022BK 232
12022BZ 232
12022NK 232
12022WH 232
12023BK 232
12037BK 238
12038WH 238
12055BK 239
12055WH 239
12630BK 239
12630WH 239
13000 175
13000R 176
13001BK 97, 178
13001CH 97, 178
13001GD 97, 178
13001WH 97, 178
13002BK 97, 178
13002OB-ABZ 97, 178
13002OB-OB 97, 178
13002WH 97, 178
13003BK 97, 178
13003WH 97, 178
13007BK 97, 178
13007CH 97, 178
13007OB 97, 178
13007WH 97, 178
13008BK 97, 178
13008WH 97, 178
13025BK 178
13025GD 178
13025WH 97, 178
13030BL 97, 178
13030PK 97, 178
13100 95
13100R 96
13102 177
14000A 179
14000AET 181
14001BK 109, 113, 183, 188
14001WH 109, 113, 183, 188
14002BK 109, 113, 183, 188
14002BZ 109, 113, 183, 188
14002NK 109, 113, 183, 188
14002OB-ABZ 109, 113, 183, 188
14002OB-OB 109, 113, 183, 188
14002WH 109, 113, 183, 188
14003 109, 113, 183, 188
14004 109, 113, 183, 188
14005 109, 113, 183, 188
14006BK 109, 113, 183, 188
14006OB 109, 113, 183, 188
14006WH 109, 113, 183, 188
14007 109, 113, 183, 188
14008 110, 114, 184, 189
14009 110, 114, 184, 189
14011BZ 184, 189
14011CH 184, 189
14011OB 184, 189
14011PB 184, 189
14011WH 184, 189
14015WH 110, 114, 189
14016BK 110, 184, 189
14016WH 110, 114, 184, 189
14019 110, 114, 184, 189
14020CL 109, 113, 183, 188
14020GD 109, 113, 183, 188
14021 110, 114, 185, 190
14022BK 111, 115, 185, 190
14022NK 111, 115, 185, 190
14022OB 111, 115, 185, 190
14022WH 111, 115, 185, 190

INDEX

Green text indicates a MAXCOR™ Product

14023BK 111, 115, 185, 190
14023NK 111, 115, 185, 190
14023OB 111, 115, 185, 190
14023WH 111, 115, 185, 190
14101AR 180
14101ARET 182
14102A 186
14102AET 187
14300AEB13 20
14300AEB18 20
14300AEB26 20
14301AREB13 21
14301AREB18 21
14301AREB26 21
14305AEBM13 24
14305AEBM18 24
14305AEBM26 24
14306AREBM13 25
14306AREBM18 25
14306AREBM26 25
14509WH 111, 115, 185, 190
14558WH 111, 115, 185, 190
15000 117
15000R 118
15006A 121
15006RA 122
15007A 38
15007AEBM 40
15007AR 39
15014A 125
15017AEB13 41
15017AEB18 41
15017AEB26 41
15017AREB13 42
15017AREB18 42
15017AREB26 42
15024A27 34
15024AR27 35
15027AEBM13 43
15027AEBM18 43
15027AEBM26 43
15029AREBM13 44
15029AREBM18 44
15029AREBM26 44
15502 45, 119, 123
15504 119, 123
15506BK 119, 123, 126
15506OB 119, 123, 126
15506PB 119, 123, 126
15506WH 119, 123, 126
15507BK 119, 123
15507PB 119, 123
15507WH 119, 123
15509 45, 119, 123
15509OB 45, 119, 123
15510 119, 123
15511BK 119, 123
15511BZ 119, 123
15511NK 119, 123
15511OB-ABZ 119, 123
15511OB-OB 119, 123
15511WH 119, 123
15512WH 126
15517WH 126
15518BK 45, 120, 124
15518CL 45, 120, 124
15518GD 45, 120, 124
15518OB-ABZ 124
15518WH 45, 120, 124
15518WHZ-ABZ 120
15519WH 126
15520BK 36, 45
15520BKLNS 36, 45
15520CL 36, 45
15520NK 36, 45
15520NKLNS 36, 45
15520OB 36, 45
15520OBLNS 36, 45
15520WH 36, 45
15520WHLNS 36, 45
15550 120, 124
15552 120, 124
15553 120, 124
15554 120, 124
15555 120, 124
15558BK 120, 124
15558WH 120, 124
15559BK 36, 45
15559WH 36, 45
15700 229
15701 229
15702 229
15703 229
15710 **206**
15710HRC 206
15710VRC 206
15800 230
15801 231
15803L **207**
15810 207, 230, 231
15811 207, 230, 231
15812 207, 230, 231
15813 207, 230, 231
17000 127
17001R 128
17002A 135
17002ANB 143
17004 147
17004R 148
17007AEBM13 46
17007AEBM18 46
17007AEBM26 46
17008AREB26 47
17008R 48
17009A 158
17010 56
17010AEBM 57
17010AEBM2642 51
17011 60
17011EBM2X13 61
17011EBM2X18 61
17011EBM2X26 61
17011EBM18EMBL 61
17011EBM26EMBL 61
17011EBM2642 61
17012 64
17012AEBM2X13 65
17013EBM18EMBL 69
17013EBM26EMBL 69
17013EBM2642 69
17014A 153
17014AR 154
17017AEB13 49
17017AEB18 49
17017AEB26 49
17020A 165
17020RA 166
17022A 168
17022RA 169
17024A27 73
17024AR27 74
17025SSA 171
17026SSRA 172
17050 204
17200HB 203
17201 203
17202 203
17204 203
17205BK 203
17205CH 203
17205OB 203
17205PB 203
17205WH 203
17206BK 203
17206CH 203
17206PB 203
17206WH 203
17207 203
17208 203
17501BZ 129, 149, 159
17501OB 129, 149, 159
17501PB 129, 149, 159
17501PW 129, 149, 159
17501WH 129, 149

INDEX

Green text indicates a MAXCOR™ Product

17502 52, 58, 62, 75, 196, 199
17502BZ 52, 58, 62, 66, 75, 129, 136, 149, 155, 159, 196, 199
17502OB 52, 58, 66, 75, 129, 136, 149, 155, 159, 196, 199
17502R 52, 58, 75
17502WH 66, 129, 136, 149, 155, 159
17503 129, 136, 149, 159
17503SP 129, 136, 149, 159
17504 129, 136, 149, 155, 159
17504SP 129, 136, 149, 155, 159
17505 58, 75, 196, 199
17505BZ 52, 58, 75, 129, 136, 149, 155, 159, 196, 199
17505NK 52, 58, 75, 129, 136, 149, 155, 159, 196, 199
17505OB 52, 58, 75, 129, 136, 149, 155, 159, 196, 199
17505R 52, 58, 75
17505WH 129, 136, 149, 155, 159
17506BZ 129, 136, 144, 149, 155, 159
17506NK 129, 136, 144, 149, 155, 159
17506OB 129, 136, 144, 149, 155, 159
17506PB 129, 136, 144, 149, 155, 159
17506WH 129, 136, 144, 149, 155, 159
17507BK 58, 75, 196, 199
17507CL 58, 75, 196, 199
17507GD 58, 75, 196, 199
17507WH 58, 75, 196, 199
17508BZ 130, 136, 150, 155, 159
17508NK 130, 136, 150, 155, 159
17508OB 130, 136, 150, 155, 159
17508PB 130, 136, 150, 155, 159
17508PW 130, 136, 150, 155, 159
17508WH 130, 136, 150, 155, 159
17509 52, 58, 62, 75, 130, 136, 150, 155, 160, 196, 199
17509R 52, 58, 62, 75
17509WH 66
17510 130, 137, 150, 160
17510BZ 130, 137, 150, 160
17510OB-ABZ 130, 137, 150, 160
17510OB-OB 130, 137, 150, 160
17510SP 130, 137, 150, 160
17511 130, 137, 150, 156, 160
17511BZ 130, 137, 150, 156, 160
17511NK 130, 137, 150, 156, 160
17511OB-ABZ 130, 137, 150, 156, 160
17511OB-OB 130, 137, 150, 156, 160
17511SP 130, 137,
17511SPBK 130, 137, 150, 156, 160
17513 130, 137, 150, 156, 160
17514 130, 137, 150, 156, 160
17515 131, 137, 151, 156, 160
17516 131, 137, 144, 151, 156, 160
17517 131, 137, 138, 151, 156, 161
17518CL 52, 131, 138, 161, 196
17518WH 52, 131, 138, 161, 196
17519 131, 138, 144, 151, 156, 161
17520CL 52, 75, 131, 138, 151, 156, 161, 196
17520CLWH 52, 75, 131, 138, 151, 156, 161, 196
17521 131, 138, 151, 157, 161
17522BK 53, 58, 131, 138, 151, 157, 161, 196, 199
17522WH 53, 58, 131, 138, 157, 161, 196, 199
17523BK 53, 58, 131, 138, 151, 157, 161, 197, 200
17523WH 53, 58, 131, 138, 151, 157, 161, 197, 200
17524BK 53, 59
17524WH 53, 59
17525BK 53, 75
17525BZ 53, 75

INDEX

Green text indicates a MAXCOR™ Product

17525NK 53, 75
17525OB 53, 75
17525WH 53, 75
17526BK 132, 138, 144, 152, 157, 162, 167, 170
17526OB 132, 138, 144, 152, 157, 162, 167, 170
17526WH 132, 138, 144, 152, 157, 162, 167
17527 132, 139, 152, 157, 162
17528BK 193
17528WH 193
17529CL 193
17529GD 193
17530CL 193
17531BK 193
17531WH 193
17532 193
17533BK 193
17533WH 193
17534BK 193
17534WH 193
17535BK 194
17535WH 194
17536BK 194
17536WH 194
17537BK 53, 59
17537WH 53, 59
17539BK 194
17539WH 194
17540BK 53, 59
17540CL 53, 59
17540GD 53, 59
17540WH 53, 59
17545A 139, 162
17545NK 132, 139, 162
17545OB 132
17545WH 132
17548A 139, 144
17549A 139, 144
17550A 132, 139, 144, 162
17550ABK 132, 139, 144, 162
17550ABKWL 132, 139, 145, 162
17550ABZ 132, 139, 144, 162
17550ACLP 132, 140, 145, 162
17550ANK 132, 139, 144, 162
17550ANKWL 132, 139, 145, 162
17550AOBWL 132, 139, 145, 162
17550AWL 132, 139, 145, 162
17550OB 132, 139, 144, 162
17551A 132, 140, 145, 162
17552A 133, 140, 145, 163
17553A 133, 140, 145, 163
17554 53, 59, 133, 140, 163, 197, 200
17555 54, 59, 133, 140, 163, 197, 200
17556BFLB 133, 140, 145, 163
17556BFLW 133, 140, 145, 163
17556BK 133, 140, 145, 163
17556CL 133, 140, 145, 163
17556GD 133, 140, 145, 163
17557BFLB 133
17557BFLW 133
17557BK 133
17557CL 133
17557GD 133
17558CL 133, 141, 145, 163
17558GD 133, 141, 145, 163
17558NK 133, 141, 145, 163
17558OB 133, 141, 145, 163
17558WH 133, 141, 145, 163
17559BK 134, 141, 163
17559WH 134, 141, 163
17560WH 134, 141, 164
17561 134
17562 134, 141, 146, 164
17563WH 197
17566 141, 146
17567 141, 146
17568 141, 146
17572 129, 136, 149, 155, 159
17572WH 52, 66, 75, 196, 199
17575 129, 136, 149, 155, 159
17575WH 52, 58, 75
17579 130, 136, 150, 155, 160
17579WH 52, 58, 66, 75, 196, 199
17600 62
17604 62, 66
17607BK 62, 66, 77
17607CL 62, 66, 77
17607GD 62, 66, 77
17607WH 62, 66, 77
17610BK 71
17610CL 71
17610GD 71
17610WH 71
17611BK 71
17611WH 71
17620BK 62, 66, 77
17620WH 62, 66, 77
17623BK 62, 77
17623WH 62, 77
17627BK 63, 66, 77
17627WH 63, 66, 77
17629CL 71
17635CL 71
17638CL 63, 71, 77
17638WH 63, 71, 77
17644CL 63, 66, 77
17645CL 63, 77
17660BK 63, 67, 77
17660WH 63, 67, 77
17663BK 71
17663WH 71
17665BK 72
17665WH 72
17704 167, 170
17711 167, 170
17711OB-ABZ 167, 170
17711OB-OB 167, 170
17715CL 167, 170
17715GD 167
17730BK-WH 173
17730OB 173
17730OB-ABZ 173
17730WH 173
17731BK-WH 173
17731CL-WH 173
17731WH 173
17733BK-WH 173
17733OB 173
17733OB-ABZ 173
17733WH 173
17800 174
17801EBM2642 78
17802EBM2X2642 81
17802EBM2642 81
17803 83
17811BK 80

INDEX

Green text indicates a MAXCOR™ Product

17811CL 80
17811GD 80
17811WH 80
17812CL 80
17812WH 80
17814BK 80
17814WH 80
17815CL 82, 86
17817CL 82, 86
17817WH 82, 86
17823BK 80
17823WH 80
17829CL 80
17830CL 80
17830GD 80
17832BK 82, 86
17832WH 82, 86
17835BK 82, 86
17835WH 82, 86
17838BK 86
17838WH 86
17842CL 82, 86
17844CL 82, 87
17863BK 80
17863WH 80
17999 203
17999B1 203
17999B2 203
17999BB 203
17999C 203
17999D 203
17999R 203
17999T 203
17999U 203
18001 262
18001SB 262
18002 262
18002LRD 262
18002LRT 262
18011 265
18012 265
18013 265
18014 265
18015 265
18100 314
18102 314
18103 315
18103BK 315
18103R 315
18104 315
18105 320
18106 320
18106R 320
18107 321, 323
18107CH 322
18107NY12 322
18110BK 316
18110WH 316
18113BK 316
18113GYWL 316
18113WH 316
18130BK 317
18130WH 317
18150
18200 294
18200 Chicago Approved 297
18200 NY Approved 295
18200W 324
18201 318
18201 NY Approved 295
18201W 324
18202 294
18202 Chicago Approved 297
18202 NY Approved 296
18202W 324
18203NY 295
18285 298
18290 299
18300 300
18300 NY Approved 303
18301 301
18301 NY Approved 303
18302 302
18303 304
18304 305, 306
18304 NY Approved 307
18305 306
18306 306
18306 NY Approved 307
18307 306
18400 308
18402 308
18500 319
18600 309
18601 310
18888 261
18888SB 261
19000A 98
19001AR 99
19002A 103
19003A 107
19003AR 108
19004A 112
19024A18 28
19024AR18 29
19199 191
19200 192
19201 195
19202 198
19501 31, 100, 104
19501BZ 31, 100, 104
19501NK 31, 100, 104
19501OB-ABZ 31, 100, 104
19501OB-OB 31, 100, 104
19501SP 100, 104
19502BK 31, 100, 104
19502SP 100, 104
19502WH 31, 100, 104
19503 22, 26, 30, 100, 104
19504 22, 26, 30, 100, 104
19505 100, 104
19506BZ 101, 105
19506NK 101, 105
19506OB 101, 105
19506PB 101, 105
19506WH 101, 105
19507 101, 105
19508 101, 105
19509BK 22, 26, 30, 101, 105
19509BZ 22, 26, 30, 101, 105
19509CL 22, 26, 30, 101, 105
19509OB 22, 26, 30, 101, 105
19509WH 22, 26, 30, 101, 105
19510CL 22, 26, 30, 101, 105
19510GD 22, 26, 30, 101, 105
19510WH 22, 26, 30, 101, 105
19511BK 101, 105
19511WH 101, 105
19521 102, 106
19522BK 102, 106
19522NK 102, 106
19522OB 102, 106
19522WH 102, 106
19523BK 102, 106
19523NK 102, 106
19523OB 102, 106
19523WH 102, 106
19550BK 23, 27
19550BKCL 23, 27
19550-CL 23, 27
19550NK 23, 27
19550NKCL 23, 27
19550OB 23, 27
19550OBCL 23, 27
19550WH 23, 27
19550WHCL 23, 27
19552CL 22, 26
19552MT 22, 26
19555CL 22, 26
19555MT 22, 26
19558WH 102, 106
19661BK 30
19661NK 30
19661OB 30
19661WH 30
19662BK 30
19662NK 30
19662OB 30
19662WH 30
19663BK 31
19663NK 31

INDEX

Green text indicates a MAXCOR™ Product

19663OB 31
19663WH 31
19664BKCL 31
19664WHCL 31
20330 253
20331 253
20332 253
20333 253
20335 253
20338 291
20339 291
20340 291
20341 291
20342 221
20344-120-277V 284
20344-120-277V-4100K 284
20345-120-277V 284
20345-120-277V-4100K 284
20346-120-277V 285
20346-120-277V-4100K 285
20346WG-120-277 285
20346WG-120-277V-4100K 285
20347-120-277V 285
20347-120-277V-4100K 285
20370EBHPF 223, 224
20374EBHPF 223, 224
20392EBHPF 219, 220
20395EBHPF 219, 220
20396EB 221
20397EB 221
20546-120-277V 280
20546-120-277V-4100K 280
20546-347/480V 280
20546-347/480V-4100K 280
20546WG-120-277V 280
20547-120-277V 280
20547-120-277V-4100K 280
20547-347/480V-4100K 280
20548-120-277V 281
20548-120-277v-4100K 281
20548-347-480V 281
20548-347-480V-4100K 281
20548WG-120-277V 281
20549-120-277V 281
20549-120-277V-4100K 281
20549-347/480V 281
20549-347/480V-4100K 281
20550-120-277V 279
20550-120-277V-4100K 279
20552-120-277V 279
20552-120-277V-4100K 279
20854-120-277V 287
20854-120-277V-4100K 287
20856-120-277V 287
20856-120-277V-4100K 287
20858-120-277V 288
20858-120-277V-4100K 288
27007EBM2X26 76
27008EBM2642 76
27009EBM2642 70
27800EBM 84
27800EBM2X26 85
27800EBM2X2642 85
27804EBM32 32
27805EBM 79
27808EBM2X26 88
27808EBM2X3242 88
27841BK 33
27841CL 33
27841GD 33
27841WH 33
27842BK 33
27842CL 33
27842WH 33
27843CL 33
27843WH 33
27881BK 89
27881CL 89
27881GD 89
27882BK 89
27882CL 89
27882WH 89
27883CL 89
27883WH 89
30001-FL-WH 252
30001-LED-WH-50K 213
30014-FL-NK 250
30014-LED-NK-41K 211
30014-PFL-NK 250
30014-PLED-NK-41K 211
30016-FL-NK 250
30016-LED-NK-41K 211
30016-PFL-NK 250
30016-PLED-NK-41K 211
30018-FL-NK 250
30018-LED-NK-41K 211
30018-PFL-NK 250
30018-PLED-NK-41K 211
30032-FL-NK 249
30032-LED-NK-30K 210
30033-FL-NK 249
30033-LED-NK-30K 210
30035-FL-NK 249
30035-LED-NK-30K 210
30104-FL-OB 249
30104-LED-OB-30K 210
30106 13
30106HL 13
30206 16
30214 16
30303 13
30304 13
30352PC 13
30360 14
30360HL-OPT 14
30360XHL-OPT 14
30364 14
30460 15
30460-OPT 15
30797 14
32103-FL-NK 249
32103-LED-NK-50K 210
32105-FL-NK 249
32106-FL-NK 249
34031-FL-BK 251
34031-LED-BK-50K 212
34082-FL-BK 251
34082-LED-BK-50K 212
34098-FL-BK 251
34098-LED-BK-50K 212
34121-FL-BK 252
34121-LED-BK-50K 213
34122-FL-BK 251
50101BA 257
50101BK 257
50101WH 257
50102BA 256
50102BK 256
50102WH 256
50131BA 257
50131BK 257
50131WH 257
50132BA 256
50132BK 256
50132WH 256
AB1 351
Ballasts 90
CG1 355
CG15 355
CG20 355
CL94 12
COS360 275
COS360L 275
DBBK 261, 263
DBCO 261, 263
DBNK 261, 263
DBWH 261, 263
DLR4 2
DLR56 4
DOS180-120-277-IV 270
DOS180-120-277-WH 270
DOS180-IV 269
DOS180LP-D-IV 273
DOS180LP-D-WH 273
DOS180LP-IV 272
DOS180LP-WH 272
DOS180NL-IV 271
DOS180NL-WH 271
DOS180-WH 269
Downrods 358
ECSBAB 261, 264
ECSBARCHBZ 261, 264
ECSBNK 261, 264
ECSBPB 261, 264
ECSBWH 261, 264
ES52MASAB 331
ES52MASBKF 331
ES52MASBZ 331
ES52MASOB 332
ES52MASPB 330
ES52MASPW 330
ES52MASWB 330
ES52MASWH 329
ES52MASWHB 332
ES52MASWI 332
ESF100OB 354
ESF100PW 354
ESF100WH 354
F4LDFL-T5 282

INDEX

Green text indicates a MAXCOR™ Product

F4LDFLT5 280
F4LDFL-T8 282
F4LDFLT8 279
F4LWG-T5 282
F4LWG-T8 282
F6LDFL-T5 282
F6LDFLT5 280
F6LDFL-T8 282
F6LDFLT8 279
F6LWG-T5 282
F6LWG-T8 282
F101BKF 352
F101BZ 352
F101PB 352
F101PW 352
F101WH 352
F101WI 352
F301AB 353
F301BKF 353
F301BZ 353
F301PB 353
F301PW 353
F301WH 353
F301WI 353
F403AB 354
F403PB 354
F403PW 354
F403WH 354
Fan Blades 358
FC1 357
FC2 357
FC3 357
FC4 357
GU10WHIP 111, 115, 190, 203
HBOS360 276, 289
HC8120 282, 286, 288
HC8277 282, 286, 288
LEDRETRO2 326
LED Tape Light 6
LRD 264
LRT 264
MTOS180-IV 274
MTOS180-WH 274
NL181WB 351
NL181WH 351
NL182WH 351
NL201BKF 350
NL201PW 350
NL201WH 350
NL201WI 350
NUC-2-08-BK 209
NUC-2-08-NK 209
NUC-2-08-OB 209
NUC-2-08-WH 209
NUC-2-12-BK 209
NUC-2-12-NK 209
NUC-2-12-OB 209
NUC-2-12-WH 209
NUC-2-21-BK 209
NUC-2-21-NK 209
NUC-2-21-OB 209
NUC-2-21-WH 209
NUC-2-30-BK 209
NUC-2-30-NK 209
NUC-2-30-OB 209
NUC-2-30-WH 209
NUC-2-40-BK 209
NUC-2-40-NK 209
NUC-2-40-OB 209
NUC-2-40-WH 209
OS150B-IV 267
OS150B-WH 267
OS150IV 266
OS150WH 266
PCSG1 326
PCSG2 326
PP24 275
Receiver 357
Reflector 219, 220
RH1 325
RH2 325
RH3 325
RH4 325
RH5 325
RH6 325
RH7 325
RH8 325
RH9 325
RH10 325
RH11 325
RH12 325
RH13 325
RH14 325
RH15 325
RH16 325
RH17 325
RH18 325
RHWP1 325
RHWP2 325
SG1 355
SG2 355
SG3CAB 355
SG3CPB 355
SG7 355
SG9 355
SG10 355
SG12 355
SG14 355
SG29 356
SG46 356
SG48 356
SG52 356
SG53 356
SG66 356
SG69 356
SG70 356
SG72 356
SG73 356
SG81 356
SG86 356
STUCCOBTN 264
STUCCOBTNAB 264
STUCCOBTNBZ 264
STUCCOBTNNK 264
STUCCOBTNWH 264
T2 LED 9
T2P LED 10
T2S LED 11
UR2 357
UR4 357
UR5 357
VS150-IV 268
VS150-WH 268
WG1 326
WG-1LT85 219, 220
WG-2LT85 219, 220, 221
WG3 326
WG4T5 286
WG4T8 286
WG6T5 286
WG6T8 286
WGECO-4T5 288
WGECO-6T5 288
WGECO-8T5 288