


# CFW300

## Variable Speed Drive

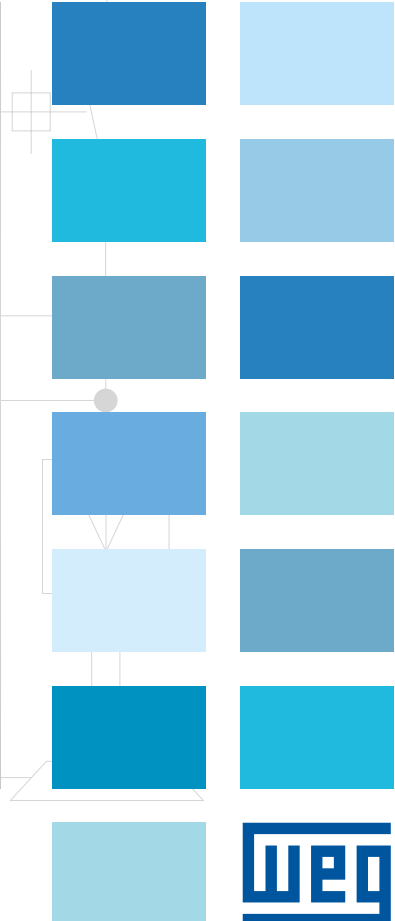


# CFW300

## EASY DRIVE

The CFW300 **variable speed drive is a high-performance VSD** for three-phase induction motors, ideal for applications on machines or equipment that require precise control and easy operation. It features compact size, contactor-style electrical installation, selectable WEG vector control (VWV) or scalar control (V/F), built-in operating interface (HMI), SoftPLC, free WPS programming software and plug-in accessories that may be added to provide extended functionalities, making it a **flexible solution of excellent cost effectiveness**.

## CONVENIENCE ALL THE TIME

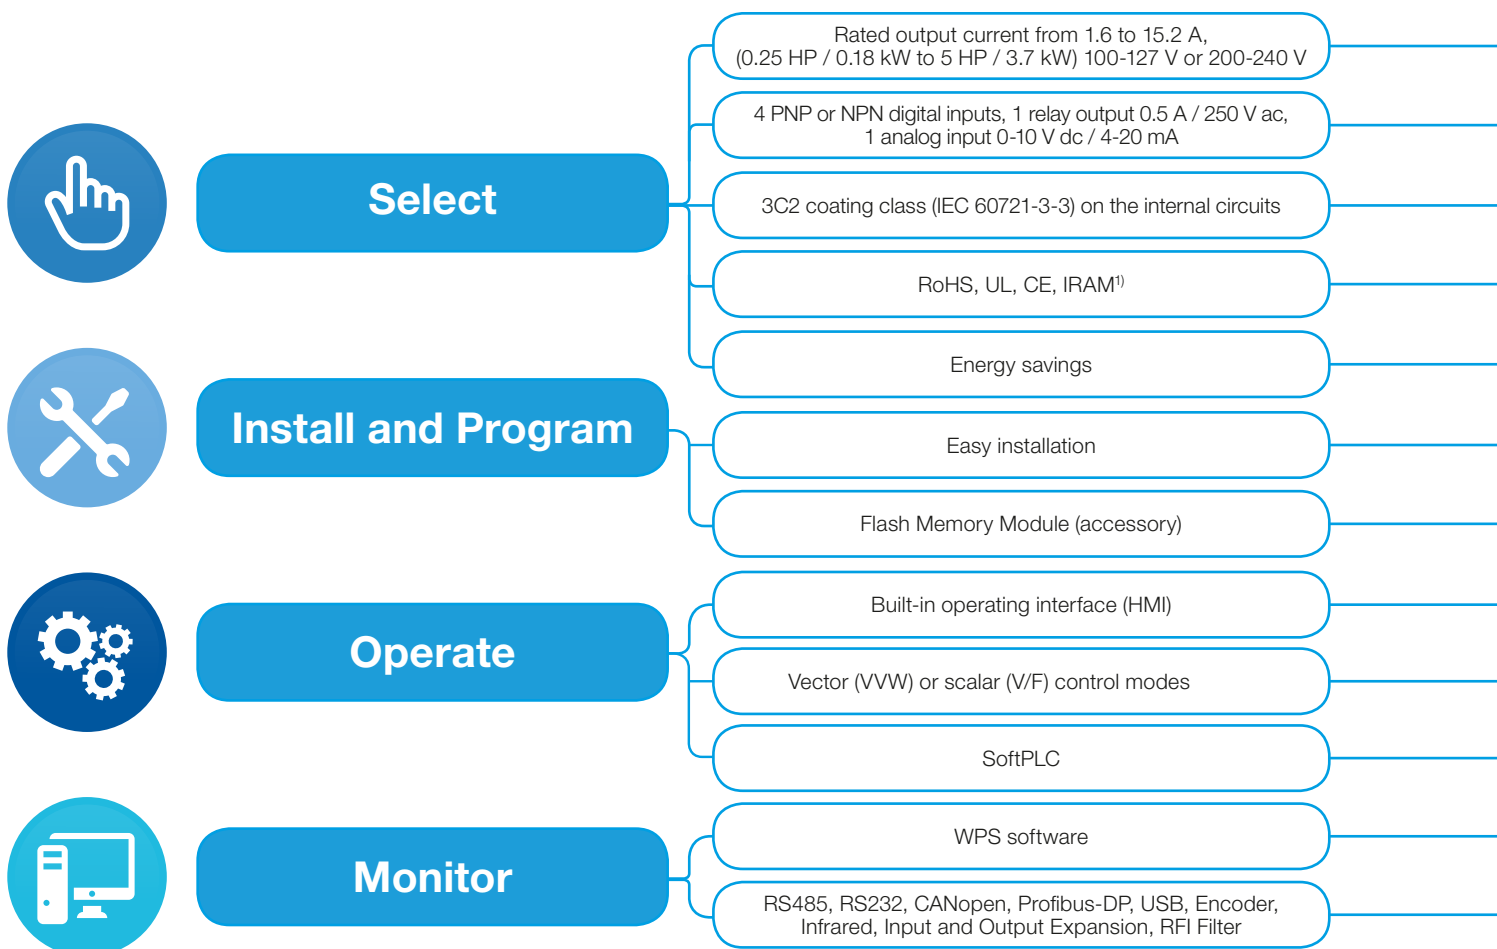

Note: it is certification. See the sales department of WEG Automation.



Single-phase and three-phase power supply or via DC link

Built-in inputs and outputs in the standard version

Greater protection for aggressive environments

Lead-free, international certificates

High performance and efficiency

Power supply on top and output to the motor in the bottom

Used to copy the original setting of the CFW300 and download it to other devices, with the VSD off

Status information of the CFW300 is easily viewed on the screen

Built-in software resource, equivalent to a small PLC

Programmable modes

Online monitoring, programming and configuration of the CFW300

Extra functionality expansion accessories

Ideal for machine or small device applications

2 slots for function expansion via accessories

Standard, no extra cost

Green product, contributing to the environmental preservation

Ideal for pumps and fans

Easy and intuitive installation with less wiring inside the electrical panel

Less configuration time

Simple operation, configurable displays, Remote operating interface (accessory)

Use on simple or complex applications

It customizes and integrates the CFW300 to the application

Easy and intuitive environment, free software

Flexibility according to the application requirements

## Flexibility

**Flash Memory Module (CFW300-MMF Accessory)**  
Downloads the original parameter setting to several other CFW300 variable speed drives, even when they are turned off

**2 Slots for Function Expansion with Accessories**  
Slots for network communication and accessibility module  
Slots for input and output (I/O) expansion modules

**RFI Filter (CFW300-KFA / B Accessory)**  
Category C2 or C3 to reduce the electromagnetic interference level

**Easily Removable Fan**

**Remote Operating Interface (HMI) (CFW300-KHMIR Accessory)**

**Greater Protection for Aggressive Environments**  
Standard Class 3C2 coating on the internal circuits of all versions, according to IEC 60721-3-3, ensures greater protection for environments with corrosive chemicals





# Applications

## Machines and Equipment



Packaging machines, ice-cream machines, mixers, kneading machines, conveyor belts, wood processing, car wash

## Opening/Closing of Gates



Automatic condo or home garage gates, elevator doors, industry or condo vehicle barriers

## Single-Phase Power Supply



100-127 V or 200-240 V single phase power supply to feed a 230 V three-phase induction motor

## Industry




Fans, exhausters, centrifugal pumps, granulators, conveyor belts, palletizers, stirrers, mixers, process dosing pumps


## Stores or Homes



Swimming pool or whirlpool bathtub pumps

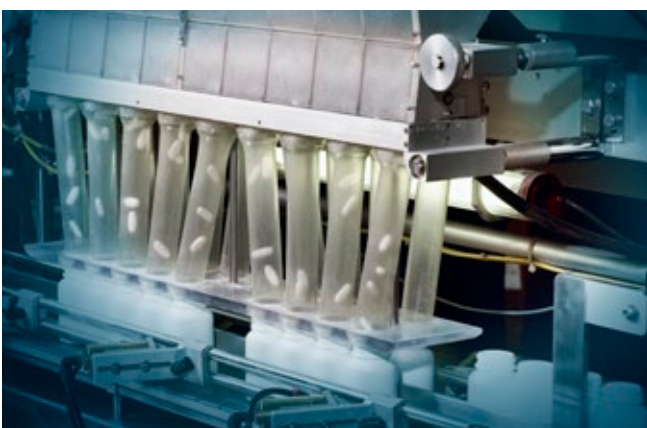


## Easy to Use

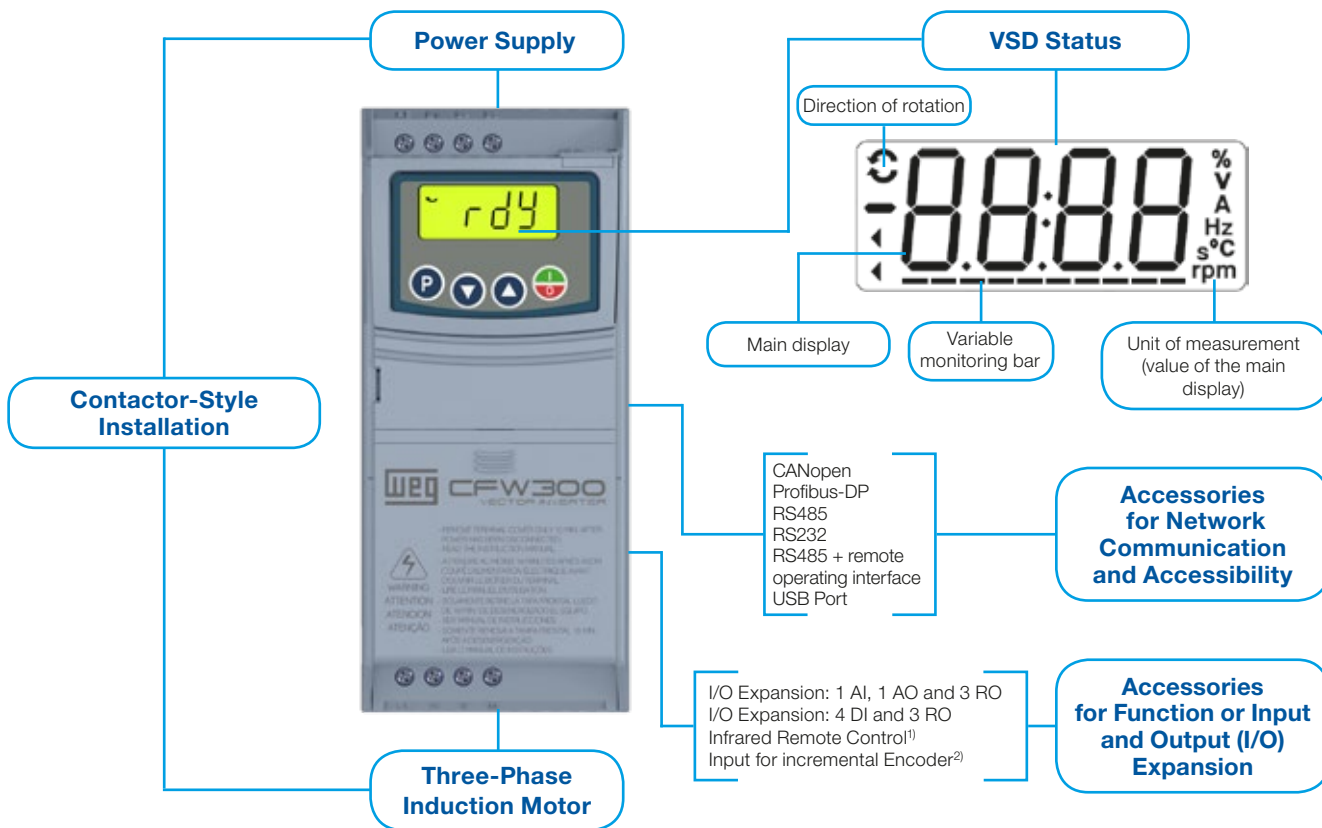

Notes: I/O = Inputs and Outputs; AI = Analog Input, AO=Analog Output, RO = Relay Output, DI = Digital Input.


1) Included in the CFW300-IOADR accessory.

2) Included in the CFW300-IOAENC accessory.

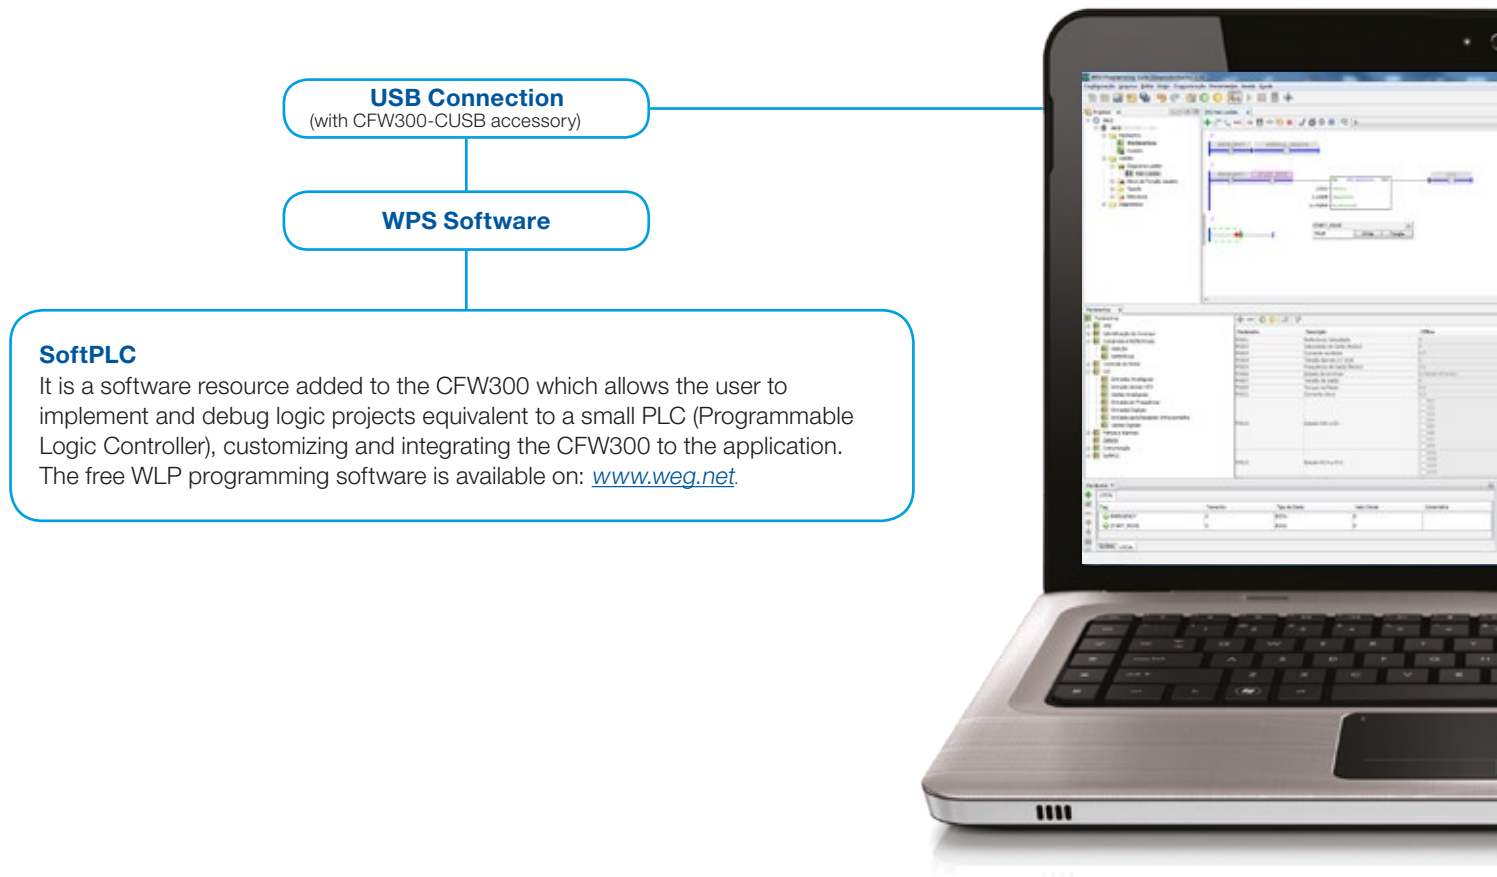

## Main Resources

- V/F, quadratic V/F or VVW vector control
- Password to protect the settings
- Engineering units (V, A, Hz, rpm, s, °C, %, etc.)
- Backup of all parameters (via software WPS, memory card or internal memory of the CFW300)
- Switching frequency selecting according to the application requirements
- Speed reference via electronic potentiometer (EP)
- Speed reference by frequency input signal
- Multispeed with up to eight programmable speeds
- Slip compensation
- Manual or automatic torque boost (V/F scalar mode) or self-tuning (VVW vector mode)
- 2 acceleration/deceleration ramps and emergency deceleration
- "S" type ramp
- DC braking
- Internal dynamic braking (only at frame size B)
- Infrared control (via CFW300-IOADR accessory)
- PID controller to control processes in closed loop (via software WPS)
- Flying start / ride through
- Skip frequency or frequency ranges
- Overload and overtemperature protection on the motor and on the IGBTs
- Overcurrent protection
- DC link voltage supervision
- Self-diagnosis alarm
- Fault log
- SoftPLC programming via free WLP software
- Fan control



## Much more advantages


The CFW300 replaces direct online starters or star-delta starters:

- Electric energy savings
- Precise speed control
- Protection and improved lifetime for the electric motor
- Diagnosis and fault log
- Easy to use and install
- Flexible, allowing the installation of accessories for the application (Plug & Play)



Easy and intuitive environment

Free at [www.weg.net](http://www.weg.net)

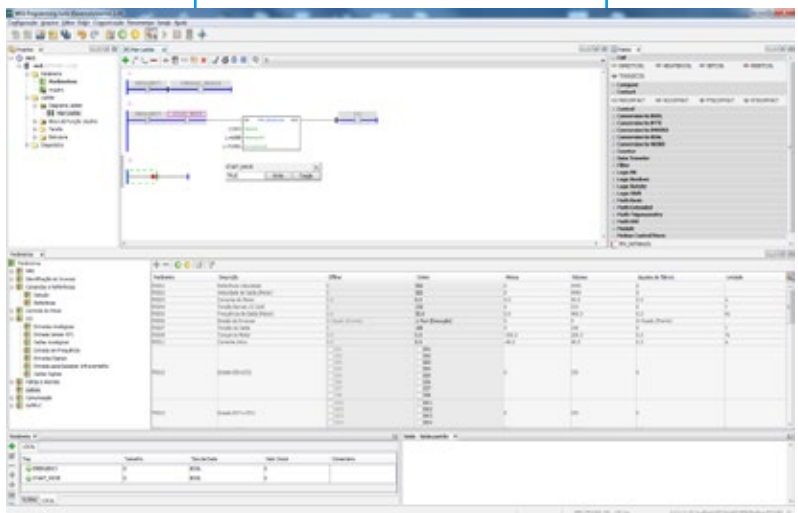

# Coding

Inverter / smart code	Model identification				Internal dynamic braking (IGBT)	Protection degree	Hardware version	Software version
	Size	Rated output current	Number of phases	Rated voltage				
CFW300	A	01P6	S	2	NB	20		
	See availability in the following table							
	NB = without dynamic braking (IGBT)							
	DB = with dynamic braking (IGBT)							
	20 = IP20							
	Hx = special hardware							
Sx = special software								

Note: for versions with special hardware (Hx) and software (Sx), contact WEG Automation sales department or your sales representative.

## Available Options

Size	Rated output current	Number of phases	Rated voltage	Internal dynamic braking (IGBT)
A	01P6 = 1.6 A	S = single-phase power supply	1 = 110-127 V	NB
	02P6 = 2.6 A			
	04P2 = 4.2 A			
	06P0 = 6.0 A			
	01P6 = 1.6 A			
	02P6 = 2.6 A			
	04P2 = 4.2 A			
	06P0 = 6.0 A			
	07P3 = 7.3 A	T = three-phase power supply	2 = 200-240 V	
	01P6 = 1.6 A			
	02P6 = 2.6 A			
	04P2 = 4.2 A			
	06P0 = 6.0 A			
	07P3 = 7.3 A	D = DC power supply	3 = 280-340 V dc	
	01P6 = 1.6 A			
02P6 = 2.6 A				
04P2 = 4.2 A				
06P0 = 6.0 A				
07P3 = 7.3 A				
B	10P0 = 10.0 A	B = single-phase or three-phase or DC power supply	2 = 200-240 V or 280-340 V dc	DB
	15P2 = 15.2 A	T = three-phase or DC power supply		





# Specification

## Standard Version

Reference	Power supply (V)		Frame size	Rated output current (A)	Maximum applicable motor <sup>1)</sup>		
					Power supply (V)	Power rating	
						(HP)	(kW)
CFW300A01P6S1NB20	Single-phase	110-127	A	1.60	220	0.25	0.18
CFW300A02P6S1NB20				2.60		0.50	0.37
CFW300A04P2S1NB20				4.20		1.00	0.75
CFW300A06POS1NB20				6.00		1.50	1.32
CFW300A01P6S2NB20	Single-phase	200-240	A	1.60	220	0.25	0.18
CFW300A02P6S2NB20				2.60		0.50	0.37
CFW300A04P2S2NB20				4.20		1.00	0.75
CFW300A06POS2NB20				6.00		1.50	1.32
CFW300A07P3S2NB20				7.30		2.00	1.50
CFW300B10P0B2DB20			B	10.00		3.00	2.20
CFW300A01P6T2NB20	Three-phase	200-240	A	1.60	220	0.25	0.18
CFW300A02P6T2NB20				2.60		0.50	0.37
CFW300A04P2T2NB20				4.20		1.00	0.75
CFW300A06POT2NB20				6.00		1.50	1.32
CFW300A07P3T2NB20				7.30		2.00	1.50
CFW300B10P0B2DB20			B	10.00		3.00	2.20
CFW300B15P2T2DB20				15.2		5.00	3.70
CFW300A01P6D3NB20	Link DC	280-340 V dc	A	1.6	220	0.25	0.18
CFW300A02P6D3NB20				2.6		0.50	0.37
CFW300A04P2D3NB20				4.2		1.00	0.75
CFW300A06P0D3NB20				6.0		1.50	1.32
CFW300A07P3D3NB20				7.3		2.00	1.50
CFW300B10P0B2DB20			B	10.0		3.00	2.20
CFW300B15P2T2DB20				15.2		5.00	3.70

Notes: 1) The power values for the maximum applicable motor shown in the table above are reference values and valid for WEG three-phase, four-pole induction motors with power supply of 220 V. The proper sizing of the CFW300 must be determined as a function of the rated current of the used motor.















2) Designed for exclusive industrial or professional use.

## Specification

The CFW300 has inputs and outputs in the standard version and allows installing Plug & Play accessories, which makes flexible and increases its capacity to adapt to the requirements of different applications.

In the front part there are two slots: the upper slot, can be used to connect with network communication or accessibility, and the lower slot, which can be used for input and output (I/O) expansion, incremental encoder input or infrared remote control kit.

### Accessories

Reference	Description	Illustrative images
<b>Upper slot - network communication and accessibility</b>		
CFW300-CRS485	RS485 communication module	
CFW300-CUSB	USB communication module (2 m cable included)	
CFW300-CRS232	RS232 communication module	
CFW300-CCAN	CANopen or DeviceNet communication module	
CFW300-CPDP	Profibus-DP communication module	
CFW300-CBLT	Bluetooth communication module	
<b>Lower slot - input and output (I/O) expansion</b>		
CFW300-IOAR	1 analog input, 1 analog output and 3 relay outputs	
CFW300-IODR	4 digital inputs and 3 relay outputs	
CFW300-IOAENC	1 analog input, 2 analog outputs and input for incremental encoder	
CFW300-IOADR	1 NTC input, 3 relay outputs and 1 input for infrared sensor (infrared sensor, NTC and remote control with battery included)	
<b>Remote operating interface (HMI)</b>		
CFW300-KHMIR	Kit with remote HMI (CFW300-CRS485 + 3 m cable included)	
<b>Flash memory</b>		
CFW300-MMF	Flash memory module (1 m cable included)	
<b>RFI filter</b>		
CFW300-KFA <sup>1)</sup>	RFI filter kit CFW300 frame size A	
CFW300-KFB <sup>1)</sup>	RFI filter kit CFW300 frame size B	

Note: 1) For single-phase power supply voltage only.

# Specification

## Configuration of the Plug-In Modules<sup>6)</sup>

Reference	Slots <sup>5)</sup>	Inputs		Outputs		USB <sup>4)</sup>	Bluetooth	Infrared sensors and NTC <sup>3)</sup>	Encoder <sup>2)</sup>	Fieldbus communication			
		Analog	Digital	Analog	Digital / relay					RS485	RS232	CANopen	Profibus-DP
CFW300-CRS485	Upper slot	-	-	-	-	-	-	-	-	1	-	-	-
CFW300-CRS232		-	-	-	-	-	-	-	-	-	1	-	-
CFW300-CCAN		-	-	-	-	-	-	-	-	-	-	1	-
CFW300-CPDP		-	-	-	-	-	-	-	-	-	-	-	1
CFW300-CUSB		-	-	-	-	1	-	-	-	-	-	-	-
CFW300-CBLT		-	-	-	-	-	1	-	-	-	-	-	-
CFW300-IOAR	Lower slot	1	-	1	3	-	-	-	-	-	-	-	-
CFW300-IODR <sup>1)</sup>		-	4	-	3	-	-	-	-	-	-	-	-
CFW300-IOAENC		1	-	2	-	-	-	-	1	-	-	-	-
CFW300-IOADR		1	-	-	3	-	-	1	-	-	-	-	-

Notes: 1) Configurable isolated digital inputs (NPN or PNP).

2) Incremental encoder (A/A - B/B), power supply of +5 V @ 100 mA for the encoder, maximum frequency of 400 kHz.

3) Remote control and battery included.

4) USB cable included.

5) Allows 1 plug-in module on the upper slot (network communication or accessibility) and 1 plug-in module on the lower slot (input/output expansion).

6) The standard version of the CFW300 already features 4 PNP or NPN digital inputs (configurable), 1 analog input 0-10 V dc / 4-20 mA and 1 relay output 0.5 A / 250 V ac.

## Dimensions



### Dimensions without Filter

Frame size	H mm (in)	W mm (in)	D mm (in)	Weight kg (lb)
A	157.9 (6.22)	70.0 (2.76)	148.4 (5.84)	0.90 (1.98)
B	198.9 (8.08)	70.0 (2.76)	158.4 (6.24)	1.34 (2.95)

Note: tolerance: +/-1.0 mm (+/-0.039 in).

### Dimensions with RFI Filter

Frame size	H mm (in)	W mm (in)	D mm (in)	Weight kg (lb)
A	196.0 (7.72)	70.0 (2.76)	190.1 (7.48)	1.30 (2.86)
B	237.0 (9.33)	70.0 (2.76)	200.1 (7.88)	1.80 (3.96)

Note: tolerance: +/-1.0 mm (+/-0.039 in).

# Technical Specifications


Power data	Power supply	<p>Voltage tolerance: 200-240 V (-15% to + 10%)            Frequency: 50/60 Hz (48 Hz to 62 Hz)            Phase unbalance: ≤3% of the rated phase-phase input voltage            Overvoltages according to category III (EN 61010/UL 508C)            Transient voltages according to category III            Maximum of 10 connections per hour (1 every 6 minutes)            Typical efficiency: ≥97%            Classification of chemically active substances: 3C2 level            Classification of mechanical conditions (vibration): 3M4 level            Acoustic noise level: &lt;60 dB</p>
Installation and connection	Environment conditions	<p>Surrounding temperature: 0 °C to 50 °C - IP20            For higher temperatures than the specifications above, it is necessary to apply 2% of current derating for each Celsius degree, limited to an increase of 10 °C            Air relative humidity: 5% to 95% non-condensing            Maximum altitude: up to 1,000 m - rated conditions            1,000 m to 4,000 m - 1% of current derating for each 100 m above 1,000 m (above the sea level)            Protection degree: 2 (according to EN 50178 and UL 508C), with non-conductive pollution            Condensation must not cause conduction of the accumulated residues</p>
Control	Method	<ul style="list-style-type: none"> <li>- V/F (scalar)</li> <li>- V/F (quadratic)</li> <li>- V/W: voltage vector control</li> <li>- PWM SVM (Space Vector Modulation)</li> </ul>
	Output frequency	0 to 400 Hz, resolution of 0.1 Hz
Performance	V/F Control	<p>Speed regulation: 1% of the rated speed (with sleep compensation)            Speed variation range: 1:20</p>
	Vector control (V/W)	<p>Speed regulation: 1% of the rated speed            Speed variation range: 1:30</p>
Inputs <sup>1)</sup>	Analog	<p>1 isolated input: 0 to 10 V or 0 to 20 mA or 4 to 20 mA            Linearity error ≤0.25%            Impedance: 100 kΩ for voltage input, 500 Ω for current input            Programmable functions            Maximum in the inputs: 30 V dc</p>
	Digital	<p>4 isolated inputs.            Programmable functions:</p> <ul style="list-style-type: none"> <li>- Active high (PNP): maximum low level of 10 V dc                                                minimum high level of 20 V dc</li> <li>- Active low (NPN): maximum low level of 5 V dc                                                minimum high level of 10 V dc</li> </ul> <p>Maximum input voltage of 30 V dc            Input current: -11 mA            Maximum input current: -20 mA</p>
Outputs <sup>1)</sup>	Relay	<p>1 relay with NO/NC contact            Maximum voltage: 250 V ac            Maximum current of 0.5 A            Programmable functions</p>
	Power supply	10 V dc power supply maximum capacity: 50 mA
Safety	Protection	<p>Overcurrent/phase-phase short circuit            Under/overvoltage at the power supply            Motor overload            Overtemperature on the power module (IGBTs)            External fault/alarm            Programming error</p>
Operating interface (HMI)	Built-in	<p>4 keys: run/stop, increment, decrement and LCD Display setting            Accuracy:</p> <ul style="list-style-type: none"> <li>- Current: 5% of the rated current</li> <li>- Speed resolution: 0.1 Hz</li> </ul>
Communication	Fieldbus communication	RS485, RS232, CANopen, DeviceNet, Profibus-DP, Bluetooth or USB Port (via plug-in modules)
Protection degree	IP20	Frame sizes A and B

Note: 1) Available in the standard version.





# Block Diagram

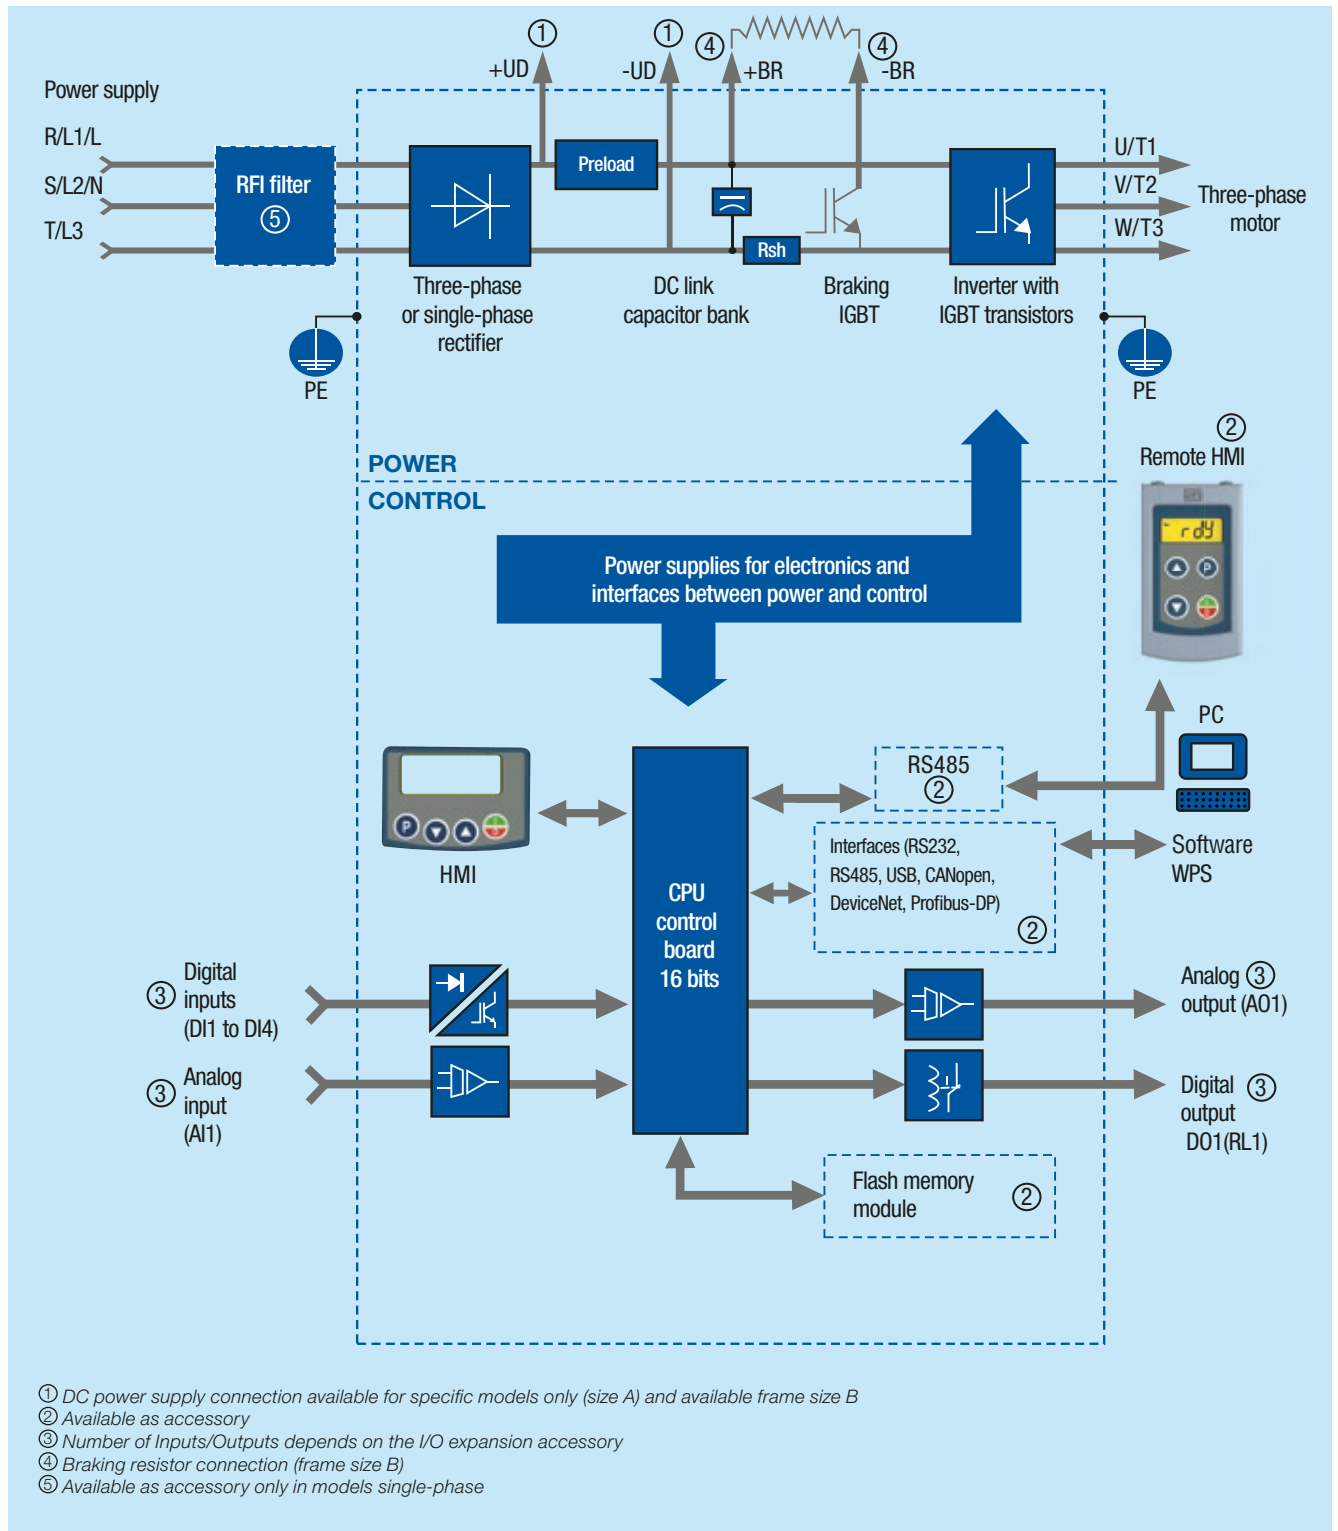

# Global presence is essential, as much as understanding your needs.

## Global Presence

With more than 30.000 employees worldwide, WEG is one of the largest electric motors, electronic equipments and systems manufacturers. We are constantly expanding our portfolio of products and services with expertise and market knowledge. We create integrated and customized solutions ranging from innovative products to complete after-sales service.

WEG's know-how guarantees our **CFW300 variable speed drives** is the right choice for your application and business, assuring safety, efficiency and reliability.



**Availability** is to have a global support network



**Partnership** is to create solutions that suit your needs



**Competitive edge** is to unite technology and innovation



# Know More

High performance and reliable products to improve your production process.



Excellence is to provide a whole solution in industrial automation that improves our customers productivity.

Visit: [www.weg.net](http://www.weg.net)

[youtube.com/wegvideos](https://www.youtube.com/wegvideos)

# WEG Worldwide Operations

## ARGENTINA

San Francisco - Cordoba  
Phone: +54 3564 421484  
[info-ar@weg.net](mailto:info-ar@weg.net)

Cordoba - Cordoba  
Phone: +54 3514 641366  
[weg-morbe@weg.com.ar](mailto:weg-morbe@weg.com.ar)

Buenos Aires  
Phone: +54 1142 998000  
[ventas@pulverlux.com.ar](mailto:ventas@pulverlux.com.ar)

## AUSTRALIA

Scoresby - Victoria  
Phone: +61 3 97654600  
[info-au@weg.net](mailto:info-au@weg.net)

## AUSTRIA

Markt Piesting - Wiener  
Neustadt-Land  
Phone: +43 2 633 4040  
[watt@wattdrive.com](mailto:watt@wattdrive.com)

Vienna  
Phone: +43 1 796 2048  
[wtr@weg.net](mailto:wtr@weg.net)

## BELGIUM

Nivelles - Belgium  
Phone: +32 67 888420  
[info-be@weg.net](mailto:info-be@weg.net)

## BRAZIL

Jaraguá do Sul - Santa Catarina  
Phone: +55 47 32764000  
[info-br@weg.net](mailto:info-br@weg.net)

## CHILE

La Reina - Santiago  
Phone: +56 2 27848900  
[info-cl@weg.net](mailto:info-cl@weg.net)

## CHINA

Nantong - Jiangsu  
Phone: +86 513 85989333  
[info-cn@weg.net](mailto:info-cn@weg.net)

Changzhou - Jiangsu  
Phone: +86 519 88067692  
[info-cn@weg.net](mailto:info-cn@weg.net)

Rugao - Jiangsu  
Phone: +86 513 80672011  
[zhuhua@weg.net](mailto:zhuhua@weg.net)

## COLOMBIA

San Cayetano - Bogota  
Phone: +57 1 4160166  
[info-co@weg.net](mailto:info-co@weg.net)

Sabaneta - Antioquia  
Phone: +57 4 4449277  
[info-co@weg.net](mailto:info-co@weg.net)

## ECUADOR

El Batan - Quito  
Phone: +593 2 5144339  
[wegecuador@weg.net](mailto:wegecuador@weg.net)

## FRANCE

Saint-Quentin-Fallavier - Isère  
Phone: +33 4 74991135  
[info-fr@weg.net](mailto:info-fr@weg.net)

## GERMANY

Türnich - Kerpen  
Phone: +49 2237 92910  
[info-de@weg.net](mailto:info-de@weg.net)

Balingen - Baden-Württemberg  
Phone: +49 7433 90410  
[info@weg-antriebe.de](mailto:info@weg-antriebe.de)

Homburg (Efze) - Hesse  
Phone: +49 5681 99520  
[info@akh-antriebstechnik.de](mailto:info@akh-antriebstechnik.de)

## GHANA

Accra  
Phone: +233 30 2766490  
[ghana@zestweg.com](mailto:ghana@zestweg.com)

## INDIA

Bangalore - Karnataka  
Phone: +91 080 46437450  
[info-in@weg.net](mailto:info-in@weg.net)

Hosur - Tamil Nadu  
Phone: +91 4344 301577  
[info-in@weg.net](mailto:info-in@weg.net)

## ITALY

Cinisello Balsamo - Milano  
Phone: +39 2 61293535  
[info-it@weg.net](mailto:info-it@weg.net)

## JAPAN

Yokohama - Kanagawa  
Phone: +81 45 5503030  
[info-jp@weg.net](mailto:info-jp@weg.net)

## MALAYSIA

Shah Alam - Selangor  
Phone: +60 3 78591626  
[info@wattdrive.com.my](mailto:info@wattdrive.com.my)

## MEXICO

Huehuetoca - Mexico  
Phone: +52 55 53214275  
[info-mx@weg.net](mailto:info-mx@weg.net)

Tizayuca - Hidalgo  
Phone: +52 77 97963790  
[info-mx@weg.net](mailto:info-mx@weg.net)

## NETHERLANDS

Oldenzaal - Overijssel  
Phone: +31 541 571080  
[info-nl@weg.net](mailto:info-nl@weg.net)

## PERU

La Victoria - Lima  
Phone: +51 1 2097600  
[info-pe@weg.net](mailto:info-pe@weg.net)

## PORTUGAL

Maia - Porto  
Phone: +351 22 9477700  
[info-pt@weg.net](mailto:info-pt@weg.net)

## RUSSIA and CIS

Saint Petersburg  
Phone: +7 812 363 2172  
[sales-wes@weg.net](mailto:sales-wes@weg.net)

## SOUTH AFRICA

Johannesburg  
Phone: +27 (0) 11 7236000  
[info@zestweg.com](mailto:info@zestweg.com)

Cape Town  
Phone: +27 (0) 21 507 7200  
[gentsets@zestweg.com](mailto:gentsets@zestweg.com)

Heidelberg  
Phone: +27 (0) 16 349 2683/4/5  
[wta@zestweg.com](mailto:wta@zestweg.com)

## SPAIN

Coslada - Madrid  
Phone: +34 91 6553008  
[info-es@weg.net](mailto:info-es@weg.net)

Valencia  
Phone: +34 96 1379296  
[info@autrial.es](mailto:info@autrial.es)

## SINGAPORE

Singapore  
Phone: +65 68589081  
[info-sg@weg.net](mailto:info-sg@weg.net)

Singapore  
Phone: +65 68622220  
[info-sg@weg.net](mailto:info-sg@weg.net)

## SCANDINAVIA

Mölnlycke - Sweden  
Phone: +46 31 888000  
[info-se@weg.net](mailto:info-se@weg.net)

## UK

Redditch - Worcestershire  
Phone: +44 1527 513800  
[info-uk@weg.net](mailto:info-uk@weg.net)

## UNITED ARAB EMIRATES

Jebel Ali - Dubai  
Phone: +971 4 8130800  
[info-ae@weg.net](mailto:info-ae@weg.net)

## USA

Duluth - Georgia  
Phone: +1 678 2492000  
[info-us@weg.net](mailto:info-us@weg.net)

Bluffton - Indiana  
Phone: +1 800 5798527  
[info-us@weg.net](mailto:info-us@weg.net)

Minneapolis - Minnesota  
Phone: +1 612 3788000  
[info-us@weg.net](mailto:info-us@weg.net)

Washington - Missouri  
Phone: +1 636-239-9300  
[wegwill@weg.net](mailto:wegwill@weg.net)

## VENEZUELA

Valencia - Carabobo  
Phone: +58 241 8210582  
[info-ve@weg.net](mailto:info-ve@weg.net)

For those countries where there is not a WEG own operation, find our local distributor at [www.weg.net](http://www.weg.net).



WEG Group - Automation Business Unit  
Jaraguá do Sul - SC - Brazil  
Phone: +55 47 3276 4000  
[automacao@weg.net](mailto:automacao@weg.net)  
[www.weg.net](http://www.weg.net)

