



FDNY

BUREAU OF FIRE PREVENTION

9 MetroTech Center, 3rd Floor
Brooklyn, NY 11201

CERTIFICATE OF APPROVAL # 6238 (AMENDED)

**THIS CERTIFICATE IS REVOCABLE, NOT TRANSFERABLE
and EXPIRES on MAY 10, 2023**

By order of Fire Commissioner Daniel A. Nigro, and pursuant to Section FC 112 of the New York City New Fire Code, the following equipment or system is accepted for use provided the conditions as outlined below are in full compliance.

Manufacturer: Digital Monitoring Products, Inc.

Trade Name: Digital Monitoring Products, Inc.

Product: Fire Alarm Communication Equipment

Model Number(s): Cellular Communicator: CellComSLCF
Network (IP) Communicator: iComSLF

Pertinent Code Section(s): Section FC 901 of the New York City Fire Code

Prescribed Tests: UL 864 9th Edition, NFPA 72

Laboratories: Intertek

Report(s): Intertek File 101565968NYM-001. Issued 2014-03-31. Revised 2016-06-27
Intertek File 101565968NYM-002. Issued 2015-10-08. Revised 2016-12-09

Description: The iComSLF Universal Alarm Communicator is compatible with any regulated, power limited fire alarm control panel that communicates using the SIA DC-05-1999.09-DCS Contact ID message protocol. The iComSLF provides the control panel with a fully supervised alarm communication path over an Ethernet or Internet connection. Primary power for the iComSLF is supplied by the control panel's auxiliary output. Backup power for the iComSLF is supplied by the control panel's backup batteries through the auxiliary connection.

The CellComSLCF Universal Alarm Communicator is compatible with any regulated, power limited fire alarm control panel that communicates using the SIA DC-05-1999.09-DCS Contact ID message protocol. The CellComSLCF provides the control panel with a fully supervised alarm communication path over the CDMA cellular network. Primary power for the CellComSLCF is supplied by the control panel's auxiliary output. Backup power for the CellComSLCF is supplied by the control panel's backup batteries through the auxiliary connection.

Conditions of Approval:

1. All uses, configurations, arrangements and functions, application and installations shall comply with the provisions of New York City Construction Codes, specifically Building Code Chapter 9 & 1RCNY §3616-04. Further, the installation shall be in accordance with applicable provisions of New York City Fire Code, New York City Electrical Code, manufacturer's installation requirements, and UL Standard 864.
2. When used with a central office control communicator or a transmitter, the installation and operation of the equipment and devices shall comply with 3RCNY §901-01. It shall have the capability of transmitting separate and distinct signals to indicate manual pull station alarm, automatic detection alarm, sprinkler waterflow alarm, supervisory signal indications, and trouble indications.
3. When installed as a central station Internet (Network) communicator or transmitter **both primary and secondary channels of communication** shall be required and shall meet the conditions of 3.1 – 3.7. **Network communication (iComSLF) shall be used as primary channel** of communication with central station and **Cellular Communicator (CellComSLCF) shall be used as the secondary channel** of communication **or in reverse order**: Cellular Communicator as primary and Internet connection as the secondary channel.
 - 3.1. Each communication channel shall be monitoring for integrity at intervals not exceeding 24 hours
 - 3.2. Failure any channel of communication shall be annunciated at the protected premises within 5 minutes of failure
 - 3.3. The failure of either channel shall be annunciated at the central station within 5 minutes of failure
 - 3.4. Reliability of the signal shall be achieved by any of the following:
 - 3.4.1. Signal repetition — multiple transmissions repeating the same signal
 - 3.4.2. Parity check — a mathematically check sum algorithm of a digital message that verifies correlation between transmitted and received message
 - 3.4.3. An equivalent means that provides certainty of 99.99 percent that the received message is identical to the transmitted message
 - 3.5. The maximum duration between the initiation of an alarm signal at the protected premises, transmission of the signal, and subsequent display and recording of the alarm signal at the central station shall not exceed 90 seconds
 - 3.6. A spare Central Station Receiver shall be provided at the central station and shall be able to be switched into the place of a failed unit within 30 seconds after detection of failure
 - 3.7. All applicable requirements of Federal Communications Commission (FCC) shall be complied with.
4. All communication devices and antennas shall be installed and dedicated for transmission of fire alarm signals and shall be properly secured at all times from unauthorized use.
5. All wiring used for the building network communications shall be plenum rated cable with minimum temperature rating of 150 degrees Celsius and shall be installed in a raceway per requirements of NYC 2011 Electrical Code, Article 760.

Expires on May 10, 2023
COA #6238 for Digital Monitoring Products, Inc.
F.P. Index#: 2003120A
FPIMS#: 40088031
May 11, 2020
Page 3 of 4


6. The Cellular Communicator **CellComSLCF** and Network Communicator **IComSLF** shall be used with FDNY approved Fire Alarm Control Panels that use the Contact ID, version SIA DC-05 1999.09, Communication Protocol.
7. The Cellular Communicator **CellComSLCF** and Network Communicator **IComSLF** shall be provided with battery backup as per NYC 2011 Electrical Code, Section 760.41, (C) Battery.
8. The **CellComSLCF** and **IComSLF** shall be included in the battery calculations for the fire alarm control panel.
9. Only enclosures painted red in color shall be used.
10. Intertek Listing requirements and limitations shall be complied with.
11. All installations are subject to inspection, test, and approval from Fire Alarm Inspection Unit (FAIU).
12. Any change in central station communication service provider shall be reported to FAIU and is subject to re-inspection, test, and approval.
13. Certificate of Approval number shall be plainly and permanently stamped or otherwise fixed upon each product by the applicant.
14. The Fire Department's conditions of approval shall be enumerated in the installation manuals and brochures that will be provided to all New York City buyers and users.
15. Fire Department Certificate of Approval does not constitute an endorsement or recommendation of your product by the Fire Department, but is a certification that your product is acceptable as of the date of issuance.
16. The Fire Department reserves the right to withdraw this approval at any time in the event there is a reasonable doubt that the product does not operate or perform as required by code, the conditions of this resolution or as represented in your application.
17. As the manufacturer of this product, you should be aware that any end user who fails to comply with the condition as outlined in the approval would be subject to enforcement action, which may include fines and imprisonment.
18. This Certificate of Approval does not grant the right to use any trademark associated with the New York City Fire Department (the letters FDNY, the FDNY Shield design, the FDNY Maltese Cross design, and the seal of the City of New York). The unauthorized use of trademarks in connection with the sale of commercial goods or services violates federal and state laws.
19. Products marked to indicate the Certificate of Approval number might refer to the "NYC Fire Department" or "NYC Fire Dept." (e.g., "NYC Fire Dept. Certificate of Approval #XXXX").

Any change in company name or ownership, product name, design or model number of any product included on this certificate must be immediately reported to this Department in writing.

Expires on May 10, 2023
COA #6238 for Digital Monitoring Products, Inc.
F.P. Index#: 2003120A
FPIMS#: 40088031
May 11, 2020
Page 4 of 4

When responding to this Department regarding this subject matter, kindly refer to F.P. Index # 2003120A and to Igor Chouchereba attention, 9 MetroTech Center #1S-43-K, phone (718) 999-1997.

Very truly yours,

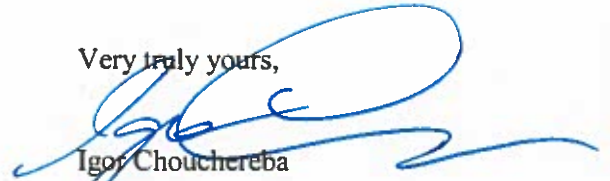

Igor Chouchereba
Supervisor of Electrical Installation, II
Technology Management

c: Trushant Shah, Deputy Director of Engineering, Technology Management.