

CE TEST REPORT

for

Wireless-N PC Card

Model No.: EW-7708Pn / GWA-H08n V1.0

of

Applicant: EDIMAX Technology Co., Ltd.

**Address: NO. 3, Wu-Chuan 3rd RD, Wu-Ku-Industrial Park, Taipei Hsien,
Taiwan. R.O.C.**

**Tested and Prepared
by**



ETS DR. GENZ TAIWAN PS CO., LTD

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679

A2LA Cert.No.: 2300.01

PTCRB Accredited Type Certification Test House



Report No.: W6M20703-7954-T-45

**6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: ets@ets-bzt.com.tw**

TABLE OF CONTENTS

1	General Information	2
1.1	Notes	2
1.2	Testing laboratory	4
1.2.1	Location	4
1.2.2	Details of accreditation status	4
1.3	Details of applicant	4
1.4	Application details	5
1.5	Test item	5
1.5.1	Additional Information	5
1.6	Test standard	6
1.7	Abbreviations	6
1.8	Test configuration	6
2	Technical Test	7
2.1	Summary of test results	7
2.2	Test environment	7
2.3	Test equipment utilized	8
2.4	Test results (enclosure)	10
3	Transmitter parameters	11
3.1	Effective radiated RF power (radiated measurement(e.i.r.p.) subclause 5.7.2.1	11
3.2	Effective radiated RF power (conducted measurement (e.i.r.p.) subclause 5.7.2.2	12
3.3	Peak power density subclause 5.7.3	14
3.4	Frequency range subclause 5.7.4	16
3.5	Spurious emissions subclause 5.7.5	18
3.5.1	Spurious emissions (conducted)	18
3.5.2	Spurious emissions (conducted standby mode) subclause 5.7.5	20
3.5.3	Spurious emissions (radiated) subclause 5.7.5	21
3.5.4	Spurious emissions (radiated standby mode) subclause 5.7.5	24
4	Receiver parameters	25
4.1	Spurious radiations (conducted) subclause 5.7.6	25
4.2	Spurious emissions (radiated) subclause 5.7.6	27

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample, which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the ETS DR. GENZ TAIWAN PS CO., LTD.

Tester:

April 30, 2007

Jay Chaing

Jay Chaing

Date

ETS-Lab.

Name

Signature

Technical responsibility for area of testing:

April 30, 2007

Steven Chuang

Steven Chuang

Date

ETS

Name

Signature

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Shuang Sing Village,
LiShuei Rd., Wanli Township,
Taipei County 207, Taiwan (R.O.C.)

Company

ETS DR. GENZ TAIWAN PS CO., LTD.
6F, NO. 58, LANE 188, RUEY-KUANG RD.
NEIHU, TAIPEI 114, TAIWAN R.O.C.
Tel : 886-2-66068877
Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA-registration number: 2300.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679

PTCRB Accredited Type Certification Test House

1.3 Details of applicant

Name	: EDIMAX Technology Co., Ltd.
Street	: NO. 3, Wu-Chuan 3rd RD, Wu-Ku-Industrial Park
Town	: Taipei Hsien
Country	: Taiwan R.O.C.
Telephone	: +886-2-7739-6888
Fax	: +886-2-7739-6887
Teletex	: ./.

1.4 Application details

Date of receipt of application : March 29, 2007
Date of receipt of test item : April 13, 2007
Date of test : from April 16, 2007 to April 27, 2007

1.5 Test item

Description of test item : Wireless-N PC Card
Type identification : EW-7708Pn / GWA-H08n V1.0
Brand Name : EDIMAX
Frequency range : 2.4 GHz ~ 2.4835 GHz
Tested frequencies : IEEE 802.11b/g, IEEE 802.11n 20MHz: 2.412 GHz ~ 2.472 GHz
: IEEE 802.11n 40MHz: 2.422~2.462 GHz
Type of Antenna : Printed Antenna
Antenna gain of Antenna : 1.0 dBi
Multi-listing model number :

Manufacturer: (if different from applicant)

Name : --
Street : --
Town : --
Country : --

1.5.1 Additional Information

- (1) The provided test sample EW-7708Pn / GWA-H08n V1.0 is be able to work with modulation, DSSS and OFDM.

There are four testing modes in the test report.

Mode A: IEEE 802.11b

Mode B: IEEE 802.11g

Mode C: IEEE 802.11N (Bandwidth 20 MHz)

Mode D: IEEE 802.11N (Bandwidth 40 MHz)

- (2) The test sample EW-7708Pn / GWA-H08n V1.0 was tested in the described test configuration under item **1.8**

1.6 Test standard

EN 300 328 : V 1.7.1 : 2006

1.7 Abbreviations

AC	Alternating Current
DC	Direct Current
ID-Code	Identification Code
I-ETS	Interim European Telecommunication Standard
CFP	Cordless Fix Part
CPP	Cordless Portable Part
AF	Audio Frequency
RF	Radio Frequency
V _{nom}	nominal Operating Voltage
V _{min}	minimum Operating Voltage
V _{max}	maximum Operating Voltage
T _{nom}	nominal Temperature
T _{min}	minimum Temperature
T _{max}	maximum Temperature
dBm	RF-Power, 0 dBm = 1 Milliwatt
dB μ V/m	Field strength in dB relative to 1 μ V/m

1.8 Test configuration

Pos.	Type	Description	
1.	CPU	Intel(R) Pentium(R) M	Processor 1600 MHz
2.	RAM	DDRAM	512MB
3.	Motherboard	FUJITSU	Intel 855GHz +ICH4-M
4.	Hard disk	HITACHI	40G
5.	DVD/CD-ROM	FUJITSU	UJDA750
6.	Monitor	ViewSonic VP171	LVCDS25972-1W
7.	AC Adapter	FUJITSU	SEB80N2-16.0 (range 100VAC~240VAC)
8.	Battery Pack	FUJITSU	FPCBP64
9.	Keyboard	HP	KB-0316
10.	Mouse	HP	265986-002
11.	Cable	all cable inside housing have been installed with split ferrites	

2 Technical Test

2.1 Summary of test results

No deviations from the technical specifications were ascertained in the course of the test performed.

2.2 Test environment

Temperature : 20°C - 25°C

Relative humidity content : 50% - 70%

Air pressure : 990 - 1300 hPa

Details of power supply : 230 VAC

Other parameter : ./.

Extreme conditions parameters:

V_{nom} : 230 V, AC
 V_{min} : 207 V, AC
 V_{max} : 253 V, AC

T_{nom} : 25 °C
 T_{min} : 0 °C
 T_{max} : 55 °C

2.3 Test equipment utilized

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2006/10/16	2007/10/15
ETSTW-CE 002	PREREGULATOR MODE DC POWER SUPPLY	None	None		Function Test	
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2006/10/16	2007/10/15
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2006/10/16	2007/10/15
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	In House Certificate	
ETSTW-CE 008	ABSORBING CLAMP	MDS 21	3469	Schwarzbeck	2005/10/24	2007/10/23
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2006/8/17	2007/8/16
ETSTW-CE 013	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T4-02	20242	FCC	2005/12/8	2007/12/7
ETSTW-CE 014	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T2-02	20241	FCC	2005/12/7	2007/12/6
ETSTW-CE 015	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T8-02	20307	FCC	2006/11/7	2008/11/6
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2006/11/21	2007/11/20
ETSTW-CS 003	COUPLING AND DECOUPLING NETWORK	CDN T400	19820	SCHAFFNER	2005/10/14	2007/10/13
ETSTW-CS 004	COUPLING AND DECOUPLING NETWORK	CDN M016	20053	SCHAFFNER	2006/10/11	2007/10/10
ETSTW-CS 005	RF Power Amplifier	100A250A	306547	AR	2006/10/11	2007/10/10
ETSTW-CS 008	6 dB Attenuator	HFP-5100-3/06 N M/F	2010876106		In House Certificate	
ETSTW-RE 002	Function Generator	33220A	MY43004982	Agilent	2005/10/14	2007/10/13
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2006/10/20	2007/10/19
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2006/10/30	2007/10/29
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2006/10/12	2007/10/11
ETSTW-RE 010	PROGRAMMABLE LINEAR POWER SUPPLY	LPS-305	30503070181	MOTECH	Function Test	
ETSTW-RE 011	PROGRAMMABLE LINEAR POWER SUPPLY	LPS-305	30503070165	MOTECH	Function Test	
ETSTW-RE 017	Log-Periodic Antenna	HL025	352886/001	R&S	2006/5/4	2008/5/3
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2004/11/8	2007/11/7
ETSTW-RE 020	MICROWAVE HORN ANTENNA	AT4002A	306915	AR	Function Test	
ETSTW-RE 021	SWEEP GENERATOR	SWM05	835130/010	R&S	2006/10/11	2007/10/10
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	EMCO	2004/6/30	2007/6/29
ETSTW-RE 028	Log-Periodic Dipole Array Antenna	3148	34429	EMCO	2006/5/26	2008/5/25
ETSTW-RE 029	Biconical Antenna	3109	33524	EMCO	2006/5/26	2008/5/25
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	EMCO	2006/5/3	2008/5/2
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2006/10/11	2007/10/10

ETSTW-RE 033	WaveRunner 6000A Serie Oscilloscope	WAVERUNNER 6100A	LCRY0604P14508	LeCroy	2006/7/27	2007/7/26
ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2005/10/17	2007/10/16
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2007/1/11	2009/1/10
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2006/5/8	2008/5/7
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2006/5/29	2008/5/28
ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2005/3/22	2008/3/21
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2005/5/19	2007/5/18
ETSTW-RE 055	SPECTRUM ANALYZER	FSU-26	200074	R&S	2006/7/28	2007/7/27
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 073	Power Meter	N1911A	MY45100769	Agilent	Function Test	
ETSTW-RE 074	Power Sensor	N1921A	MY45241198	Agilent	Function Test	
ETSTW-EMI 001	HARMONICS 1000	HAR 1000-1P	093	EMC-PARTNER	2006/9/12	2007/9/11
ETSTW-EMS 001	BASELSTRASSE 160 CH-4242 LAUFEN	CN-EFT1000	354	EMC-PARTNER	2004/11/2	2007/11/1
ETSTW-EMS 002	Frequency Converter	YF-6020	308014	T-Power	Function Test	
ETSTW-EMS 003	EMC Immunity Test System	TRA2000IN6	579	EMC-PARTNER	2006/11/8	2007/11/7
ETSTW-EMS 004	ESD Simulator	ESD2000	16	EMC-PARTNER	2006/10/18	2007/10/17
ETSTW-EMS 008	Safety Test Solutions	ELT-400	E-0039	Narda	2005/5/4	2008/5/3
ETSTW-EMS 009	Magnetic Field Antenna	MF1000-1	104	EMC-PARTNER	2004/12/3	2007/12/2
ETSTW-EMS 010	Coupling De-coupling Network	CDN-UTP8	14	EMC-PARTNER	2005/9/1	2008/8/31
ETSTW-EMS 011	Calibration Fixture	F-203I-CF-23MM	451	FCC	2006/7/29	2008/7/28
ETSTW-EMS 012	EM Injection Clamp	F-203I-23MM	476	FCC	2006/7/29	2008/7/28
ETSTW-EMS 014	Digital Thermo-Hygro Meter	0507	02	WISEWIND	2005/11/15	2007/11/14
ETSTW-RS 003	RF Power Amplifier	30S1G3	306933	AR	2006/10/11	2007/10/10
ETSTW-RS 004	RF Power Amplifier	150W1000	307009	AR	2006/10/11	2007/10/10
ETSTW-RS 005	Electric Field Probe Type 8.3	2244/90.21	AF-0016	Narda	2005/9/7	2007/9/6
ETSTW-RS 006	SIGNAL GENERATOR	SML03	101551	R&S	2006/10/9	2007/10/8
ETSTW-RS 007	14" COLOR VIDEO MONITOR	HS-CM145A	0512011548		Function Test	

2.4 Test results (enclosure)

1st test test after modification production test

Test case	Subclause	Required	Test passed	Test failed
<i>TRANSMITTER PARAMETERS</i>				
Effective radiated RF power (e.i.r.p.)	5.7.2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Peak power density	5.7.3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Frequency range	5.7.4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious emissions transmitter operating - conducted	5.7.5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Spurious emissions transmitter operating - radiated	5.7.5	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious emissions transmitter standby - conducted	5.7.5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Spurious emissions transmitter standby - radiated	5.7.5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<i>RECEIVER PARAMETER</i>				
Spurious emissions - conducted	5.7.6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Spurious emissions - radiated	5.7.6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

3 Transmitter parameters

3.1 Effective radiated RF power (radiated measurement(e.i.r.p.) subclause 5.7.2.1

This method shall only be used for integral antenna equipment that does not have a temporary antenna connector provided.

Rated output power: < 20dBm

Test conditions		Transmitter Power (dBm) Peak Power	
		lowest frequency Channel 1	highest frequency Channel 13
$T_{nom} = \text{-- } ^\circ\text{C}$	$V_{nom} = \text{-- } \text{V AC}$	--	--
$T_{min} = \text{-- } ^\circ\text{C}$	$V_{min} = \text{-- } \text{V AC}$	--	--
	$V_{max} = \text{-- } \text{V AC}$	--	--
$T_{max} = \text{-- } ^\circ\text{C}$	$V_{min} = \text{-- } \text{V AC}$	--	--
	$V_{max} = \text{-- } \text{V AC}$	--	--
Measurement uncertainty		<±1.5dB	

Limits: subclause 4.3.1.2

Under all test conditions	$\leq -10 \text{ dBW (100 mW) e.i.r.p.}$
---------------------------	--

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 017, ETSTW-RE 021, ETSTW-RE 030, ETSTW-RE 044

Comment: According to EN 300 328 V1.7.1(2006-10) subclause 5.4.1, it states that "Radiated RF power measurements are imprecise and therefore conducted measurements are recommended.". And the applicant provided a suitable connector for conducted RF power measurements therefore this test is not applicable.

3.2 Effective radiated RF power (conducted measurement (e.i.r.p.) subclause 5.7.2.2

This measurement shall be performed using normal operation of the equipment with the test modulation applied. In case of conducted measurements on smart antenna systems (devices with multiple transmit chains) a power splitter/combiner shall be used to combine all the transmit chains (antenna outputs) into a single test point. The insertion loss of the power splitter/combiner shall be taken into account.

Rated output power: < 20 dBm Antenna gain: 1 dBi
 This test result should be less than 19 dBm (rated output power – antenna gain)

Mode A

Test conditions		Transmitter Power (dBm) Peak Detector		
		lowest frequency Channel 1	centre frequency Channel 7	highest frequency Channel 13
$T_{nom} = 25^{\circ}C$	$V_{nom} = 230 \text{ V AC}$	18.55	17.70	15.89
$T_{min} = 0^{\circ}C$	$V_{min} = 207 \text{ V AC}$	18.94	18.08	16.25
	$V_{max} = 253 \text{ V AC}$	18.92	18.03	16.20
$T_{max} = 55^{\circ}C$	$V_{min} = 207 \text{ V AC}$	18.71	17.62	15.71
	$V_{max} = 253 \text{ V AC}$	18.56	17.69	15.86
Measurement uncertainty		<±1.5dB		

Mode B

Test conditions		Transmitter Power (dBm) Peak Detector		
		lowest frequency Channel 1	centre frequency Channel 7	highest frequency Channel 13
$T_{nom} = 25^{\circ}C$	$V_{nom} = 230 \text{ V AC}$	17.32	15.22	13.73
$T_{min} = 0^{\circ}C$	$V_{min} = 207 \text{ V AC}$	17.71	15.67	14.22
	$V_{max} = 253 \text{ V AC}$	17.72	15.67	14.12
$T_{max} = 55^{\circ}C$	$V_{min} = 207 \text{ V AC}$	17.30	15.24	13.82
	$V_{max} = 253 \text{ V AC}$	17.24	15.28	13.71
Measurement uncertainty		<±1.5dB		

Mode C

Test conditions		Transmitter Power (dBm) Peak Detector		
		lowest frequency Channel 1	centre frequency Channel 7	highest frequency Channel 13
$T_{nom} = 25^{\circ}C$	$V_{nom} = 230 \text{ V AC}$	18.29	16.91	15.12
$T_{min} = 0^{\circ}C$	$V_{min} = 207 \text{ V AC}$	18.70	17.28	15.46
	$V_{max} = 253 \text{ V AC}$	18.75	17.41	15.49
$T_{max} = 55^{\circ}C$	$V_{min} = 207 \text{ V AC}$	18.44	17.03	15.08
	$V_{max} = 253 \text{ V AC}$	18.31	16.97	15.15
Measurement uncertainty		<±1.5dB		

Mode D

Test conditions		Transmitter Power (dBm) Peak Detector		
		lowest frequency Channel 1	centre frequency Channel 5	highest frequency Channel 9
$T_{nom} = 25^{\circ}C$	$V_{nom} = 230 \text{ V AC}$	18.70	18.11	15.30
$T_{min} = 0^{\circ}C$	$V_{min} = 207 \text{ V AC}$	18.87	18.45	15.74
	$V_{max} = 253 \text{ V AC}$	18.86	18.58	15.79
$T_{max} = 55^{\circ}C$	$V_{min} = 207 \text{ V AC}$	18.85	18.25	15.39
	$V_{max} = 253 \text{ V AC}$	18.97	18.15	15.43
Measurement uncertainty		<±1.5dB		

Limits: subclause 4.3.1.2

Under all test conditions	$\leq -10 \text{ dBW (100 mW) e.i.r.p.}$
---------------------------	--

Test equipment used: ETSTW-RE 073, ETSTW-RE 074

Comment: See attached diagrams in the Appendix.

3.3 Peak power density

subclause 5.7.3

The maximum e.i.r.p. spectral density is defined as the highest e.i.r.p. level in Watts per Hertz generated by the transmitter within the power envelope.

Rated radiated power < 10 dBm/ 1MHz

Mode A

Tests	Measured Power Density		
	Channel 1	Channel 7	Channel 13
Measured power density(dBm)	1.50	1.68	0.32
Measured frequency (GHz)	2.414179487	2.444174679	2.469612179
Measurement uncertainty	<±3dB		

Mode B

Tests	Measured Power Density		
	Channel 1	Channel 7	Channel 13
Measured power density(dBm)	-1.93	-2.02	-2.82
Measured frequency (GHz)	2.405397436	2.449366987	2.479158654
Measurement uncertainty	<±3dB		

Mode C

Tests	Measured Power Density		
	Channel 1	Channel 7	Channel 13
Measured power density(dBm)	-2.25	-2.13	-3.24
Measured frequency (GHz)	2.419049679	2.434482372	2.464599359
Measurement uncertainty	<±3dB		

Mode D

Tests	Measured Power Density		
	Channel 1	Channel 5	Channel 9
Measured power density(dBm)	-6.07	-6.07	-6.72
Measured frequency (GHz)	2.415953526	2.436073718	2.452089744
Measurement uncertainty	<±3dB		

Limits: subclause 4.3.2.2

Under normal test Conditions only	-20dBW/1 MHz 10dBm/1 MHz
--------------------------------------	-----------------------------

Is Tx on Time < 10 microseconds ? : No

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 055

3.4 Frequency range

subclause 5.7.4

These measurements shall be performed under both normal and extreme test conditions.

Mode A

Test Conditions		Frequency (GHz) at a level of -30 dBm (measured in a 100kHz bandwidth)	
		Lowest value of f_L	Highest value of f_H
$T_{nom}= 25^{\circ}C$	$V_{nom}= 230$ V AC	2.402788462	2.481096154
$T_{min}= 0^{\circ}C$	$V_{min}= 207$ V AC	2.402788462	2.481192308
	$V_{max}= 253$ V AC	2.402788462	2.481192308
$T_{max}= 55^{\circ}C$	$V_{min}= 207$ V AC	2.402788462	2.481096154
	$V_{max}= 253$ V AC	2.402788462	2.481000000
Max measured frequencies (GHz)		2.402788462	2.481192308
Measurement uncertainty		$< \pm 10^{-5}$	

Mode B

Test Conditions		Frequency (GHz) at a level of -30 dBm (measured in a 100kHz bandwidth)	
		Lowest value of f_L	Highest value of f_H
$T_{nom}= 25^{\circ}C$	$V_{nom}= 230$ V AC	2.402788462	2.481000000
$T_{min}= 0^{\circ}C$	$V_{min}= 207$ V AC	2.402788462	2.481096154
	$V_{max}= 253$ V AC	2.402788462	2.481000000
$T_{max}= 55^{\circ}C$	$V_{min}= 207$ V AC	2.402884615	2.480903846
	$V_{max}= 253$ V AC	2.402884615	2.480903846
Max measured frequencies (GHz)		2.402788462	2.481096154
Measurement uncertainty		$< \pm 10^{-5}$	

Mode C

Test Conditions		Frequency (GHz) at a level of -30 dBm (measured in a 100kHz bandwidth)	
		Lowest value of f_L	Highest value of f_H
$T_{nom} = 25^\circ C$	$V_{nom} = 230$ V AC	2.402596154	2.481288462
$T_{min} = 0^\circ C$	$V_{min} = 207$ V AC	2.402500000	2.481288462
	$V_{max} = 253$ V AC	2.402596154	2.481288462
$T_{max} = 55^\circ C$	$V_{min} = 207$ V AC	2.402692308	2.481288462
	$V_{max} = 253$ V AC	2.402692308	2.481288462
Max measured frequencies (GHz)		2.402500000	2.481288462
Measurement uncertainty		$< \pm 10^{-5}$	

Mode D

Test Conditions		Frequency (GHz) at a level of -30 dBm (measured in a 100kHz bandwidth)	
		Lowest value of f_L	Highest value of f_H
$T_{nom} = 25^\circ C$	$V_{nom} = 230$ V AC	2.403461538	2.480615385
$T_{min} = 0^\circ C$	$V_{min} = 207$ V AC	2.403461538	2.480615385
	$V_{max} = 253$ V AC	2.403461538	2.480615385
$T_{max} = 55^\circ C$	$V_{min} = 207$ V AC	2.403461538	2.480423077
	$V_{max} = 253$ V AC	2.403461538	2.480519231
Max measured frequencies (GHz)		2.403461538	2.480615385
Measurement uncertainty		$< \pm 10^{-5}$	

Limits: subclause 4.3.3.2

Under all test conditions	$f_{Low} > 2400$ MHz, $f_{High} < 2483.5$ MHz
---------------------------	---

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 055

3.5 Spurious emissions

subclause 5.7.5

3.5.1 Spurious emissions (conducted)

Transmitter operating

Mode A

Lowest Frequency 2412 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	--
200 MHz - 1 GHz	0.1	--
1 GHz - 4 GHz	0.1	--
4 GHz - 8 GHz	0.1	--
8 GHz - 12.75 GHz	0.1	--
Measurement uncertainty	<±3dB	

Highest Frequency 2472 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	--
200 MHz - 1 GHz	0.1	--
1 GHz - 4 GHz	0.1	--
4 GHz - 8 GHz	0.1	--
8 GHz - 12.75 GHz	0.1	--
Measurement uncertainty	<±3dB	

Mode B

Lowest Frequency 2412 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	--
200 MHz - 1 GHz	0.1	--
1 GHz - 4 GHz	0.1	--
4 GHz - 8 GHz	0.1	--
8 GHz - 12.75 GHz	0.1	--
Measurement uncertainty	<±3dB	

Highest Frequency 2472 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	--
200 MHz - 1 GHz	0.1	--
1 GHz - 4 GHz	0.1	--
4 GHz - 8 GHz	0.1	--
8 GHz - 12.75 GHz	0.1	--
Measurement uncertainty	<±3dB	

Limits: subclause 4.3.4.2

Frequency Range	Limit when operating	Limit when in standby
30 MHz to 1 GHz	-36 dBm	-57 dBm
Above 1 GHz to 12,75 GHz	-30 dBm	-47 dBm
1,8 GHz to 1,9 GHz 5,15 GHz to 5,3 GHz	-47 dBm	-47 dBm

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 055

Comment: This test is not applicable.

3.5.2 Spurious emissions (conducted standby mode)

subclause 5.7.5

Transmitter operating

Lowest Frequency

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	--	--
200 MHz - 1 GHz	--	--
1 GHz - 4 GHz	--	--
4 GHz - 8 GHz	--	--
8 GHz - 12.75 GHz	--	--
Measurement uncertainty	<±3dB	

Highest Frequency

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	--	--
200 MHz - 1 GHz	--	--
1 GHz - 4 GHz	--	--
4 GHz - 8 GHz	--	--
8 GHz - 12.75 GHz	--	--
Measurement uncertainty	<±3dB	

Limits: subclause 4.3.4.2

Frequency Range	Limit when operating	Limit when standby
30 MHz to 1 GHz	-36 dBm	-57 dBm
1 GHz to 12,75 GHz	-30 dBm	-47 dBm
1,8 GHz to 1,9 GHz 5,15 GHz to 5,3 GHz	-47 dBm	-47 dBm

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 055

Comment: This test is not applicable.

3.5.3 Spurious emissions (radiated)

subclause 5.7.5

Transmitter part

Mode A

Operating frequency 2412 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz – 200 MHz	0.1	-66.37
200 MHz – 1 GHz	0.1	-63.91
1 GHz - 4 GHz	0.1	-42.60
4 GHz - 8 GHz	0.1	-31.88
8 GHz - 12.75 GHz	0.1	-35.26
Measurement uncertainty	<±6dB	

Operating frequency 2472 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	-65.88
200 MHz - 1 GHz	0.1	-62.66
1 GHz - 4 GHz	0.1	-43.95
4 GHz - 8 GHz	0.1	-32.17
8 GHz - 12.75 GHz	0.1	-34.56
Measurement uncertainty	<±6dB	

Mode B

Operating frequency 2412 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz – 200 MHz	0.1	-65.41
200 MHz – 1 GHz	0.1	-64.02
1 GHz - 4 GHz	0.1	-41.90
4 GHz - 8 GHz	0.1	-32.12
8 GHz - 12.75 GHz	0.1	35.26
Measurement uncertainty	<±6dB	

Operating frequency 2472 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	-65.52
200 MHz - 1 GHz	0.1	-64.06
1 GHz - 4 GHz	0.1	-41.33
4 GHz - 8 GHz	0.1	-32.10
8 GHz - 12.75 GHz	0.1	-35.14
Measurement uncertainty	<±6dB	

Mode C

Operating frequency 2412 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz – 200 MHz	0.1	-65.93
200 MHz – 1 GHz	0.1	-59.15
1 GHz - 4 GHz	0.1	-37.31
4 GHz - 8 GHz	0.1	-34.07
8 GHz - 12.75 GHz	0.1	-35.21
Measurement uncertainty	<±6dB	

Operating frequency 2472 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	-65.17
200 MHz - 1 GHz	0.1	-62.18
1 GHz - 4 GHz	0.1	-41.77
4 GHz - 8 GHz	0.1	-33.47
8 GHz - 12.75 GHz	0.1	-35.88
Measurement uncertainty	<±6dB	

Mode D

Operating frequency 2422 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz – 200 MHz	0.1	-65.87
200 MHz – 1 GHz	0.1	-65.52
1 GHz - 4 GHz	0.1	-36.84
4 GHz - 8 GHz	0.1	-32.43
8 GHz - 12.75 GHz	0.1	-34.70
Measurement uncertainty	<±6dB	

Operating frequency 2462 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	-66.66
200 MHz - 1 GHz	0.1	-65.26
1 GHz - 4 GHz	0.1	-47.74
4 GHz - 8 GHz	0.1	-34.17
8 GHz - 12.75 GHz	0.1	-35.27
Measurement uncertainty	<±6dB	

Limits: subclause 4.3.4.2

Frequency Range	Limits narrowband operating	Limits wideband operating
30 MHz to 1 GHz	-36 dBm	-57 dBm
1 GHz to 12,75 GHz	-30 dBm	-47 dBm
1,8 GHz to 1,9 GHz 5,15 GHz to 5,3 GHz	-47 dBm	-47 dBm

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 017, ETSTW-RE 021,
ETSTW-RE 028, ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 042,
ETSTW-RE 043, ETSTW-RE 044

Comment: See attached diagrams in the Appendix.

3.5.4 Spurious emissions (radiated standby mode)

subclause 5.7.5

Transmitter operating

Lowest Frequency

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	--	--
200 MHz - 1 GHz	--	--
1 GHz - 4 GHz	--	--
4 GHz - 8 GHz	--	--
8 GHz - 12.75 GHz	--	--
Measurement uncertainty	<±3dB	

Highest Frequency

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	--	--
200 MHz - 1 GHz	--	--
1 GHz - 4 GHz	--	--
4 GHz - 8 GHz	--	--
8 GHz - 12.75 GHz	--	--
Measurement uncertainty	<±3dB	

Limits: subclause 4.3.4.2

Frequency Range	Limit when operating	Limit when standby
30 MHz to 1 GHz	-36 dBm	-57 dBm
1 GHz to 12,75 GHz	-30 dBm	-47 dBm
1,8 GHz to 1,9 GHz 5,15 GHz to 5,3 GHz	-47 dBm	-47 dBm

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 055

Comment: This test is not applicable.

4 Receiver parameters

4.1 Spurious radiations (conducted)

subclause 5.7.6

Receiver Part

Mode A

Lowest Frequency 2412 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	--
200 MHz - 1 GHz	0.1	--
1 GHz - 4 GHz	0.1	--
4 GHz - 8 GHz	0.1	--
8 GHz - 12.75 GHz	0.1	--
Measurement uncertainty	<±3dB	

Highest Frequency 2472 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	--
200 MHz - 1 GHz	0.1	--
1 GHz - 4 GHz	0.1	--
4 GHz - 8 GHz	0.1	--
8 GHz - 12.75 GHz	0.1	--
Measurement uncertainty	<±3dB	

Mode B

Lowest Frequency 2412 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	--
200 MHz - 1 GHz	0.1	--
1 GHz - 4 GHz	0.1	--
4 GHz - 8 GHz	0.1	--
8 GHz - 12.75 GHz	0.1	--
Measurement uncertainty	<±3dB	

Highest Frequency 2472 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	--
200 MHz - 1 GHz	0.1	--
1 GHz - 4 GHz	0.1	--
4 GHz - 8 GHz	0.1	--
8 GHz - 12.75 GHz	0.1	--
Measurement uncertainty	<±3dB	

Limits: subclause 4.3.5.2

Frequency Range	Limits narrowband	Limits wideband
30 MHz to 1 GHz	-57 dBm/Hz	-107 dBm/Hz
1 GHz to 12,75 GHz	-47 dBm/Hz	-97 dBm/Hz

Test equipment used: ETSTW-RE 003 ETSTW-RE 004 ETSTW-RE 055

Comment: This test is not applicable.

4.2 Spurious emissions (radiated)

subclause 5.7.6

Receiver Part

Mode A

Operating frequency 2412 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	-65.09
200 MHz - 1 GHz	0.1	-63.33
1 GHz - 4 GHz	0.1	-49.51
4 GHz - 8 GHz	0.1	-48.52
8 GHz - 12.75 GHz	0.1	-50.14
Measurement uncertainty	<±6dB	

Operating frequency 2472 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	-63.82
200 MHz - 1 GHz	0.1	-63.93
1 GHz - 4 GHz	0.1	-49.14
4 GHz - 8 GHz	0.1	-48.55
8 GHz - 12.75 GHz	0.1	-50.21
Measurement uncertainty	<±6dB	

Mode B

Operating frequency 2412 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	-65.49
200 MHz - 1 GHz	0.1	-63.05
1 GHz - 4 GHz	0.1	-49.37
4 GHz - 8 GHz	0.1	-48.65
8 GHz - 12.75 GHz	0.1	-50.17
Measurement uncertainty	<±6dB	

Operating frequency 2472 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	-63.74
200 MHz - 1 GHz	0.1	-65.36
1 GHz - 4 GHz	0.1	-49.29
4 GHz - 8 GHz	0.1	-48.52
8 GHz - 12.75 GHz	0.1	-50.08
Measurement uncertainty	<±6dB	

Mode C

Operating frequency 2412 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	-64.33
200 MHz - 1 GHz	0.1	-61.74
1 GHz - 4 GHz	0.1	-49.36
4 GHz - 8 GHz	0.1	-48.50
8 GHz - 12.75 GHz	0.1	-50.17
Measurement uncertainty	<±6dB	

Operating frequency 2472 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	-65.39
200 MHz - 1 GHz	0.1	-64.15
1 GHz - 4 GHz	0.1	-49.08
4 GHz - 8 GHz	0.1	-48.51
8 GHz - 12.75 GHz	0.1	-50.16
Measurement uncertainty	<±6dB	

Mode D

Operating frequency 2422 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	-65.29
200 MHz - 1 GHz	0.1	-63.79
1 GHz - 4 GHz	0.1	-48.77
4 GHz - 8 GHz	0.1	-48.51
8 GHz - 12.75 GHz	0.1	-49.84
Measurement uncertainty	<±6dB	

Operating frequency 2462 MHz

Frequency (MHz)	Measurement Bandwidth (MHz)	Spurious Emission Level (dBm)
30 MHz - 200 MHz	0.1	-64.35
200 MHz - 1 GHz	0.1	-64.88
1 GHz - 4 GHz	0.1	-50.21
4 GHz - 8 GHz	0.1	-48.54
8 GHz - 12.75 GHz	0.1	-49.07
Measurement uncertainty	<±6dB	

Limits: subclause 4.3.5.2

Frequency Range	Limits narrowband	Limits wideband
30 MHz to 1 GHz	-57 dBm/Hz	-107 dBm/Hz
1 GHz to 12,75 GHz	-47 dBm/Hz	-97 dBm/Hz

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 017, ETSTW-RE 021,
 ETSTW-RE 028, ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 042,
 ETSTW-RE 043, ETSTW-RE 044

Comment: See attached diagrams in the Appendix.

Appendix

Measurement diagrams


Radiated spurious emission

(The measurement diagrams plots attached below are preliminary wideband scan with a peak detector for reference only. The final test results are listed on section 3.5.3 and section 4.2)

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:199.649MHz Pmax:-66.46dBm RBW: 100 kHz

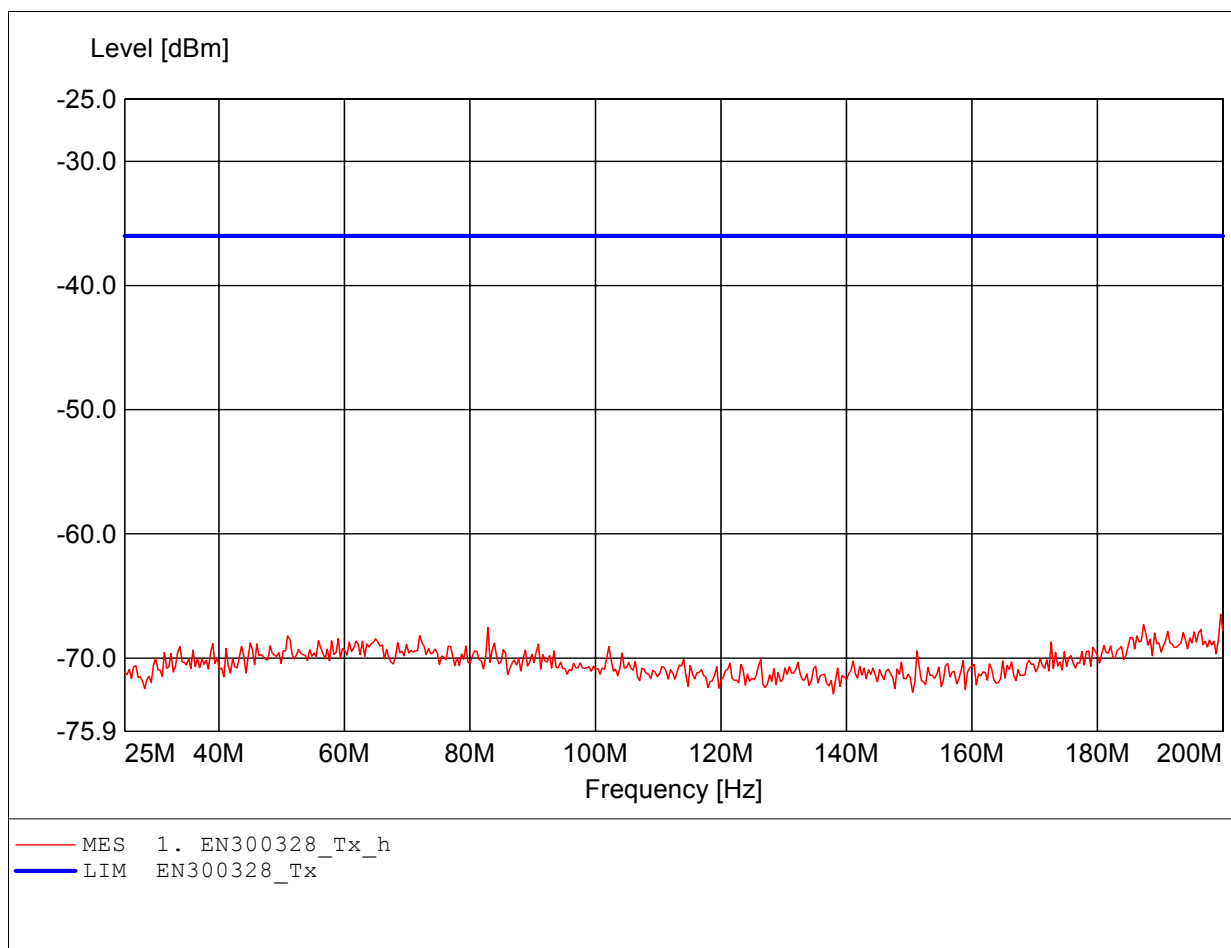

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:187.375MHz Pmax:-66.59dBm RBW: 100 kHz

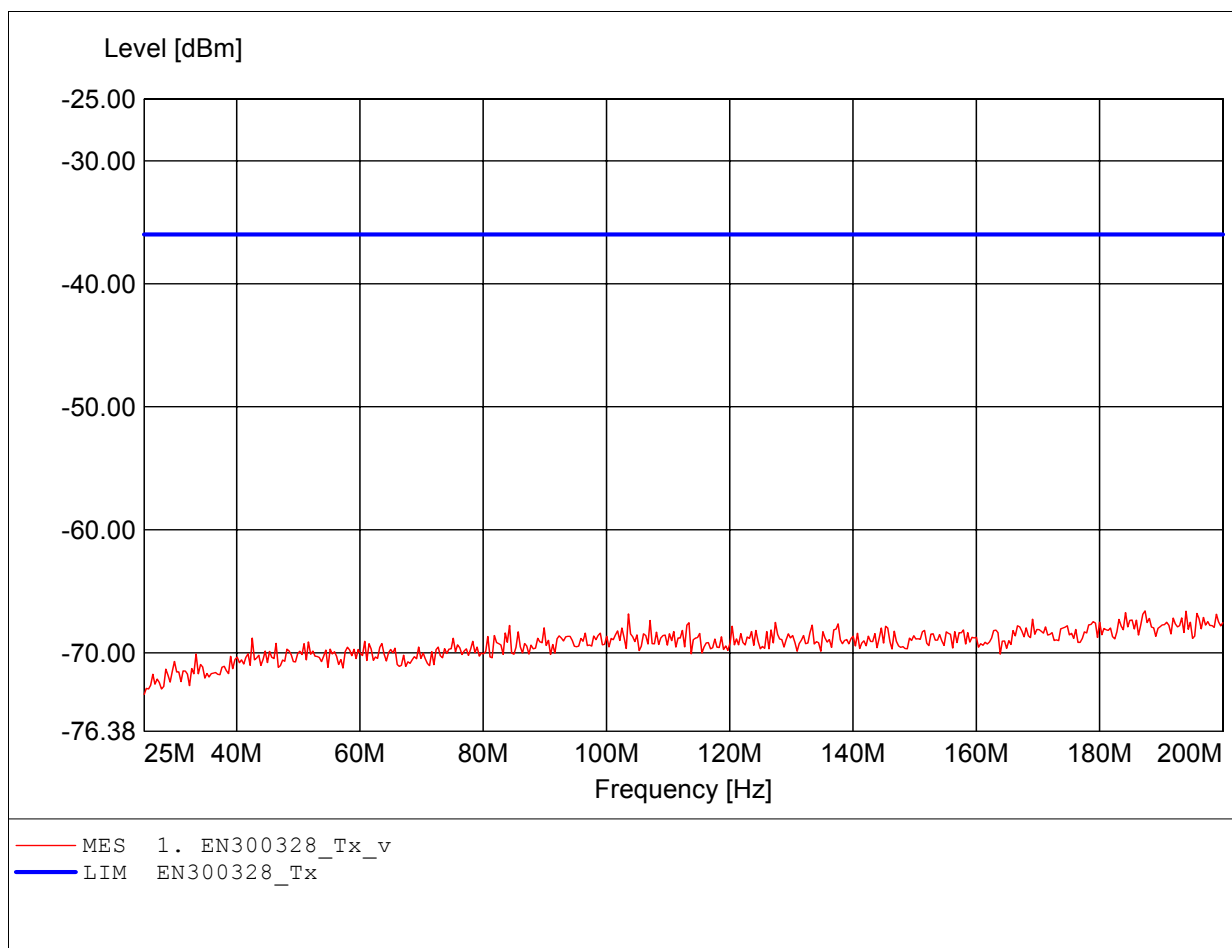

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:913.427MHz Pmax:-64.99dBm RBW: 100 kHz

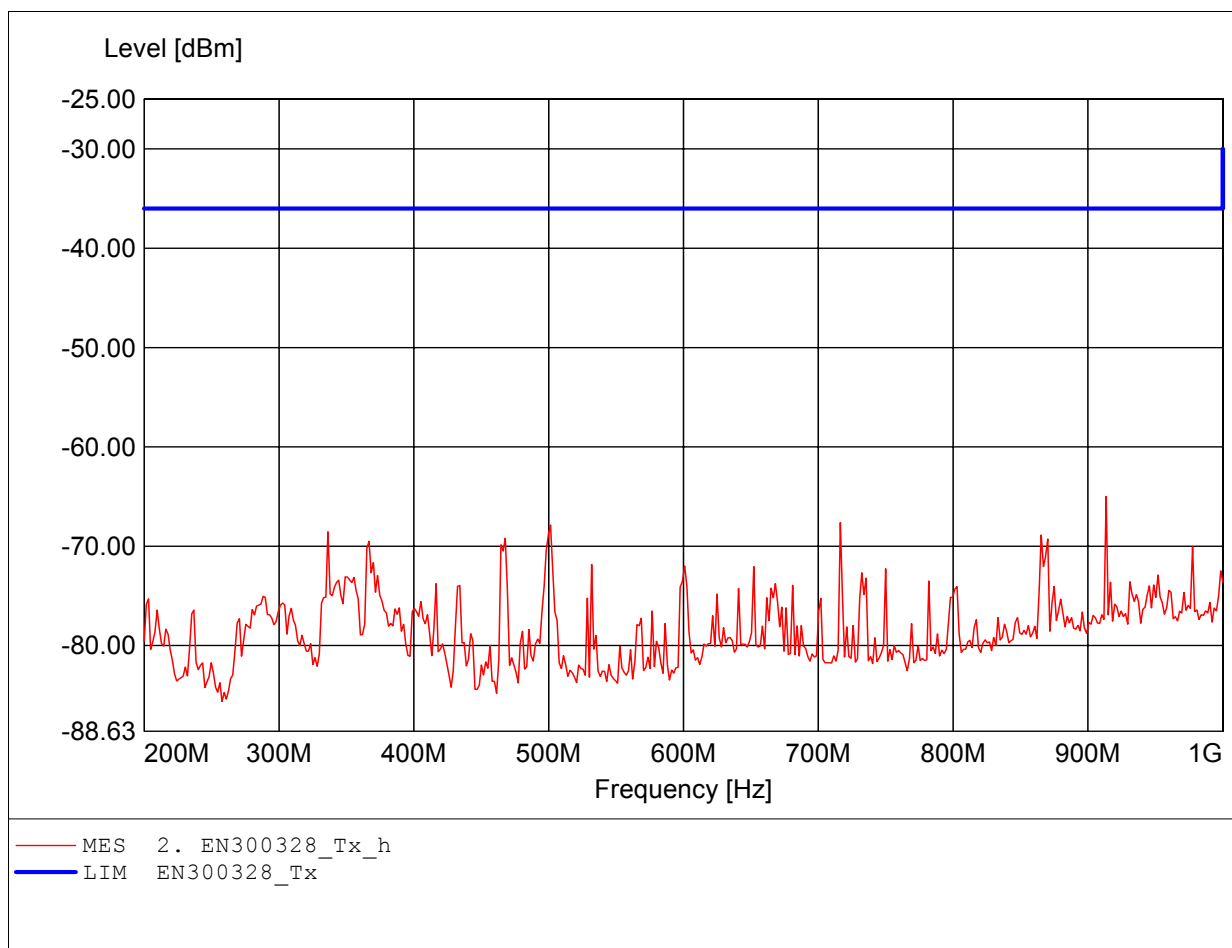

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:781.964MHz Pmax:-64.05dBm RBW: 100 kHz

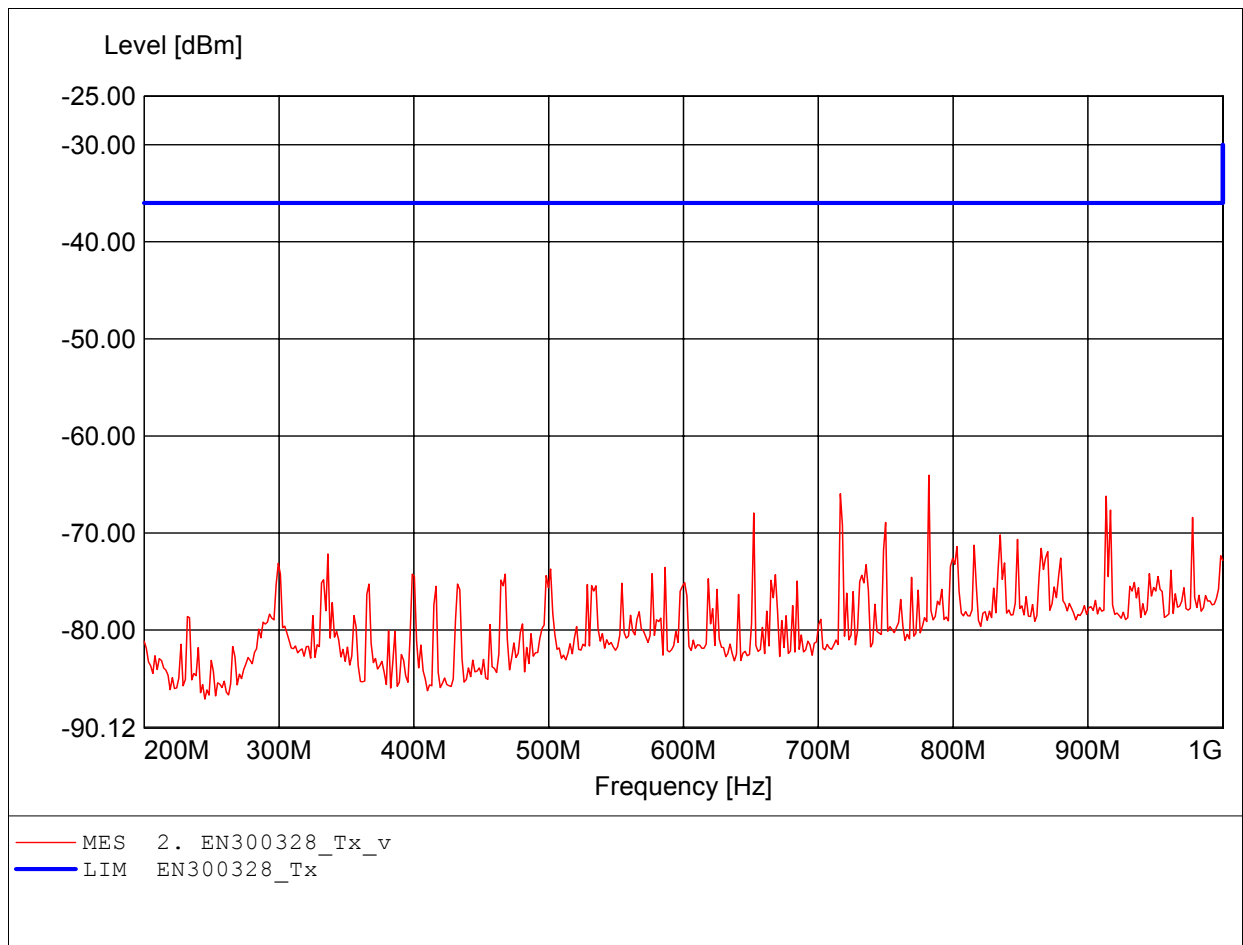

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:2.374GHz Pmax:-42.69dBm RBW: 100 kHz

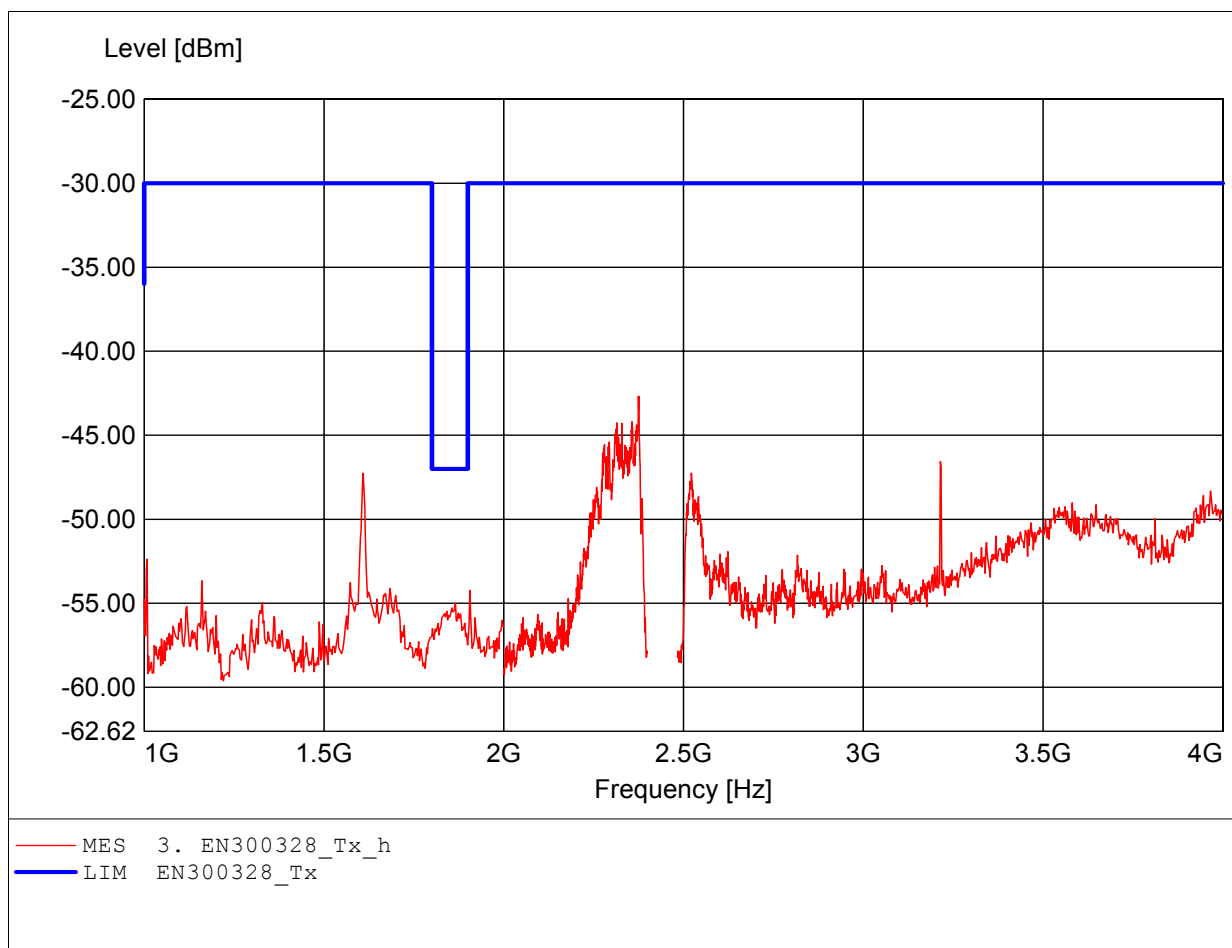

Spurious emissions under normal conditions


in accordance to the EN 300 328

Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:3.547GHz Pmax:-48.58dBm RBW: 100 kHz

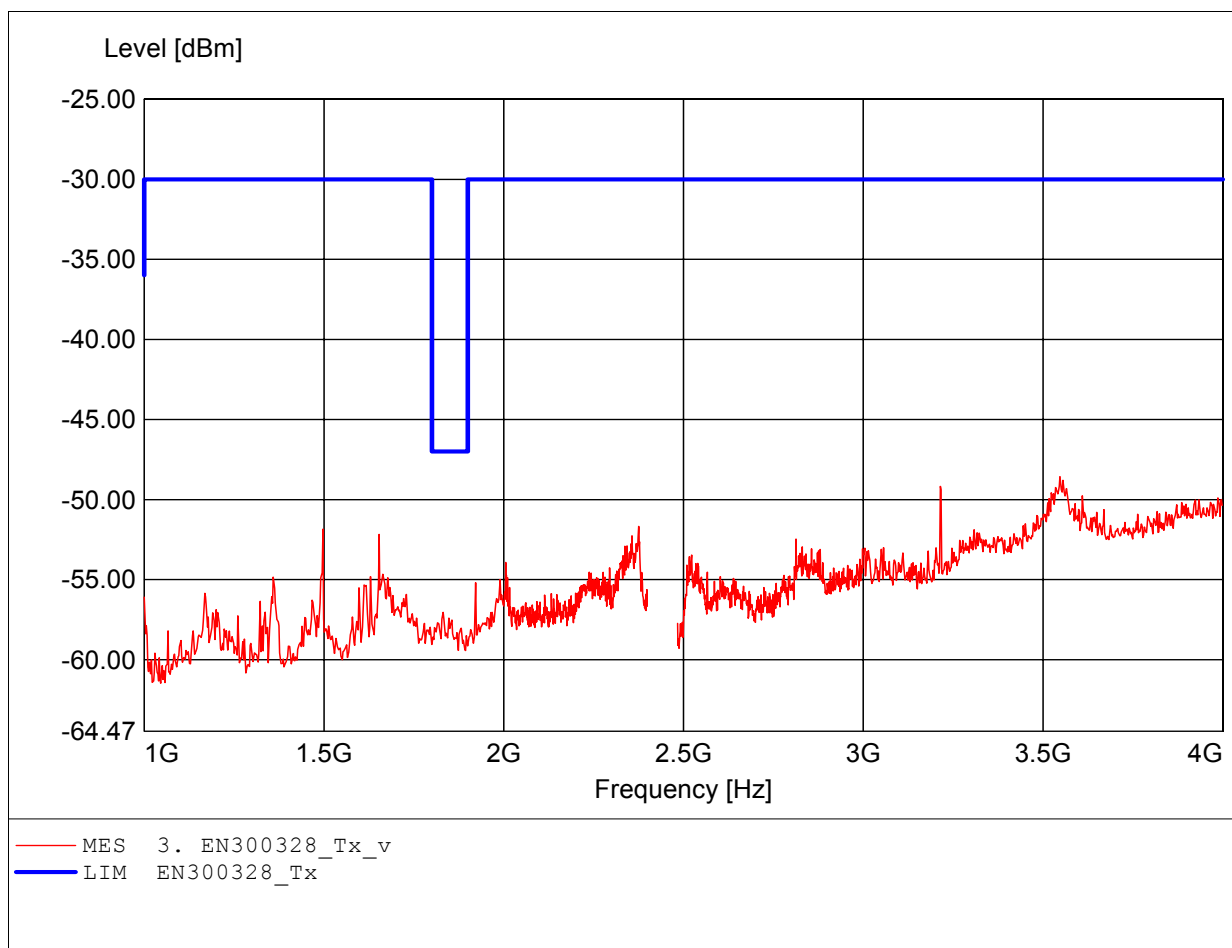


Spurious emissions under normal conditions
in accordance to the EN 300 328

Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:6.437GHz Pmax:-32.95dBm RBW: 100 kHz

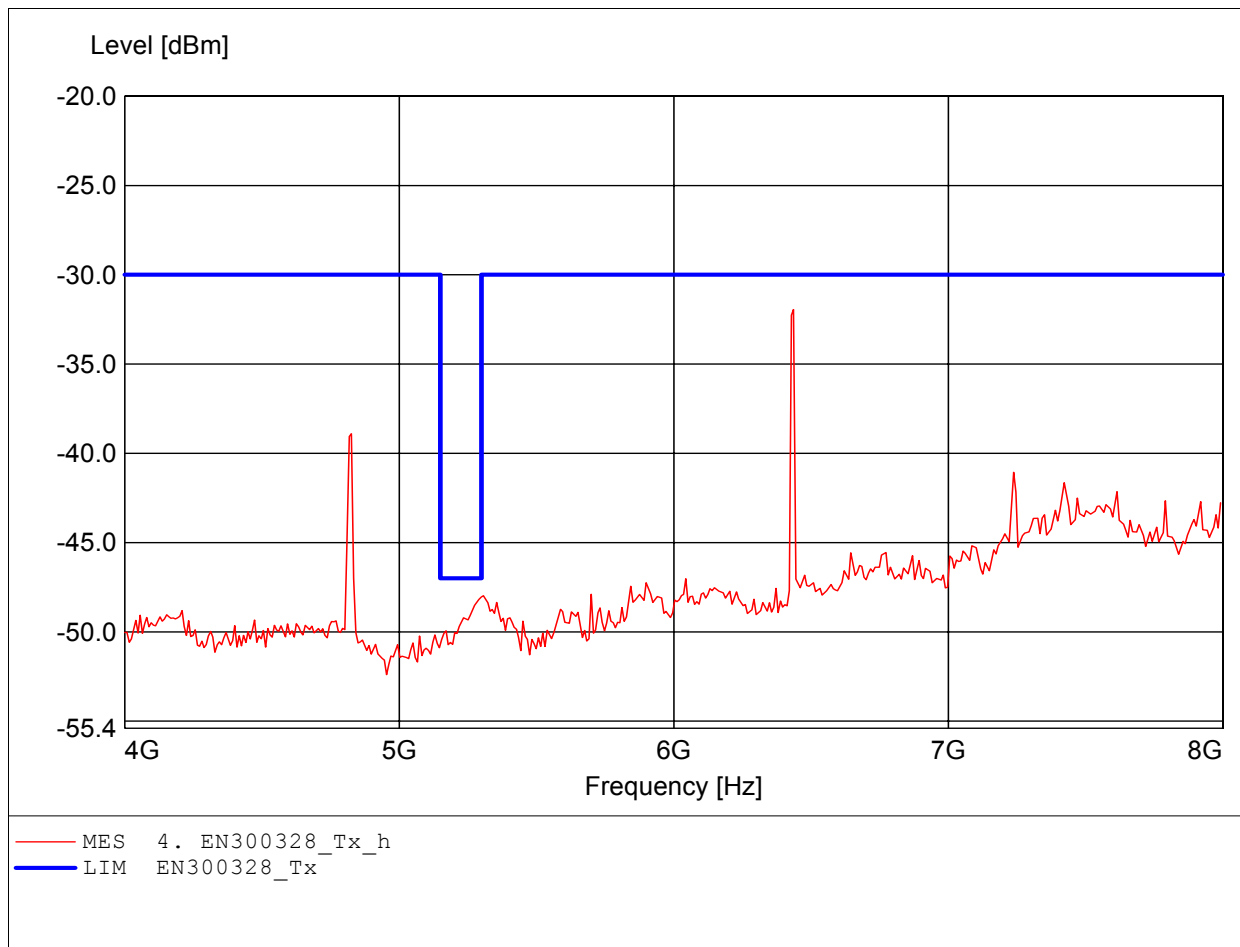

Spurious emissions under normal conditions
in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:6.429GHz Pmax:-31.94dBm RBW: 100 kHz

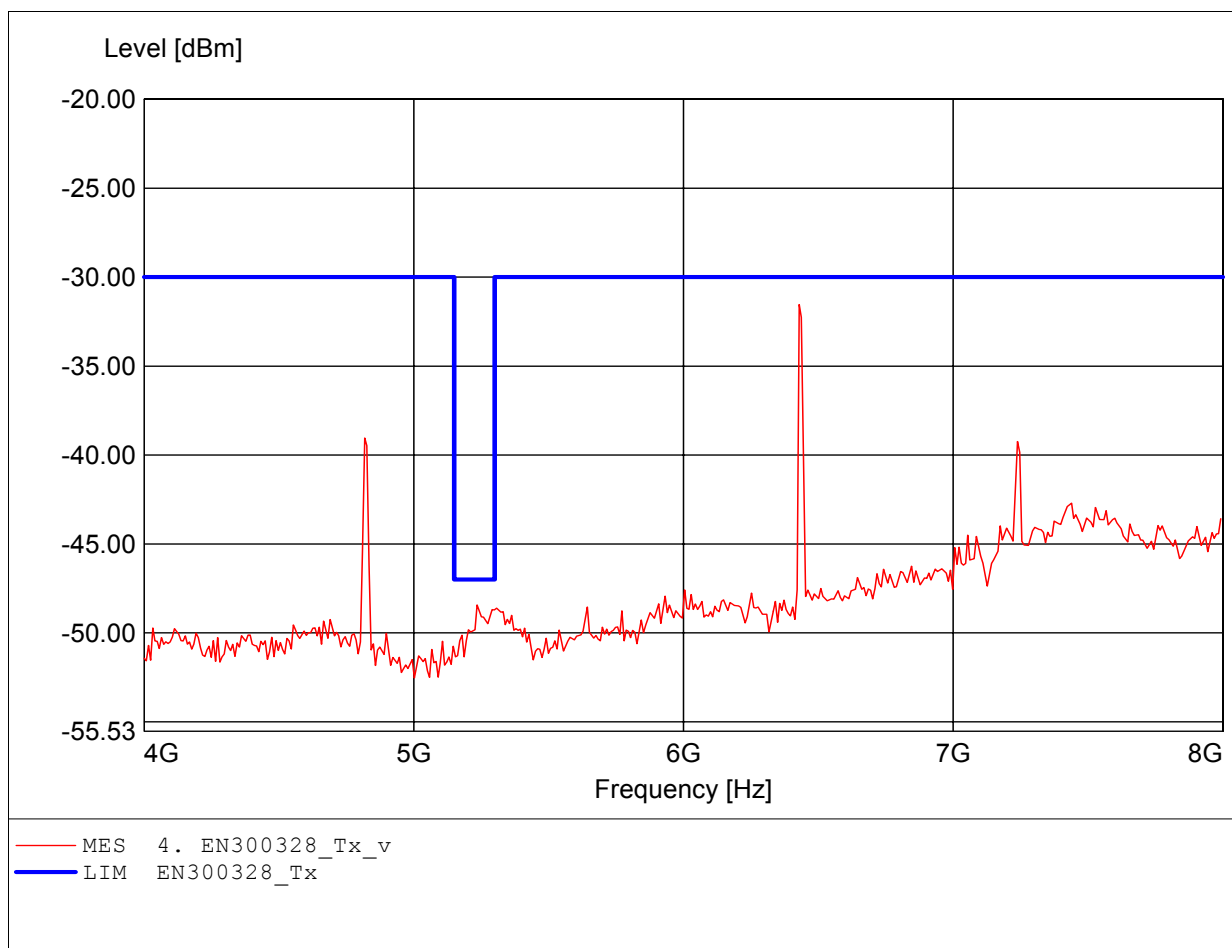

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.217GHz Pmax:-35.35dBm RBW: 100 kHz

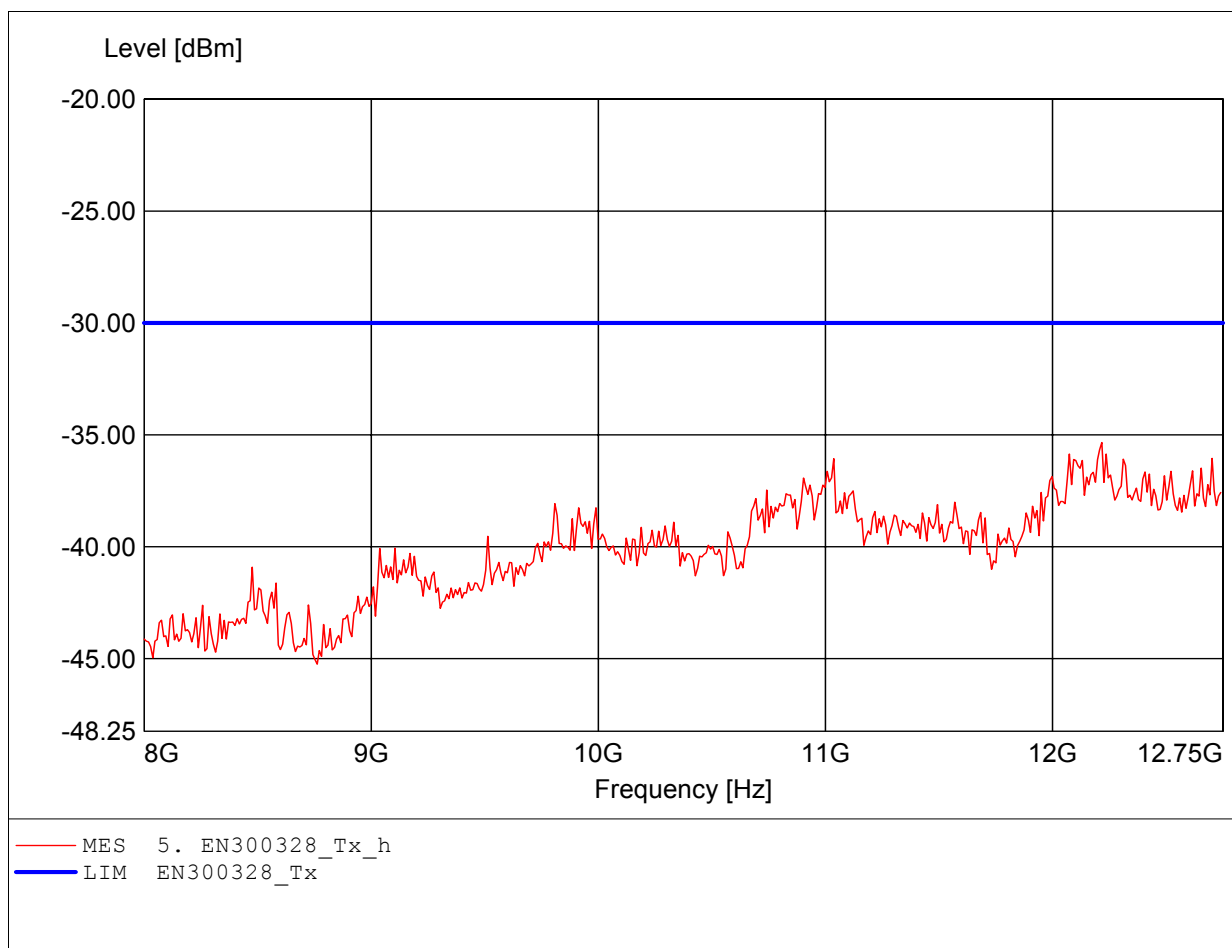

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.112GHz Pmax:-34.58dBm RBW: 100 kHz

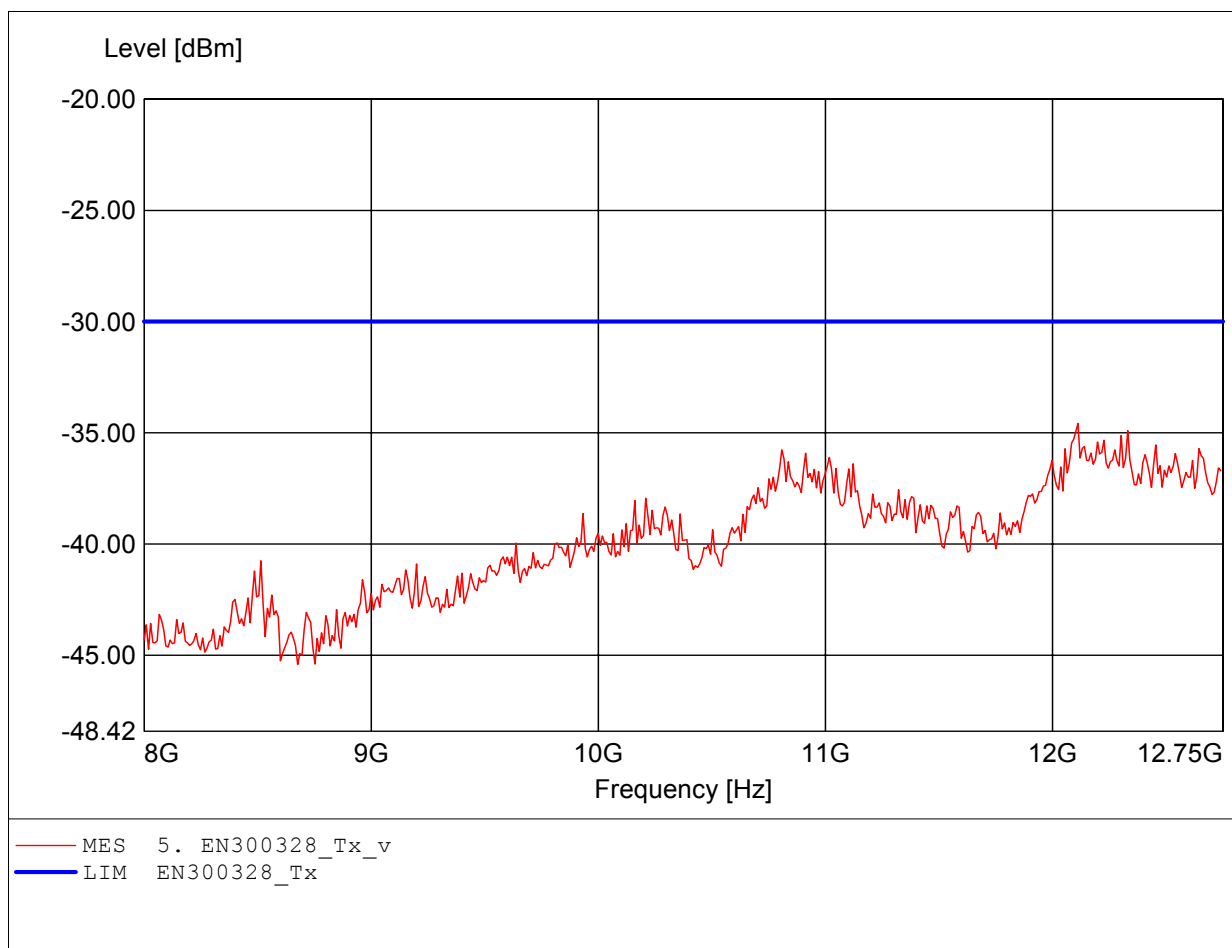

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:194.038MHz Pmax:-67.55dBm RBW: 100 kHz

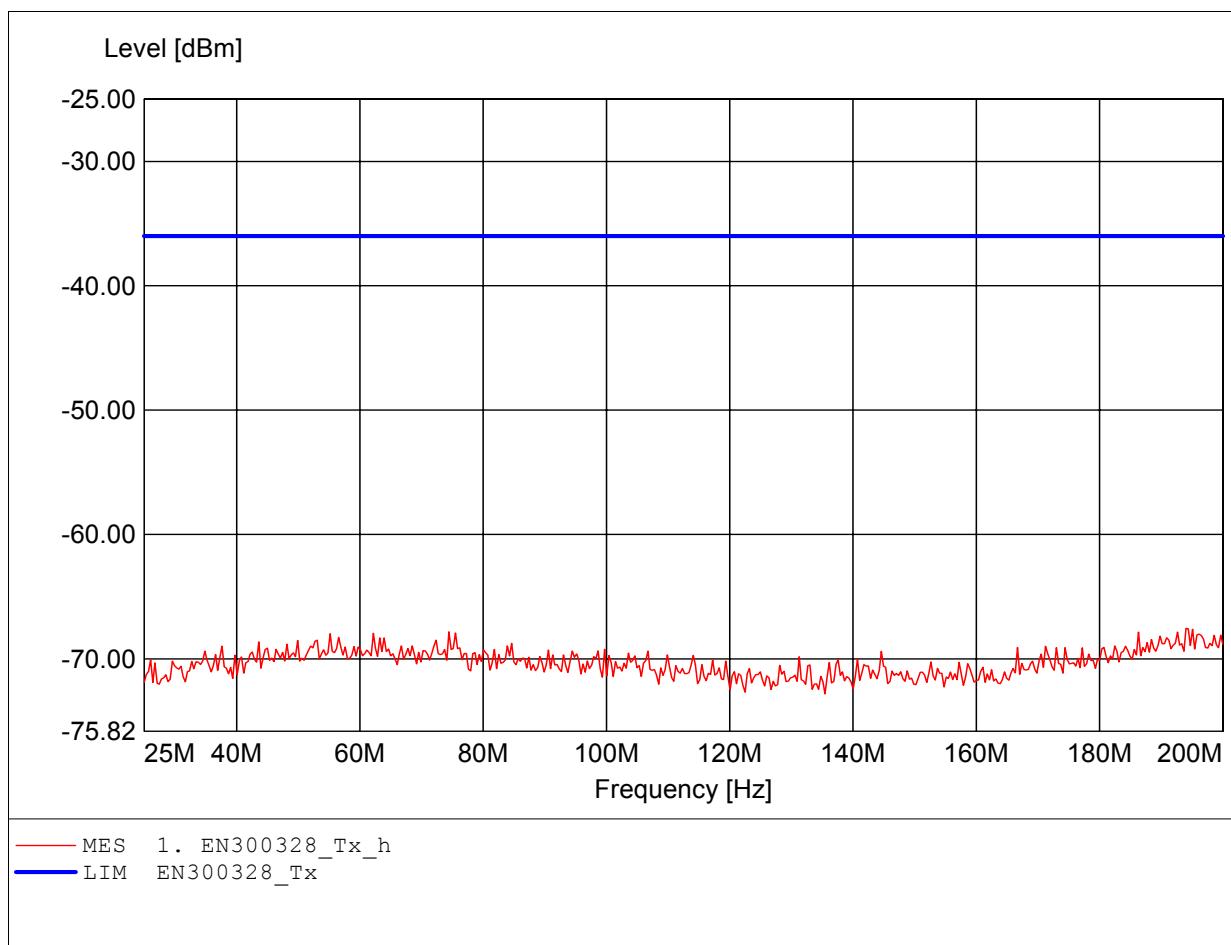

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:200.000MHz Pmax:-65.97dBm RBW: 100 kHz

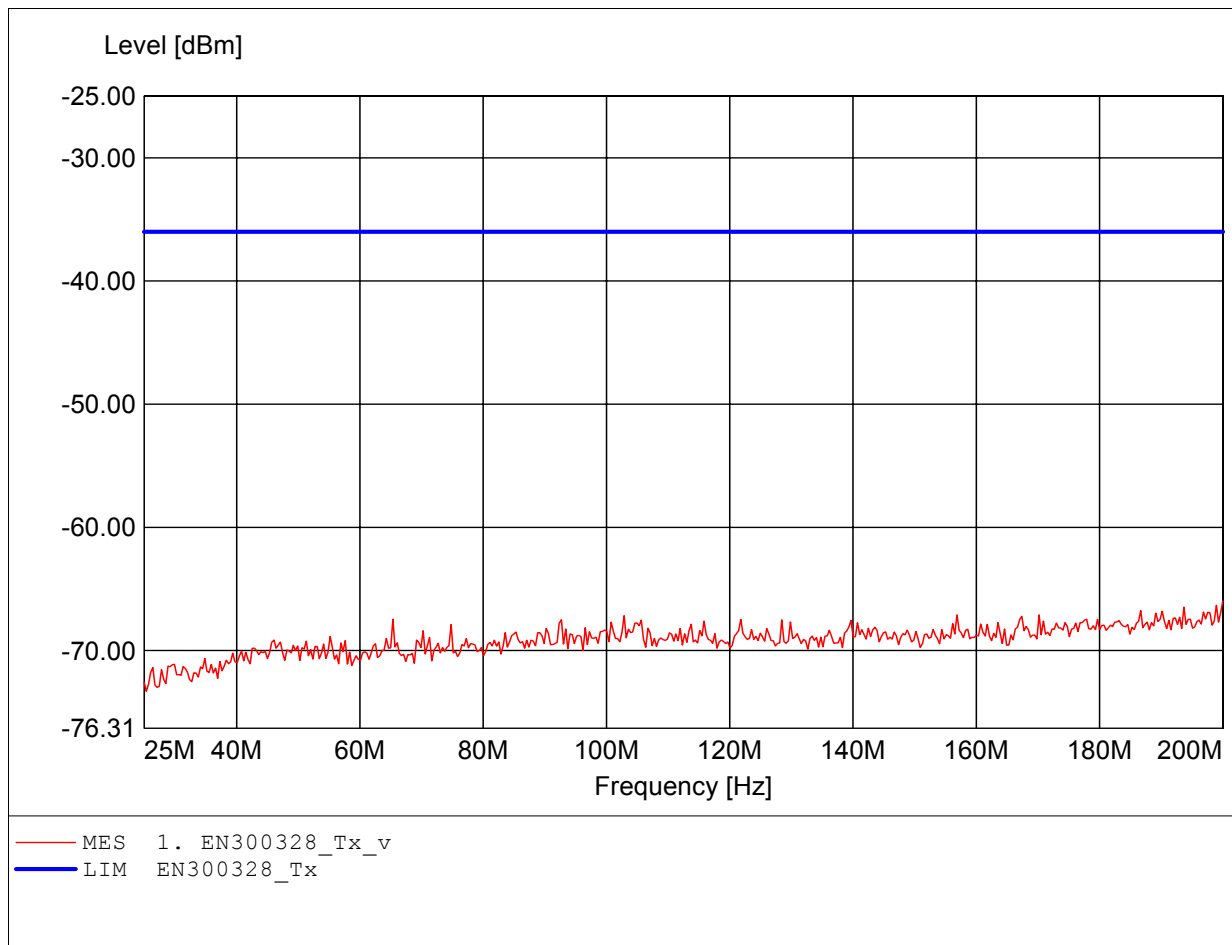

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq: 738.677MHz Pmax: -63.34dBm RBW: 100 kHz

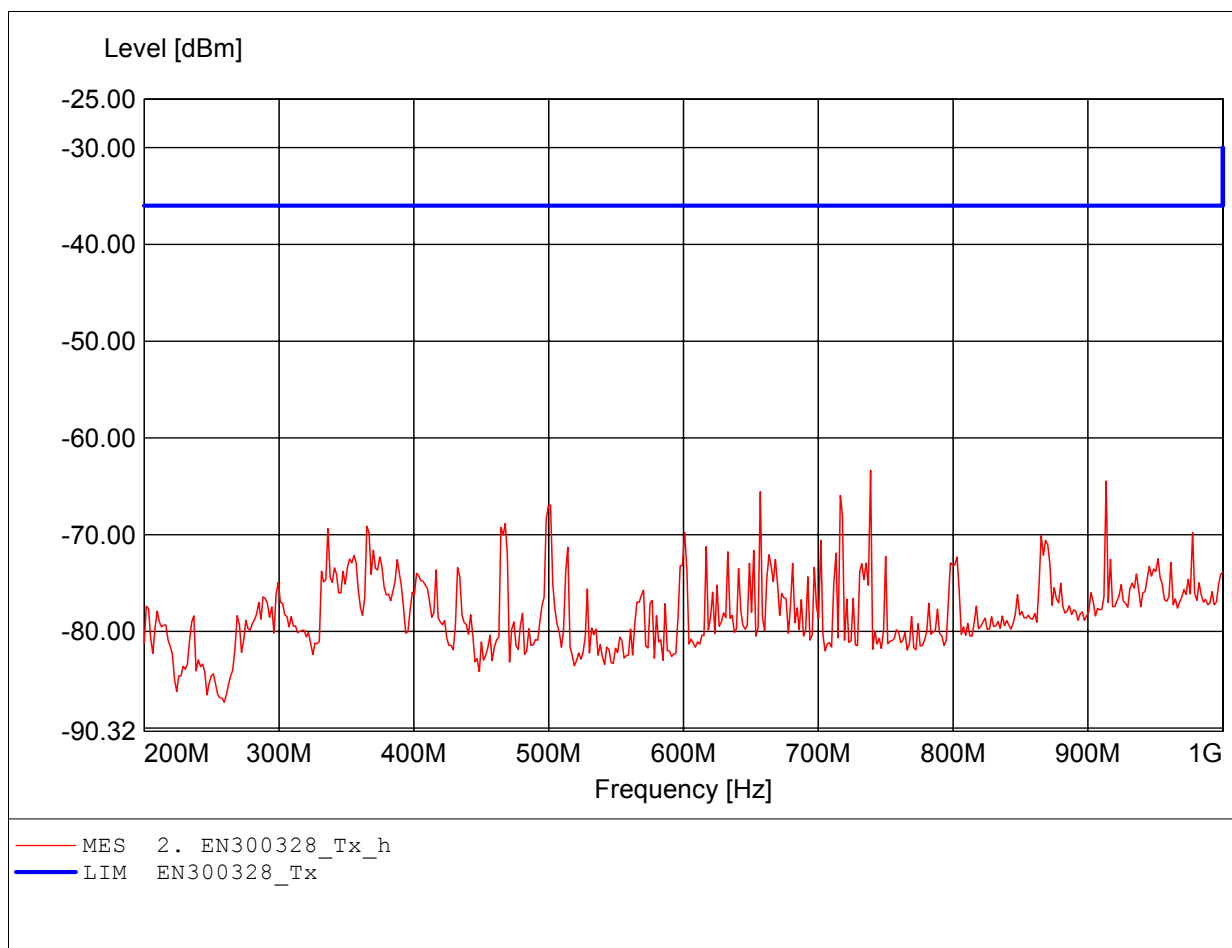

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:716.232MHz Pmax:-62.74dBm RBW: 100 kHz

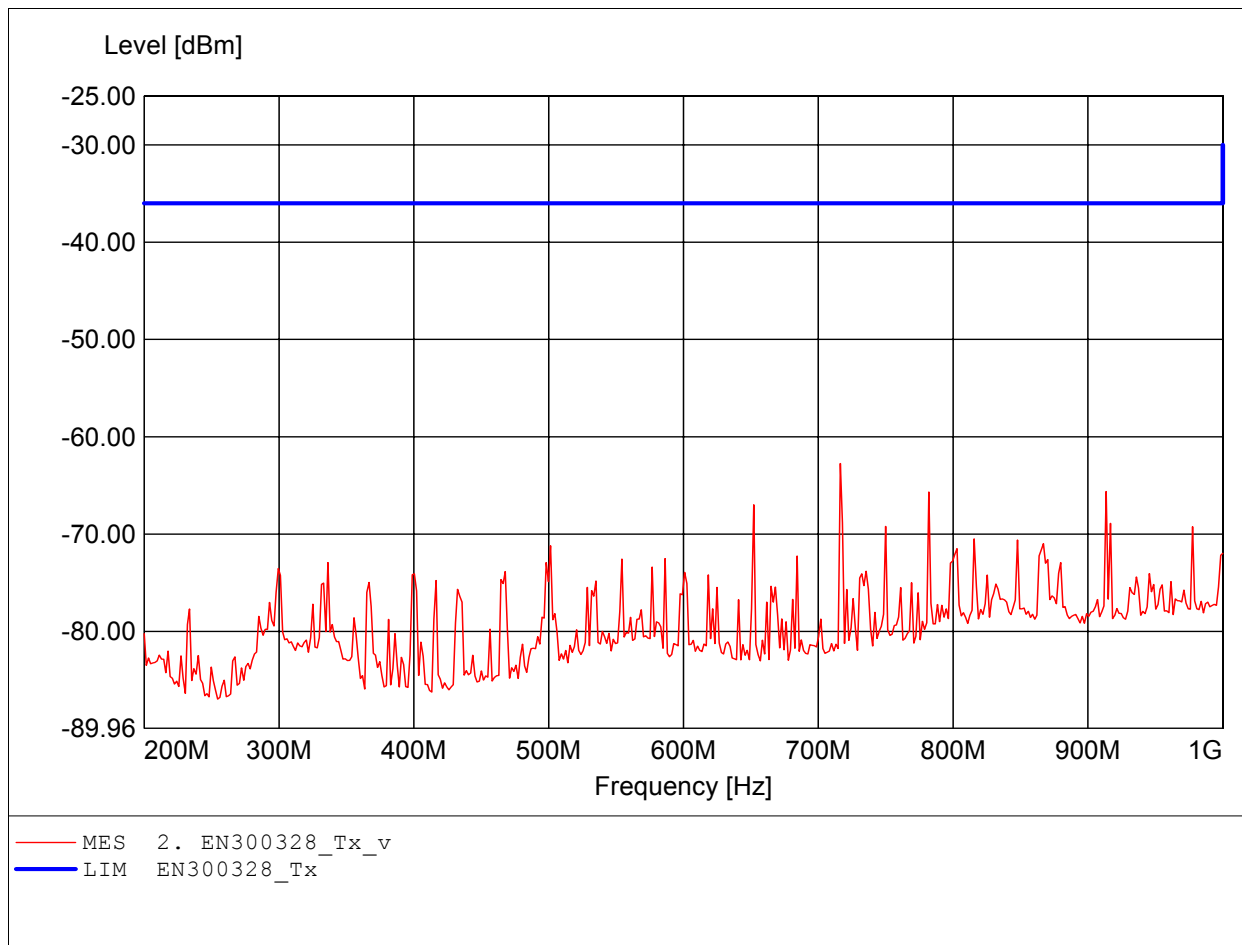

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:2.329GHz Pmax:-44.04dBm RBW: 100 kHz

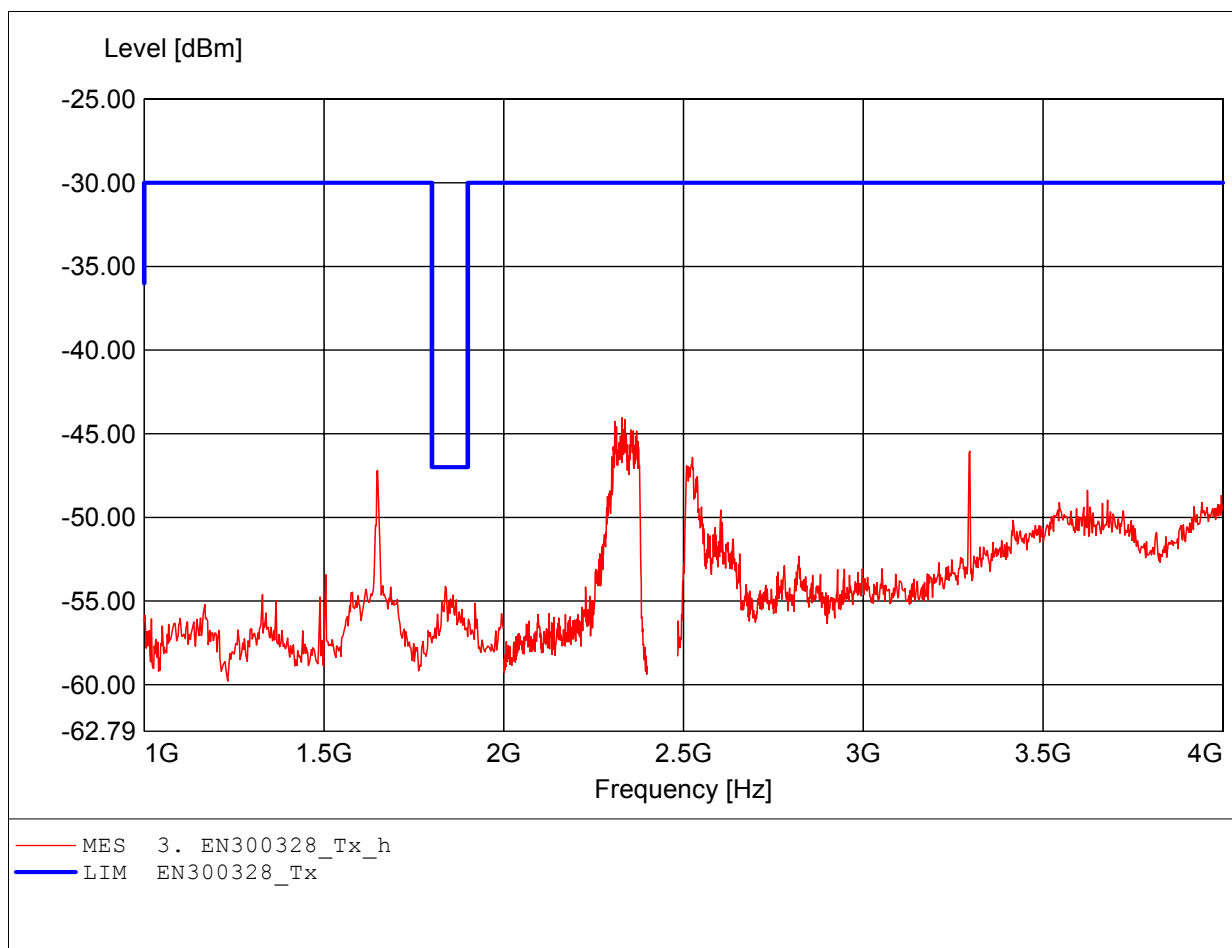

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:3.547GHz Pmax:-48.76dBm RBW: 100 kHz

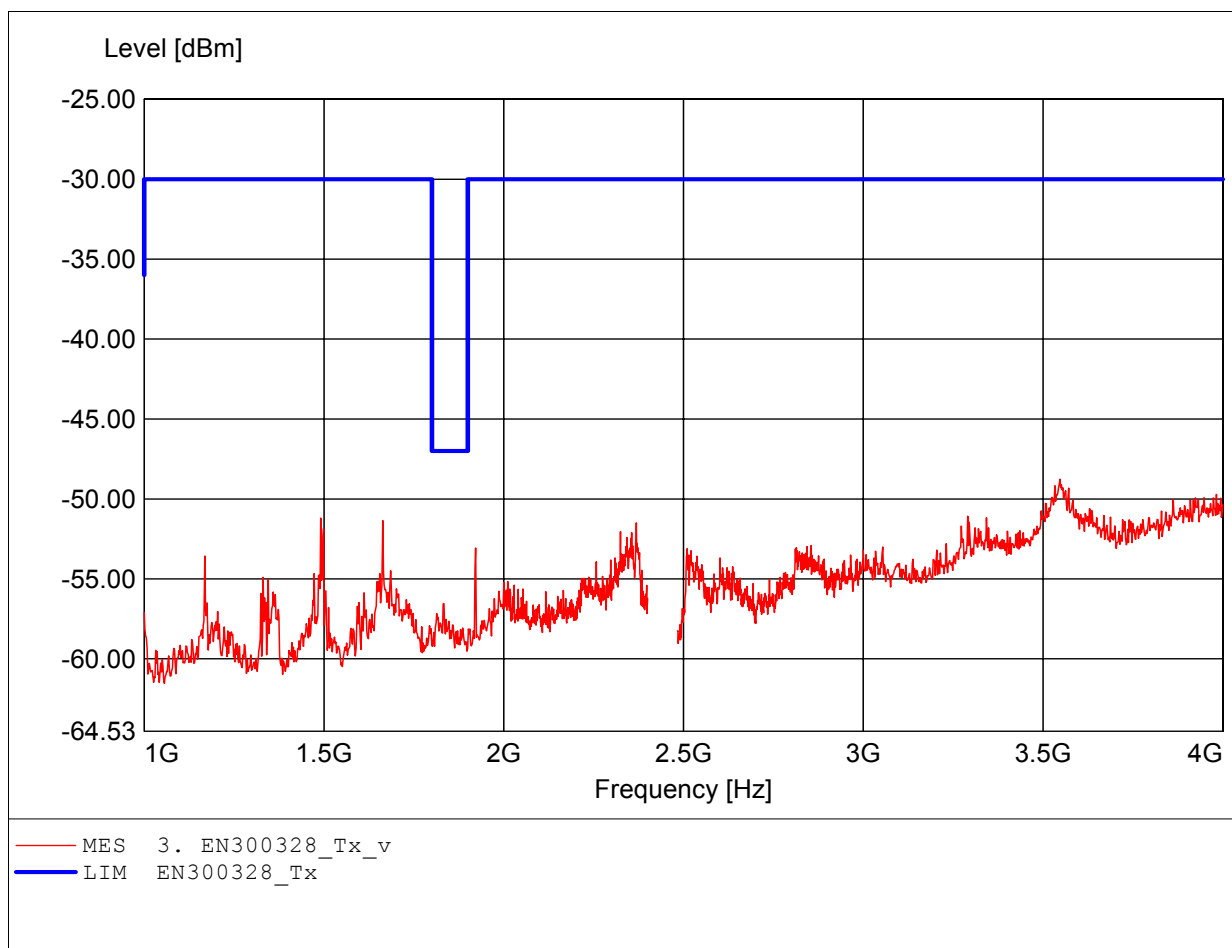

Spurious emissions under normal conditions


in accordance to the EN 300 328

Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:4.946GHz Pmax:-33.08dBm RBW: 100 kHz

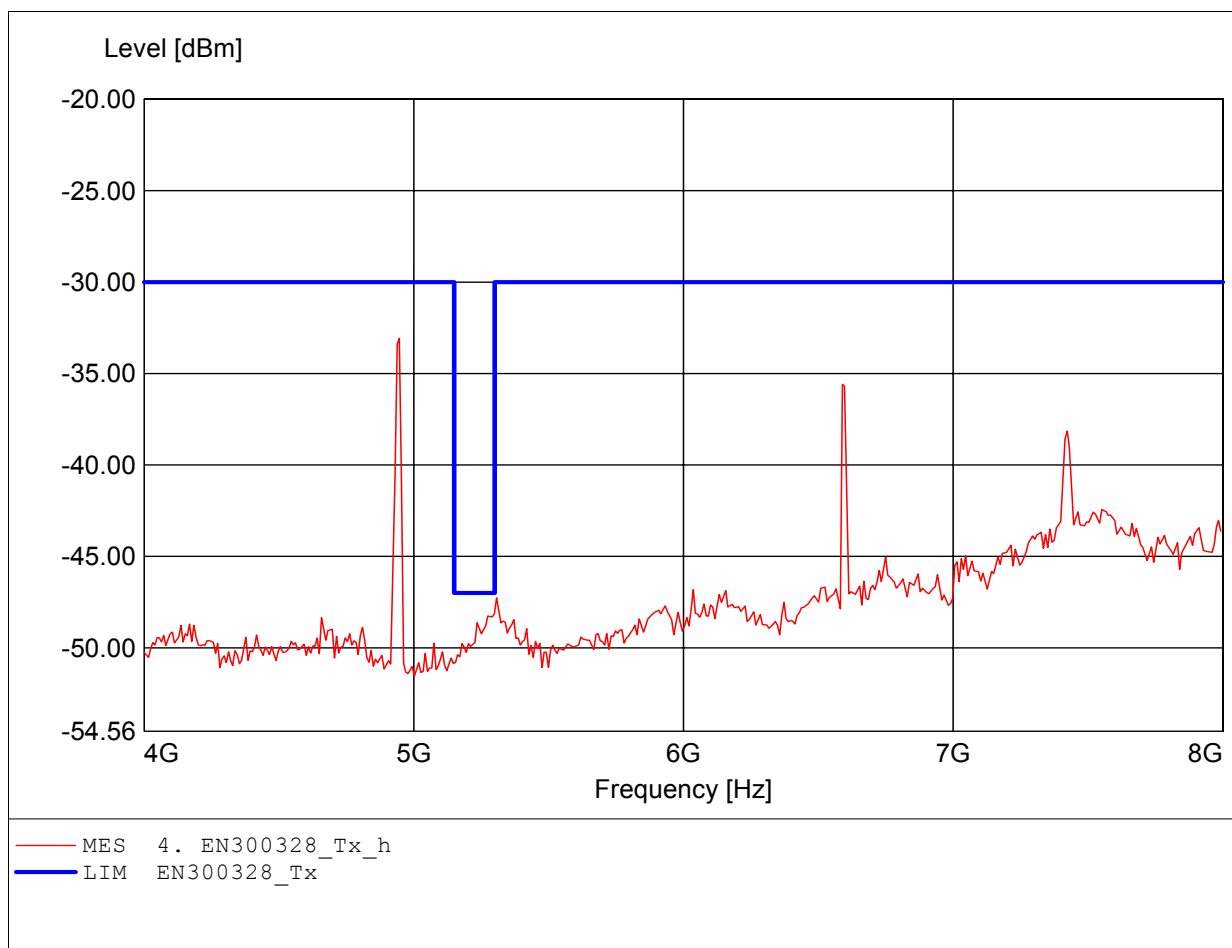

Spurious emissions under normal conditions
in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:6.597GHz Pmax:-32.23dBm RBW: 100 kHz

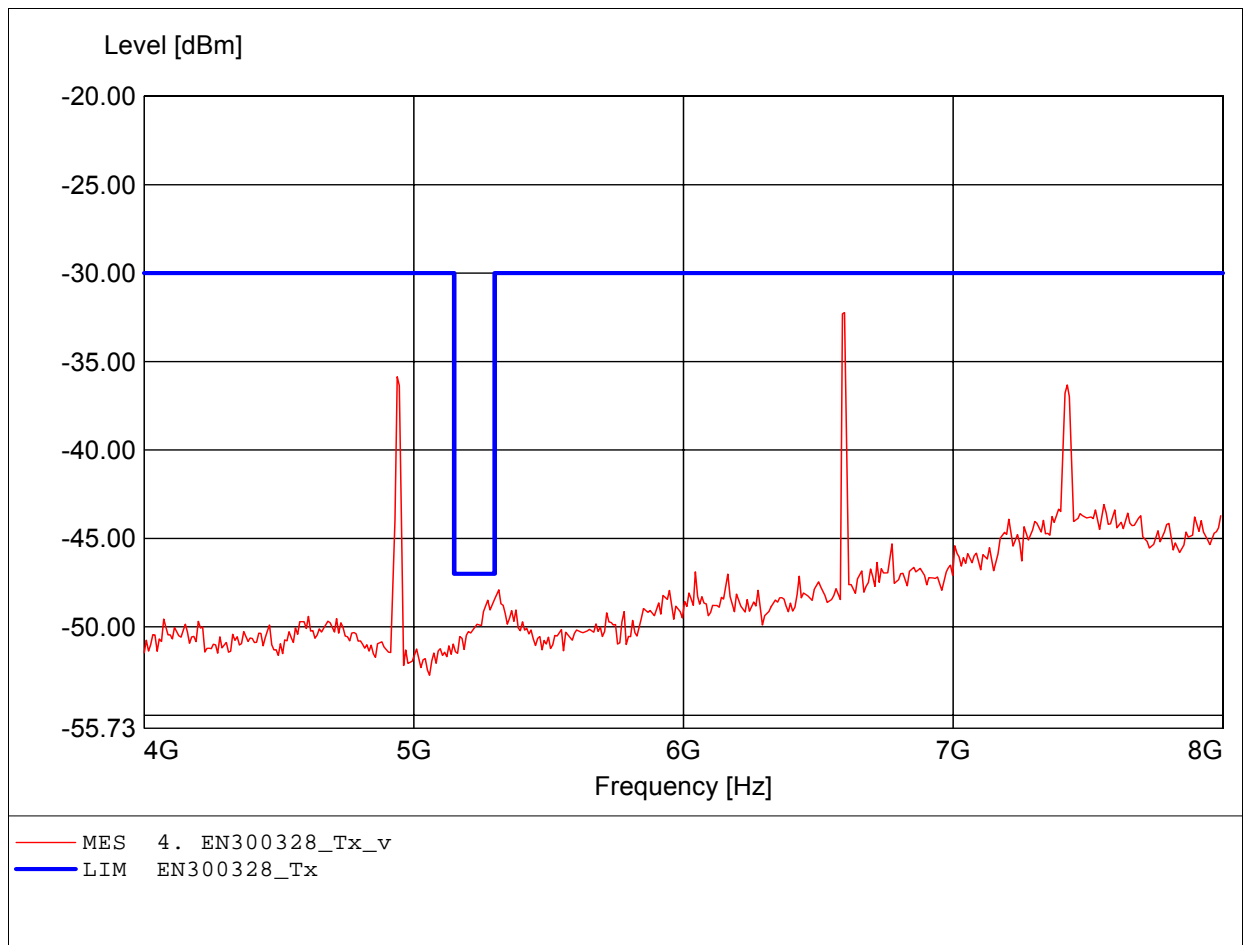

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.093GHz Pmax:-35.61dBm RBW: 100 kHz

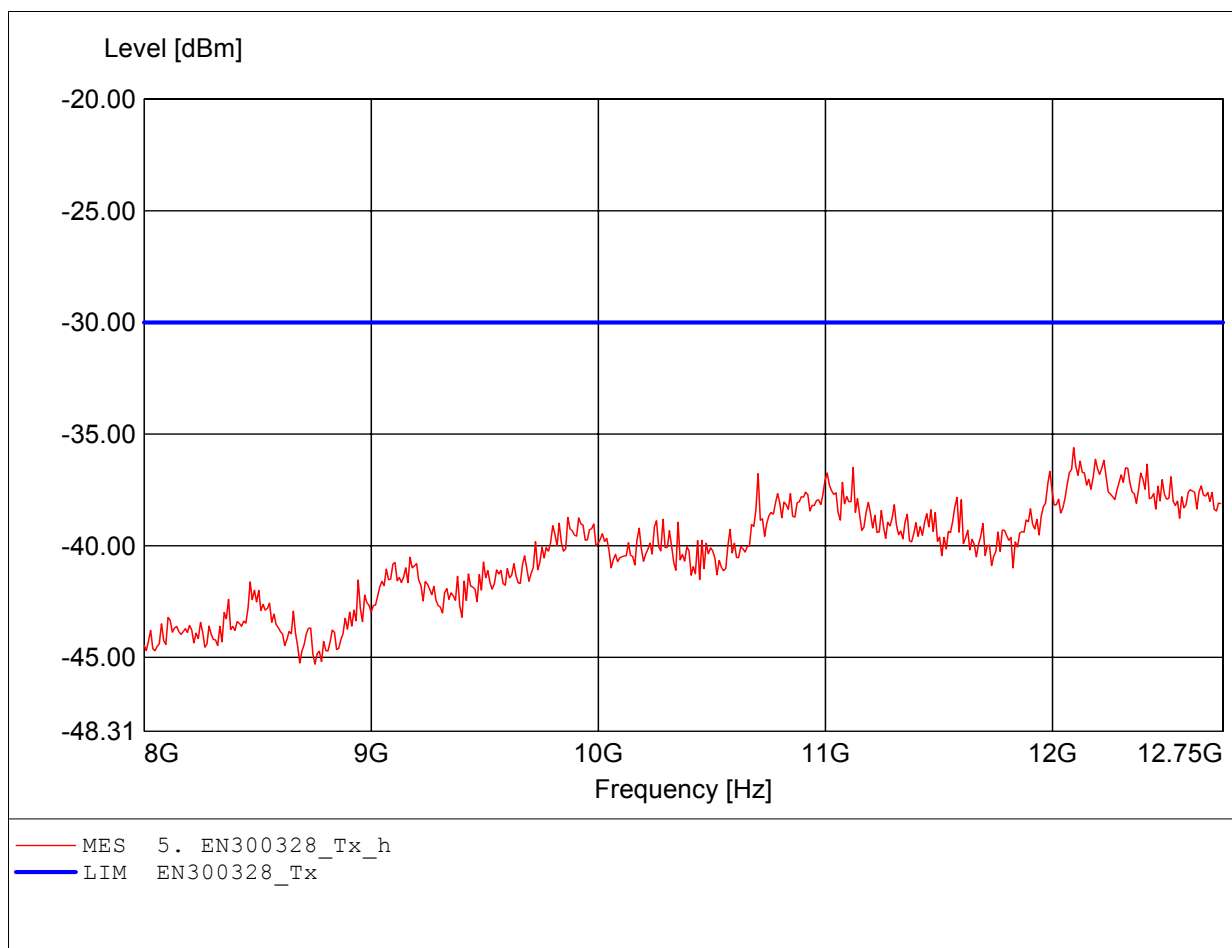

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.103GHz Pmax:-34.65dBm RBW: 100 kHz

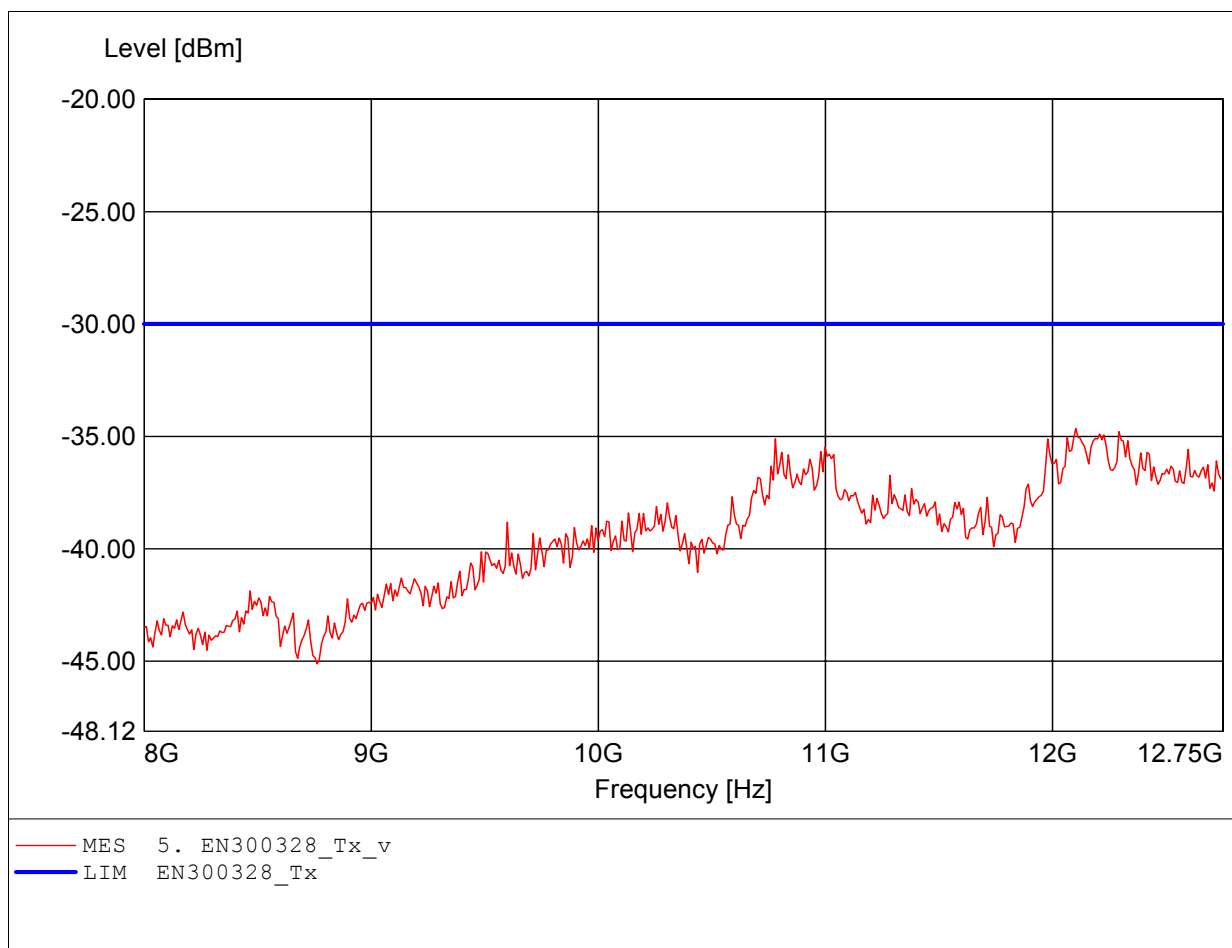

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:190.531MHz Pmax:-66.56dBm RBW: 100 kHz

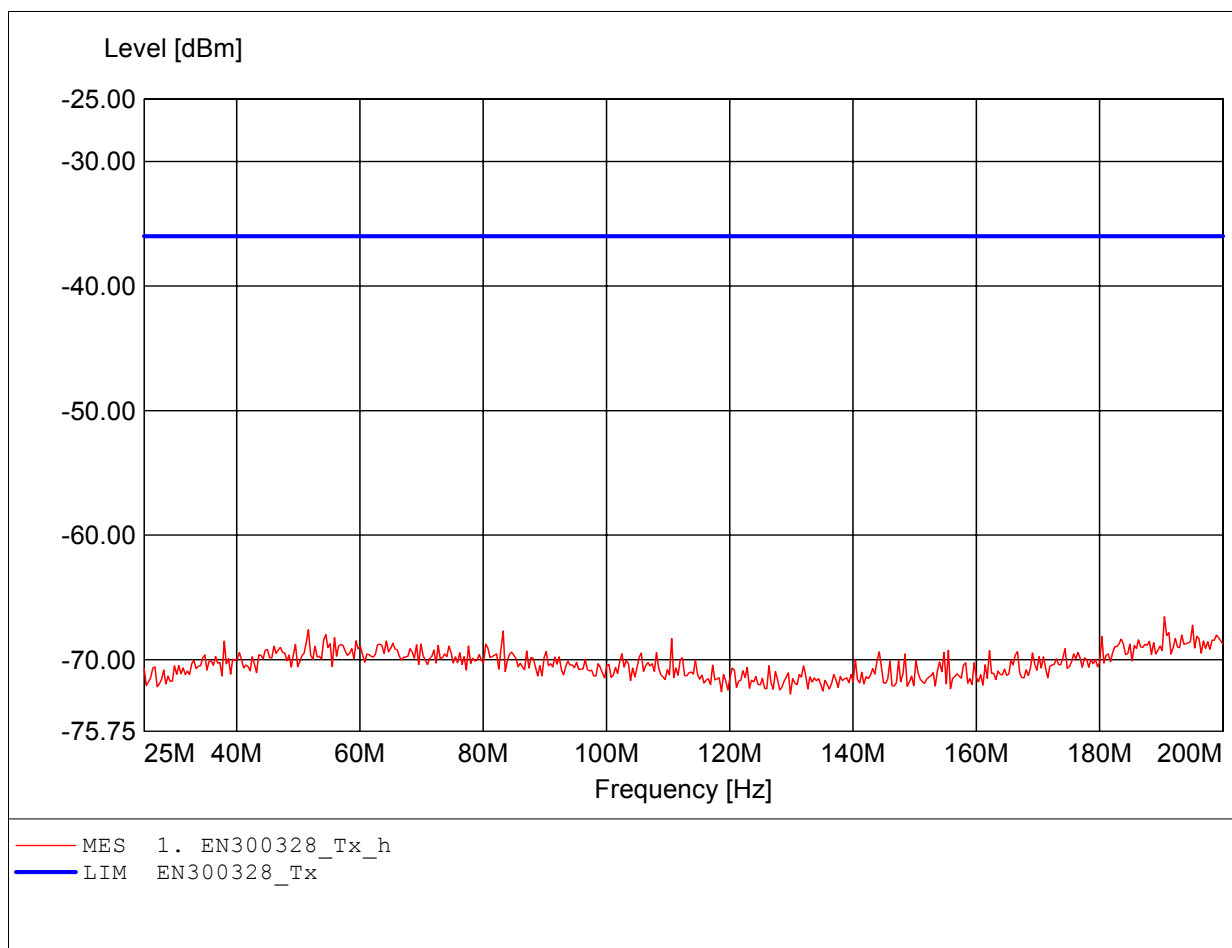

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:190.531MHz Pmax:-65.50dBm RBW: 100 kHz

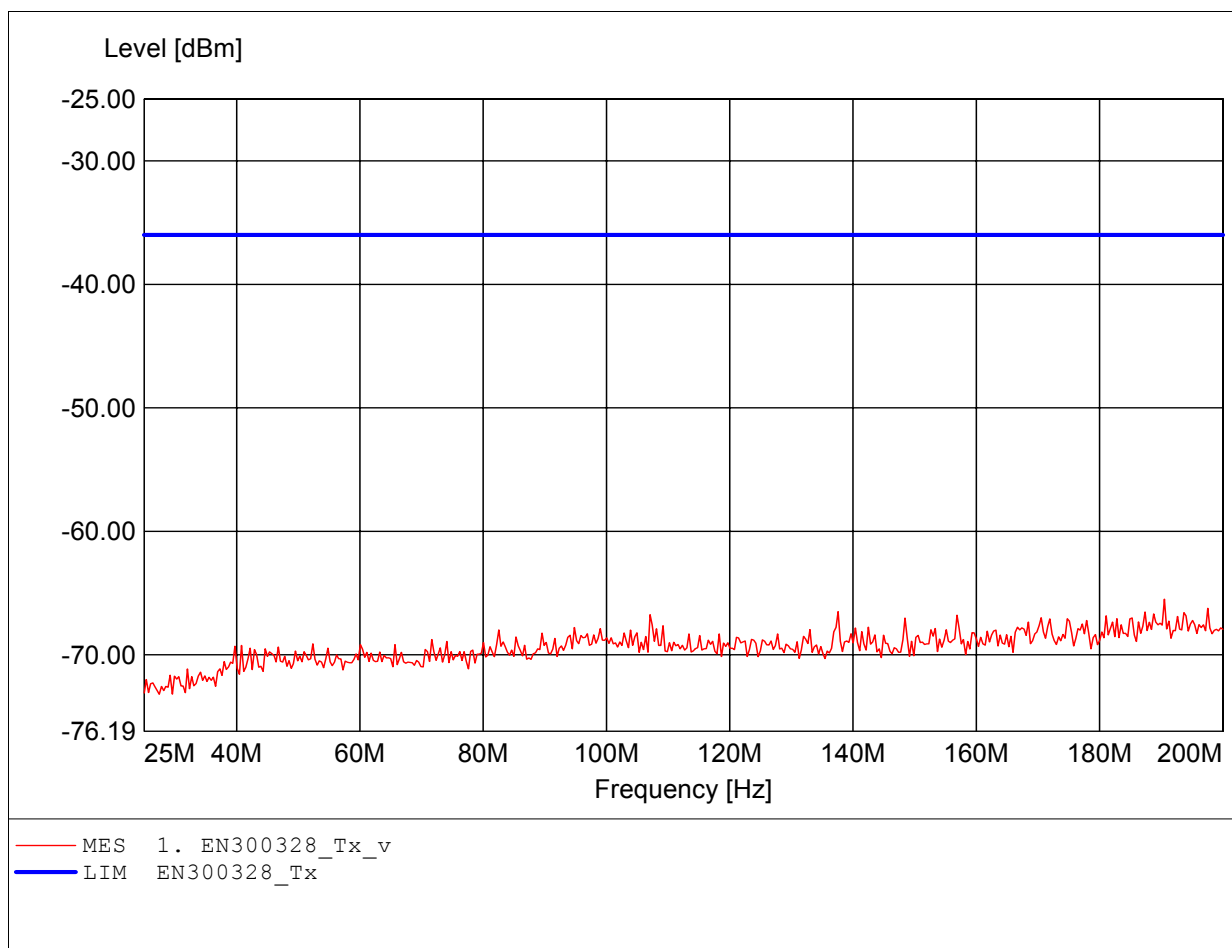

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:913.427MHz Pmax:-64.15dBm RBW: 100 kHz

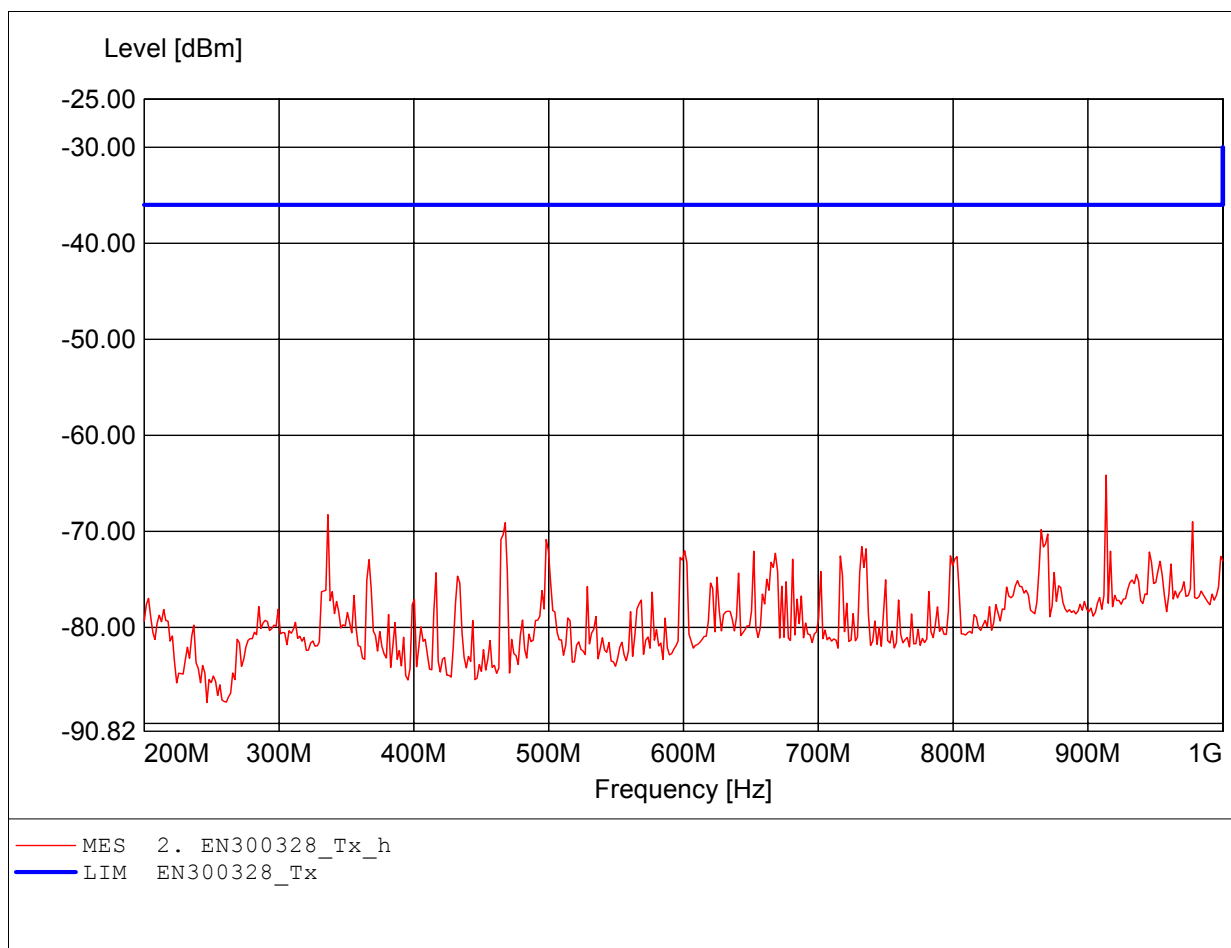

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:781.964MHz Pmax:-66.07dBm RBW: 100 kHz

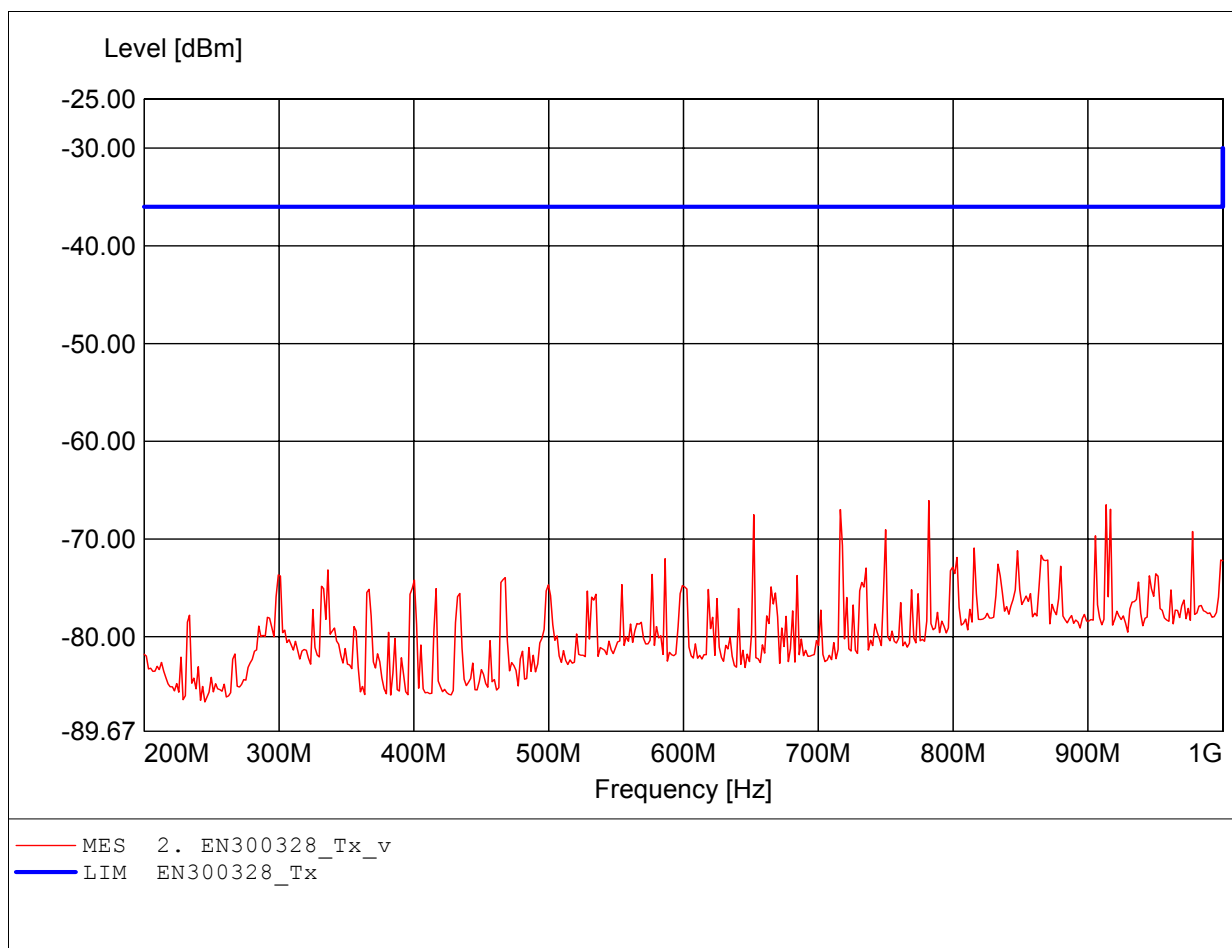

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:2.379GHz Pmax:-41.95dBm RBW: 100 kHz

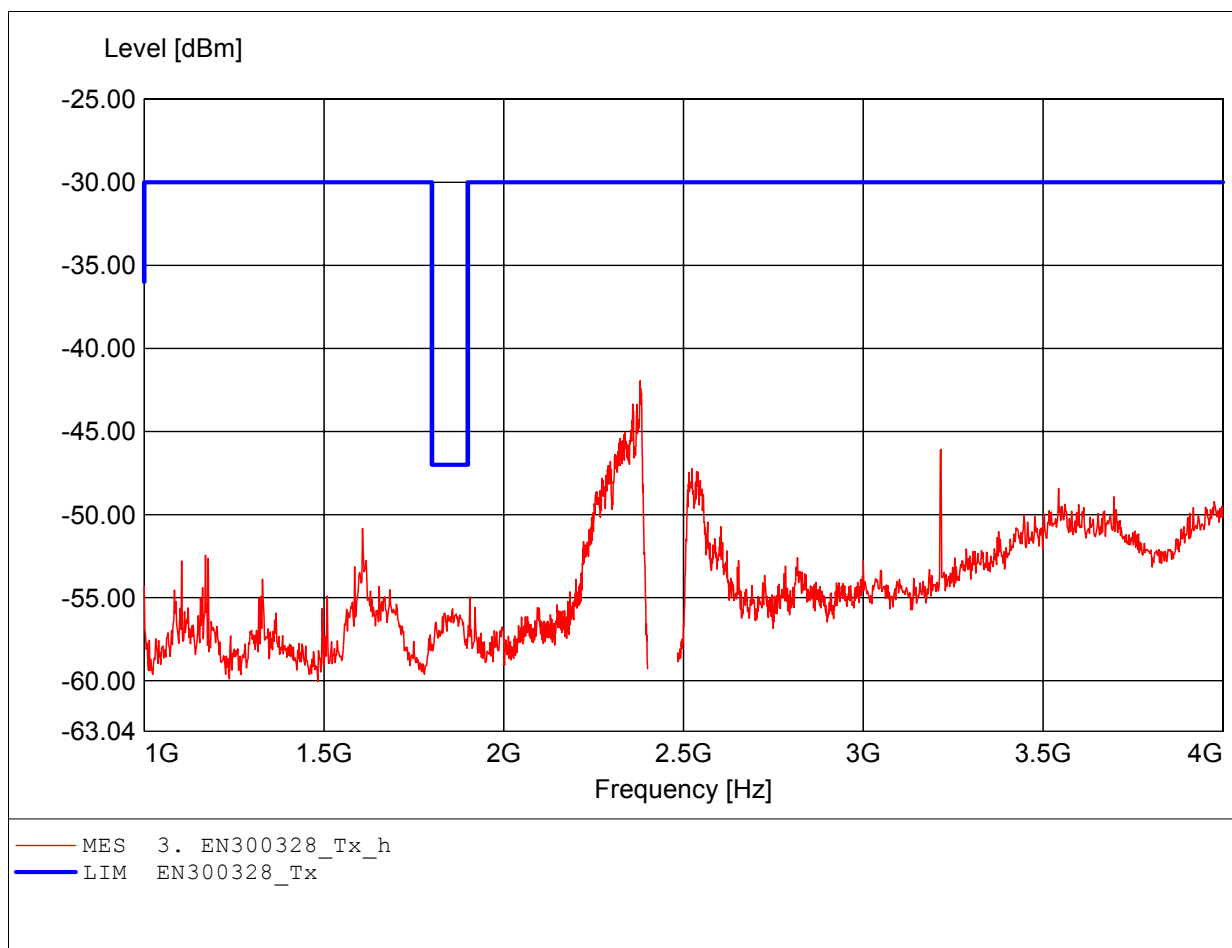

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:3.565GHz Pmax:-49.51dBm RBW: 100 kHz

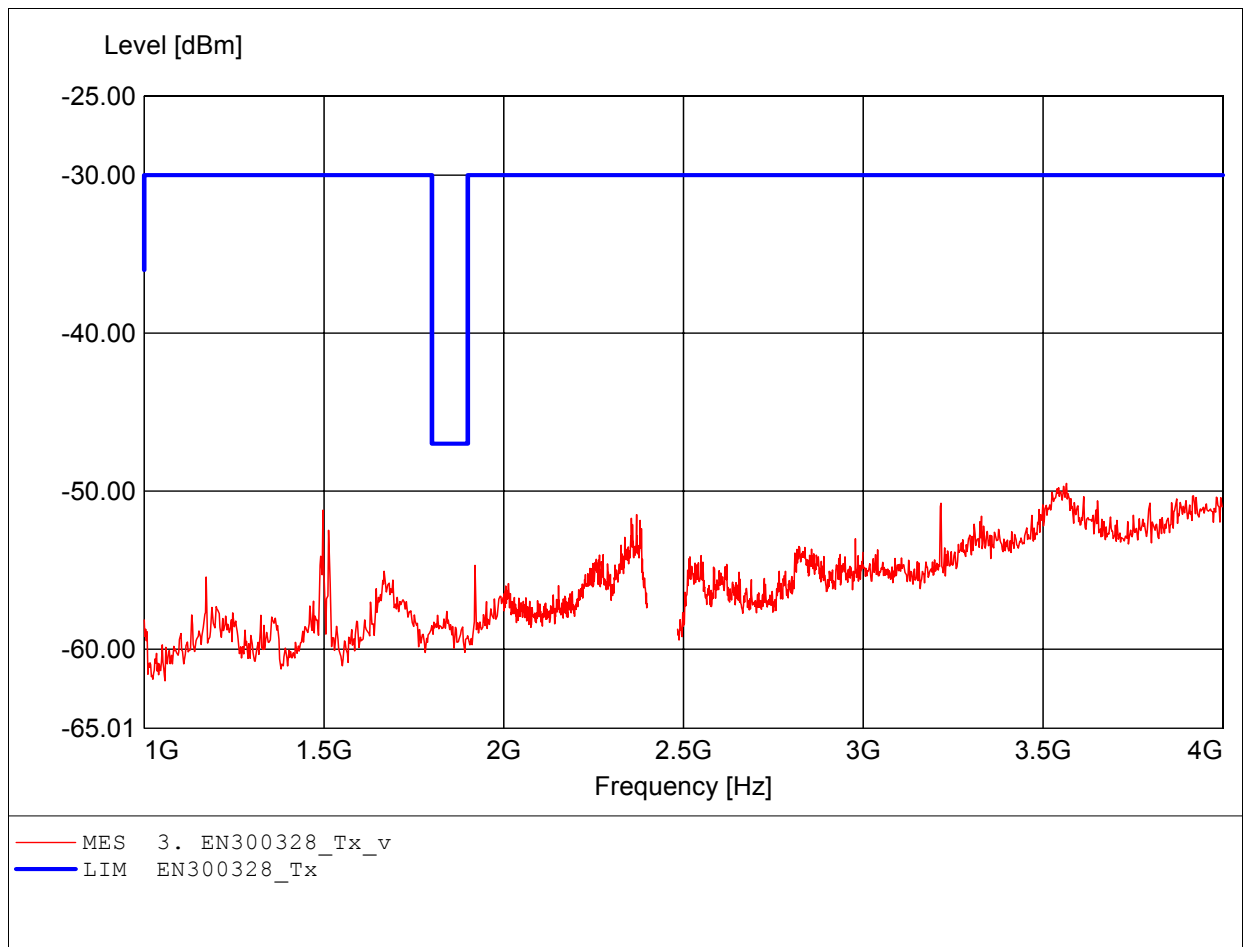

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:6.437GHz Pmax:-35.14dBm RBW: 100 kHz

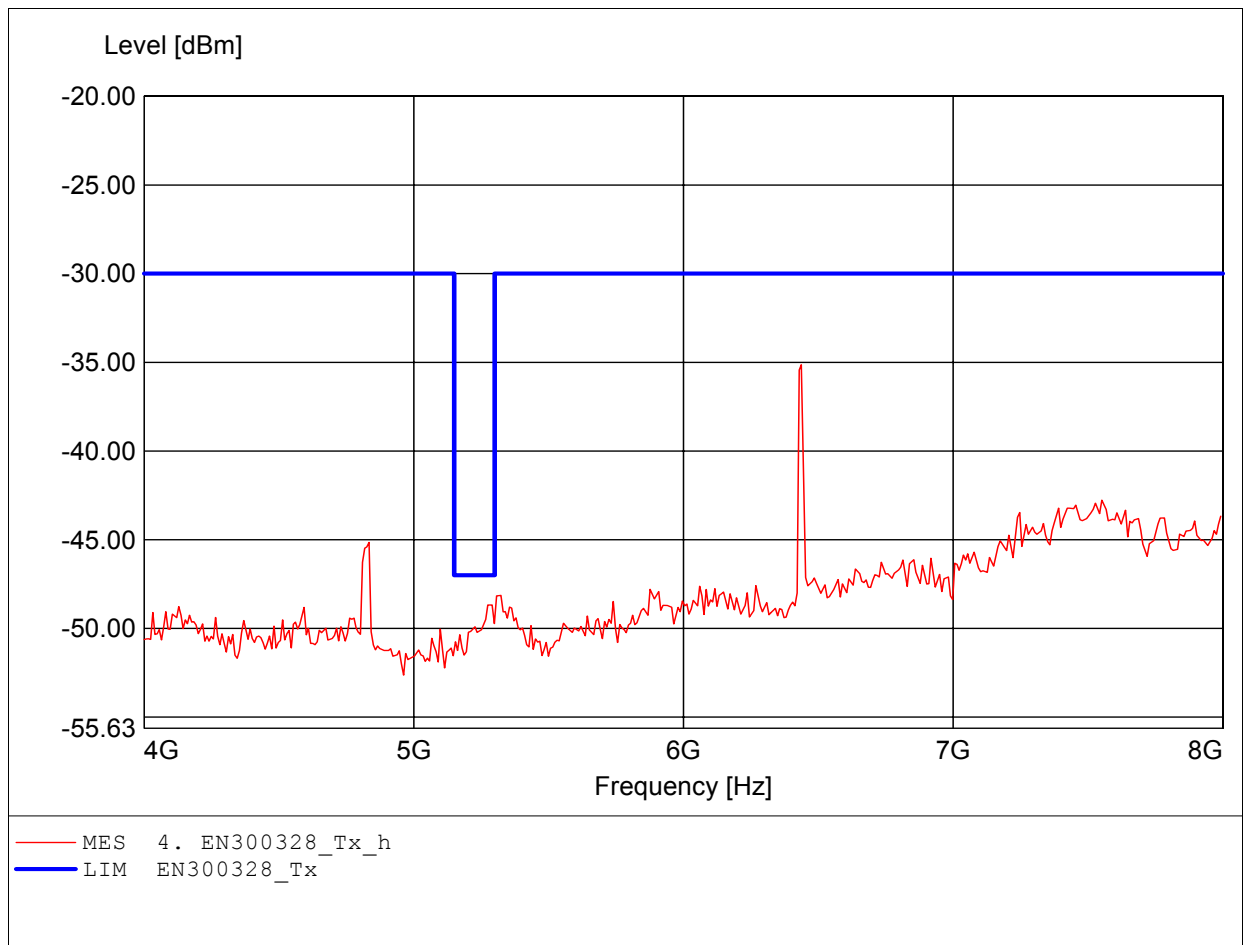

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:6.437GHz Pmax:-32.21dBm RBW: 100 kHz

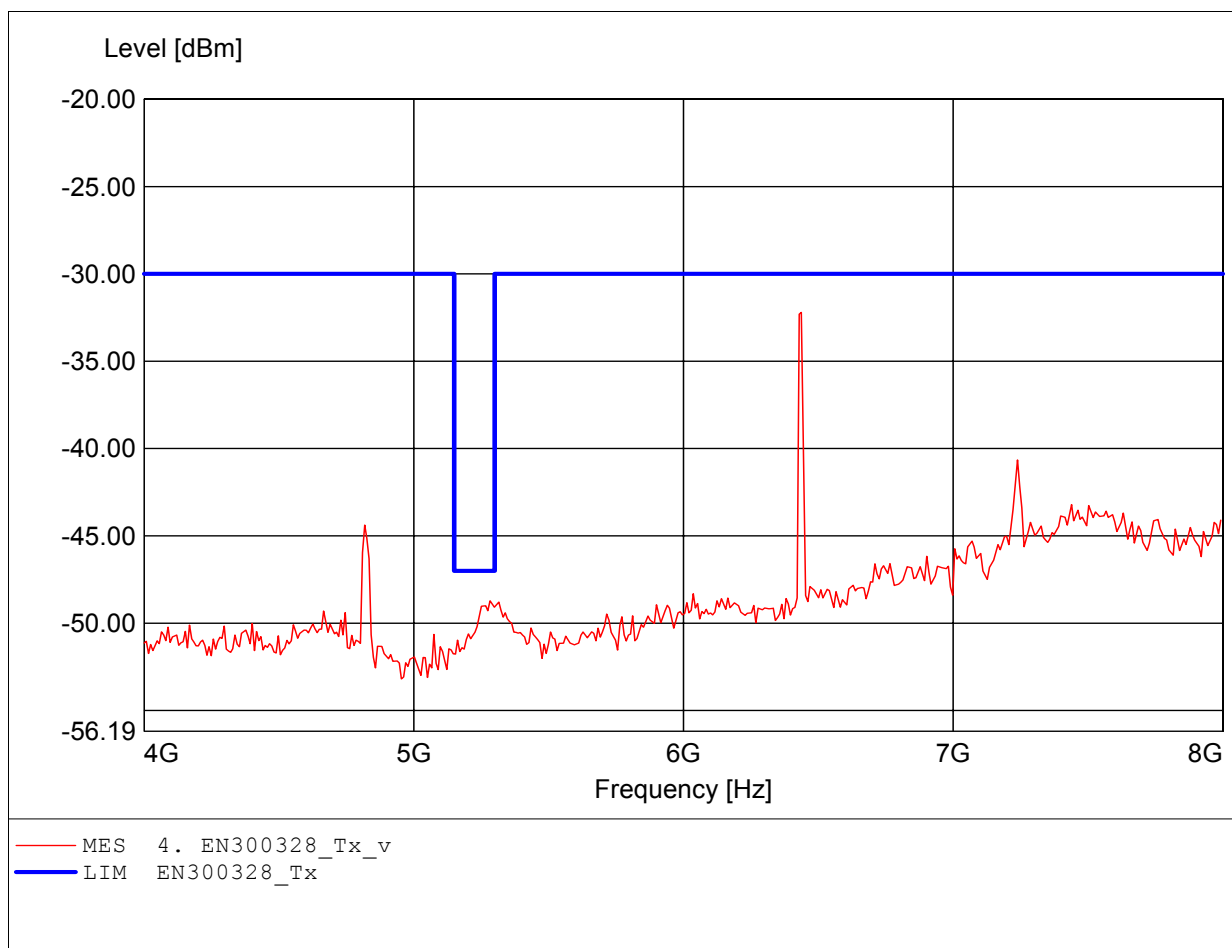

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.188GHz Pmax:-35.68dBm RBW: 100 kHz

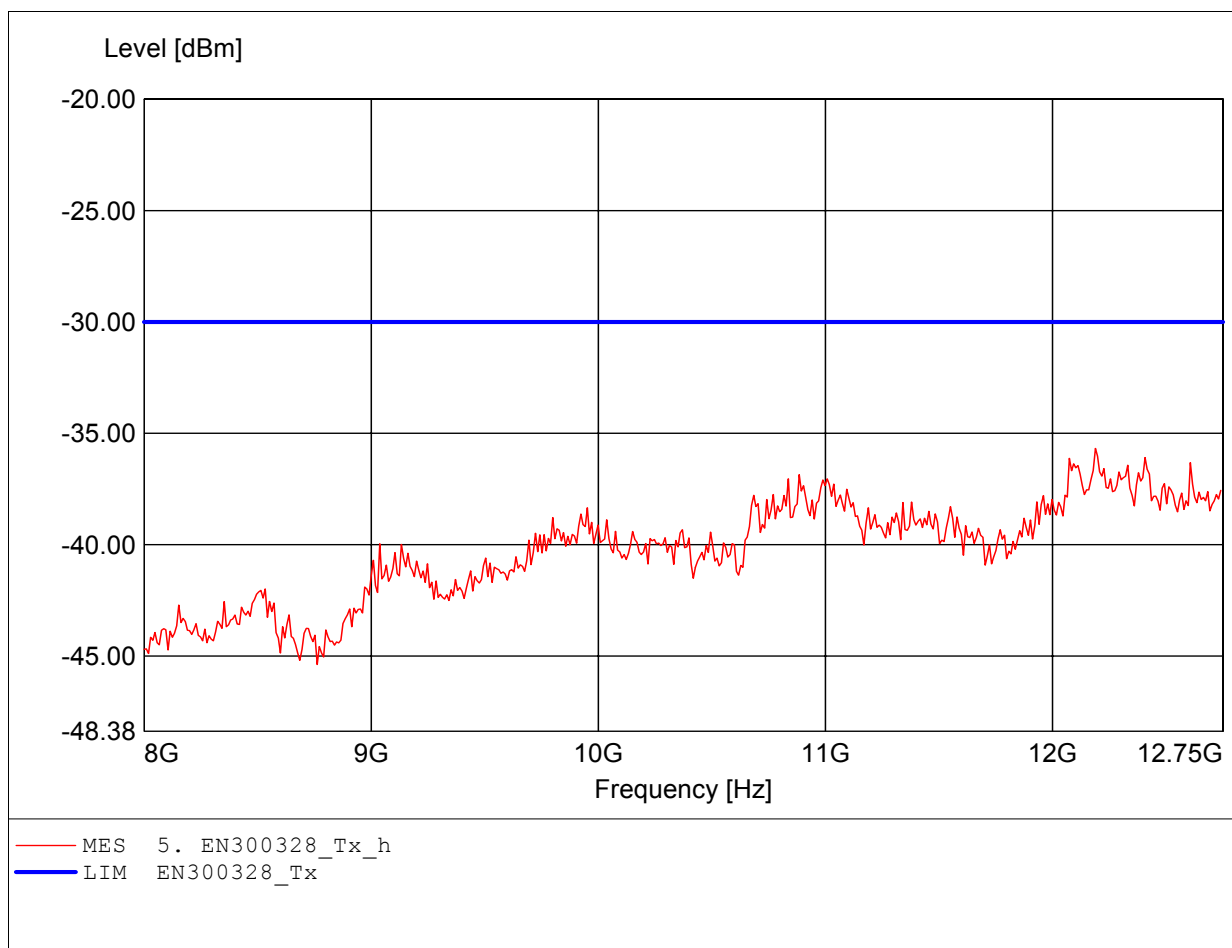

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.322GHz Pmax:-35.37dBm RBW: 100 kHz

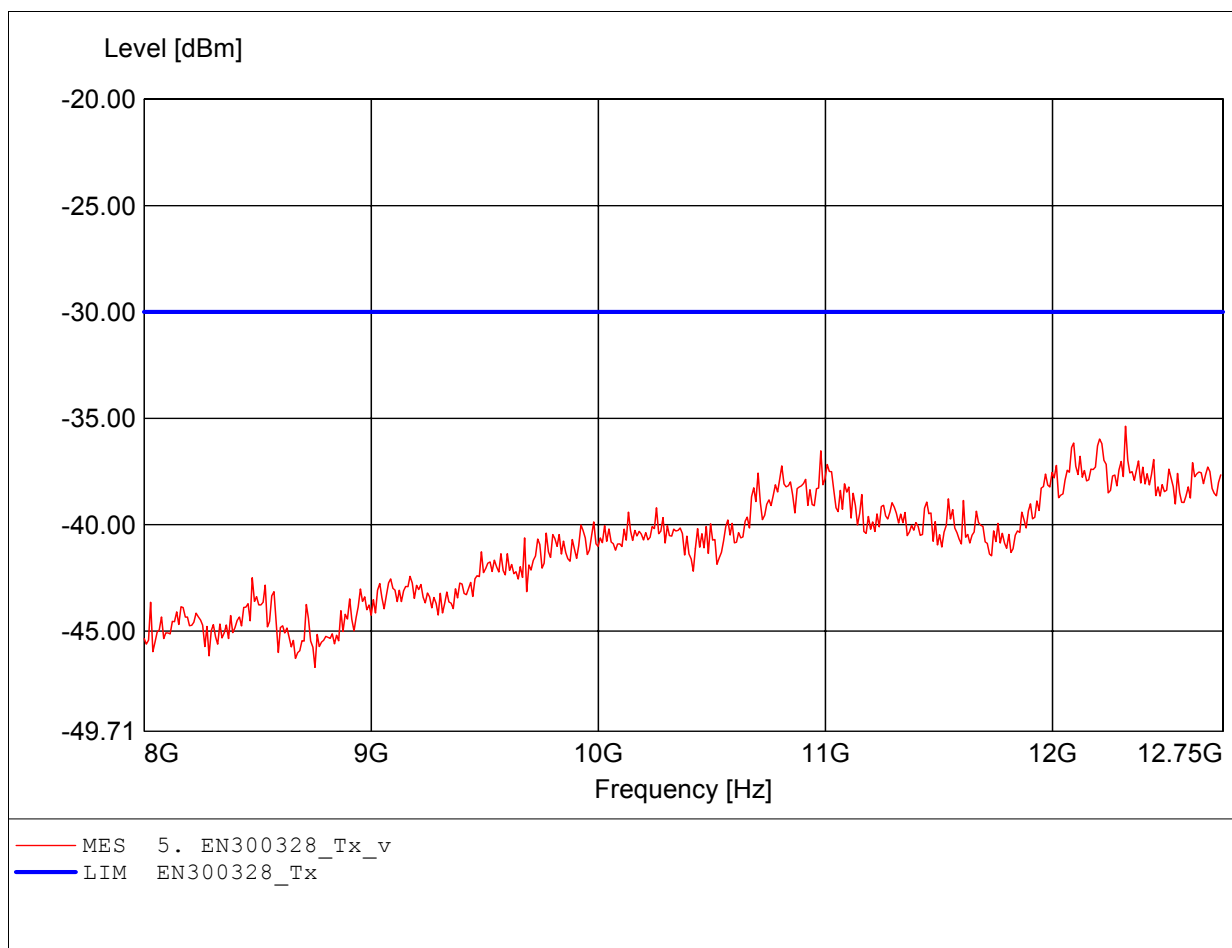

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:198.948MHz Pmax:-67.10dBm RBW: 100 kHz

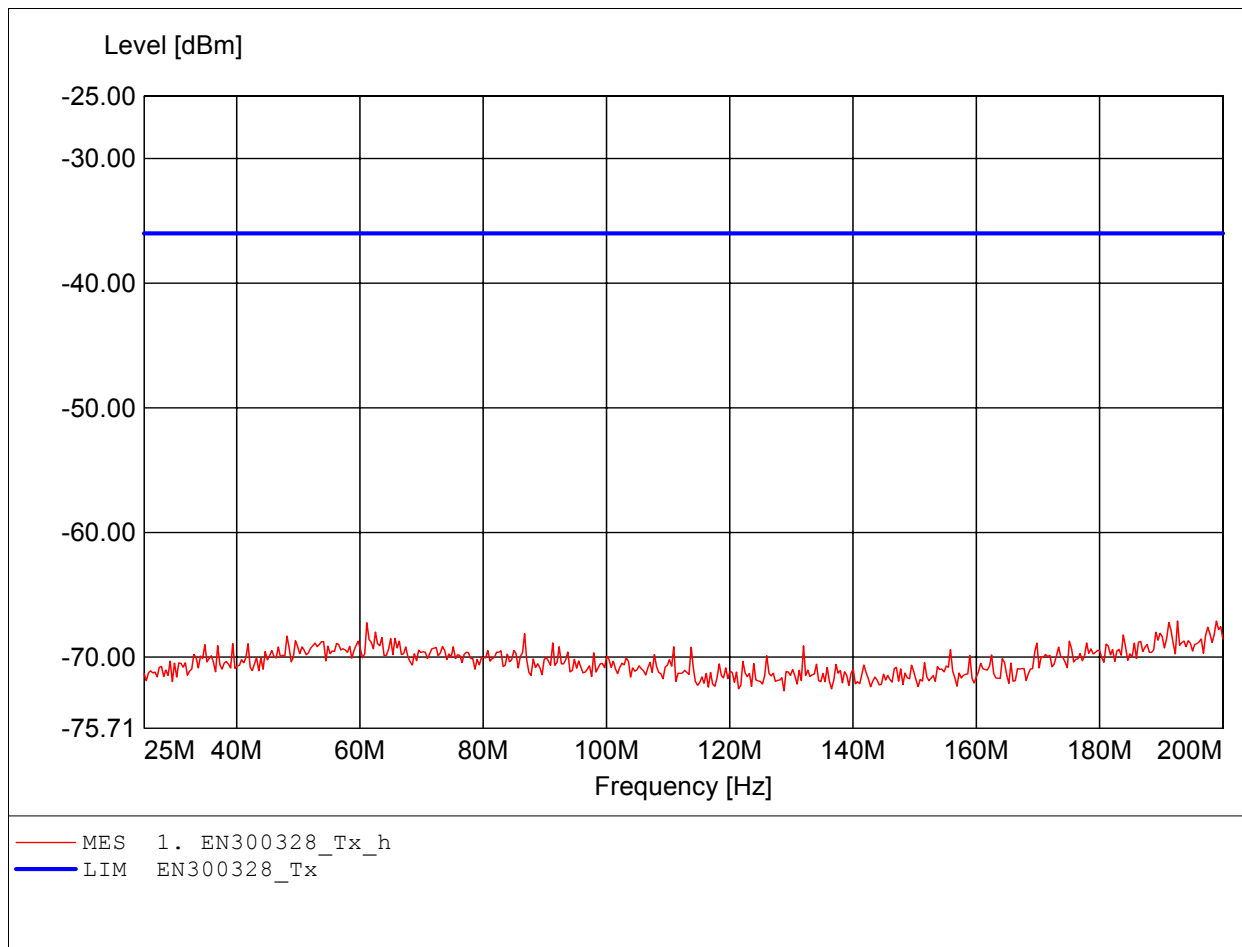

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:196.493MHz Pmax:-65.64dBm RBW: 100 kHz

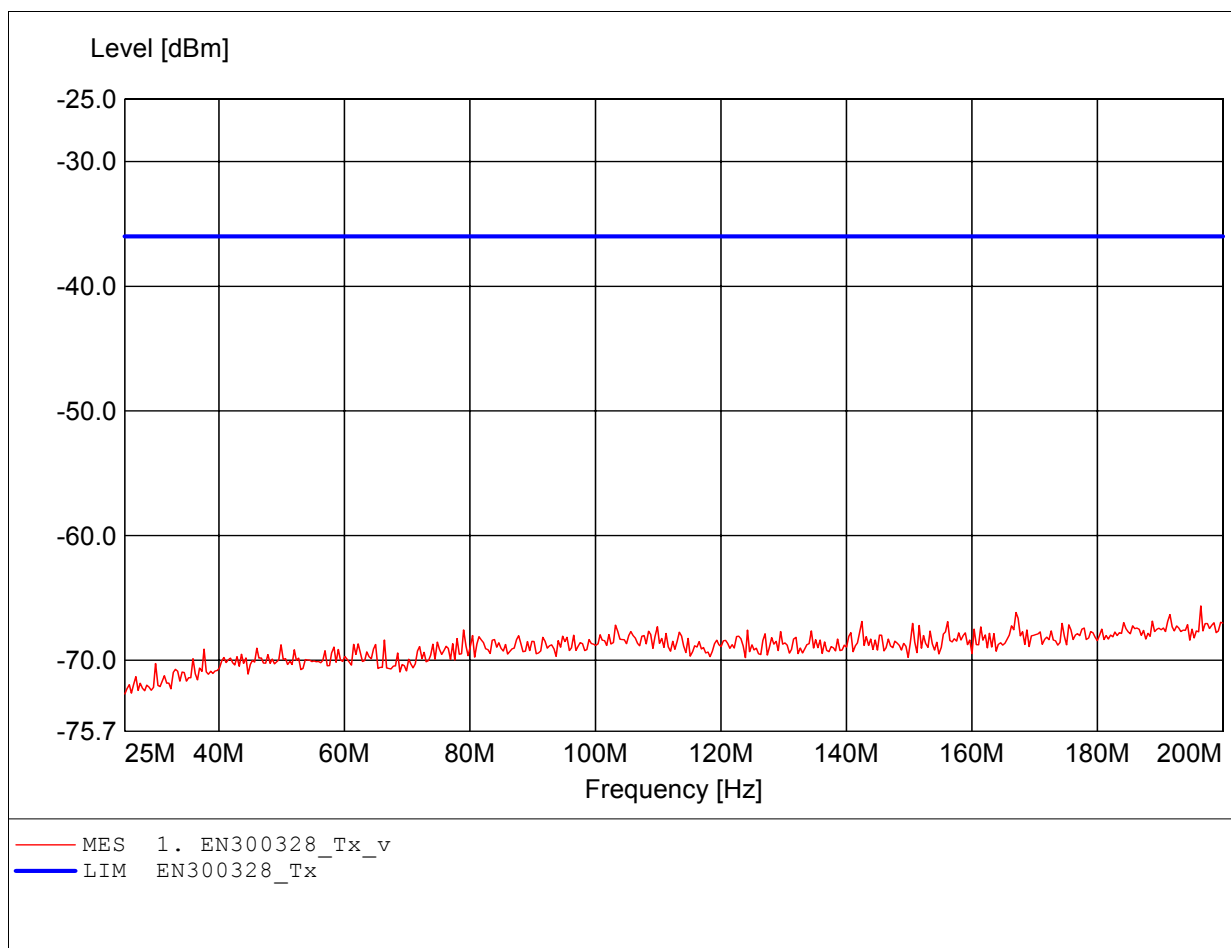

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:656.914MHz Pmax:-64.19dBm RBW: 100 kHz

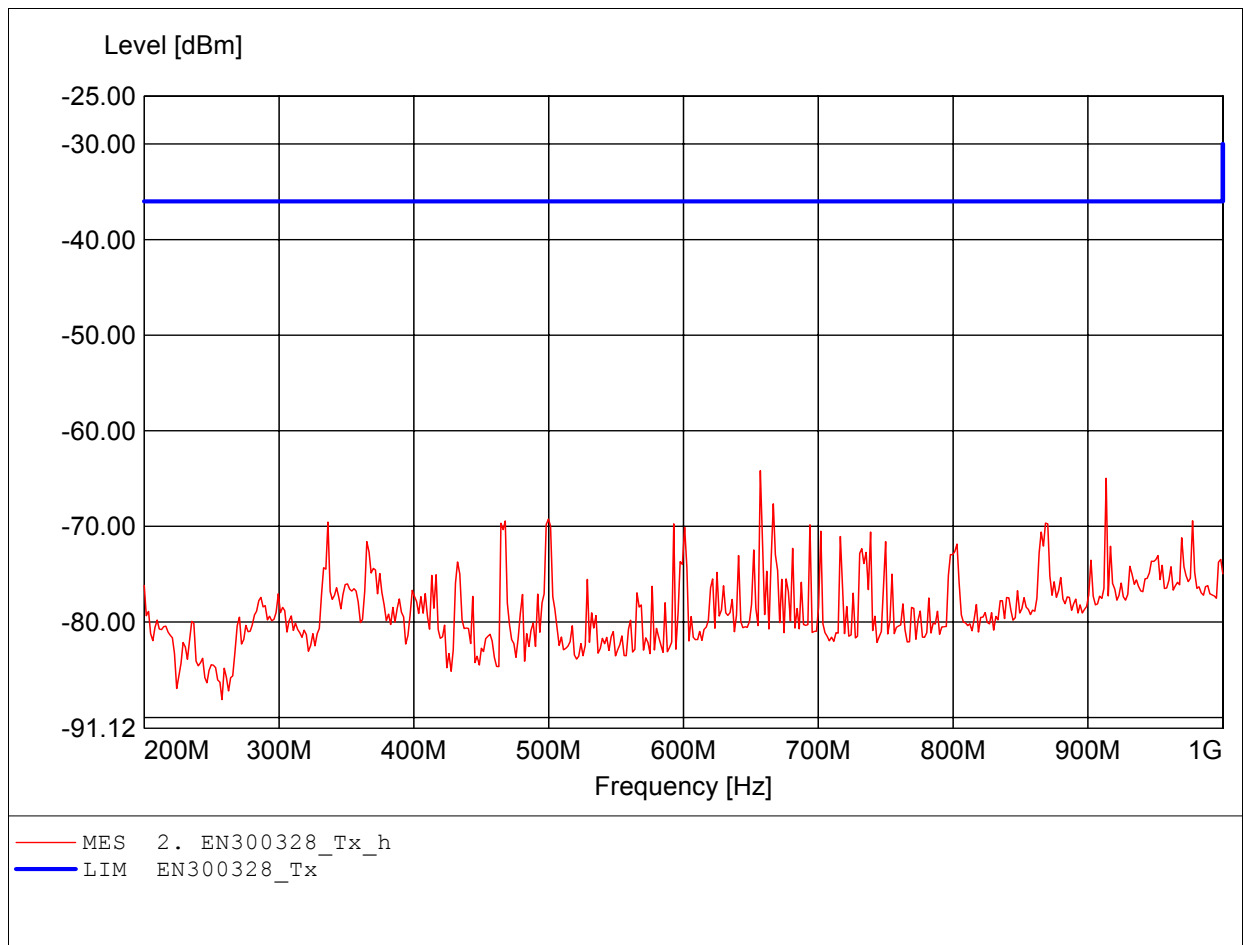

Spurious emissions under normal conditions


in accordance to the EN 300 328

Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:716.232MHz Pmax:-64.75dBm RBW: 100 kHz

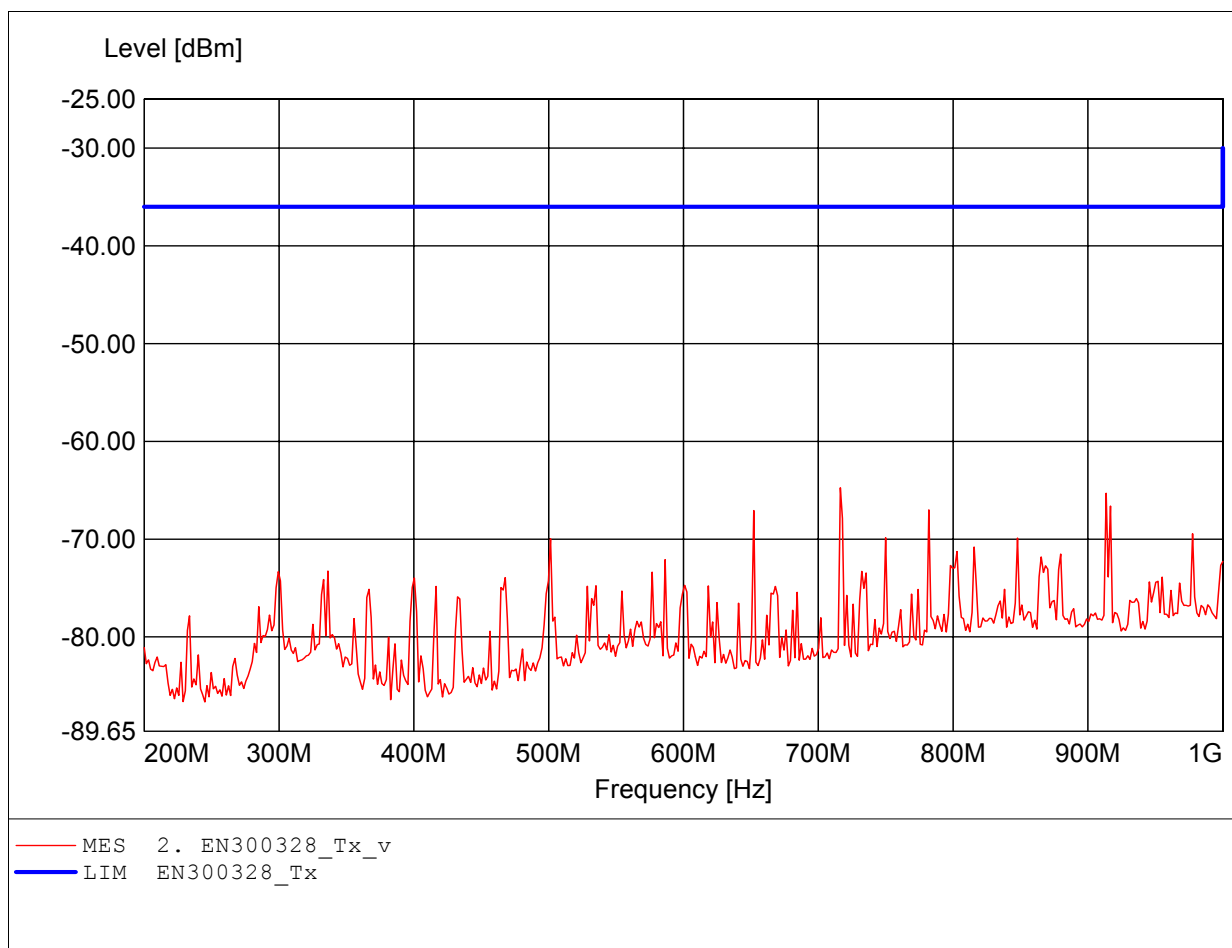

Spurious emissions under normal conditions
in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:2.358GHz Pmax:-41.43dBm RBW: 100 kHz

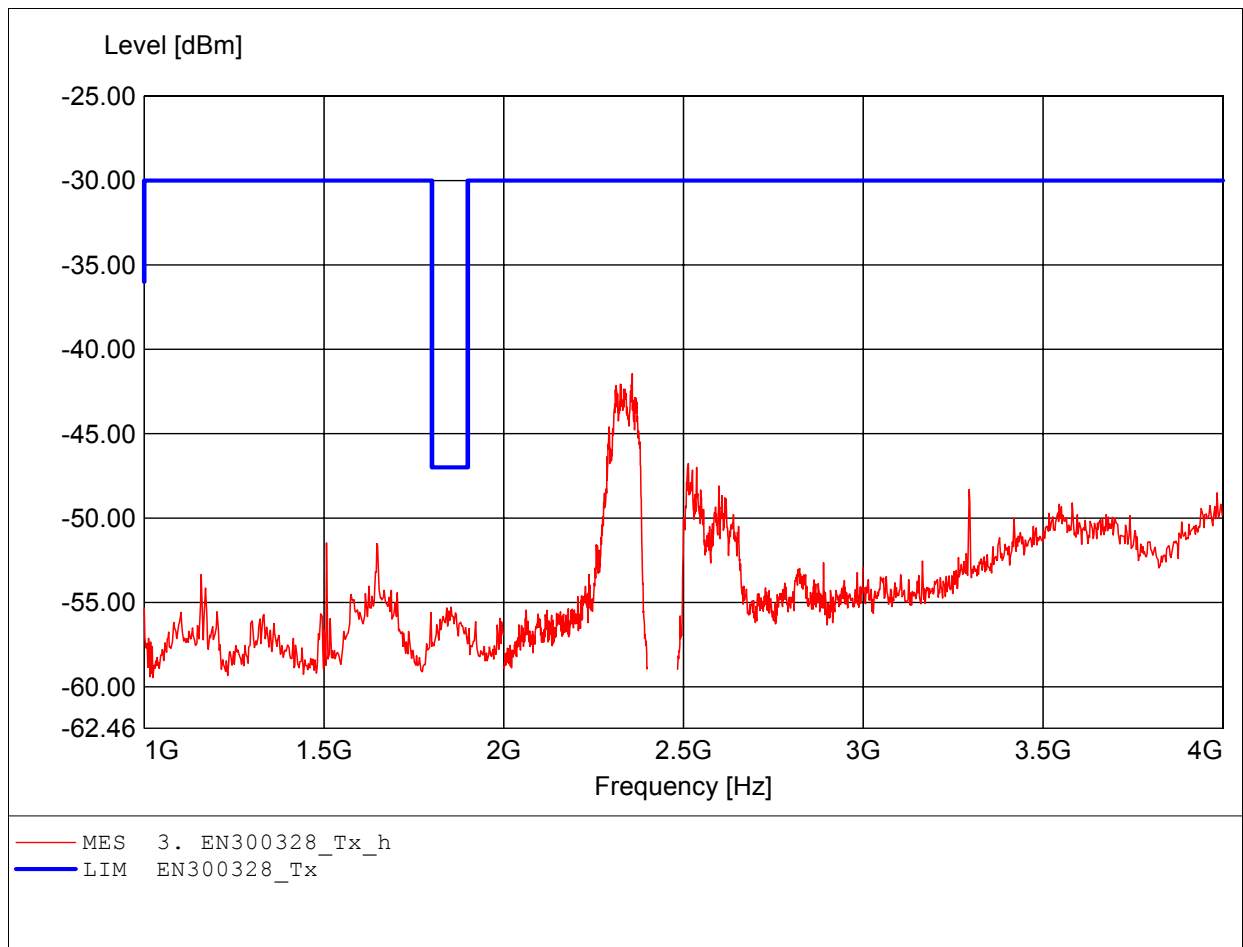

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:3.545GHz Pmax:-49.07dBm RBW: 100 kHz

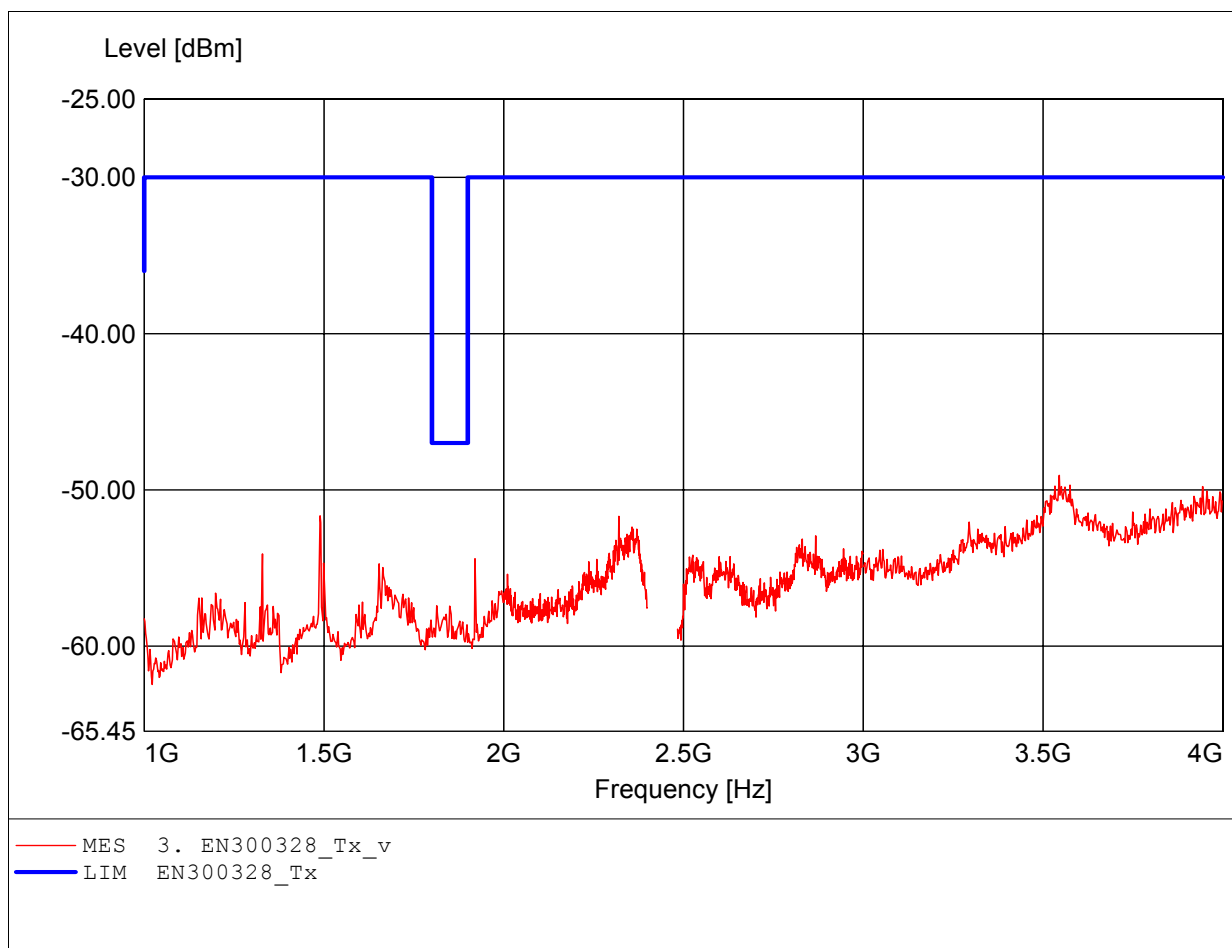

Spurious emissions under normal conditions


in accordance to the EN 300 328

Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:4.946GHz Pmax:-37.90dBm RBW: 100 kHz

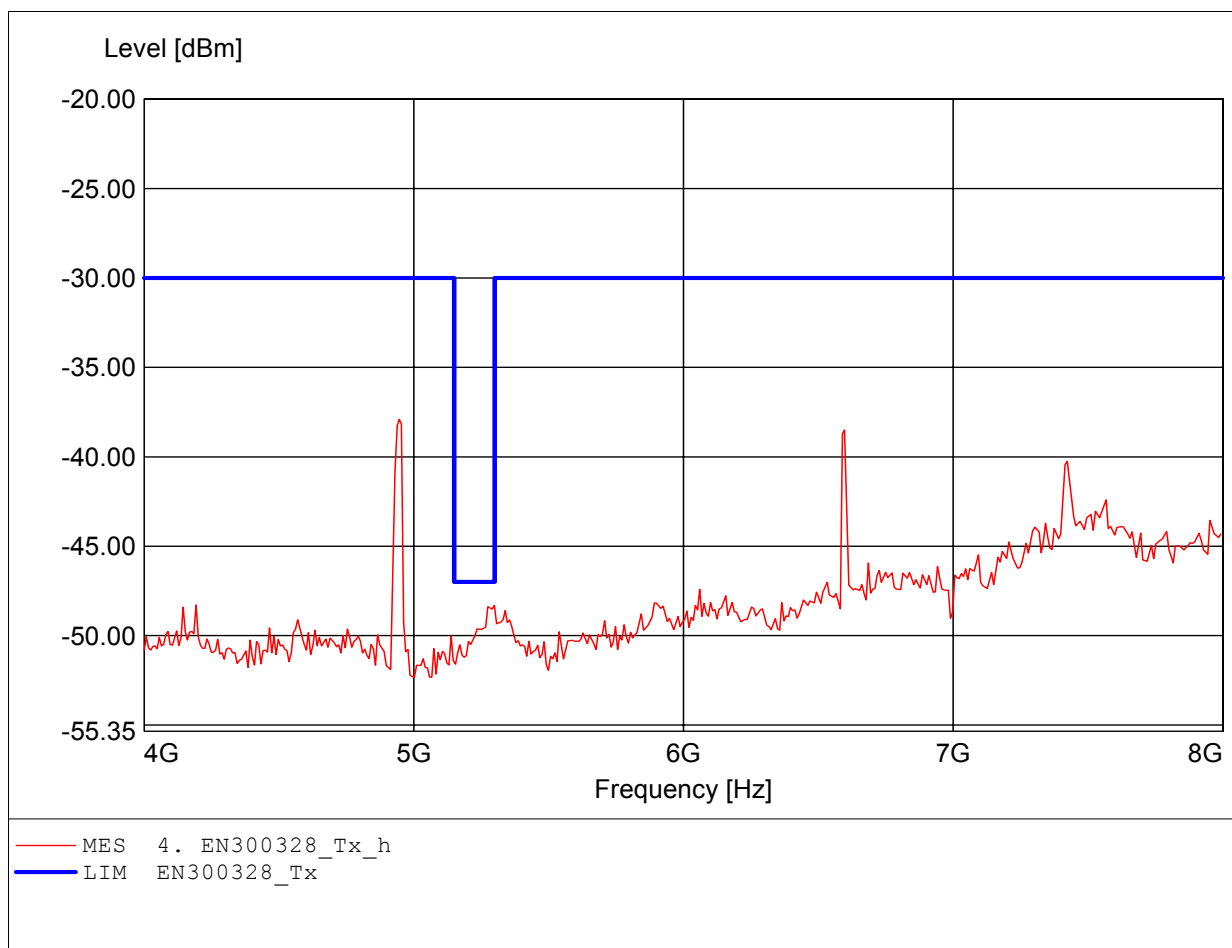

Spurious emissions under normal conditions
in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:6.589GHz Pmax:-32.19dBm RBW: 100 kHz

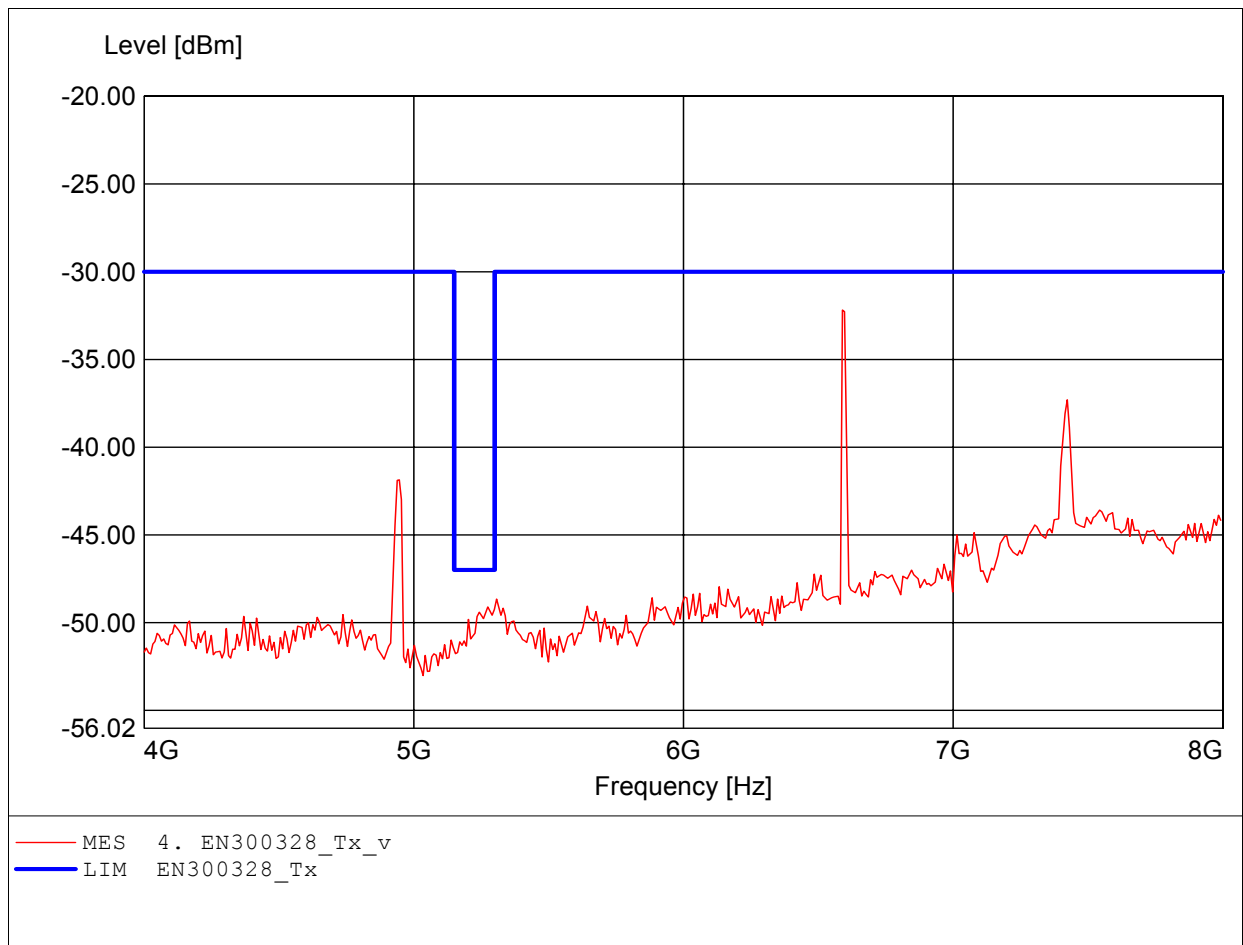

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.312GHz Pmax:-35.70dBm RBW: 100 kHz

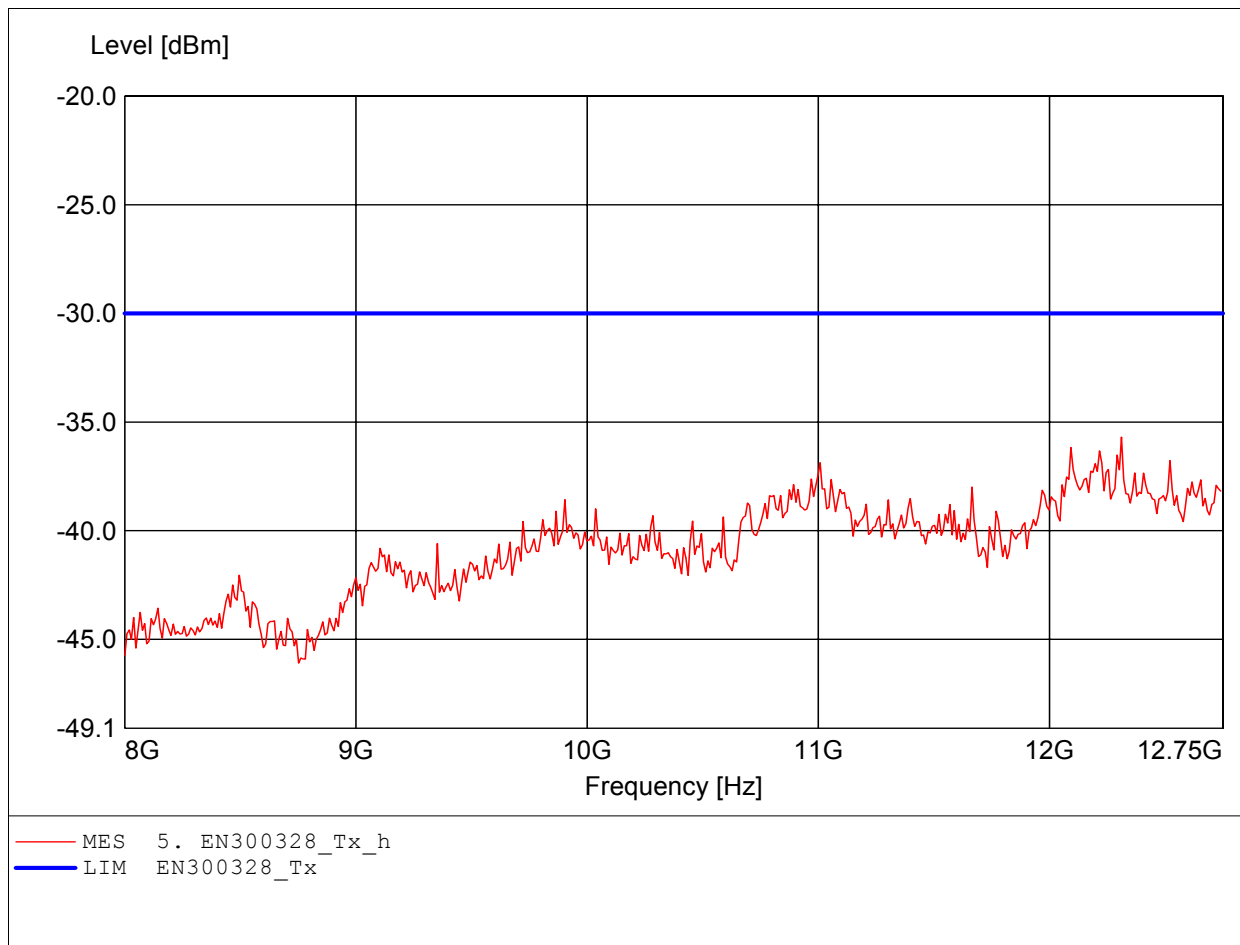

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.093GHz Pmax:-35.38dBm RBW: 100 kHz

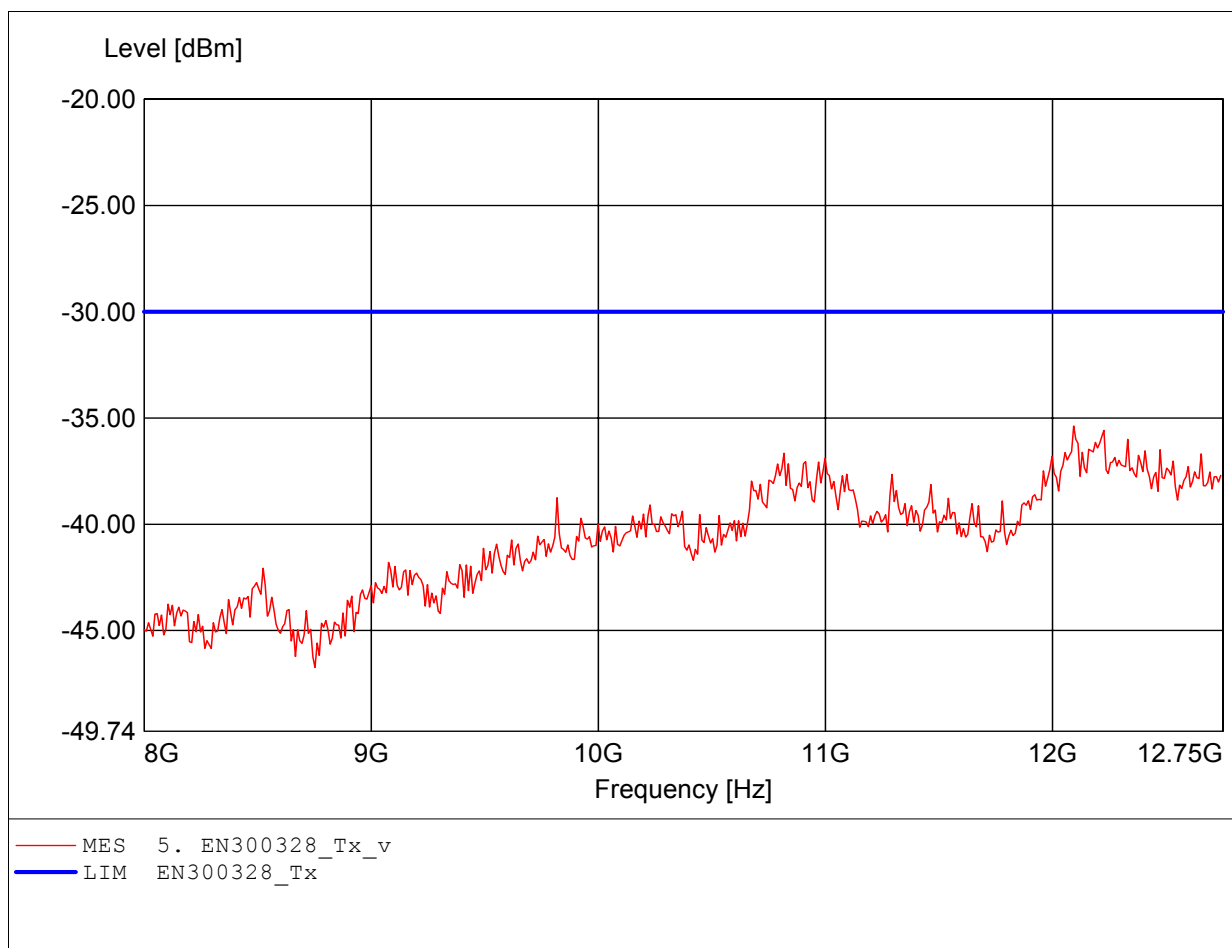

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:192.635MHz Pmax:-67.07dBm RBW: 100 kHz

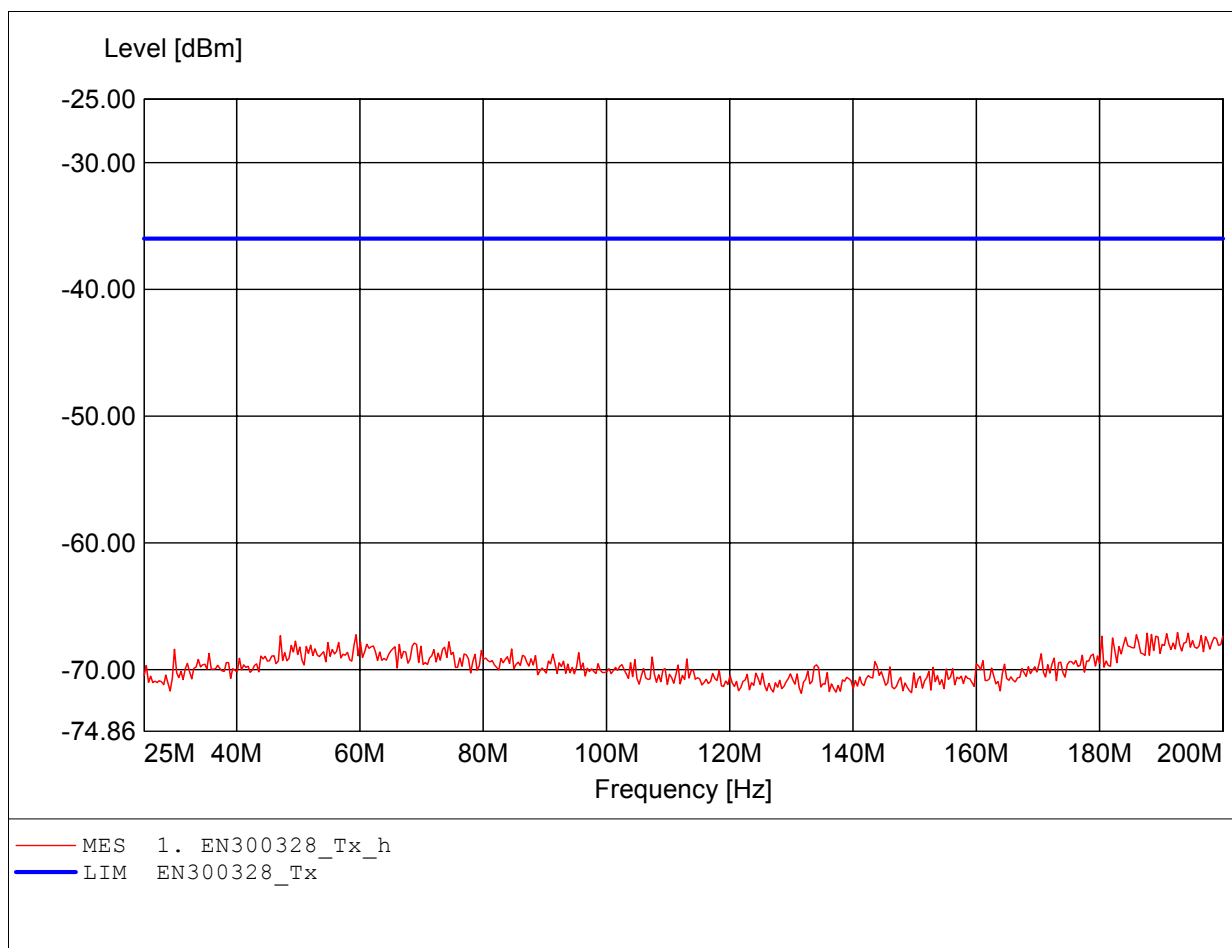

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:190.180MHz Pmax:-66.04dBm RBW: 100 kHz

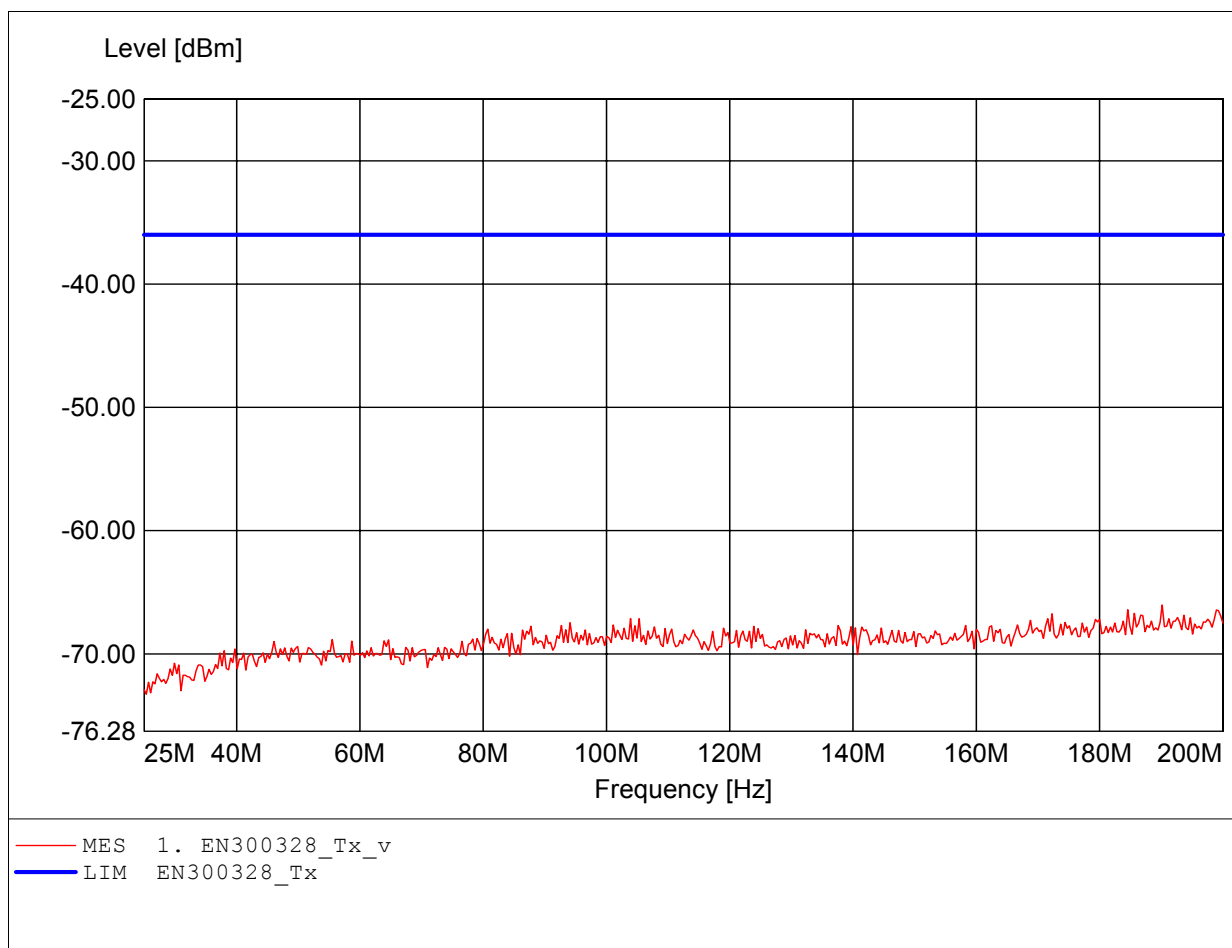

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:498.196MHz Pmax:-59.22dBm RBW: 100 kHz

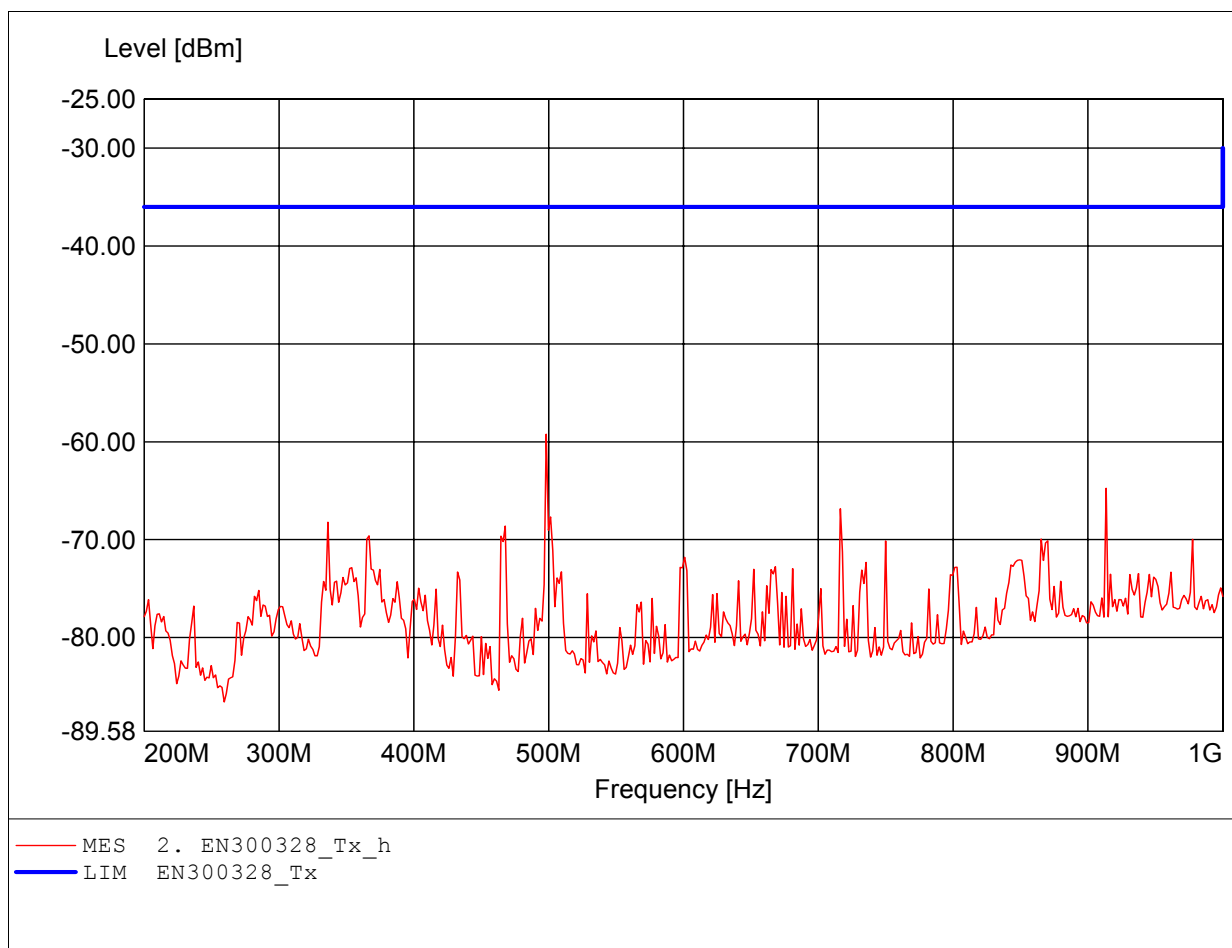

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:716.232MHz Pmax:-64.59dBm RBW: 100 kHz

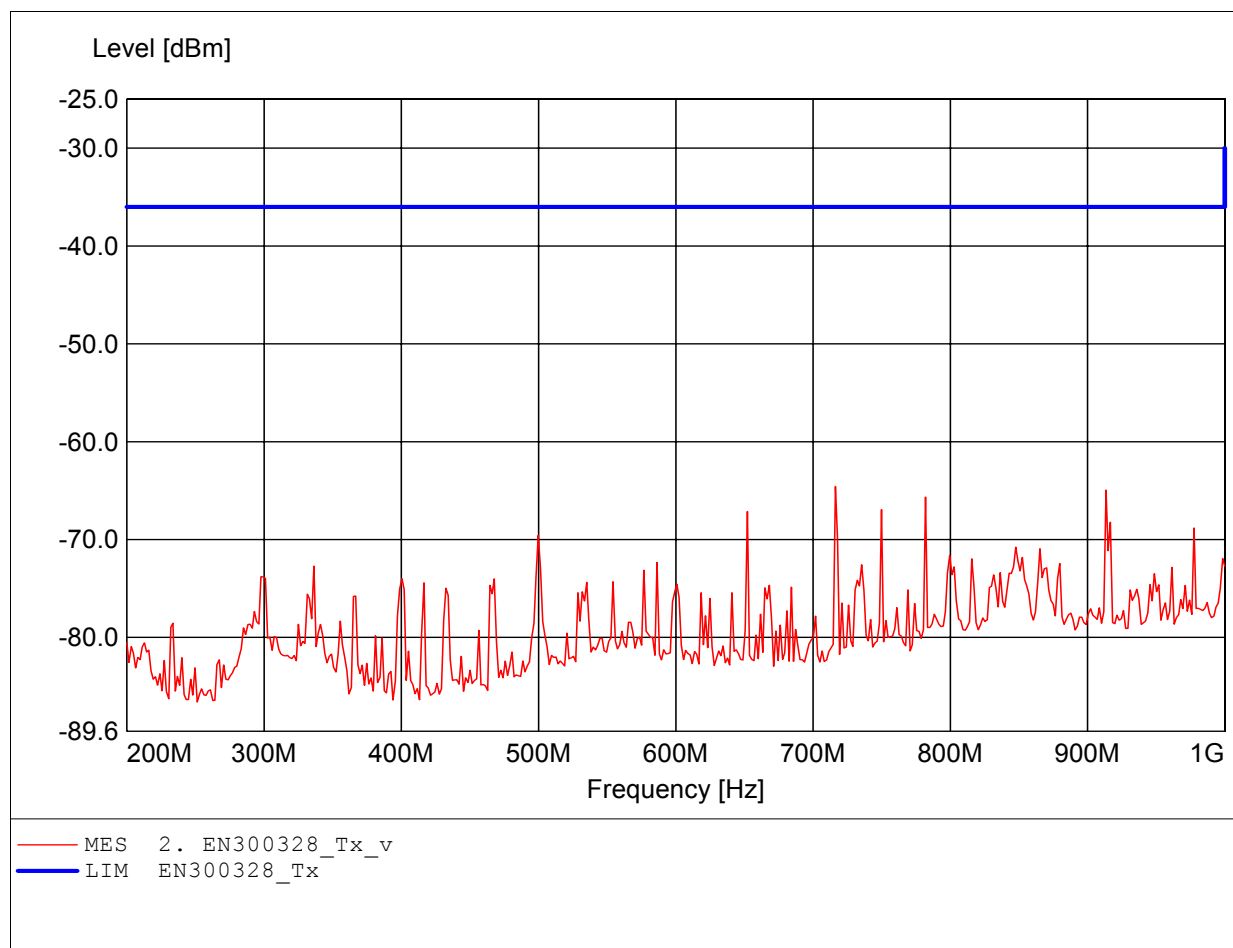

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:2.381GHz Pmax:-37.47dBm RBW: 100 kHz

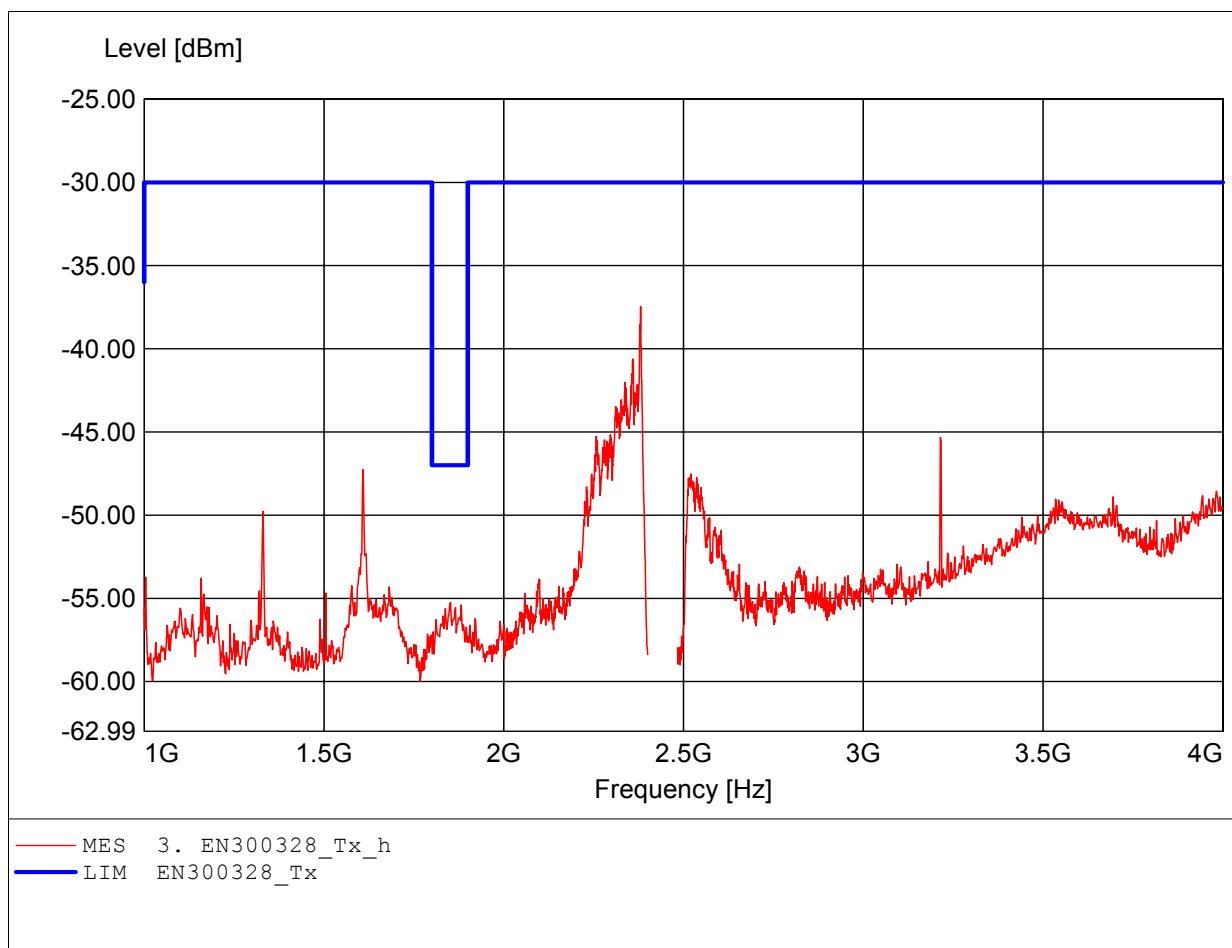

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:3.553GHz Pmax:-49.35dBm RBW: 100 kHz

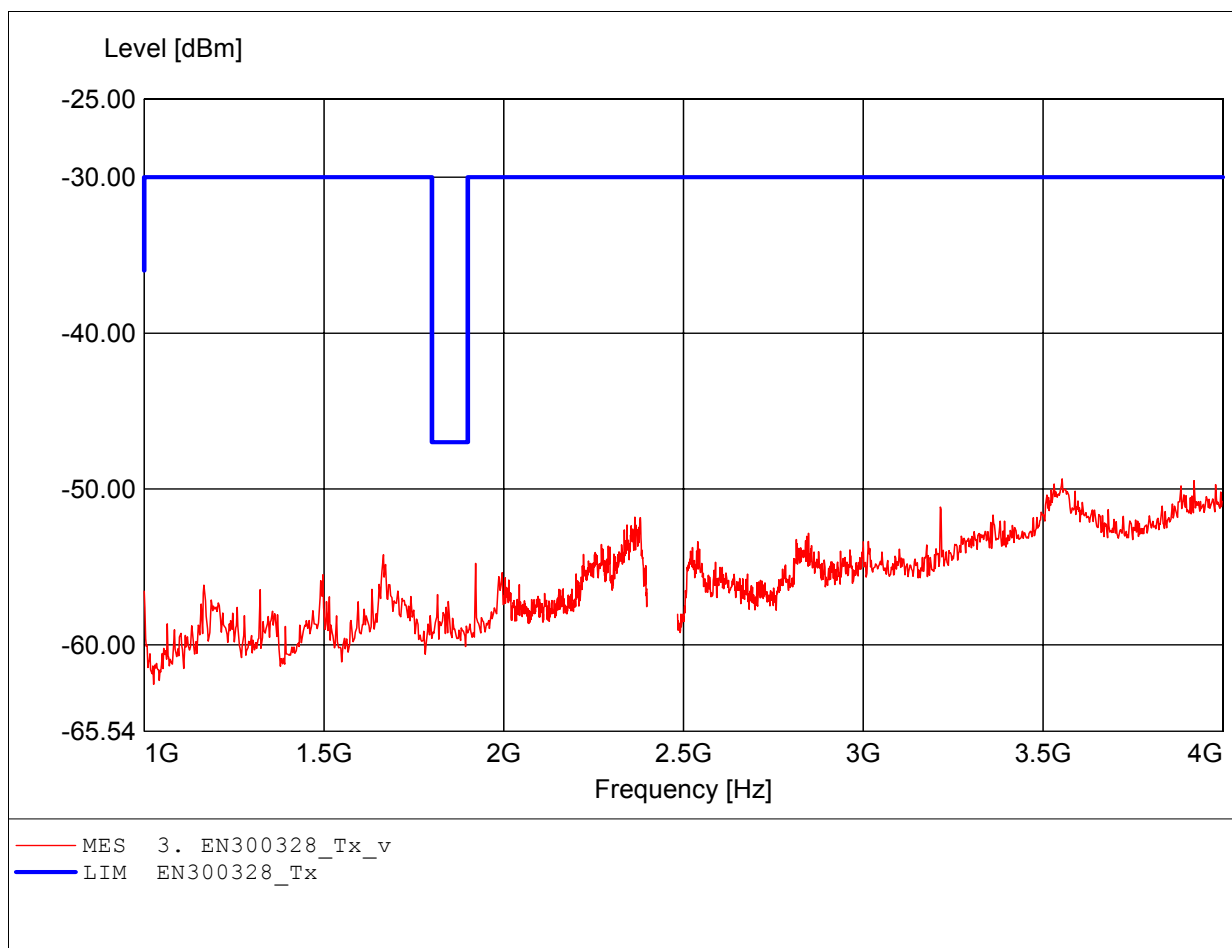

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:6.437GHz Pmax:-34.12dBm RBW: 100 kHz

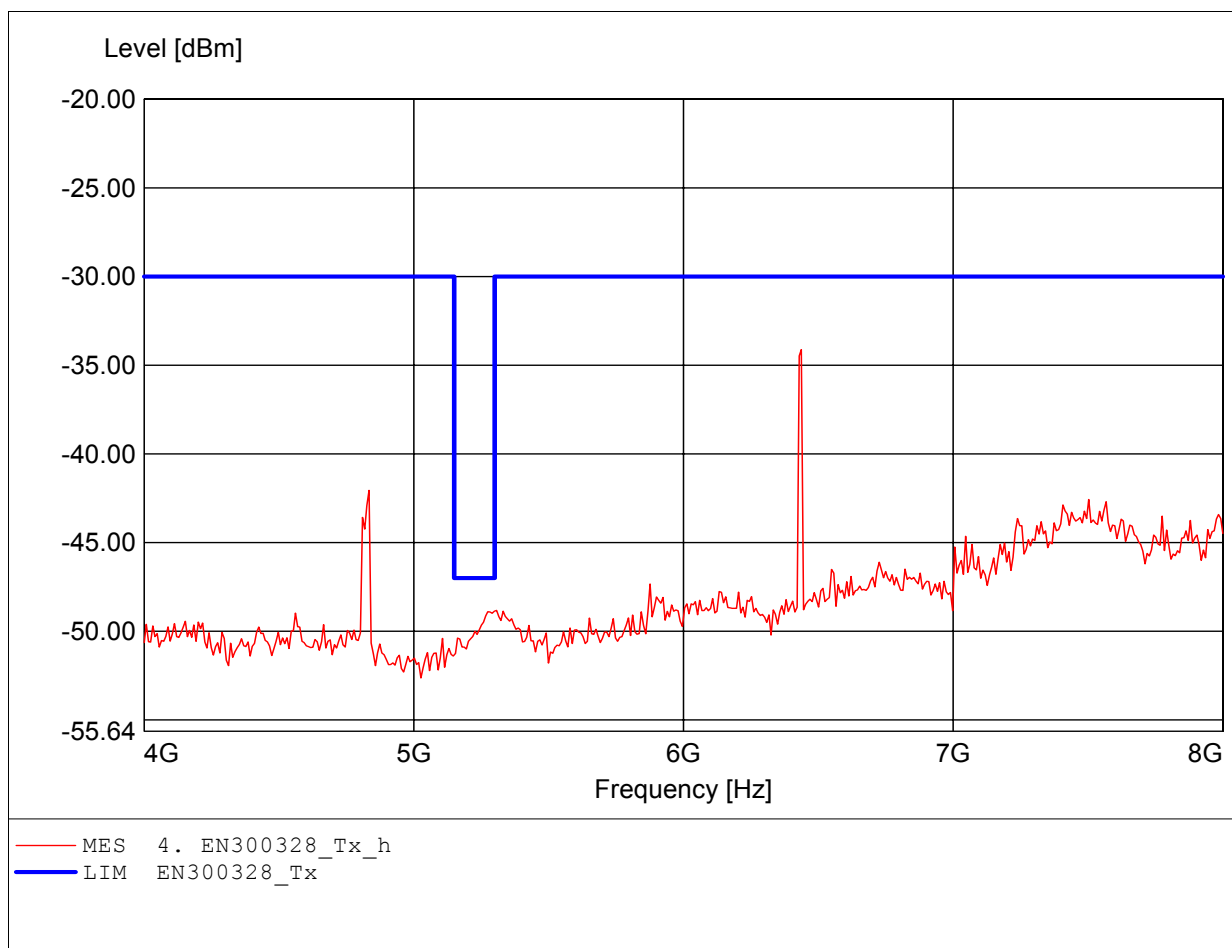

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:6.437GHz Pmax:-32.27dBm RBW: 100 kHz

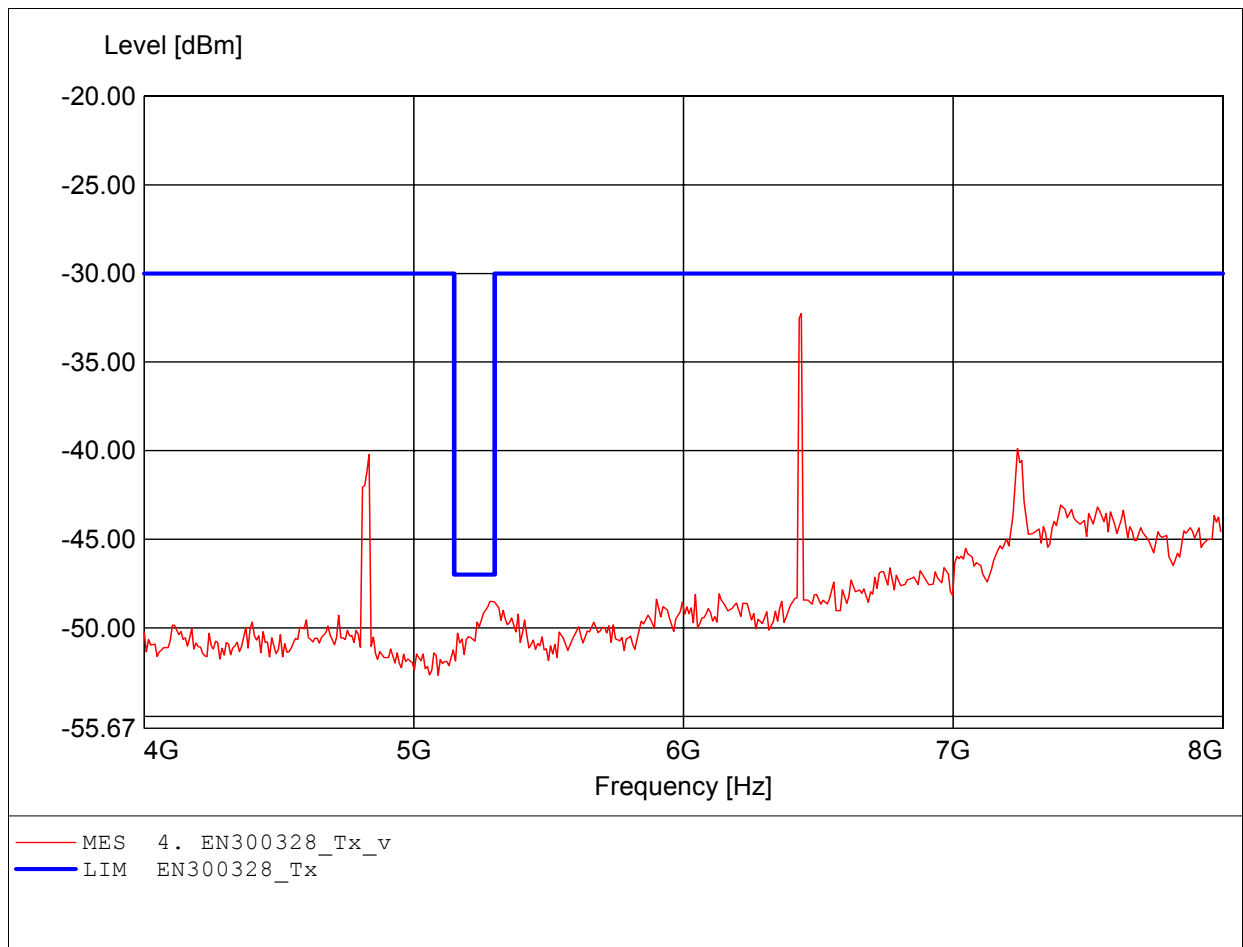

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.417GHz Pmax:-36.40dBm RBW: 100 kHz

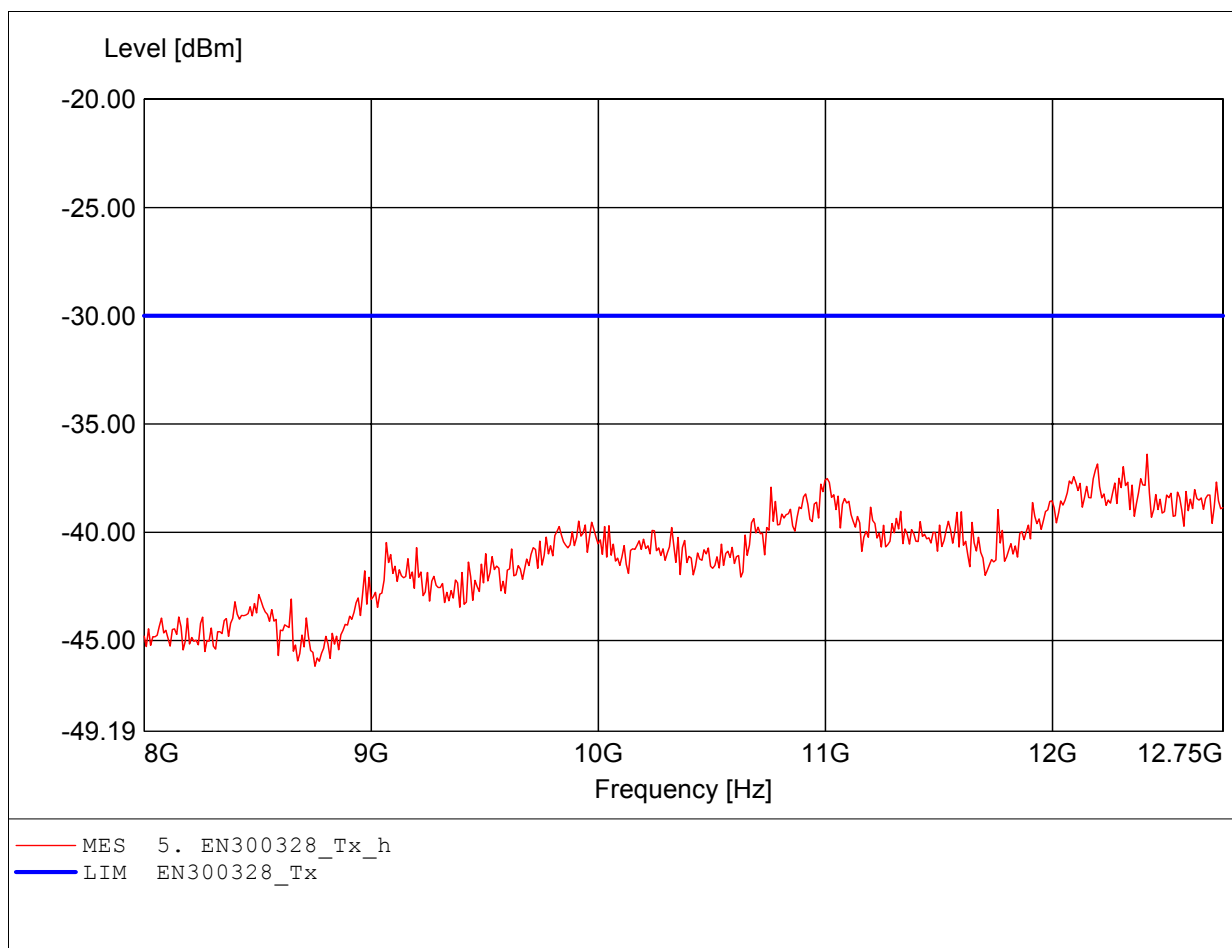

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.188GHz Pmax:-35.30dBm RBW: 100 kHz

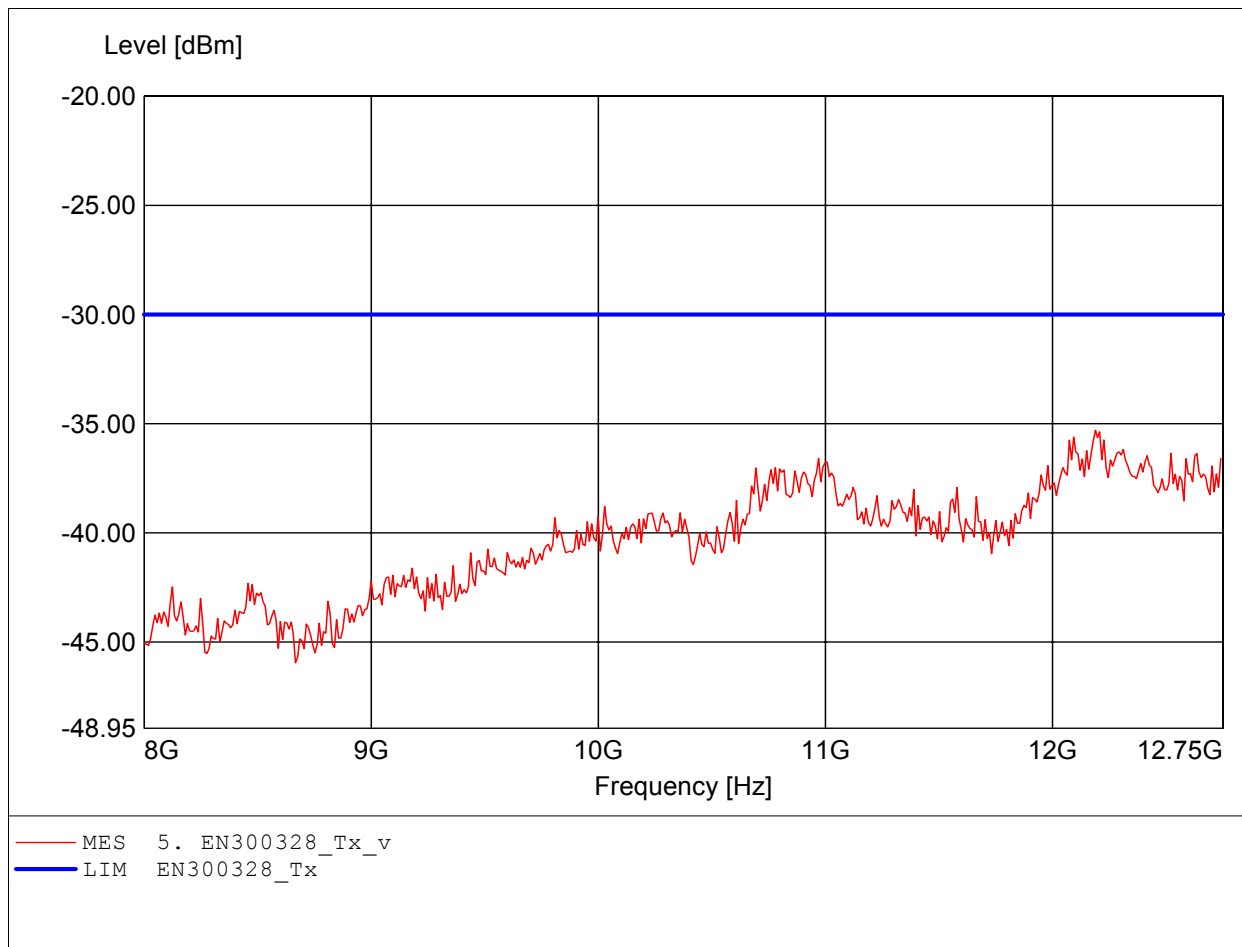

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:191.583MHz Pmax:-66.55dBm RBW: 100 kHz

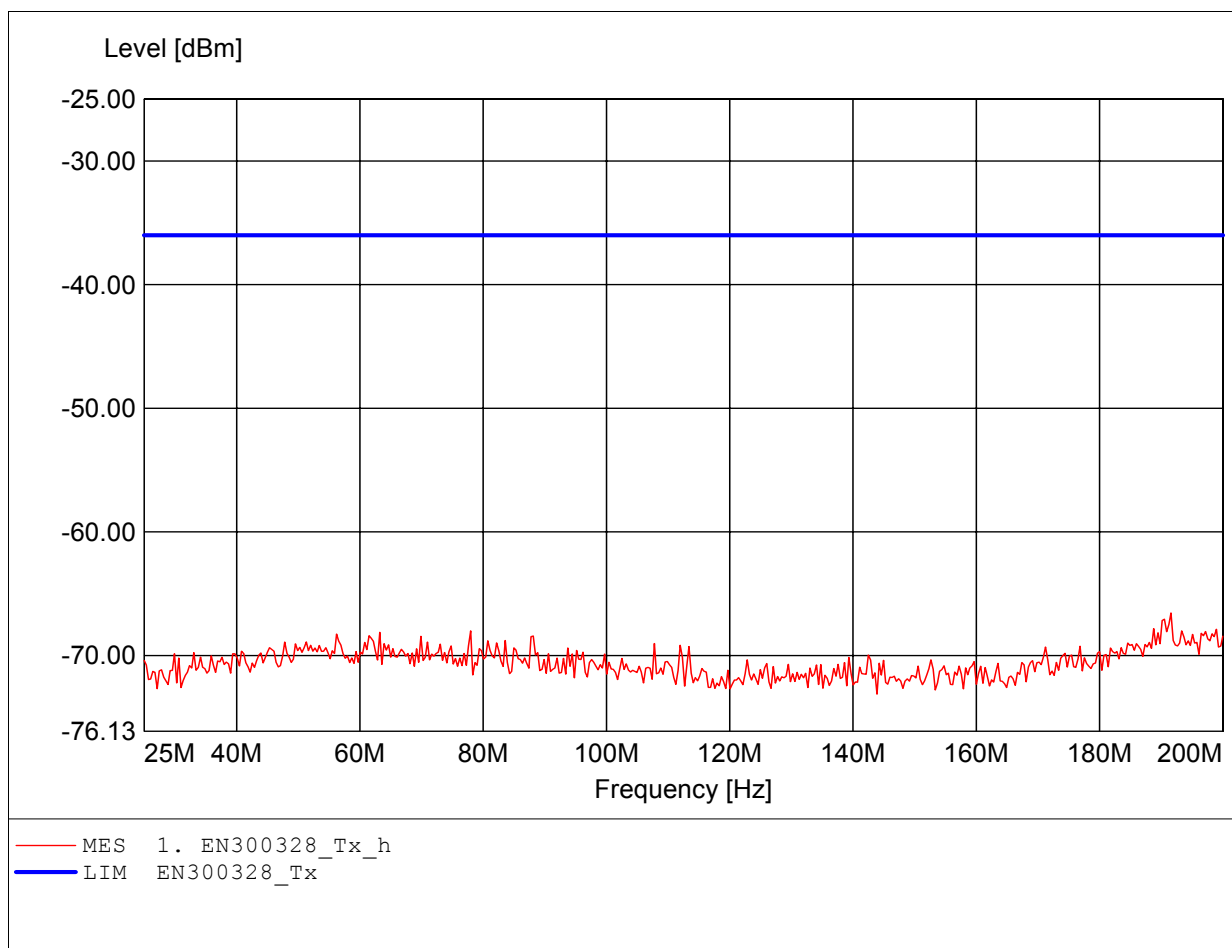

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:181.764MHz Pmax:-65.29dBm RBW: 100 kHz

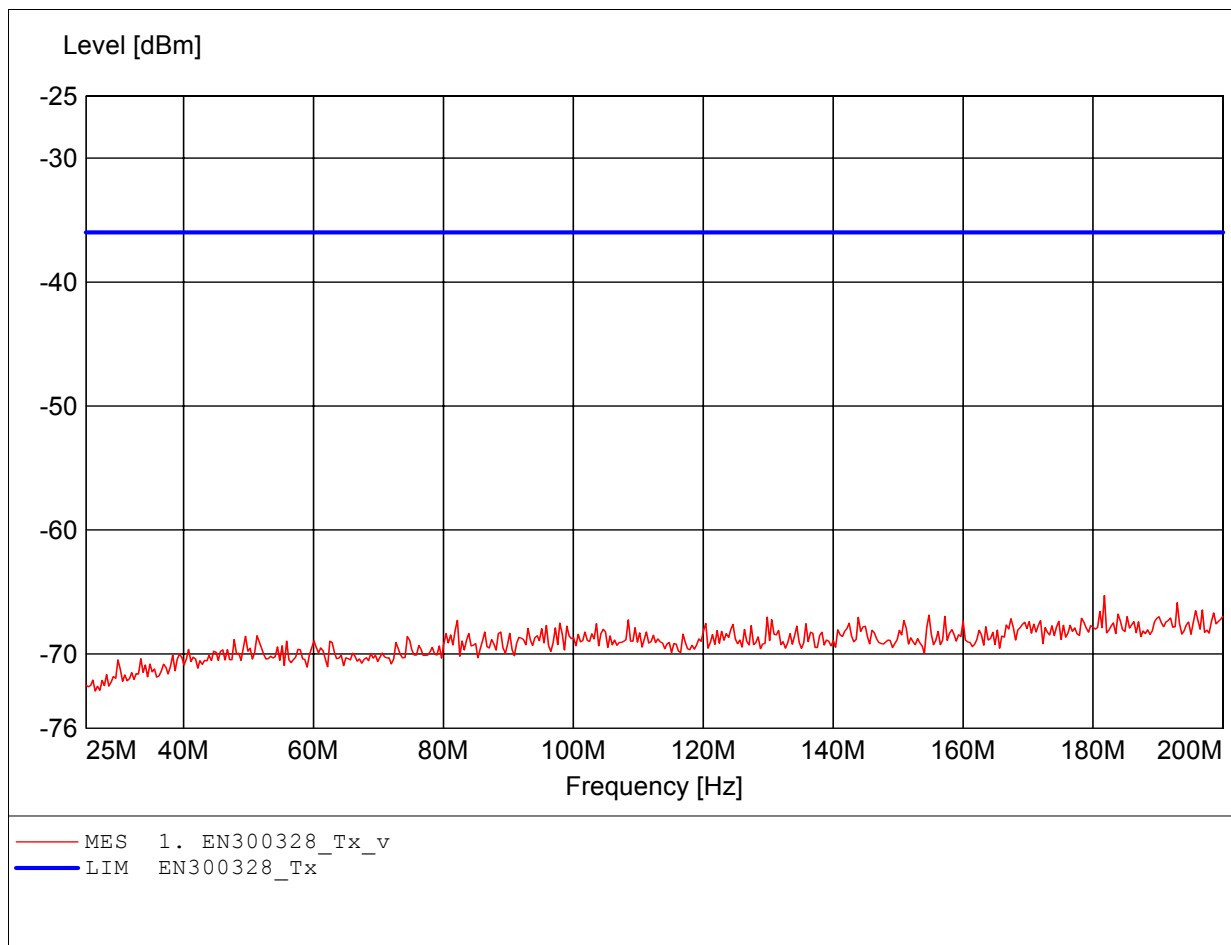

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:575.150MHz Pmax:-62.28dBm RBW: 100 kHz

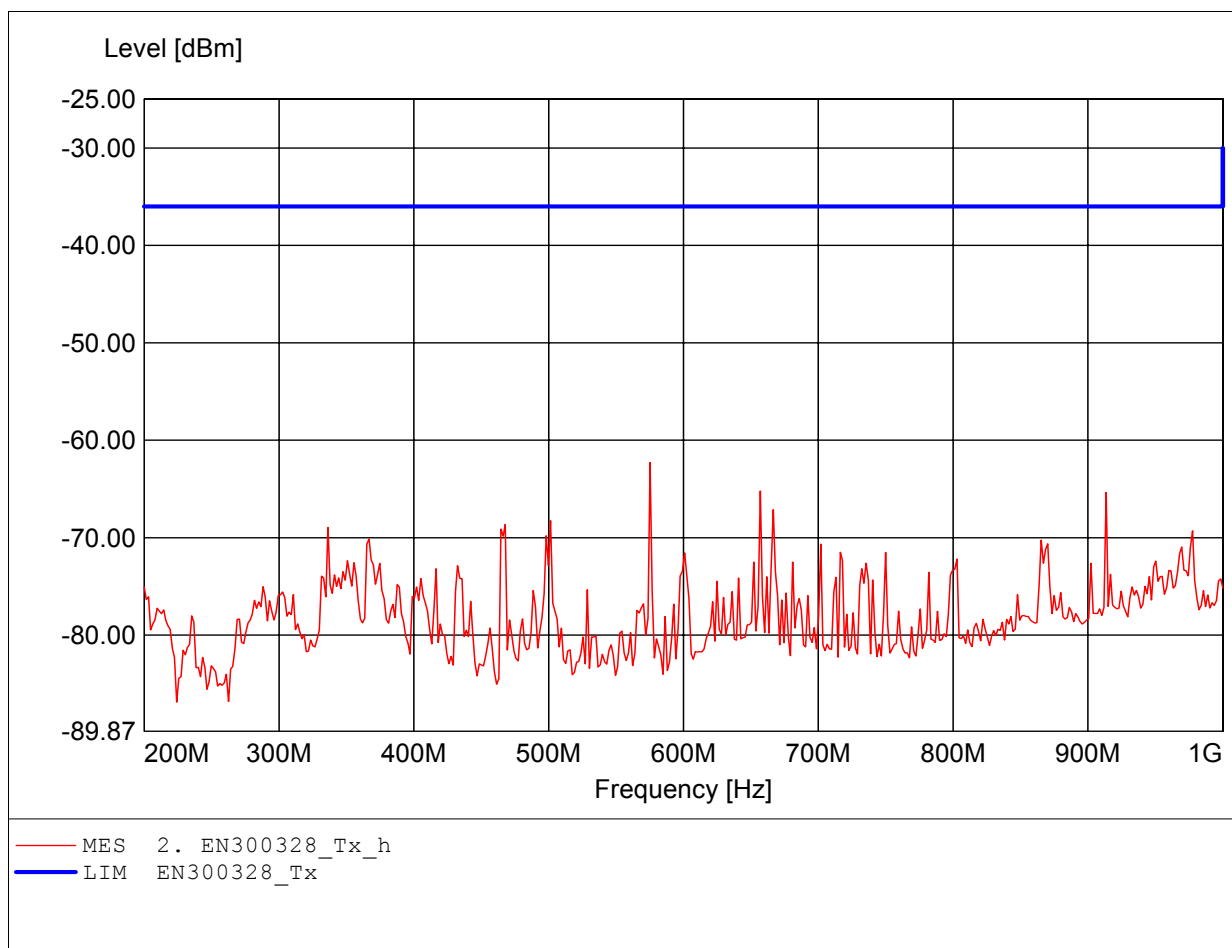

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:716.232MHz Pmax:-66.29dBm RBW: 100 kHz

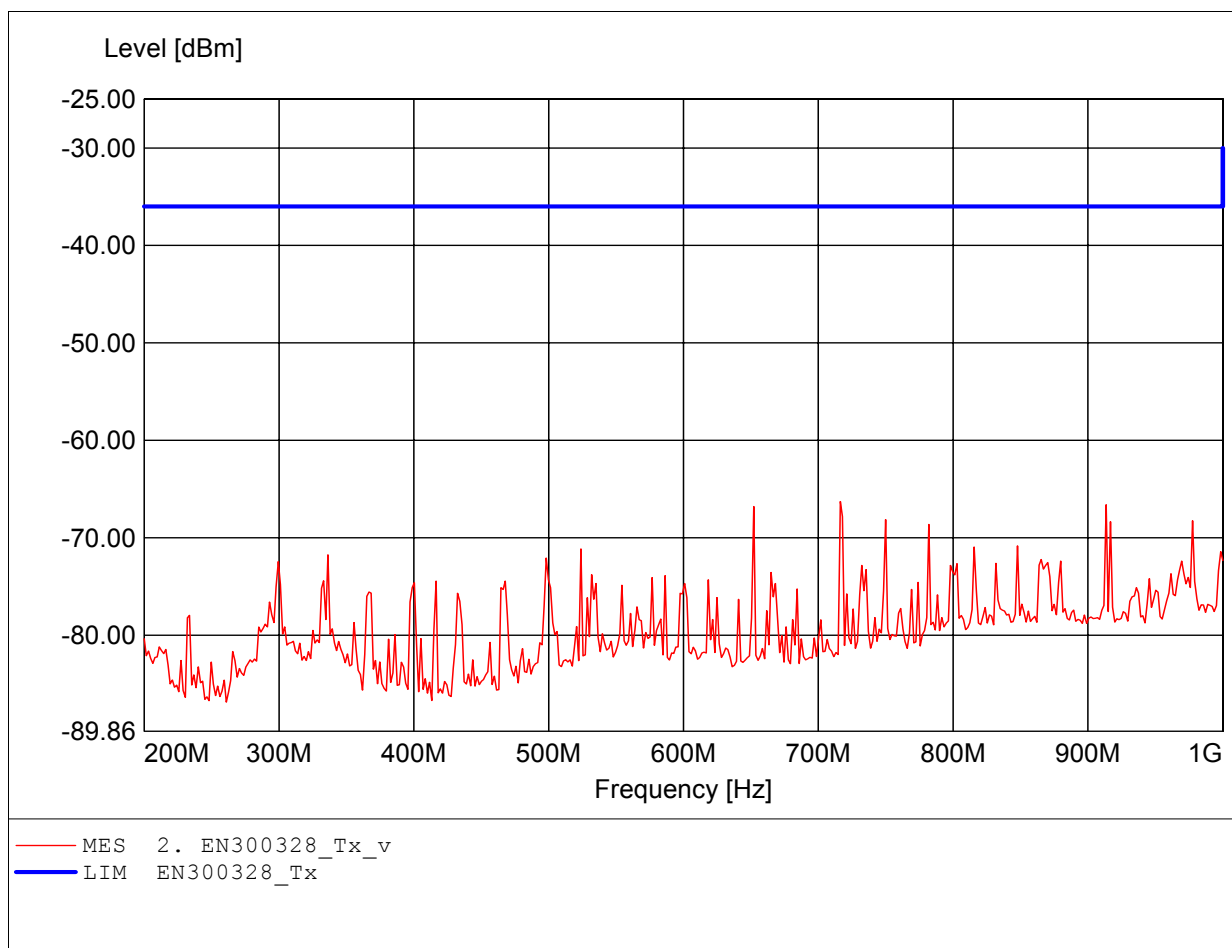

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:2.315GHz Pmax:-41.87dBm RBW: 100 kHz

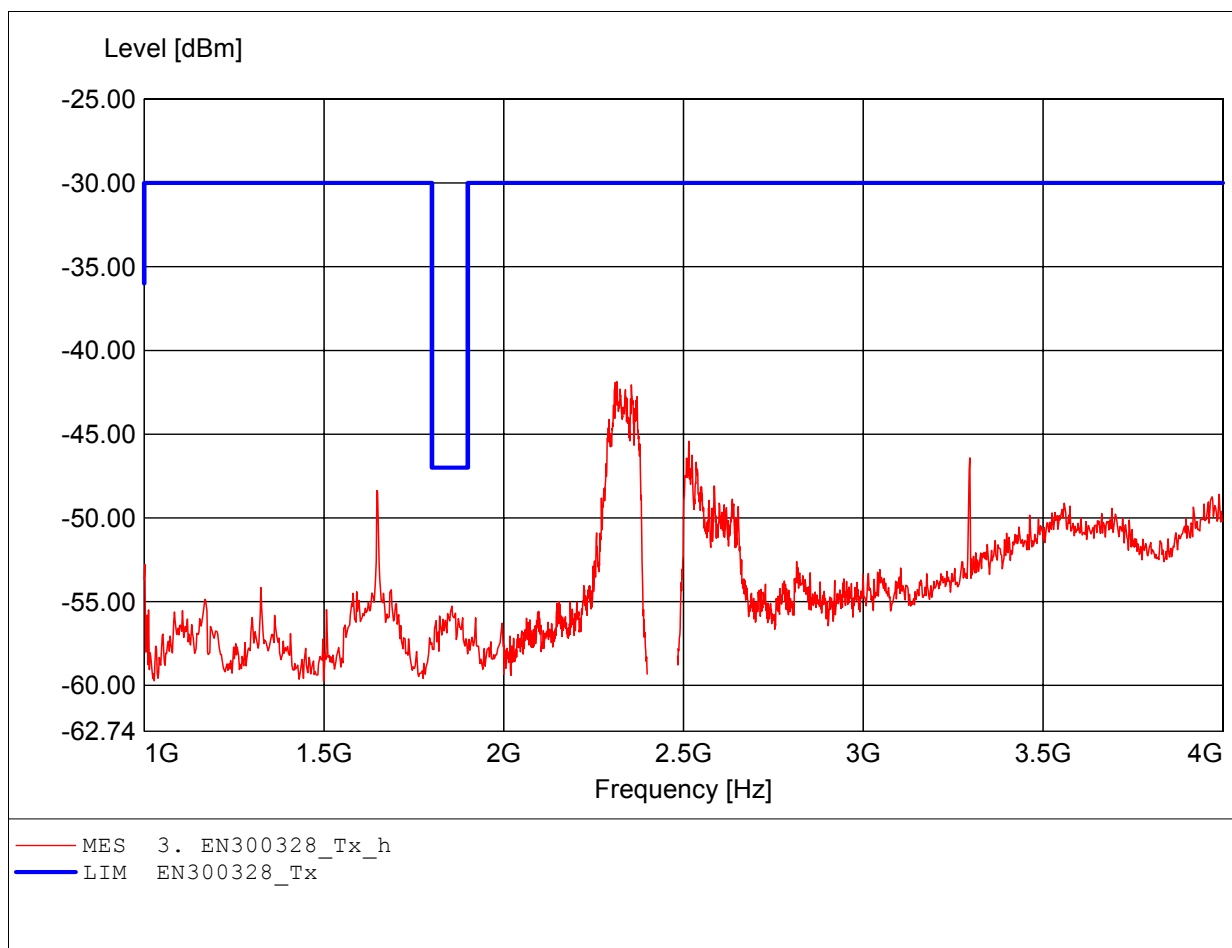

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:1.758GHz Pmax:-46.71dBm RBW: 100 kHz

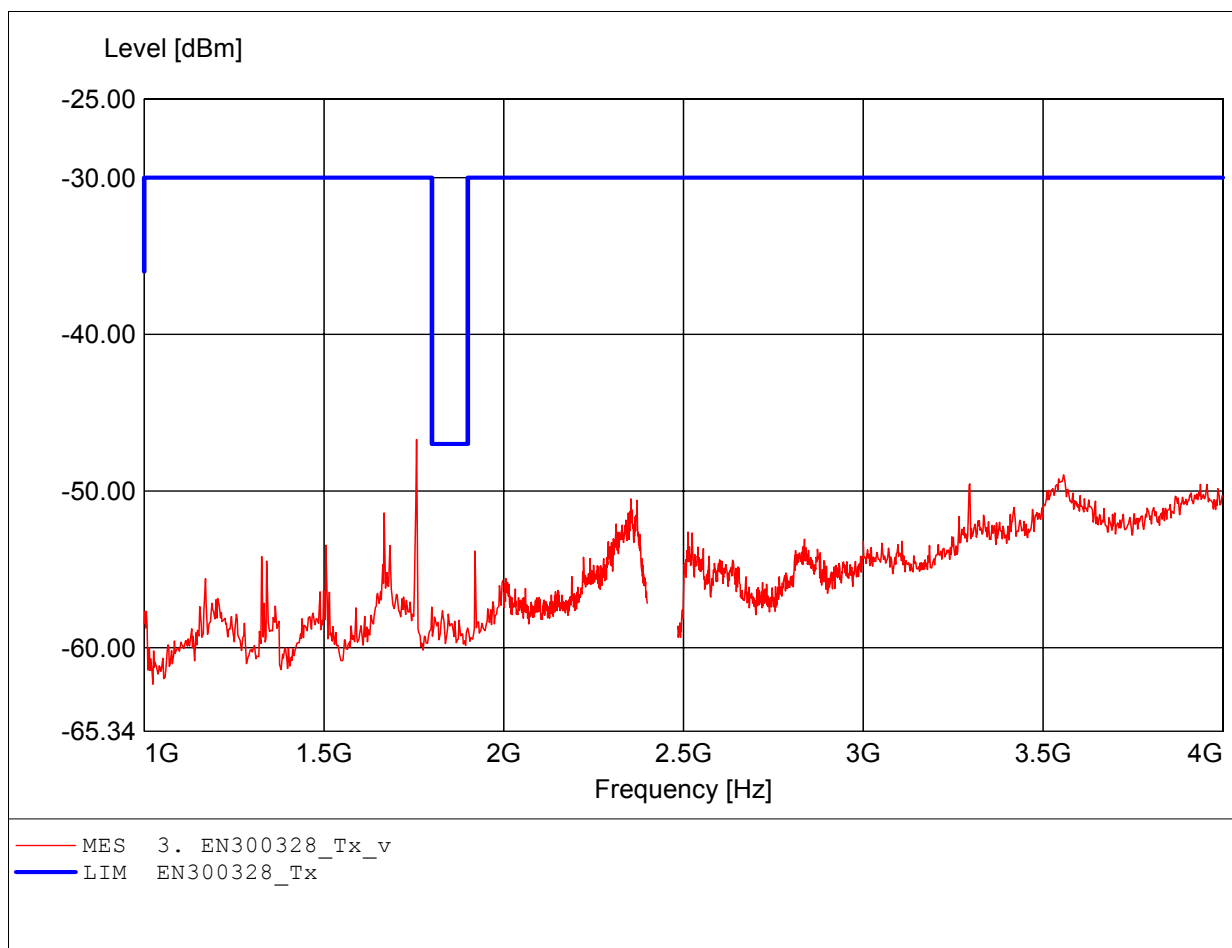

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:7.423GHz Pmax:-39.09dBm RBW: 100 kHz

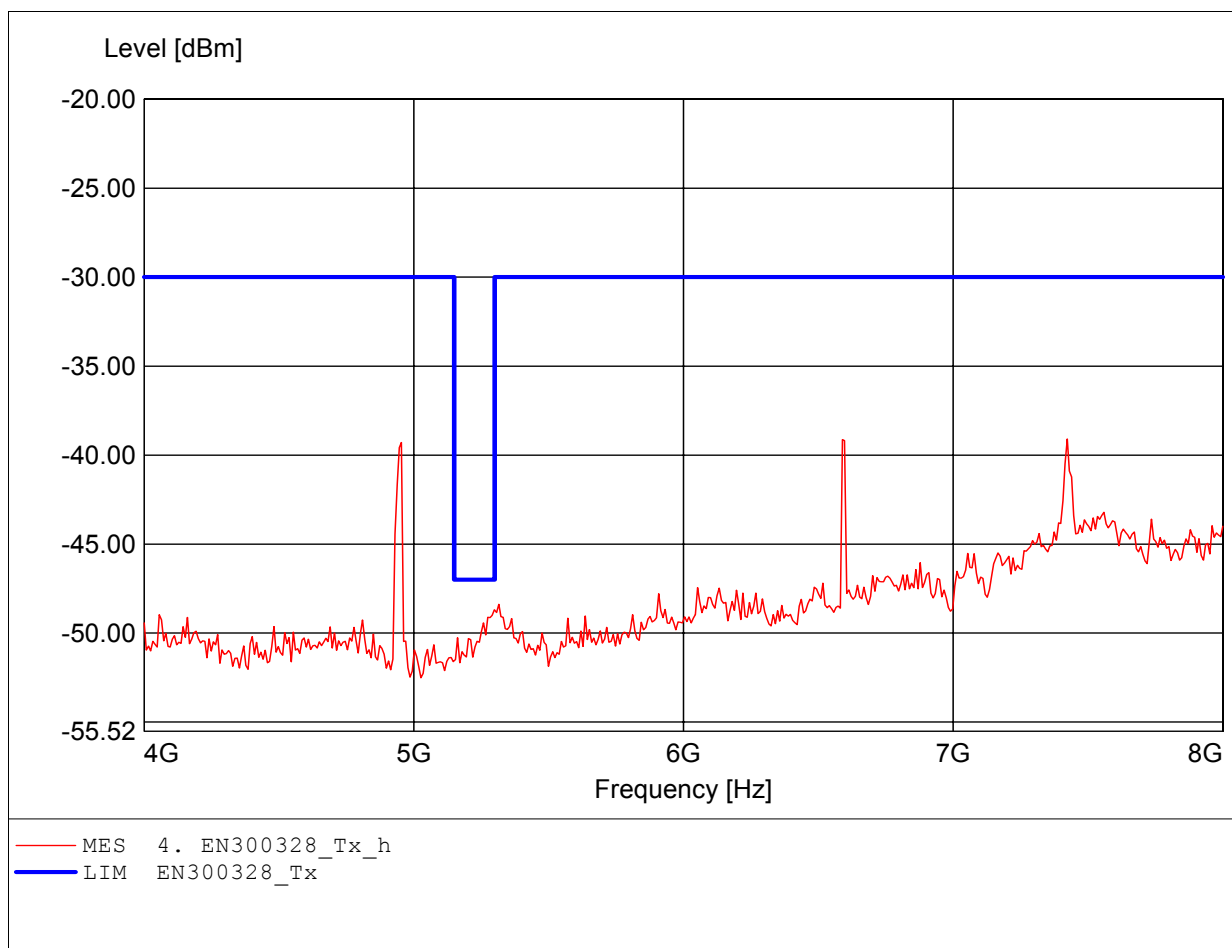

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:6.597GHz Pmax:-33.59dBm RBW: 100 kHz

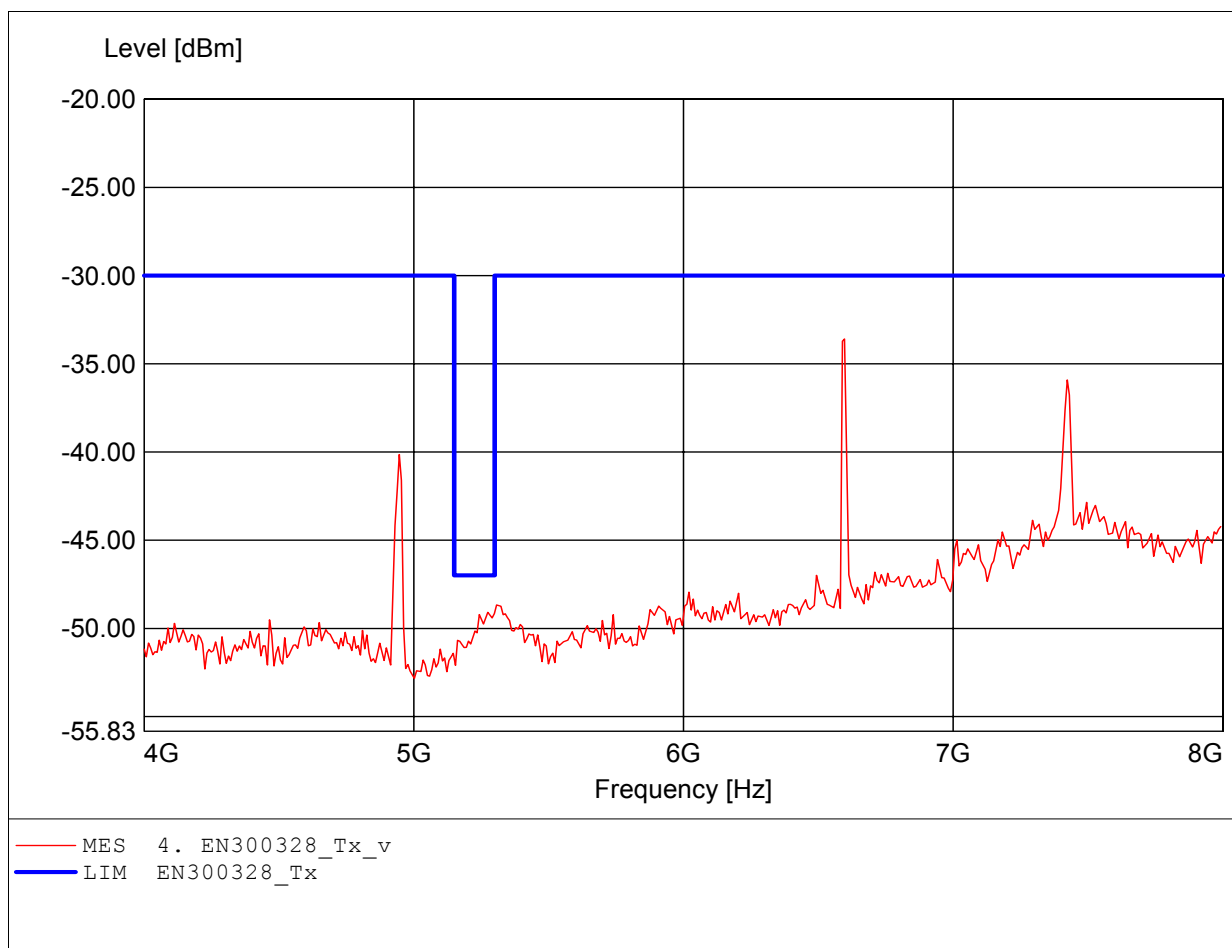

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.188GHz Pmax:-36.59dBm RBW: 100 kHz

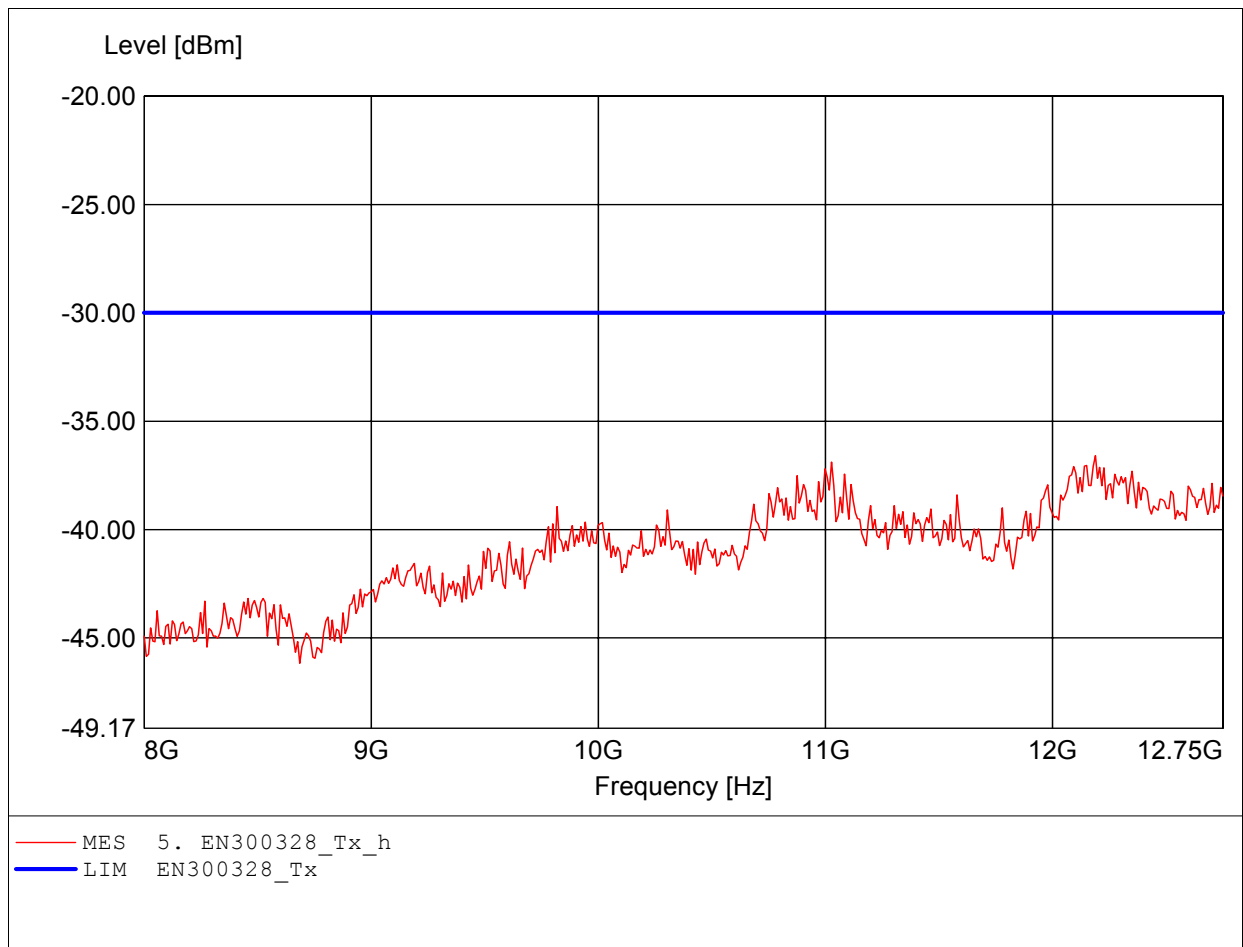

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.312GHz Pmax:-35.95dBm RBW: 100 kHz

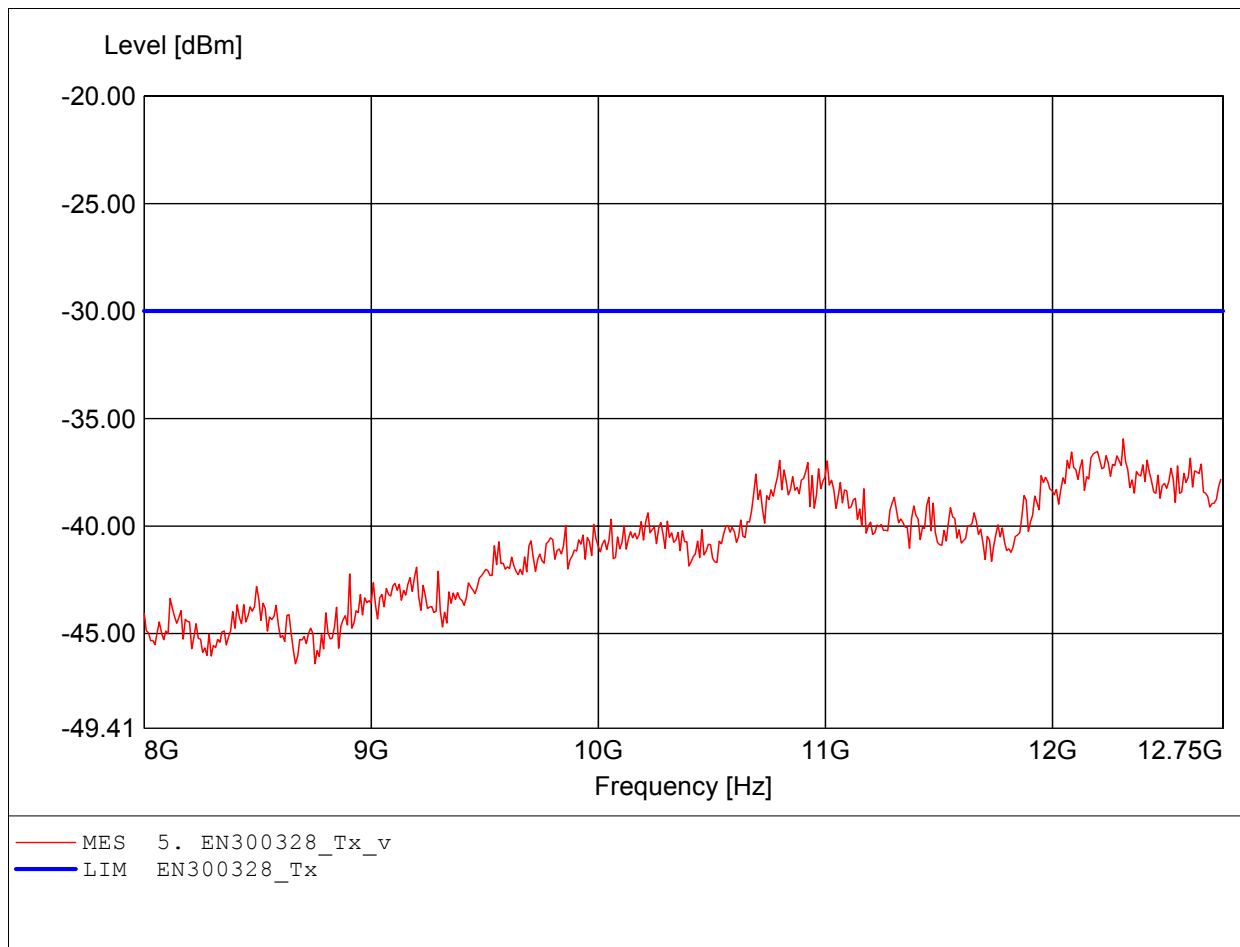

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:196.142MHz Pmax:-67.18dBm RBW: 100 kHz

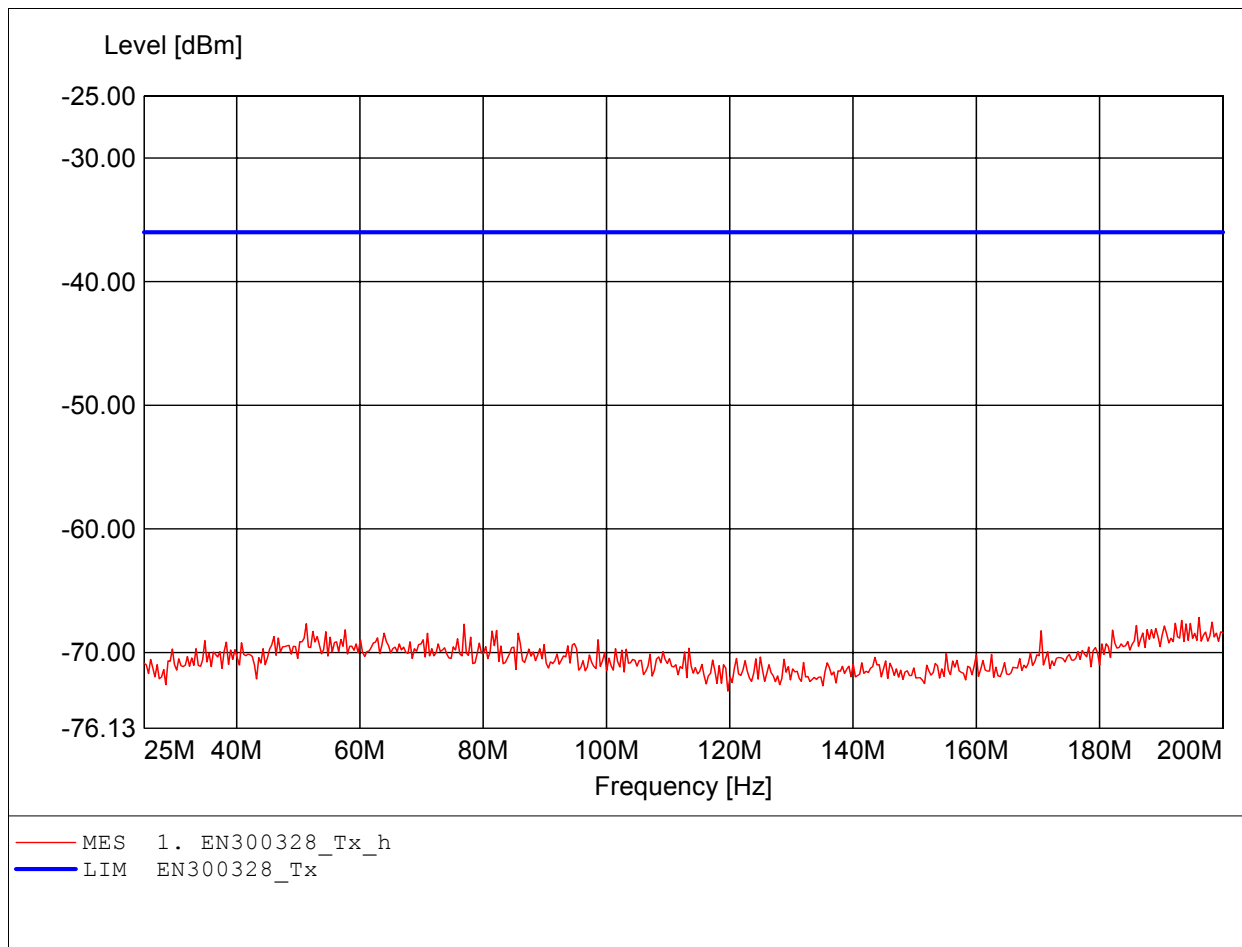

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:197.545MHz Pmax:-65.97dBm RBW: 100 kHz

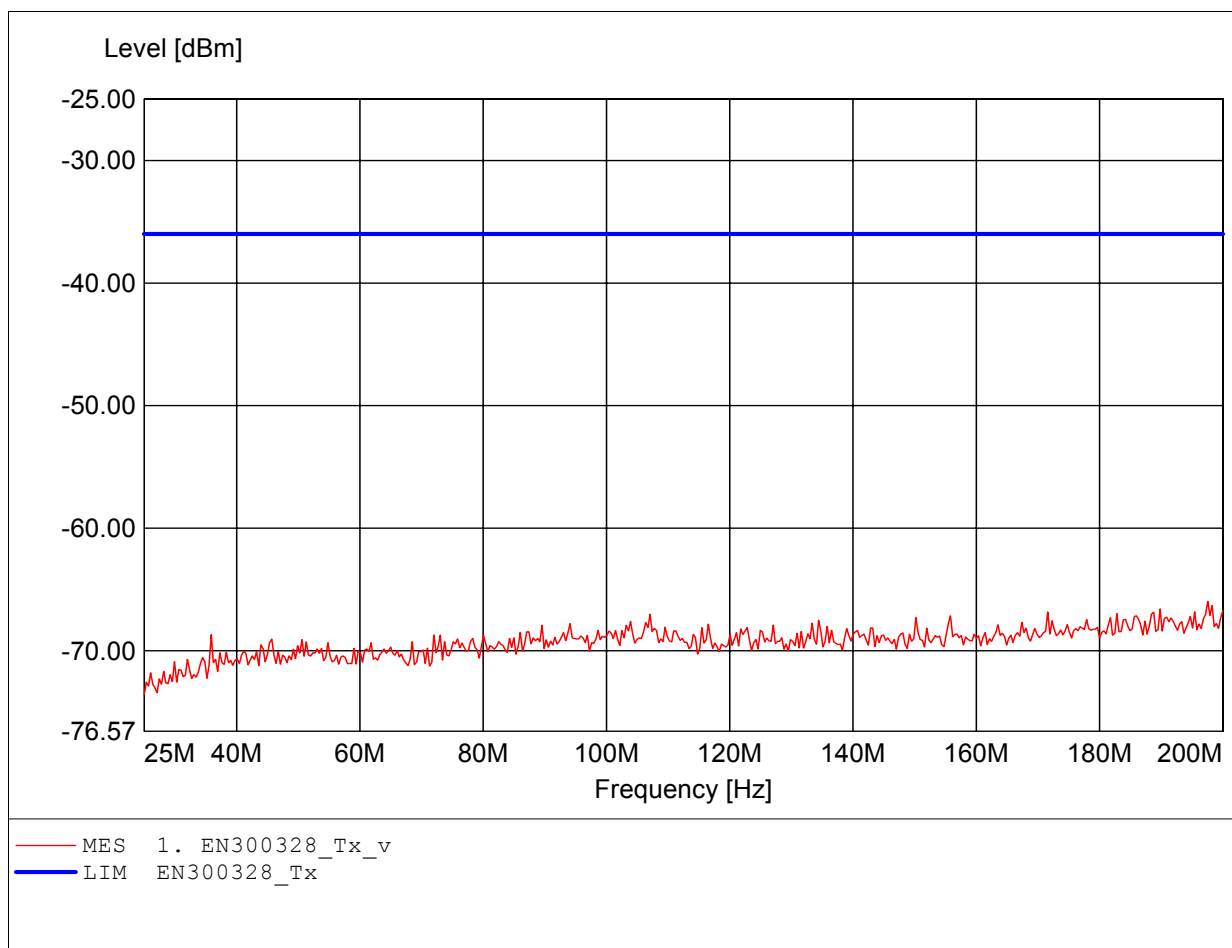

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:913.427MHz Pmax:-65.63dBm RBW: 100 kHz

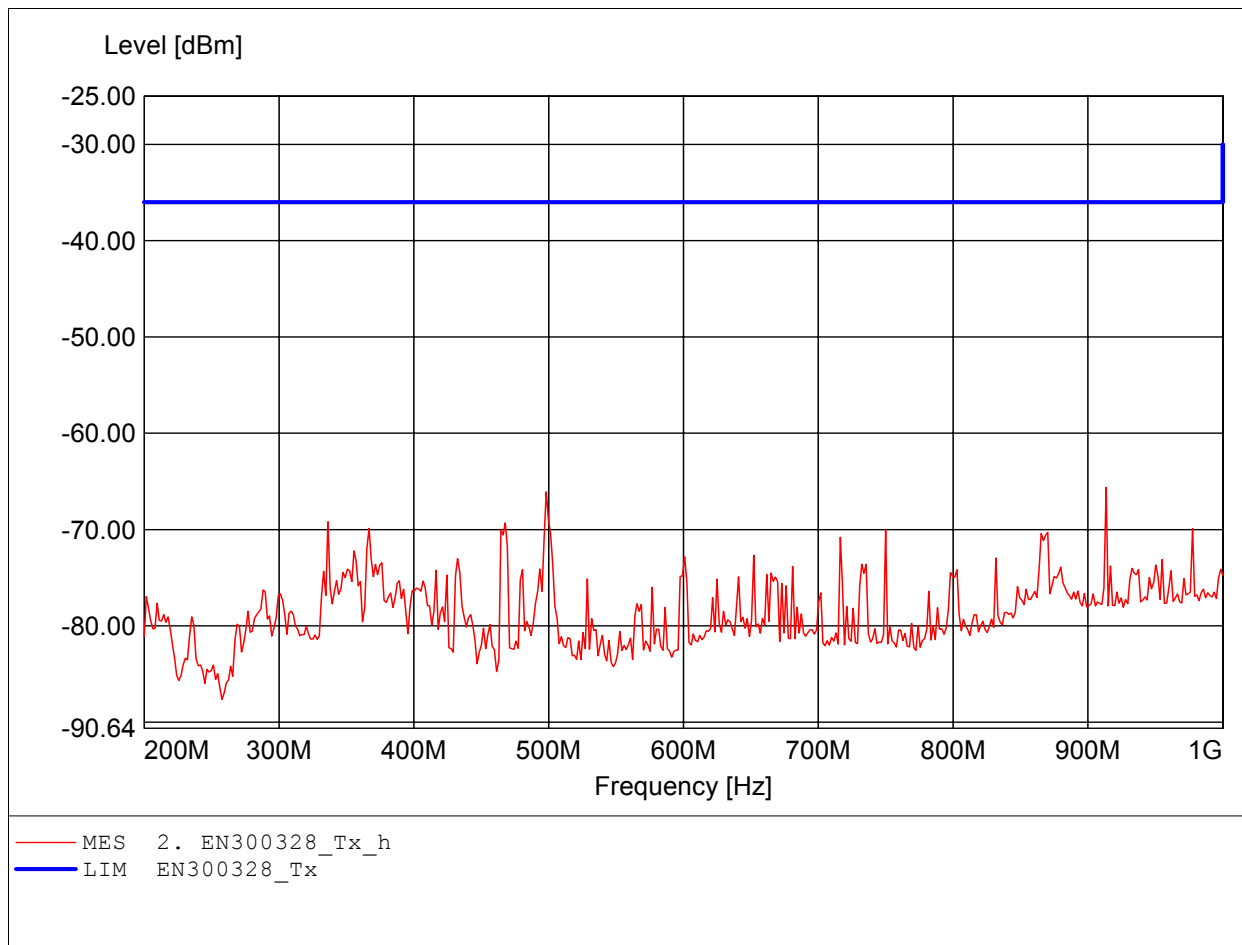

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:913.427MHz Pmax:-65.78dBm RBW: 100 kHz

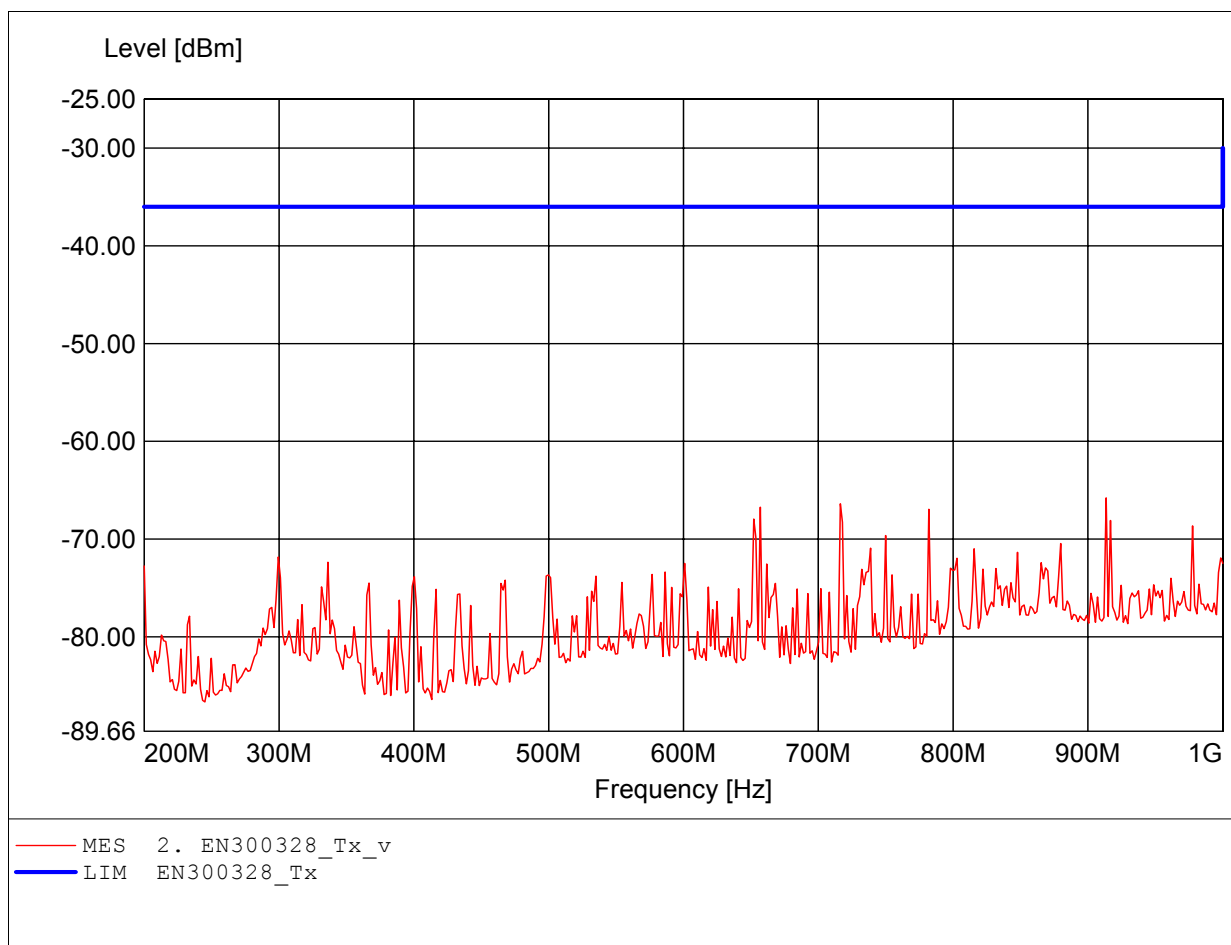

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:2.374GHz Pmax:-36.95dBm RBW: 100 kHz

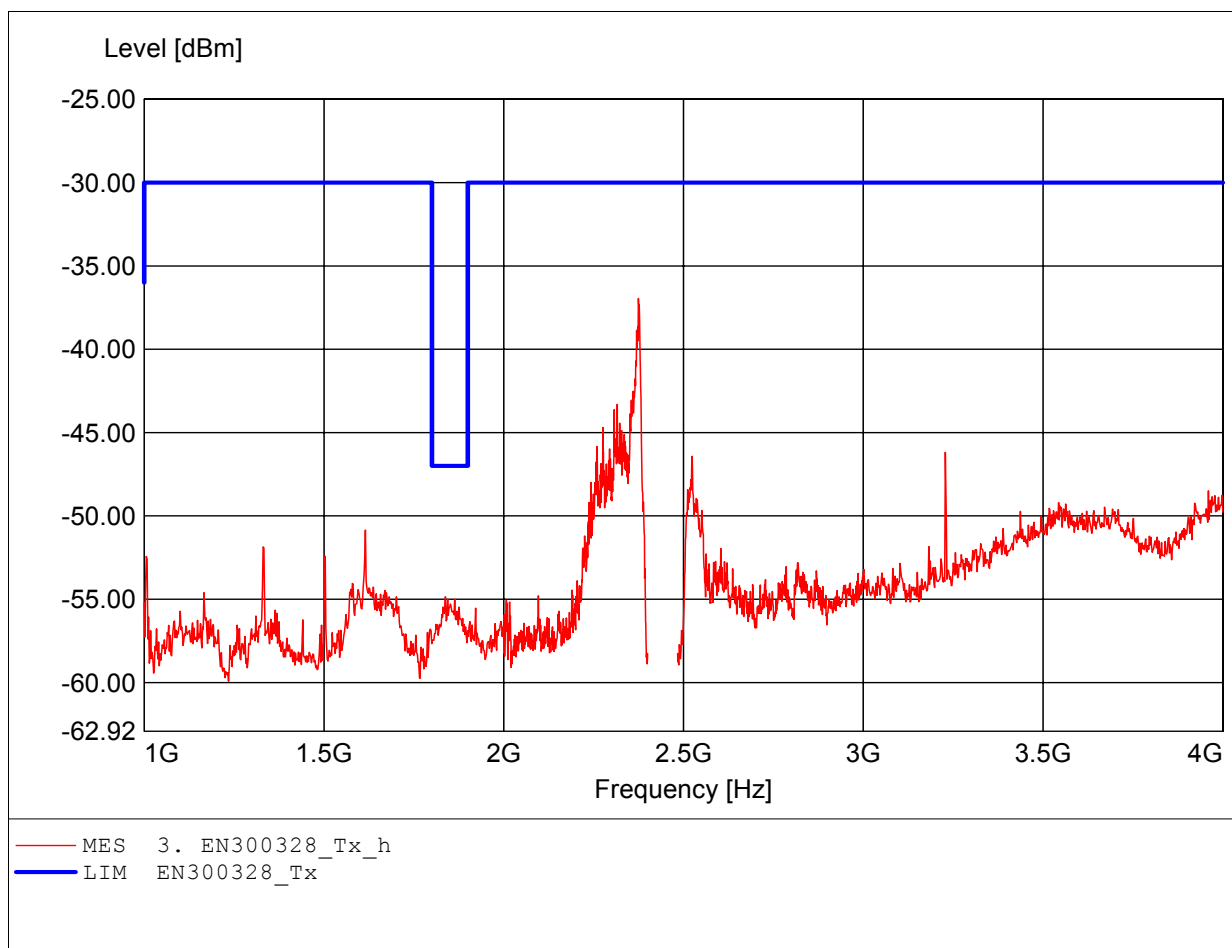

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:2.374GHz Pmax:-46.09dBm RBW: 100 kHz

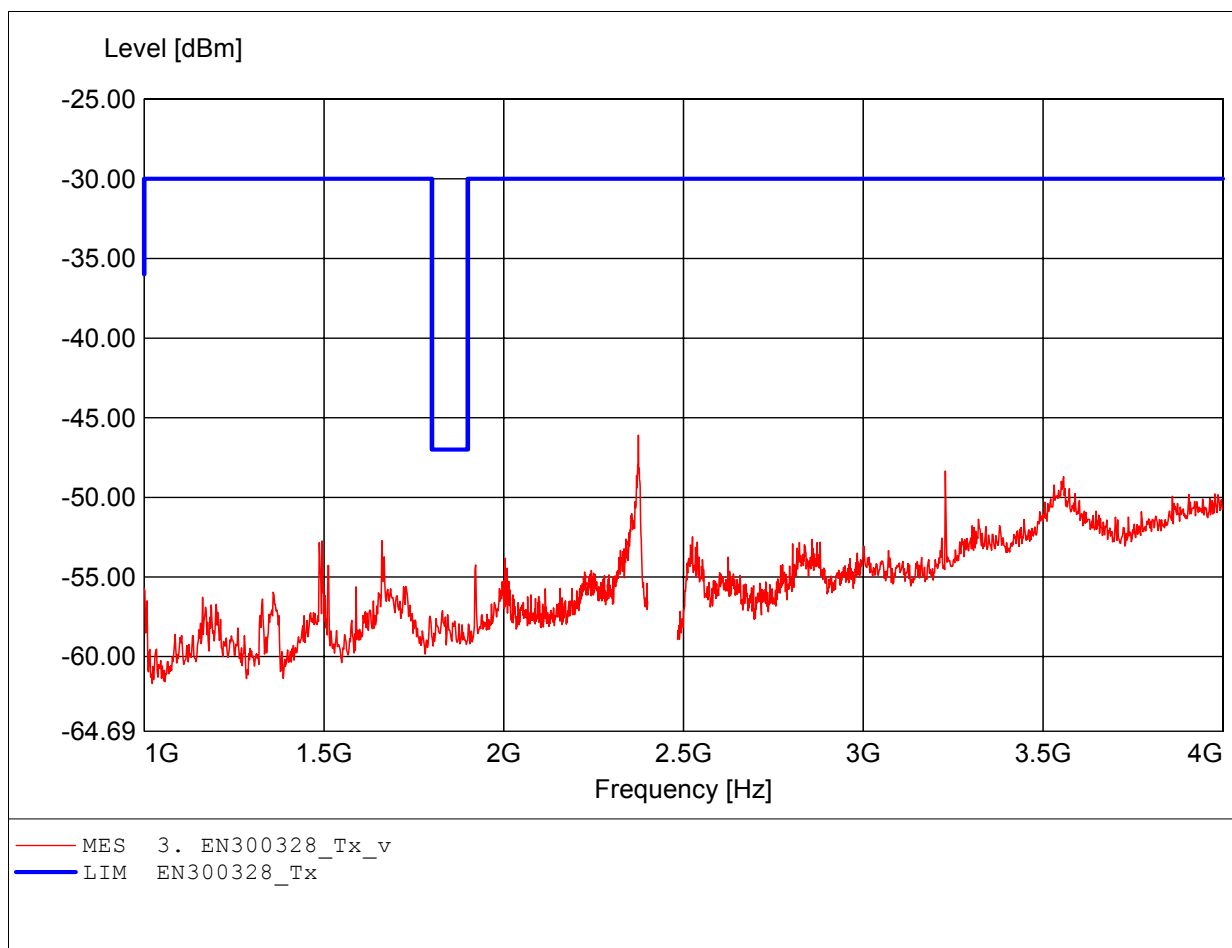

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:6.461GHz Pmax:-33.36dBm RBW: 100 kHz

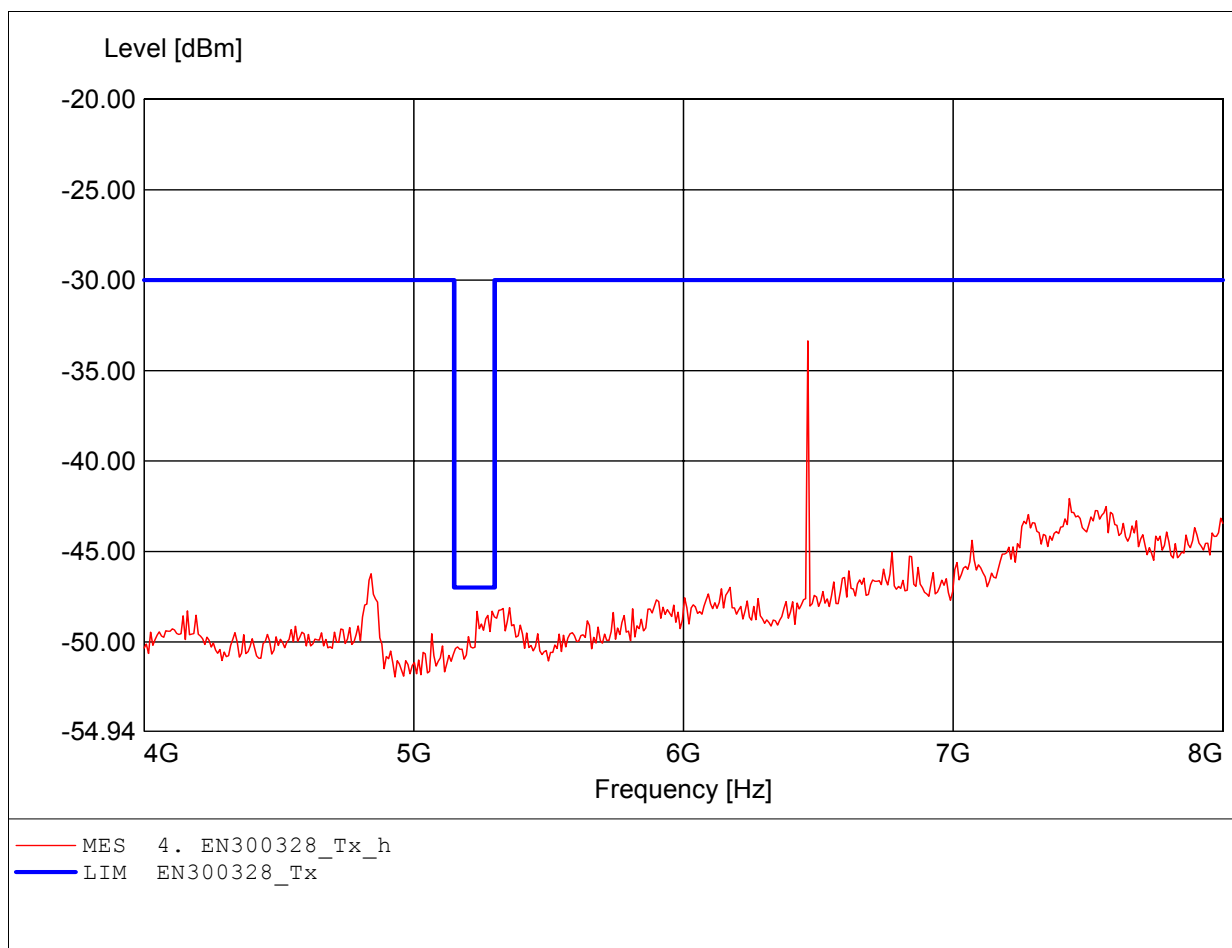

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:6.461GHz Pmax:-32.51dBm RBW: 100 kHz

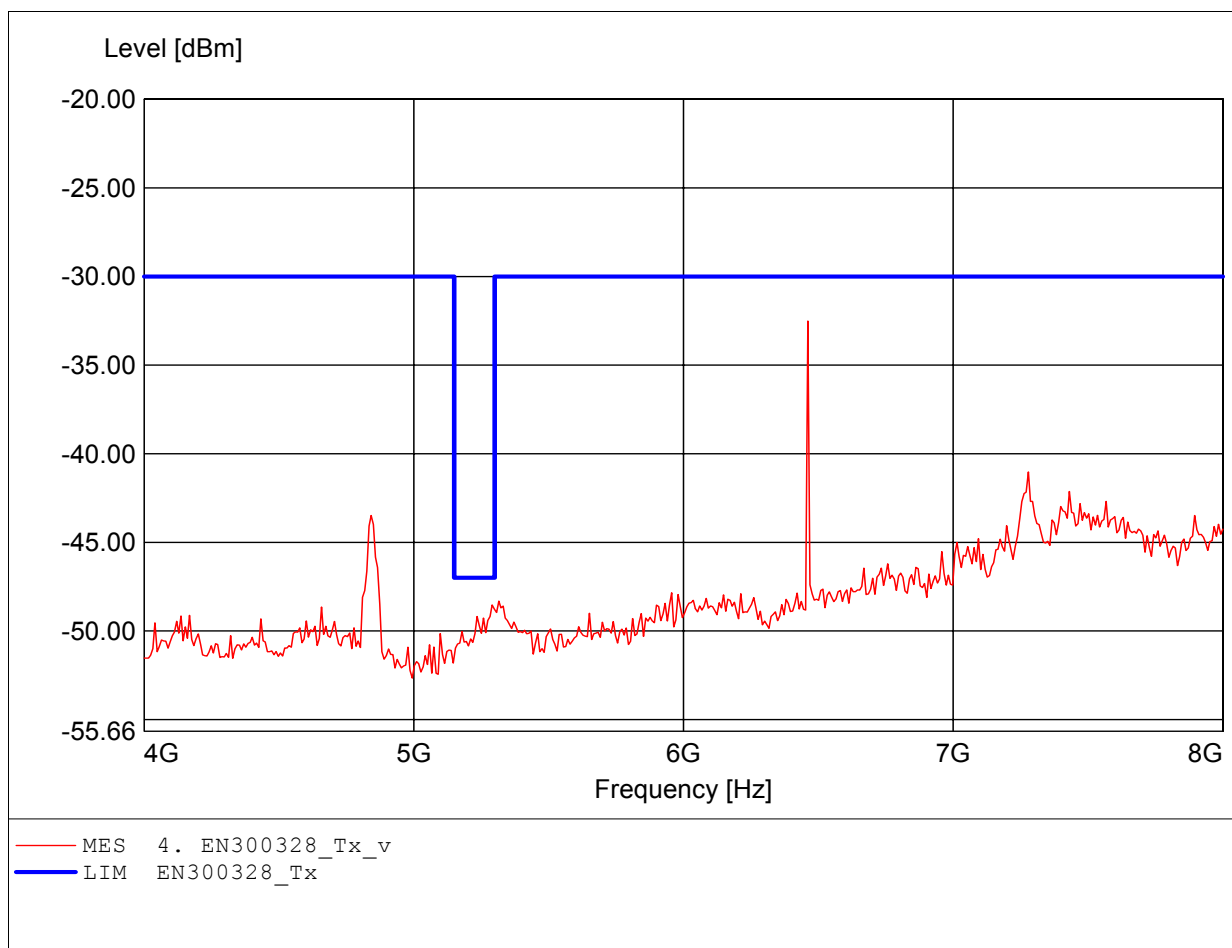

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.131GHz Pmax:-35.53dBm RBW: 100 kHz

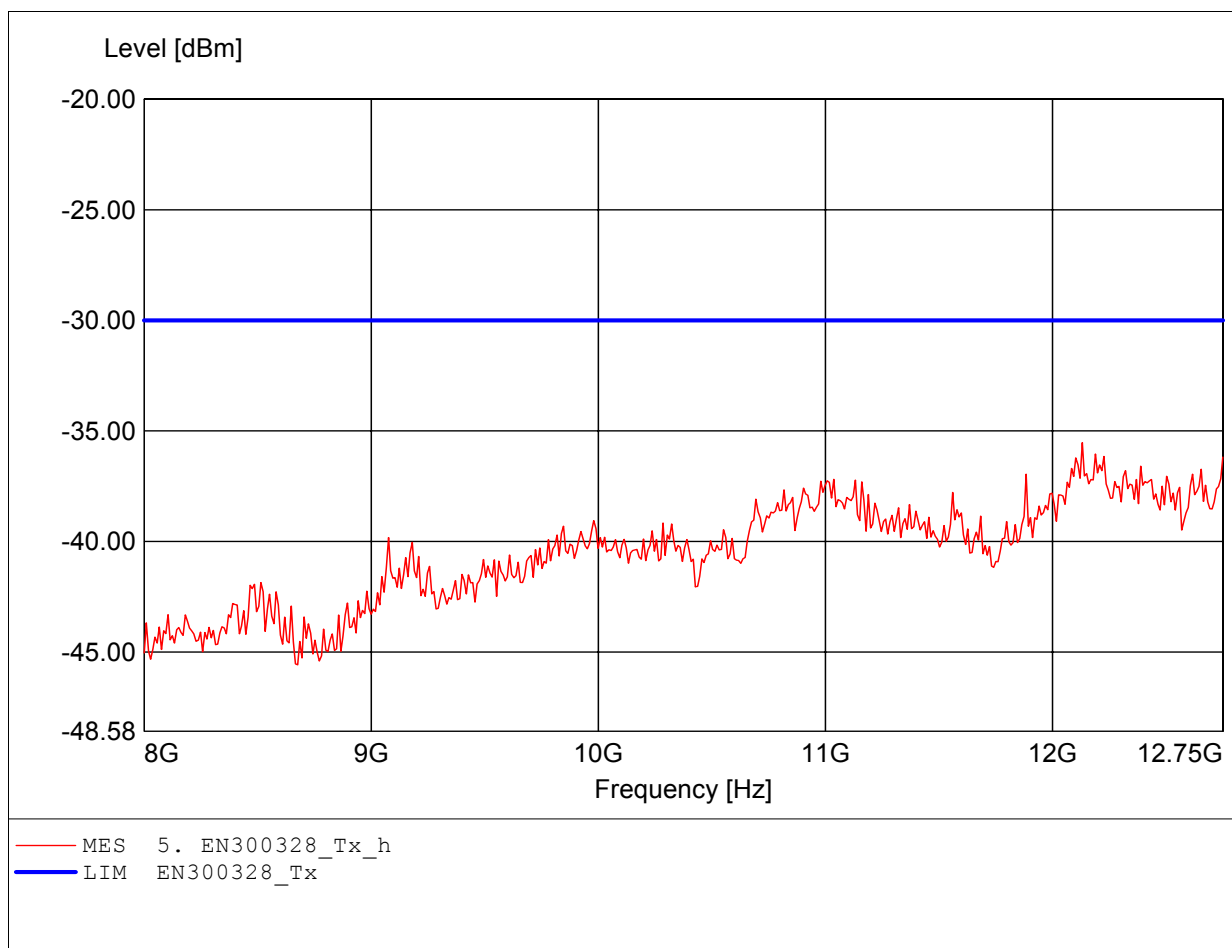

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.188GHz Pmax:-34.85dBm RBW: 100 kHz

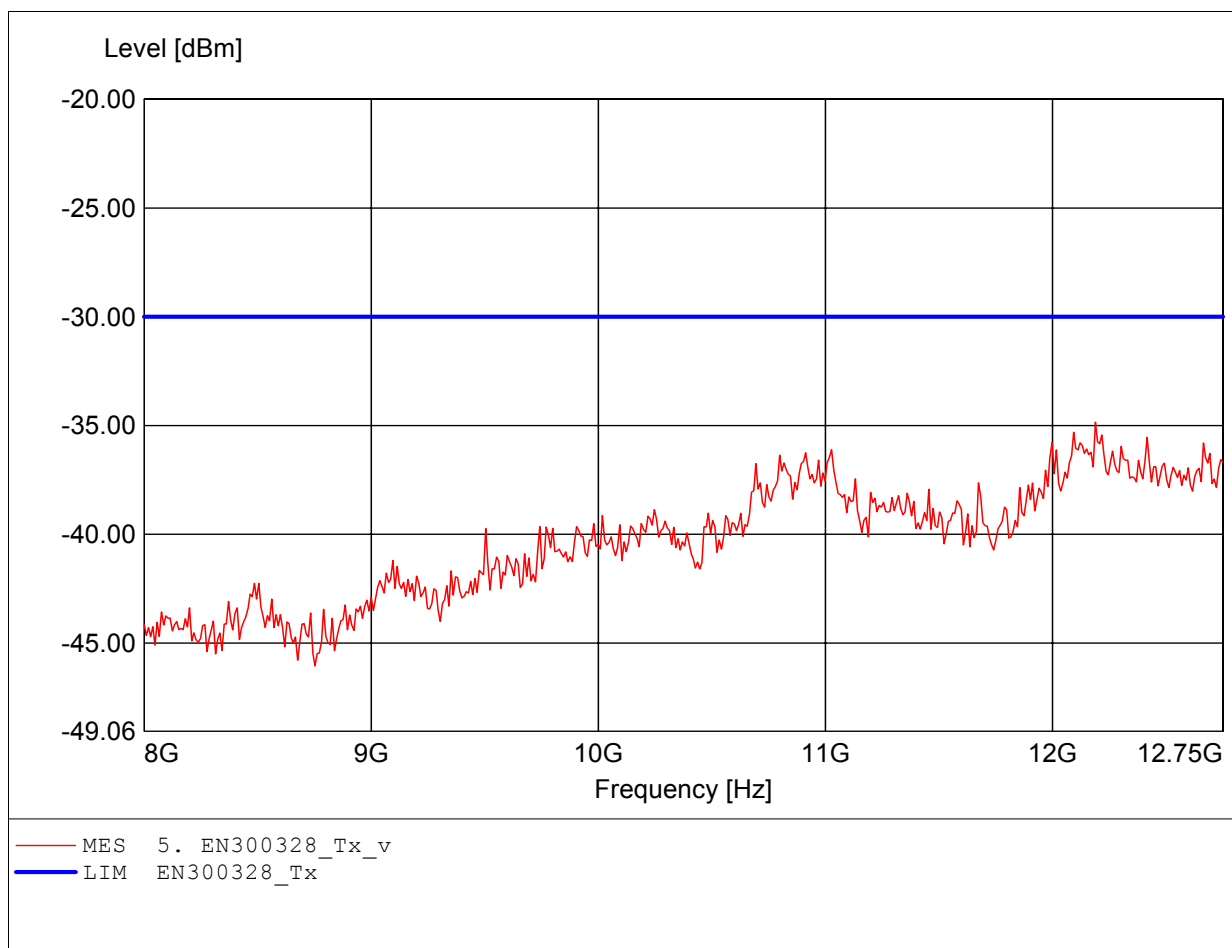

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:192.285MHz Pmax:-66.75dBm RBW: 100 kHz

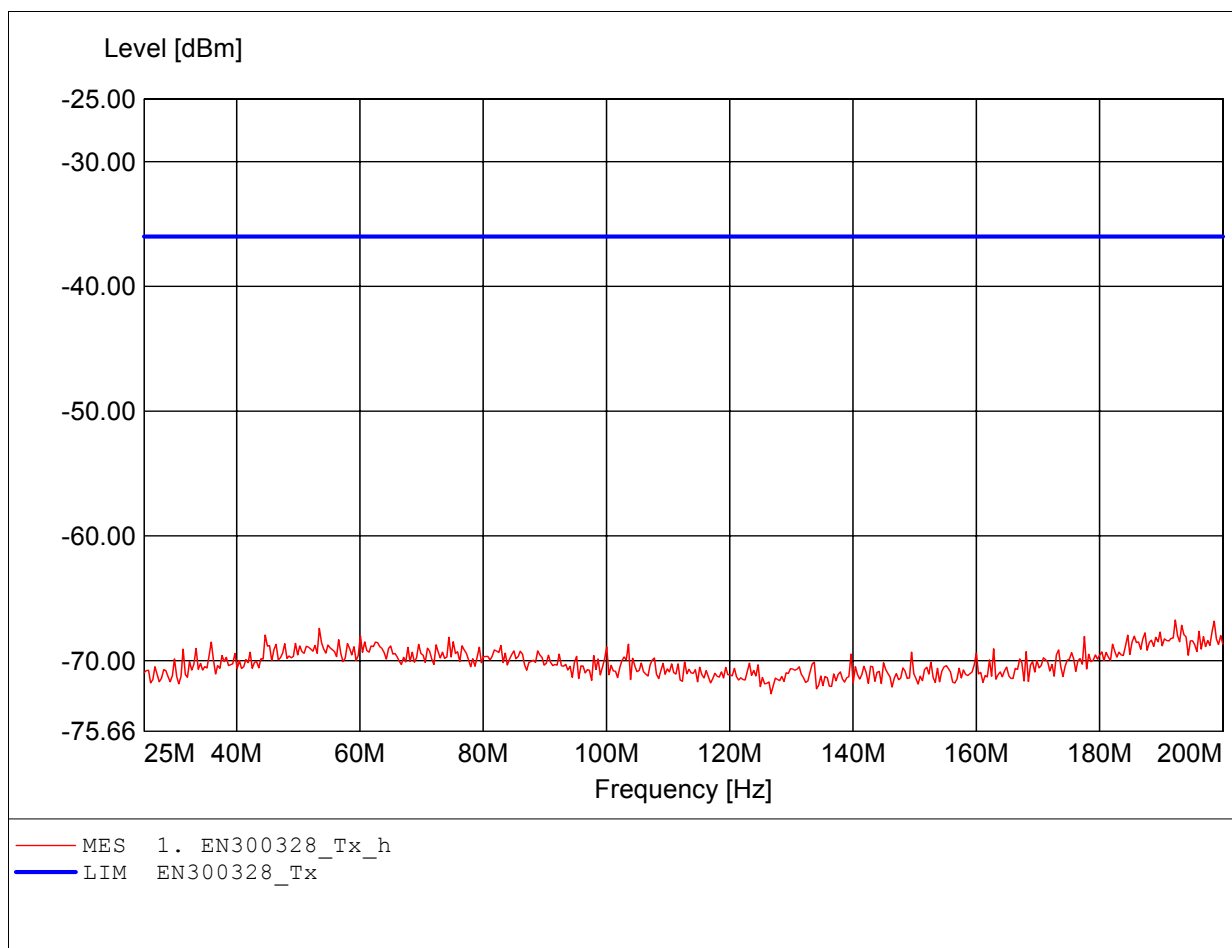

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:162.826MHz Pmax:-66.93dBm RBW: 100 kHz

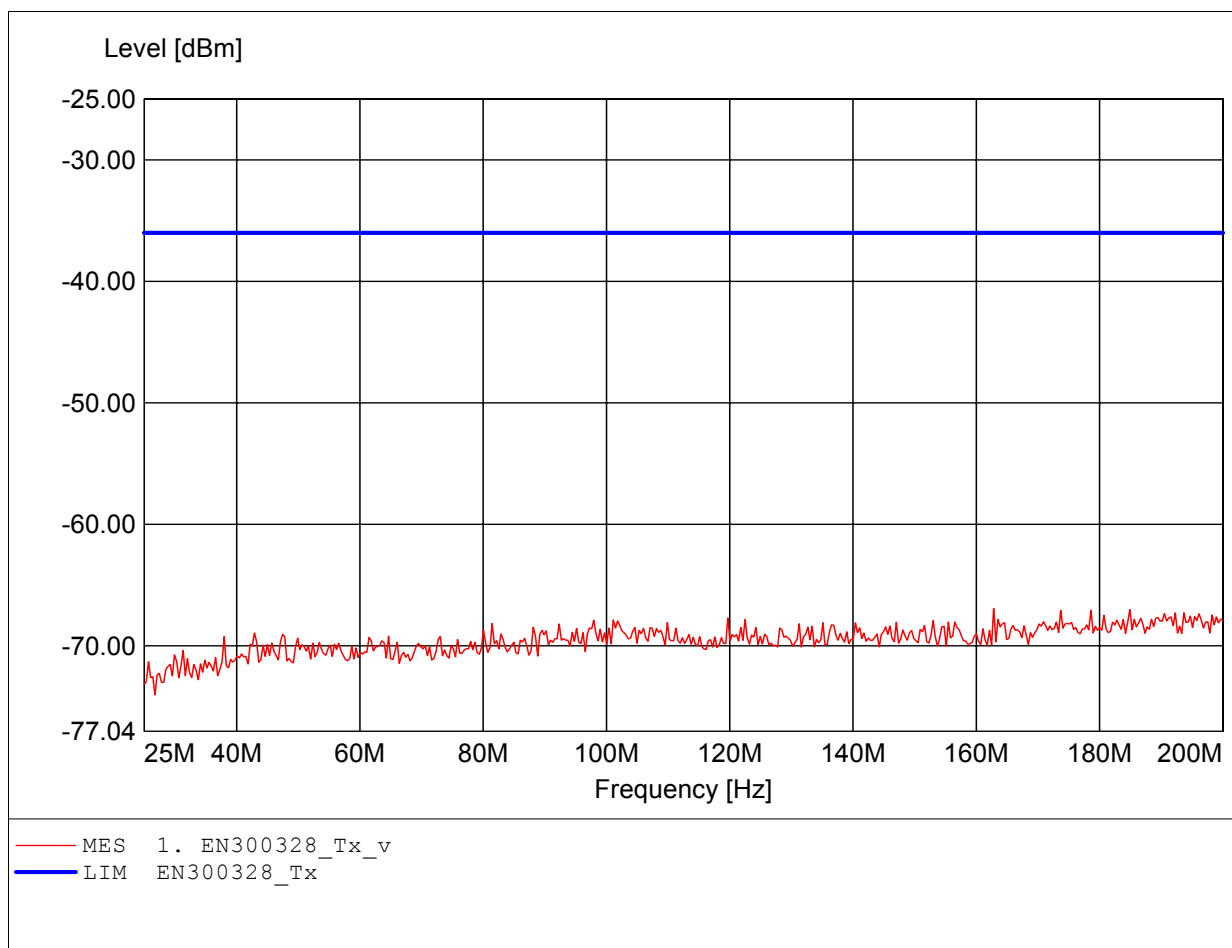

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:913.427MHz Pmax:-65.38dBm RBW: 100 kHz

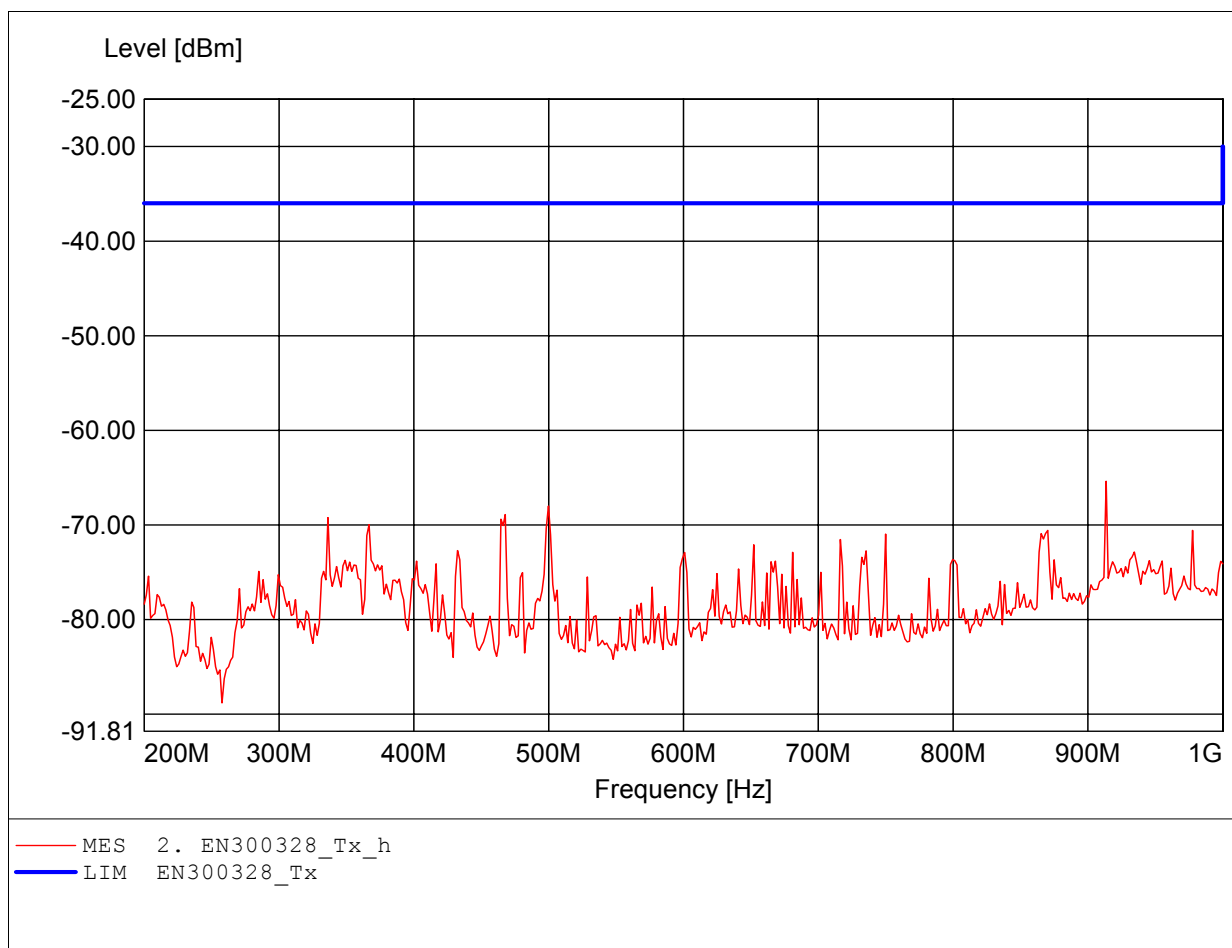

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:913.427MHz Pmax:-65.51dBm RBW: 100 kHz

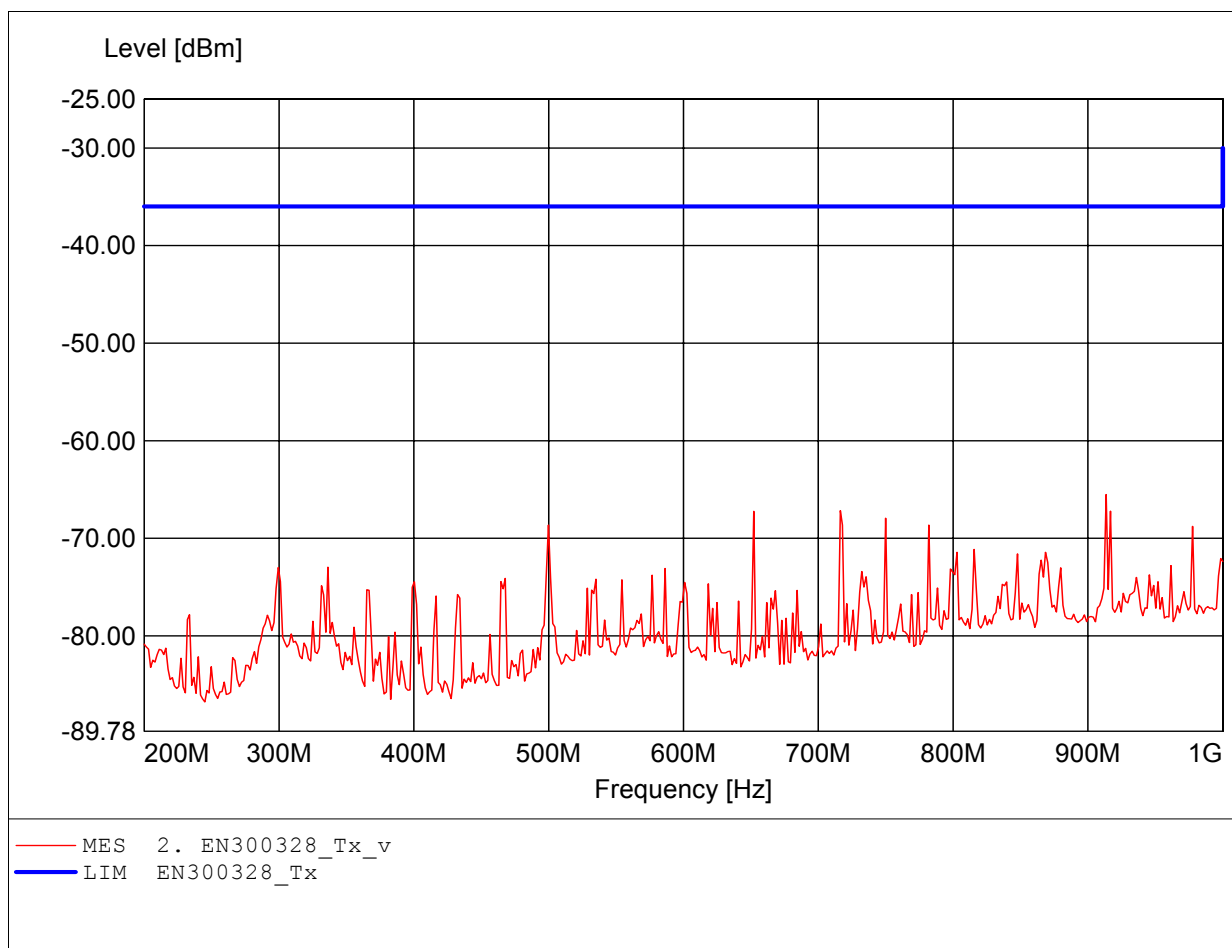

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:2.511GHz Pmax:-43.78dBm RBW: 100 kHz

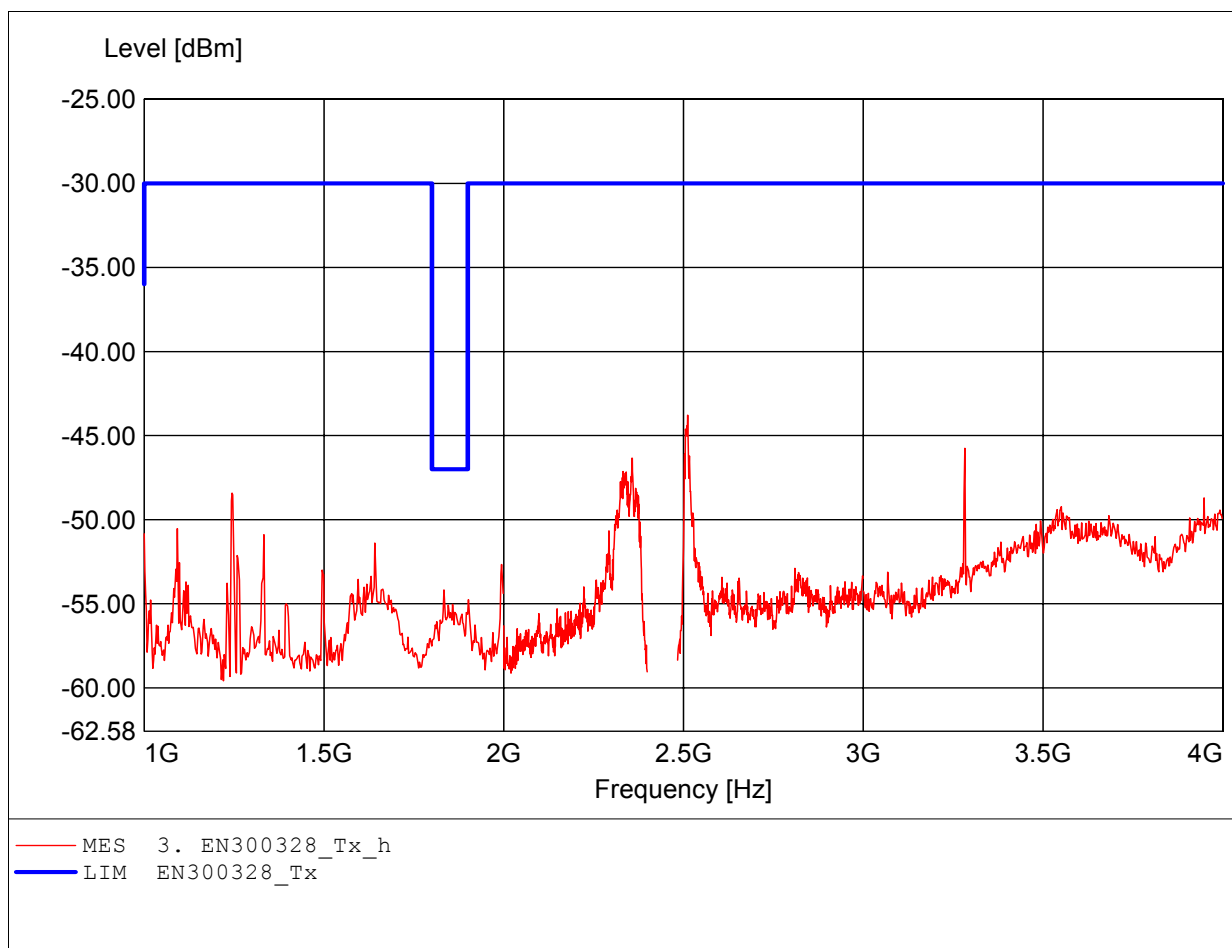

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:1.994GHz Pmax:-47.80dBm RBW: 100 kHz

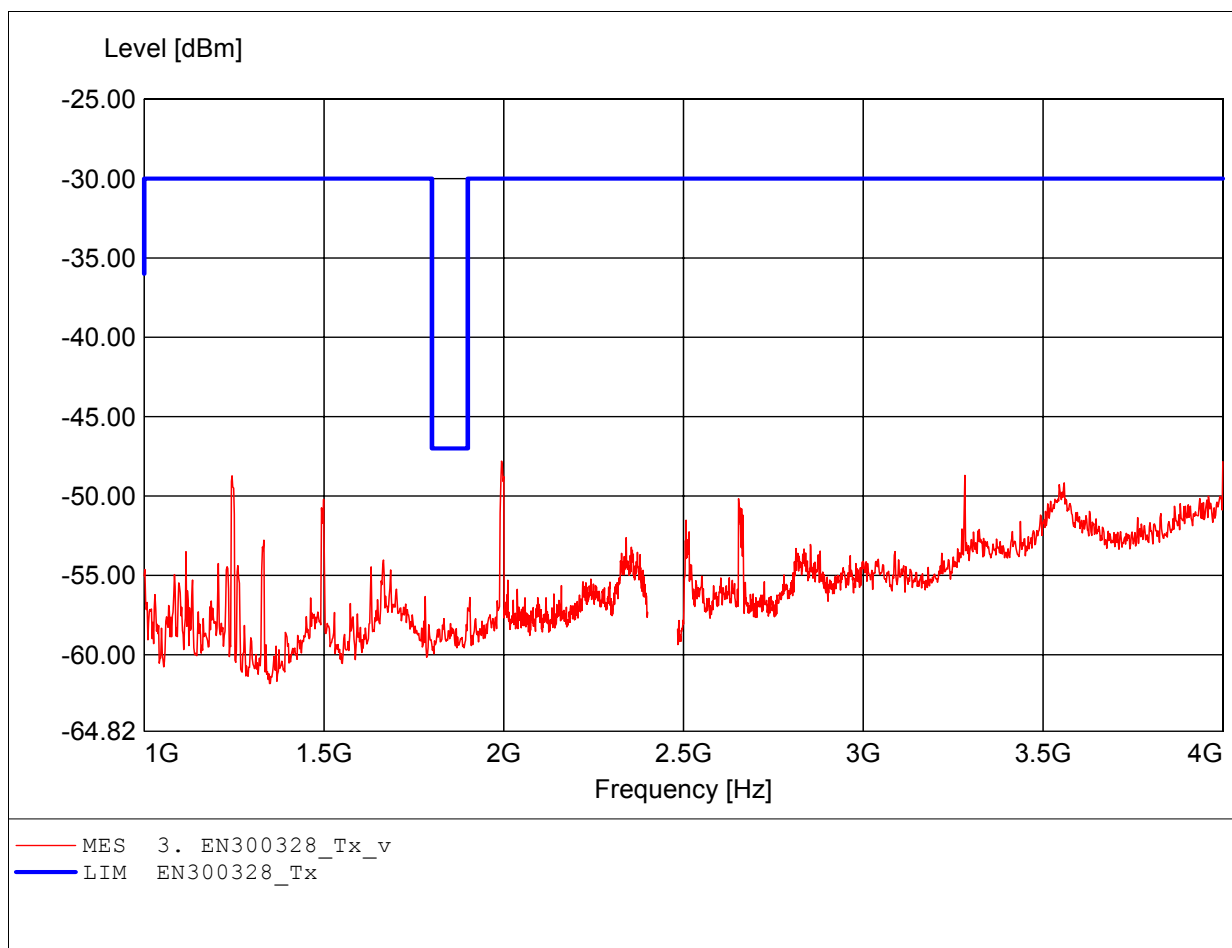

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:6.565GHz Pmax:-40.35dBm RBW: 100 kHz

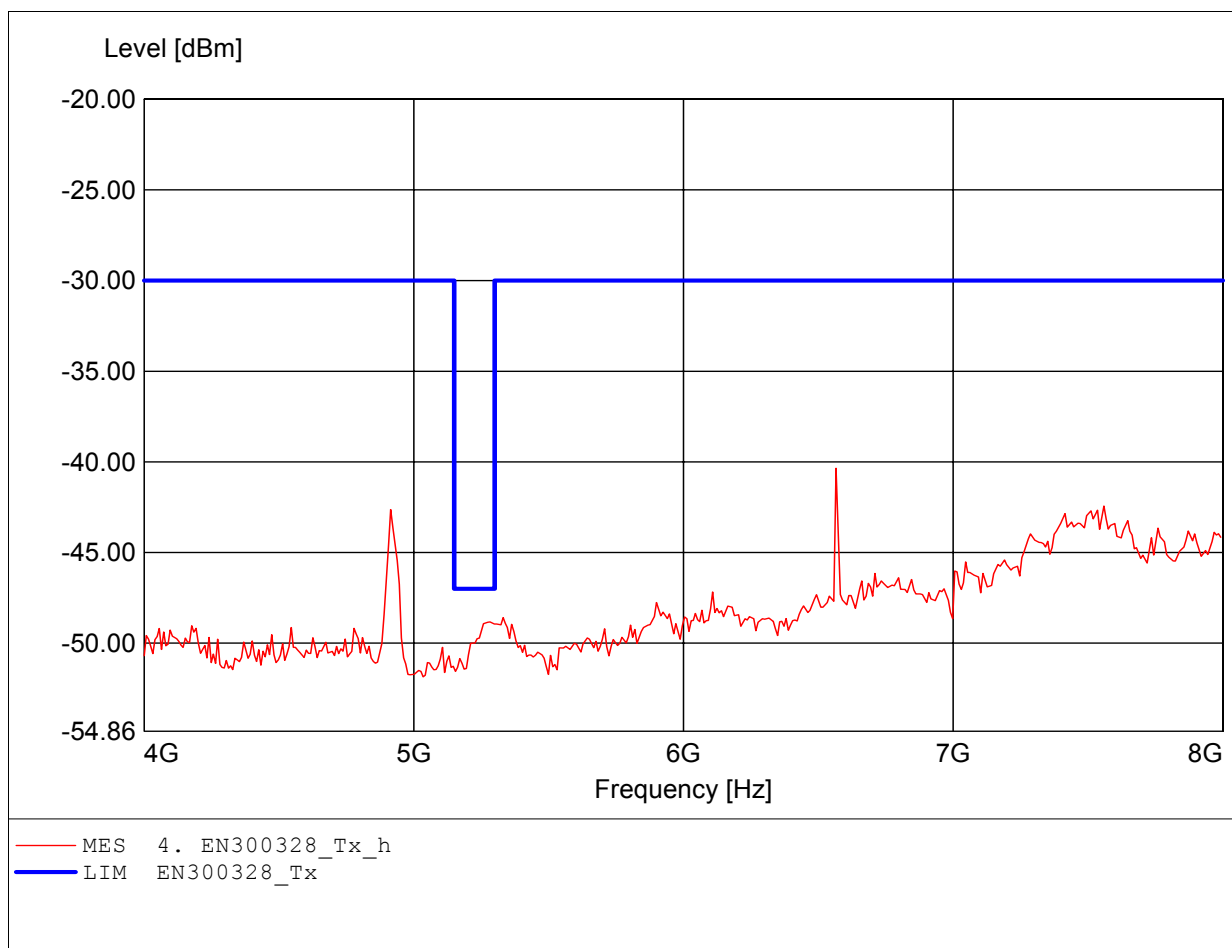

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:6.565GHz Pmax:-34.26dBm RBW: 100 kHz

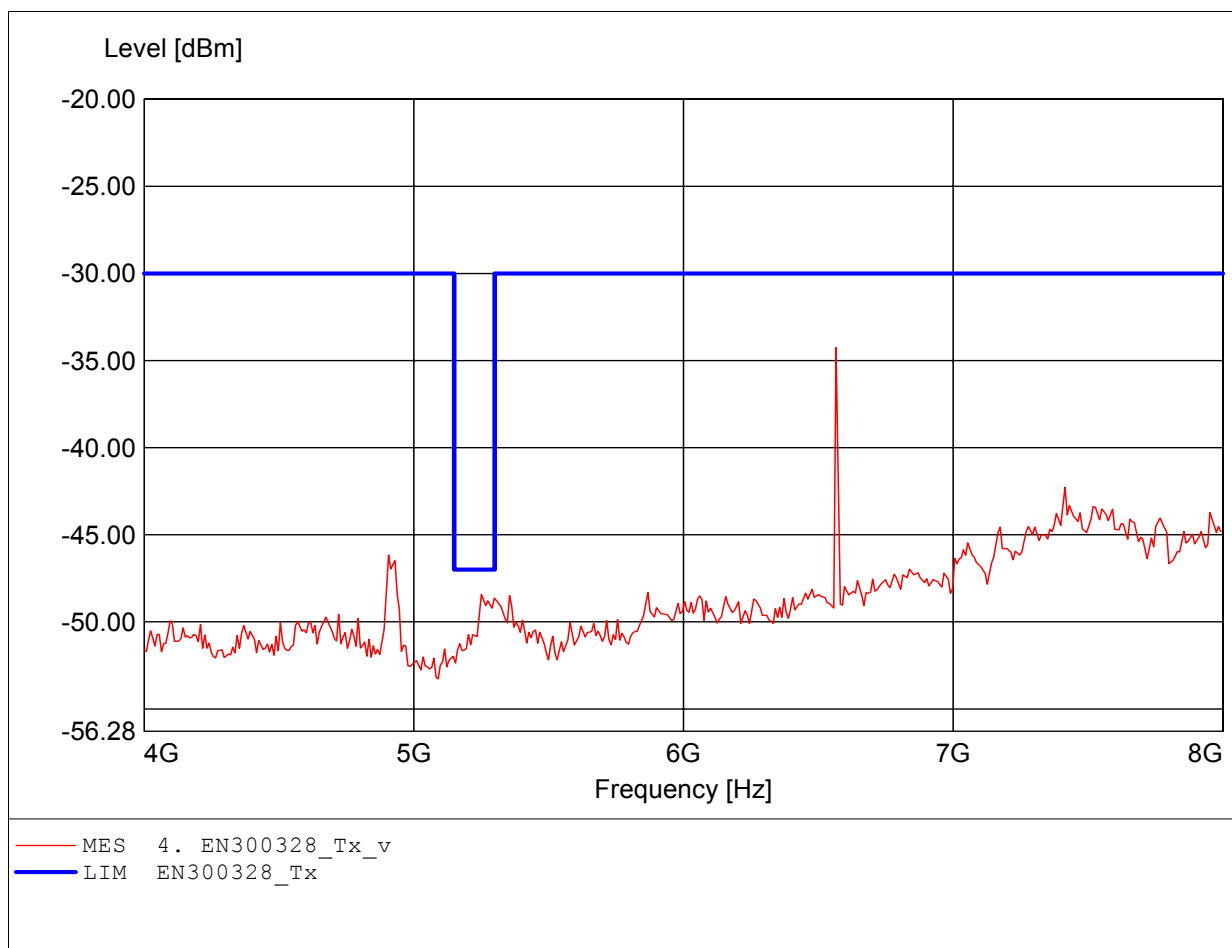

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.645GHz Pmax:-35.87dBm RBW: 100 kHz

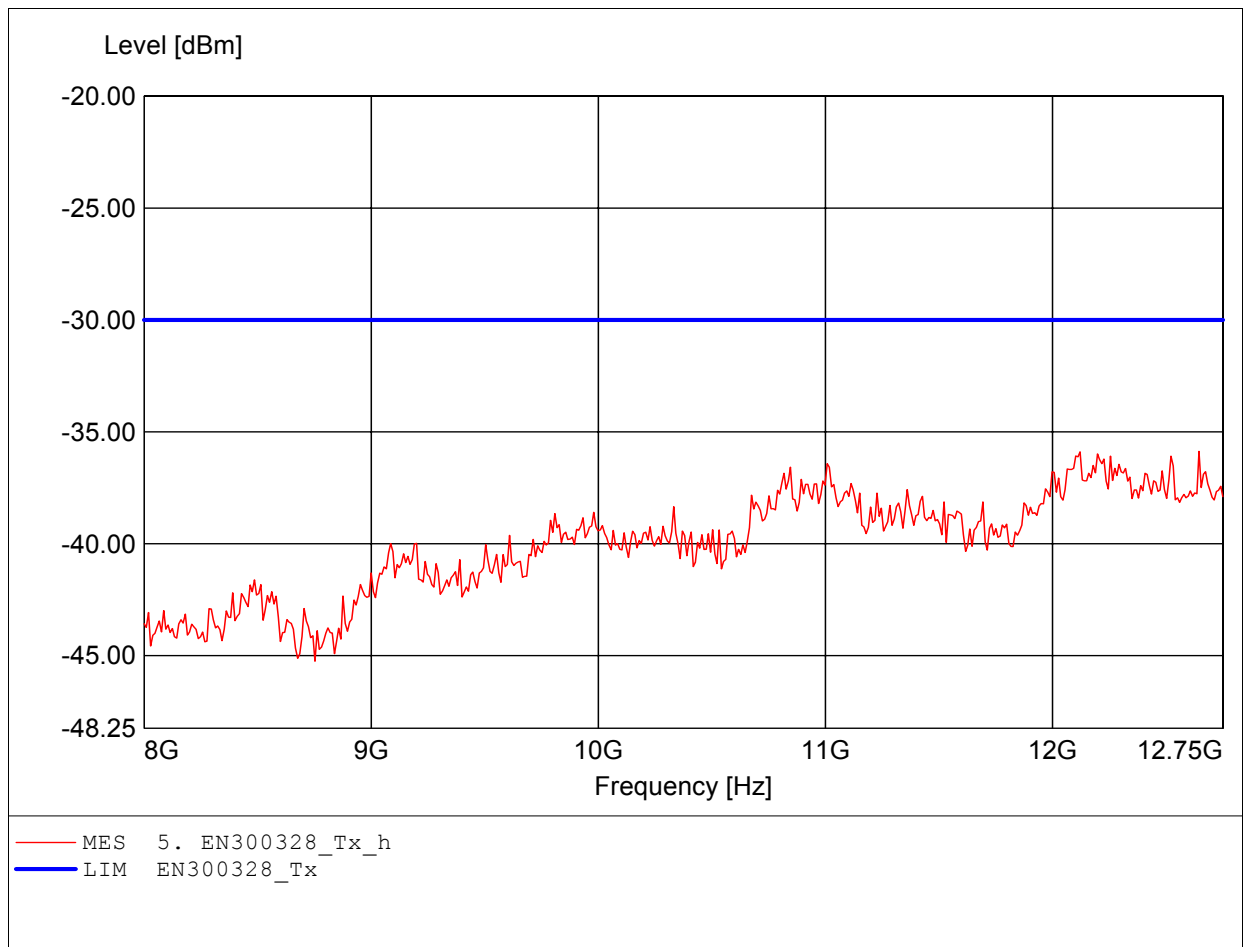

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: according to EN 300 328 / mode: Tx
Freq:12.207GHz Pmax:-35.32dBm RBW: 100 kHz

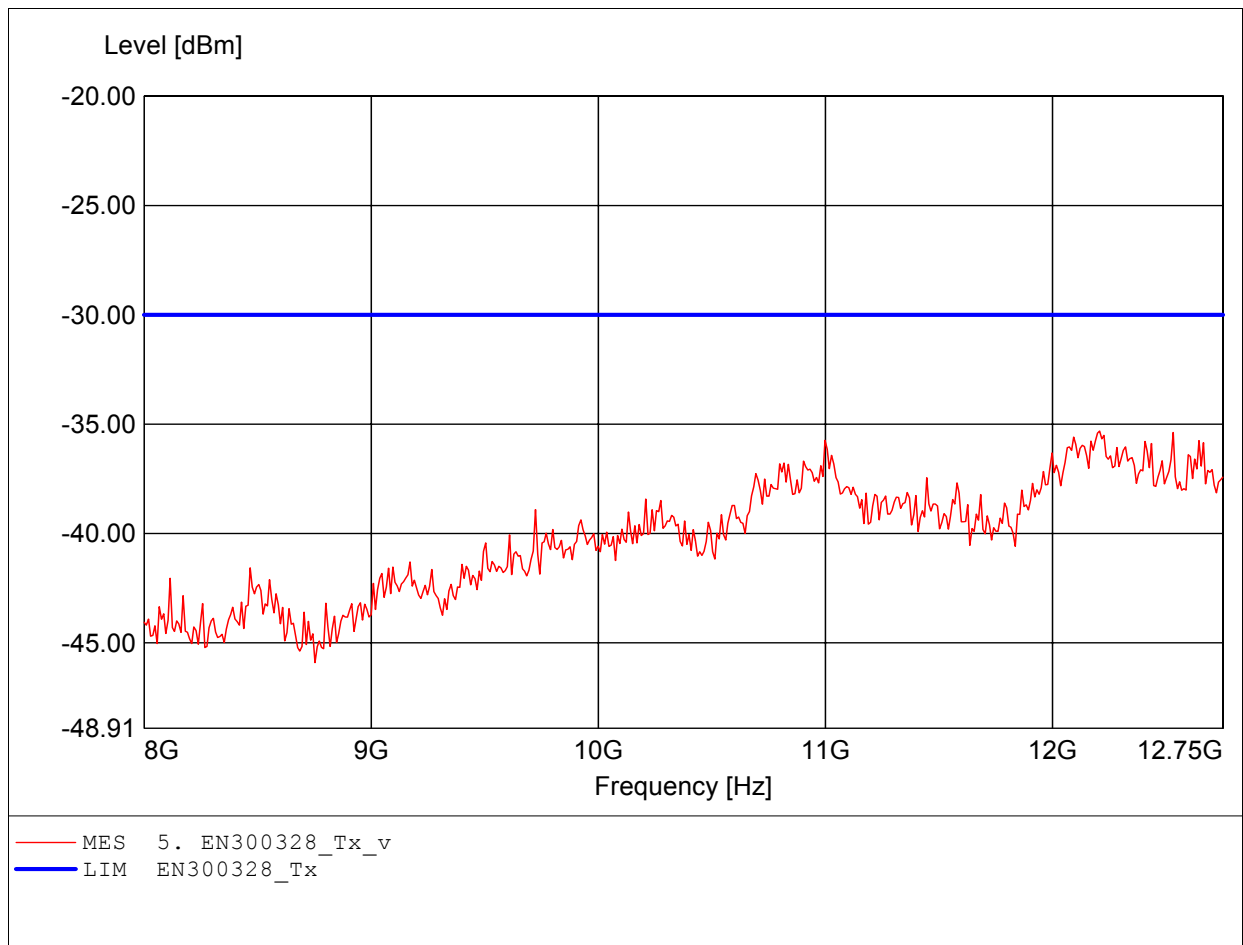

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:196.142MHz Pmax:-65.99dBm RBW: 100 kHz

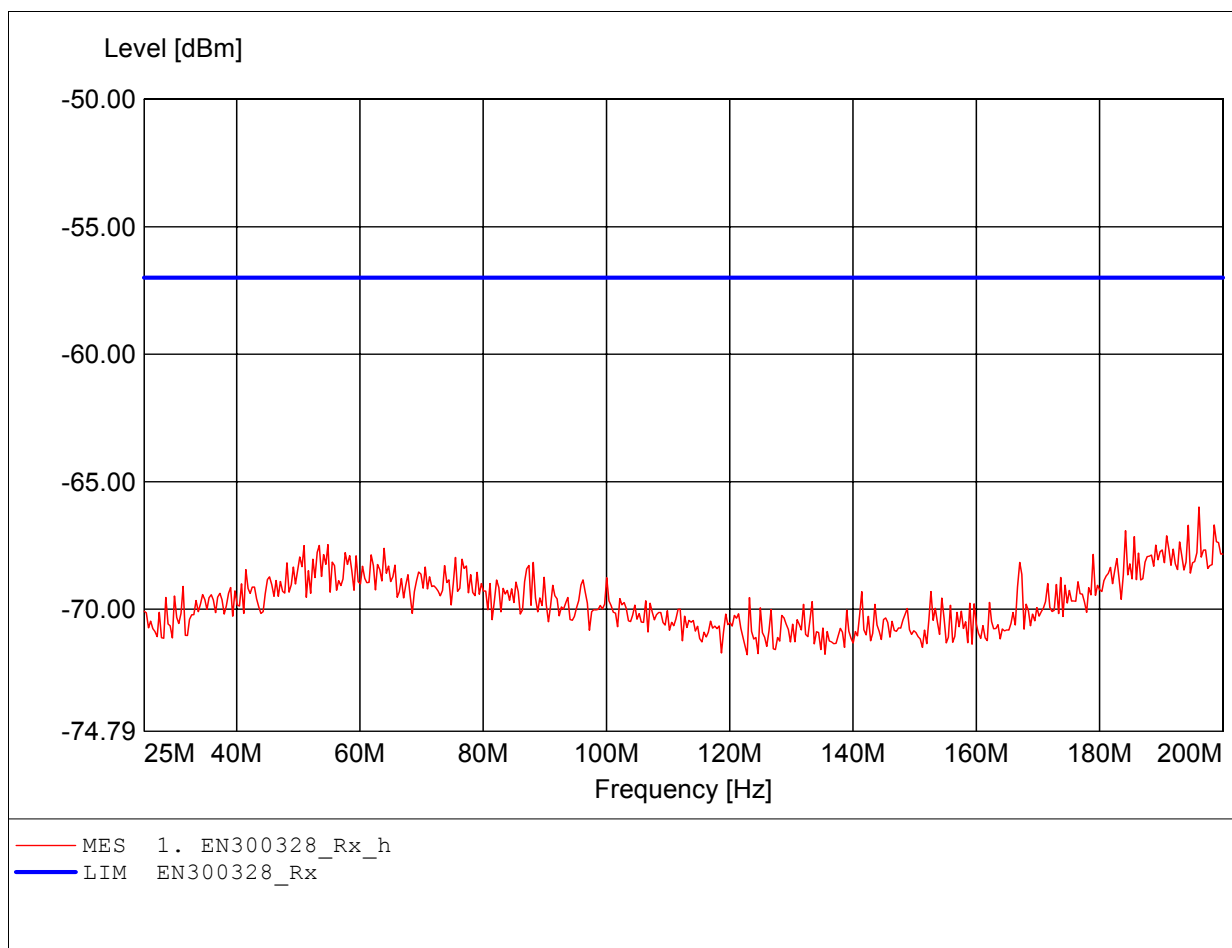

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:198.246MHz Pmax:-65.16dBm RBW: 100 kHz

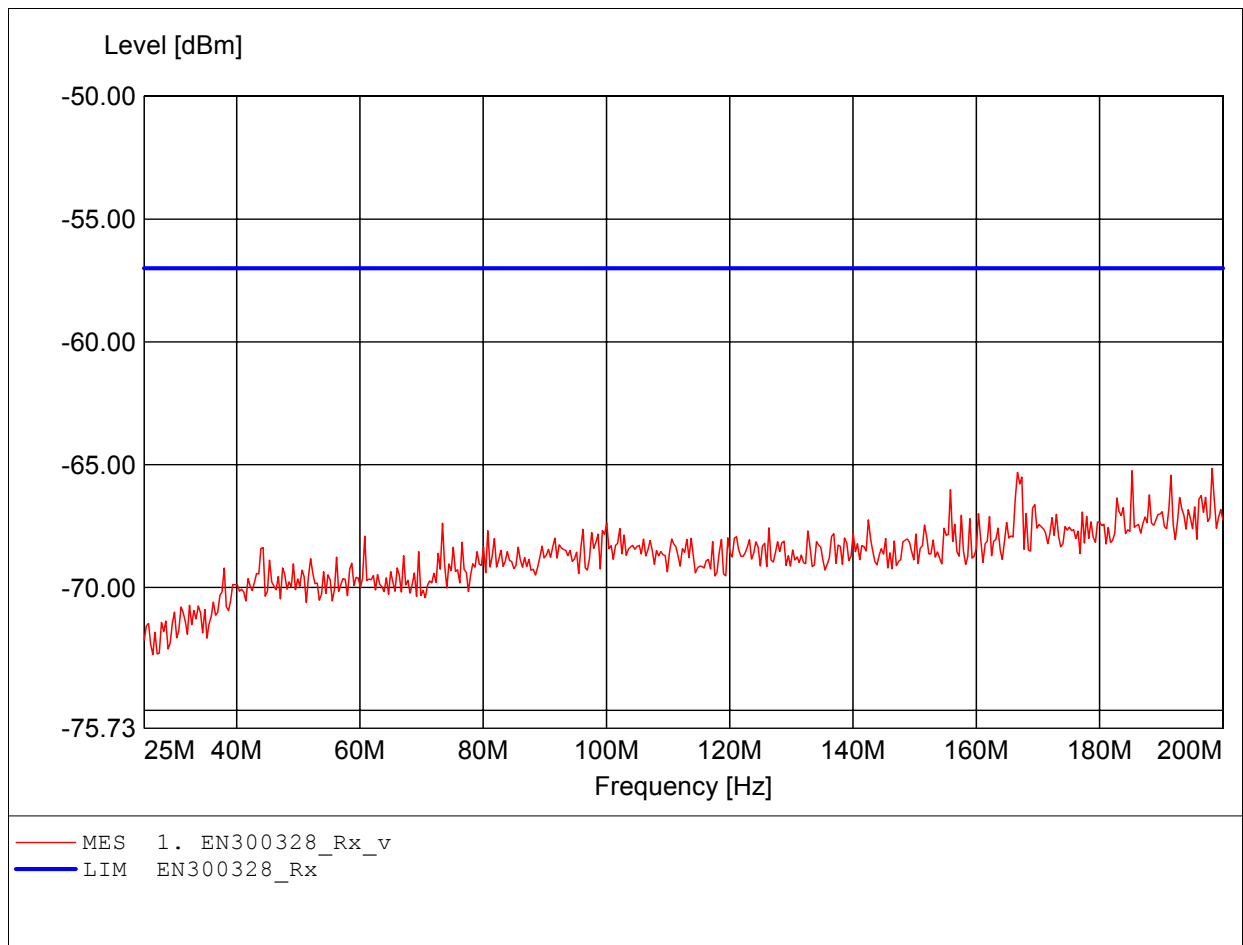

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq: 913.427MHz Pmax: -64.72dBm RBW: 100 kHz

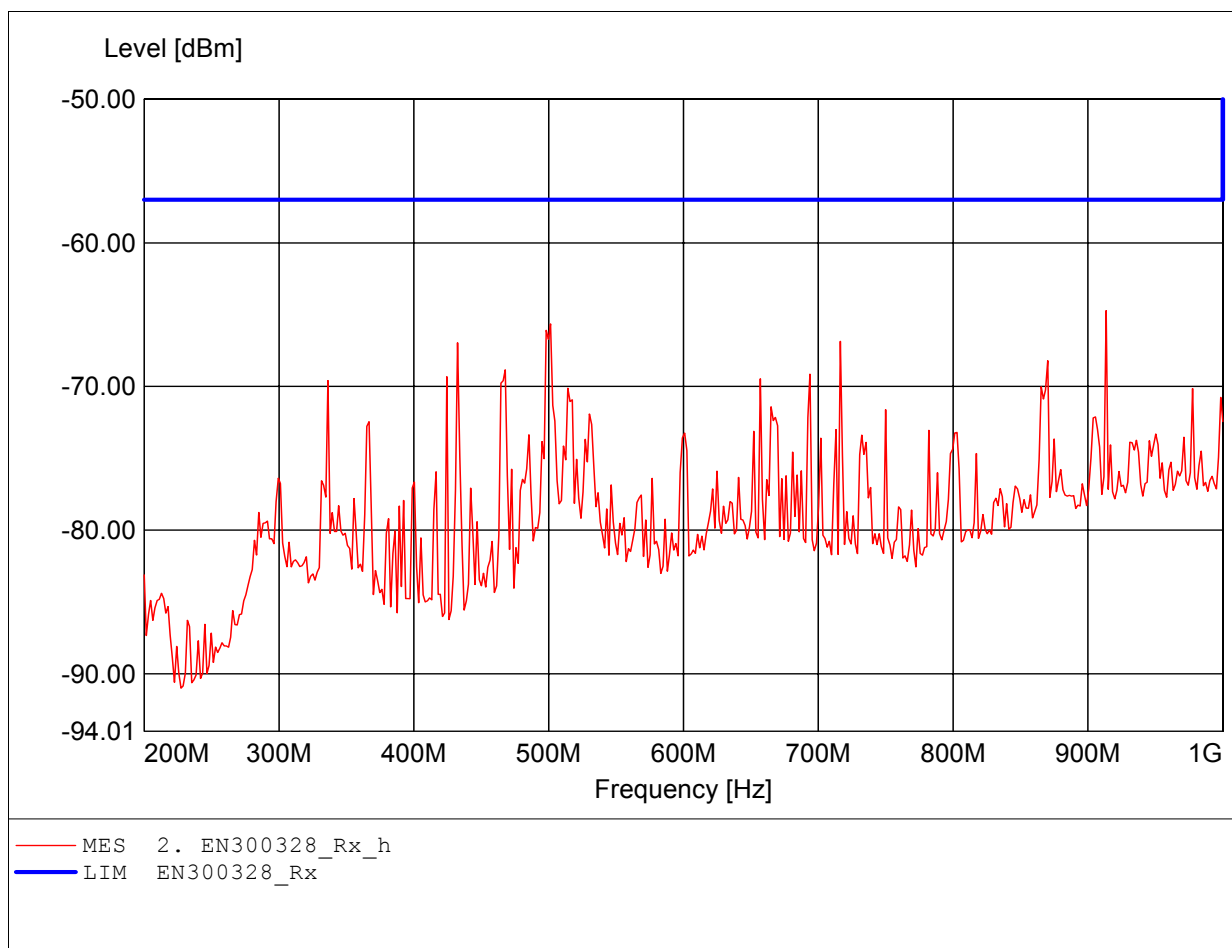

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq: 913.427MHz Pmax: -63.41dBm RBW: 100 kHz

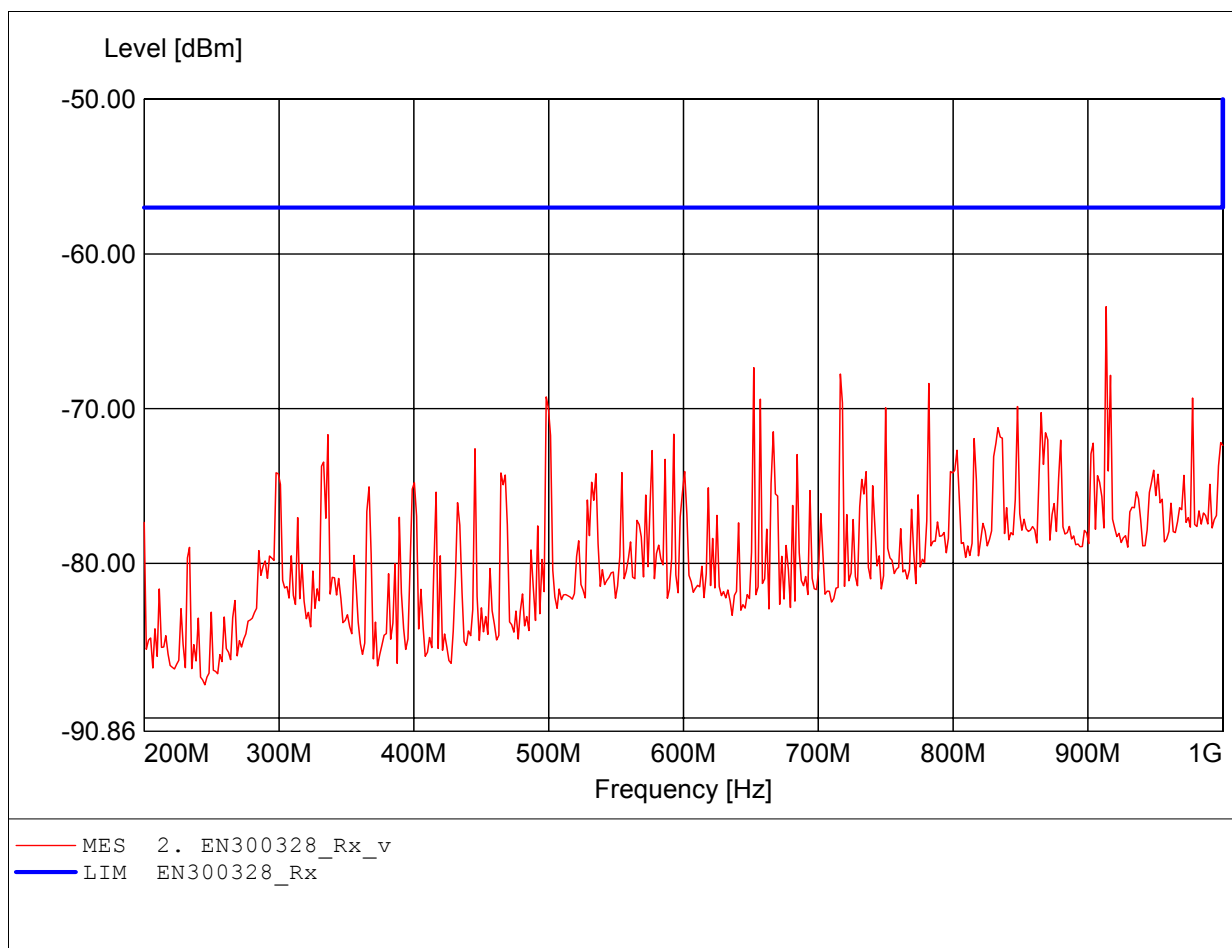

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Dist.: 3m, Ant.: HL 025, ampl.: 1-4GHz
Freq:3.549GHz Pmax:-49.66dBm RBW: 100 kHz

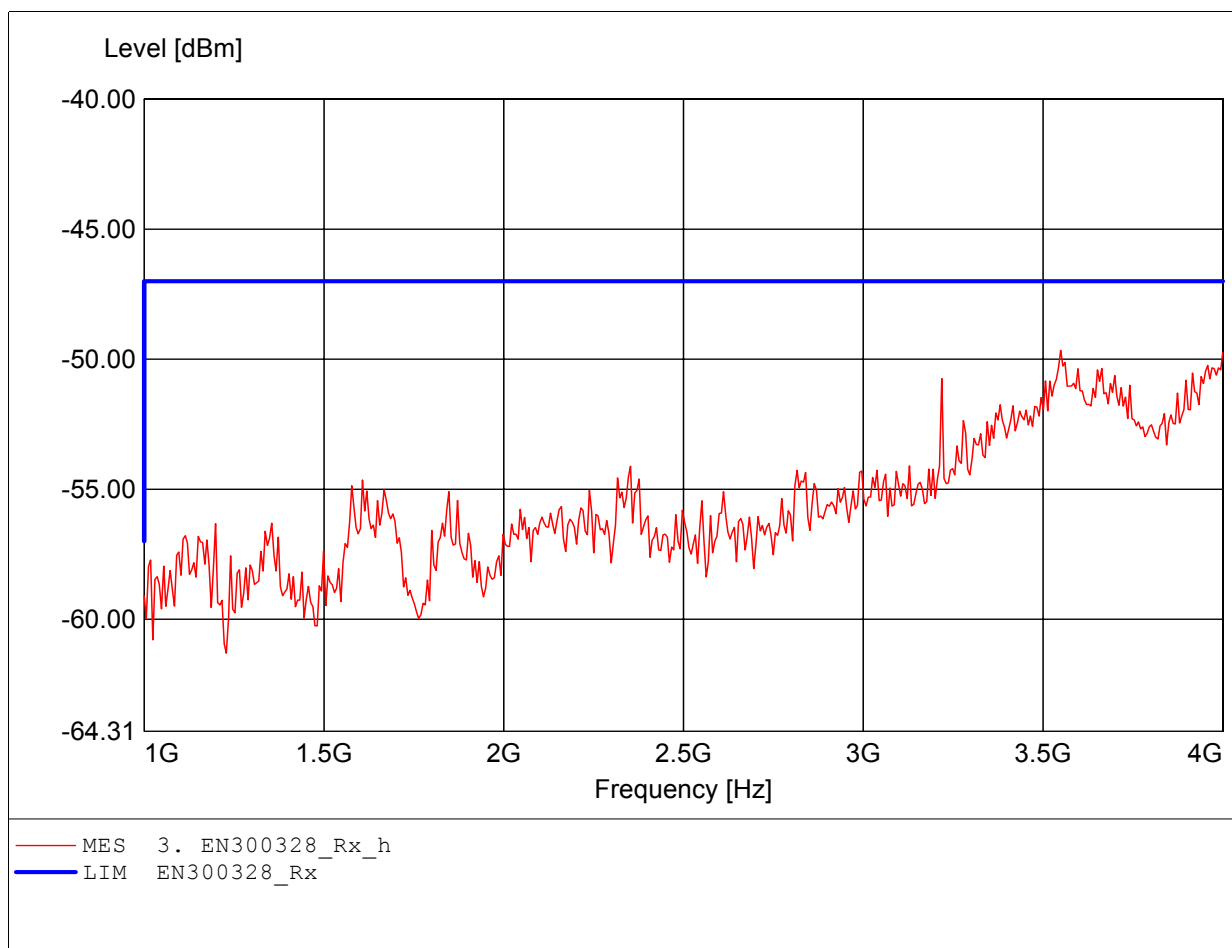

Spurious emissions under normal conditions


in accordance to the EN 300 328

Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:3.549GHz Pmax:-50.18dBm RBW: 100 kHz

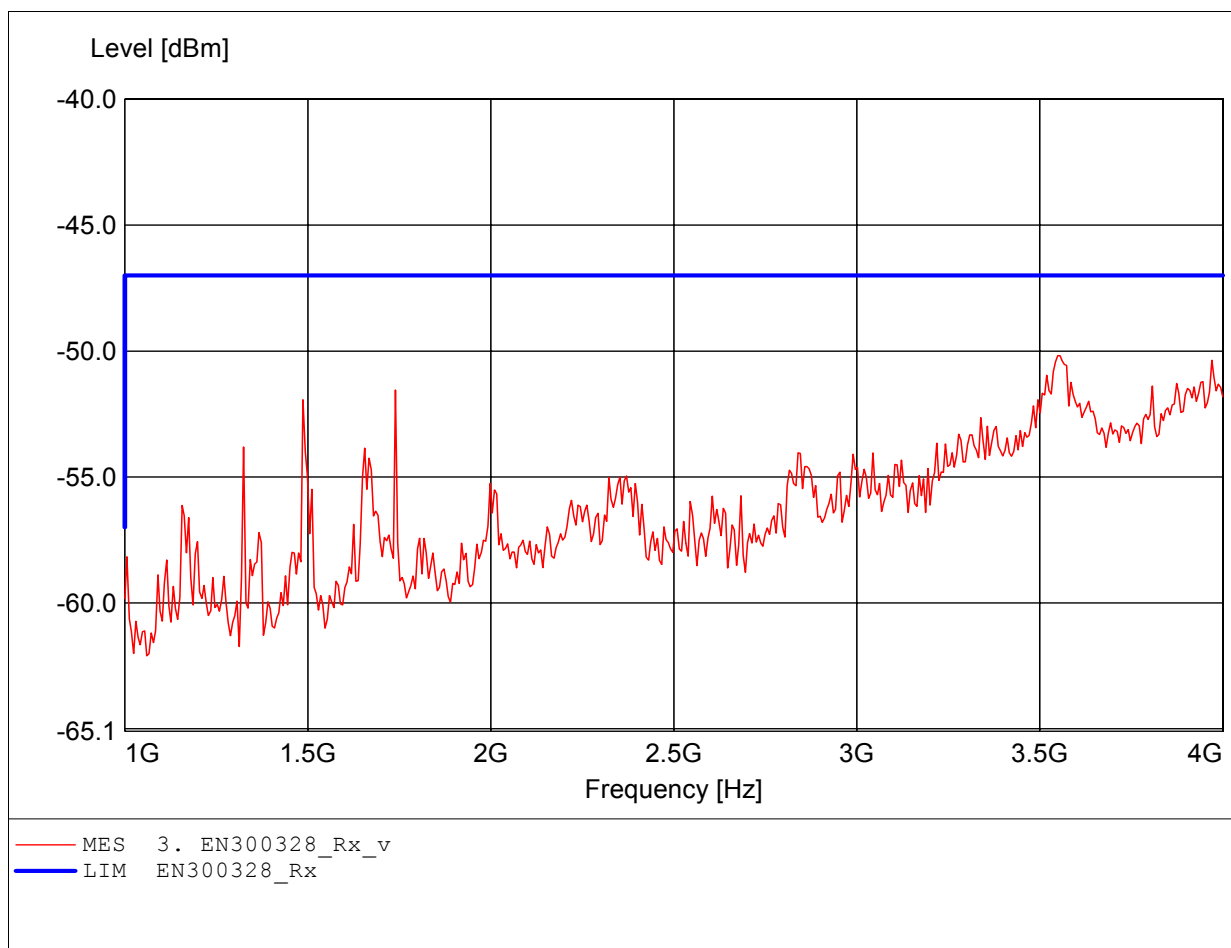

Spurious emissions under normal conditions
in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:7.471GHz Pmax:-48.69dBm RBW: 100 kHz

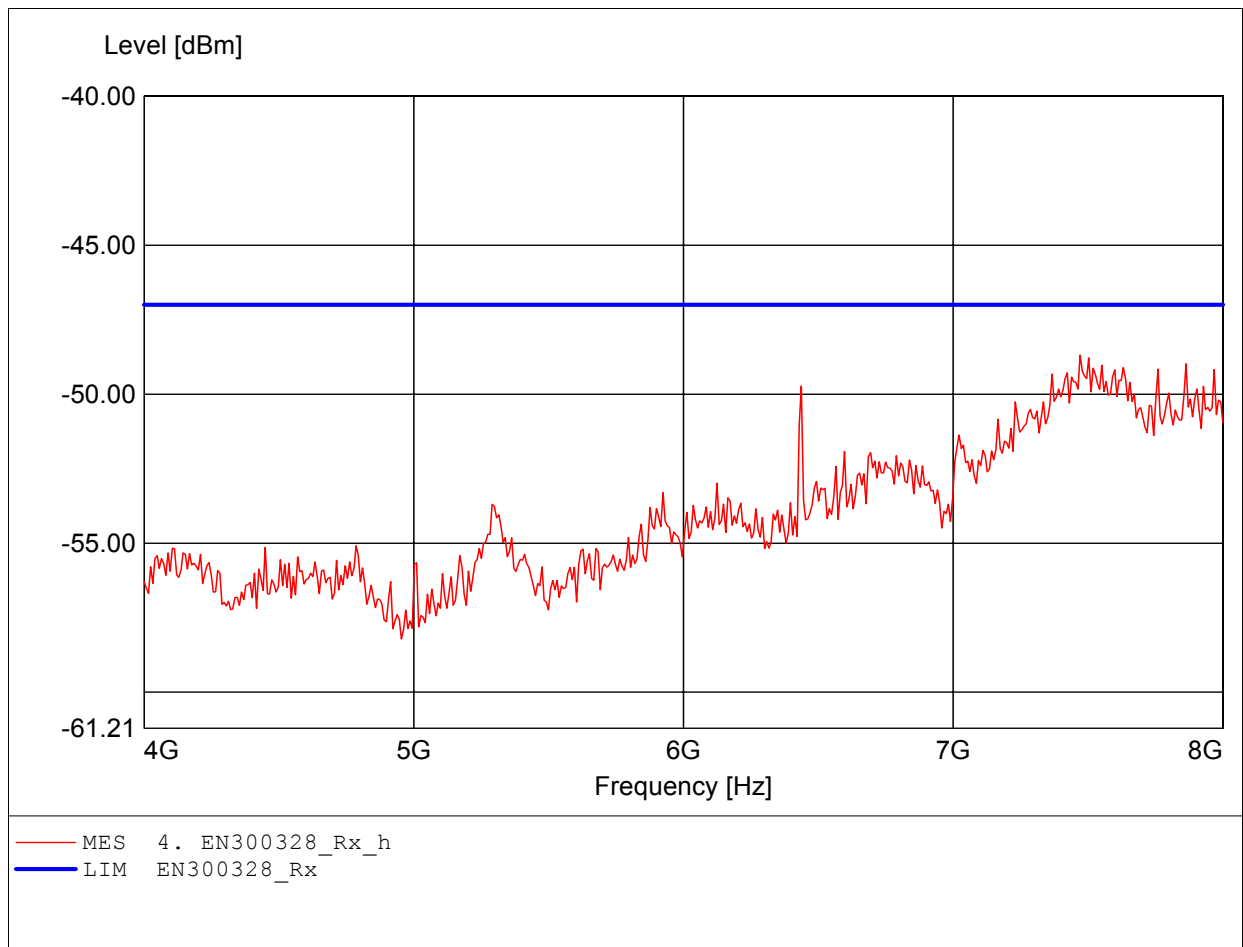

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:7.511GHz Pmax:-49.05dBm RBW: 100 kHz

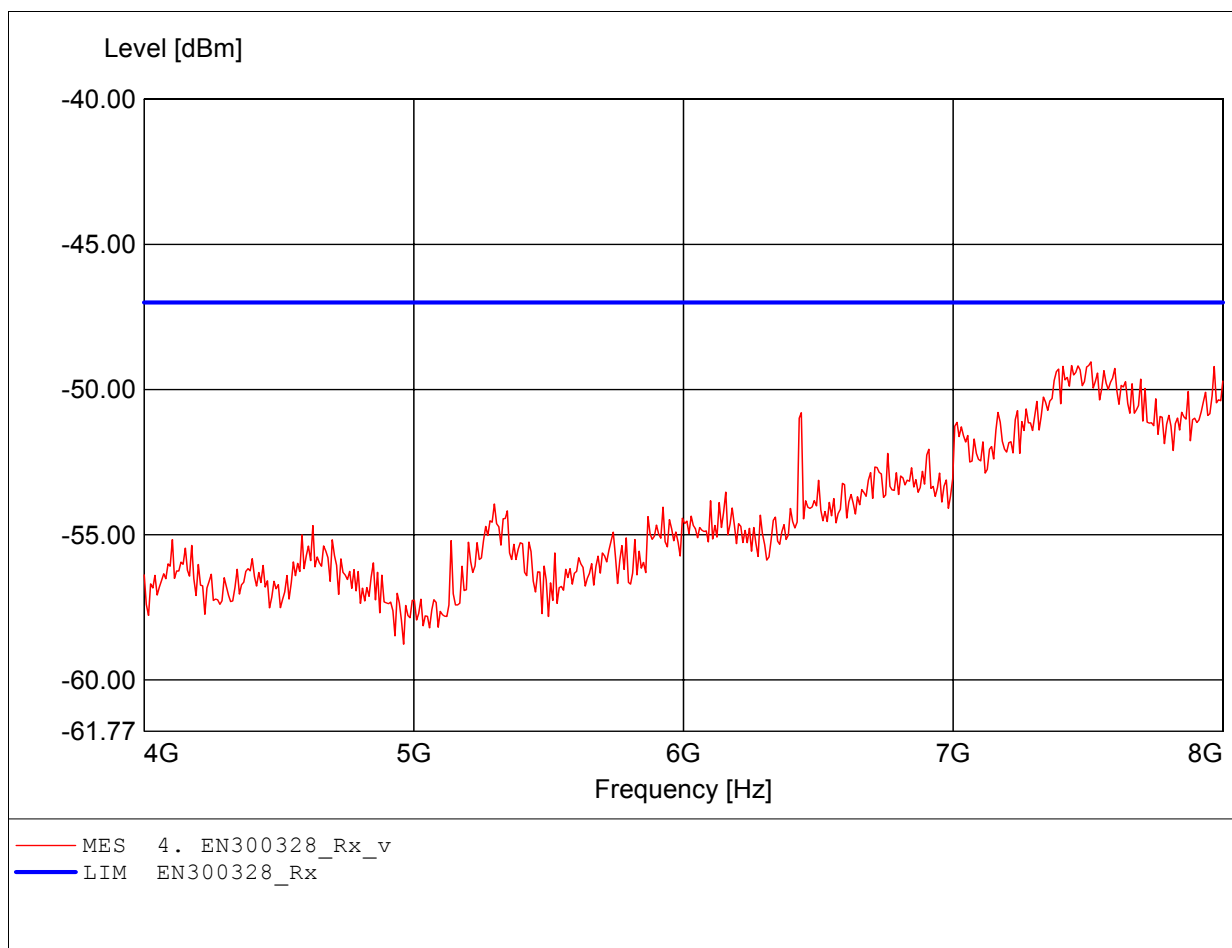

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.522GHz Pmax:-50.91dBm RBW: 100 kHz

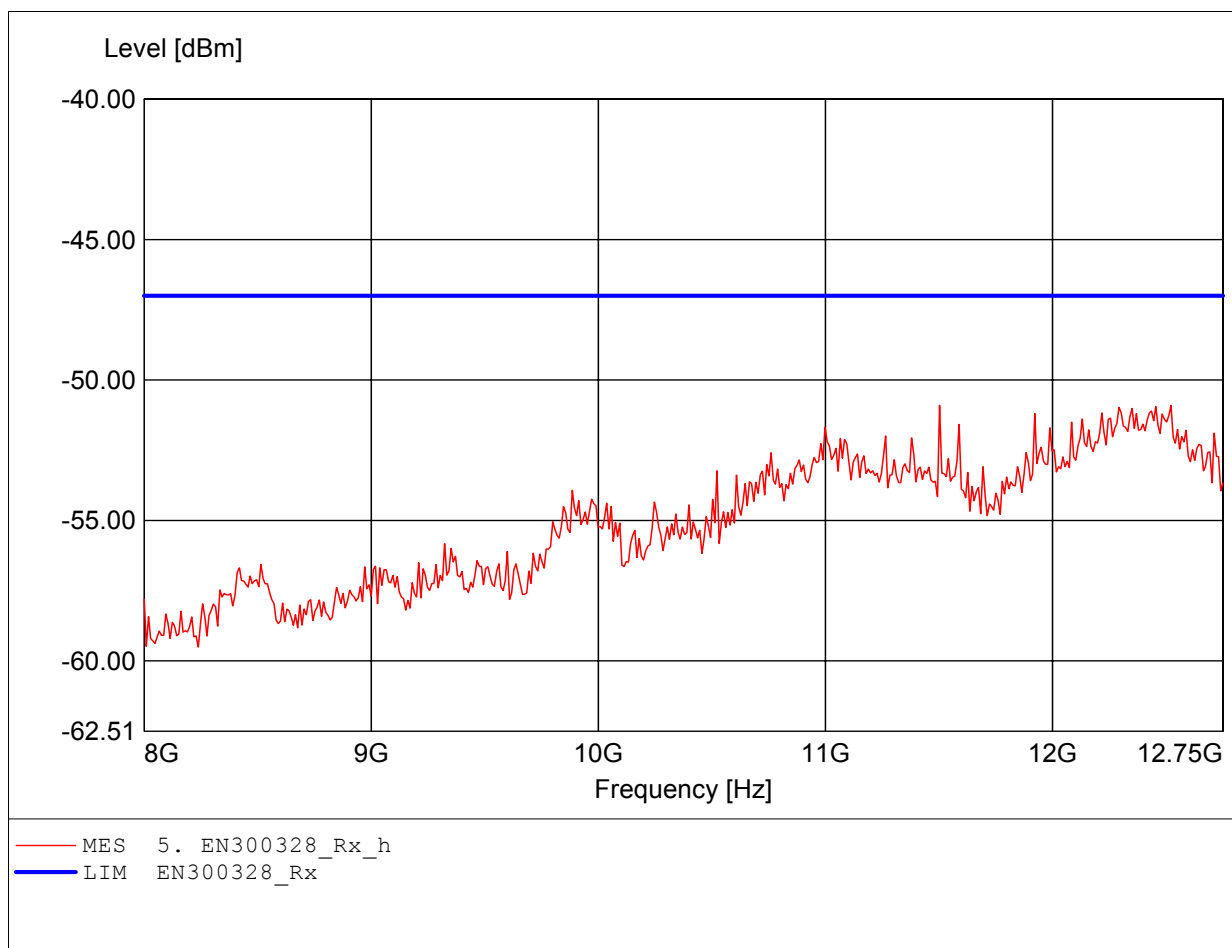

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.455GHz Pmax:-50.27dBm RBW: 100 kHz

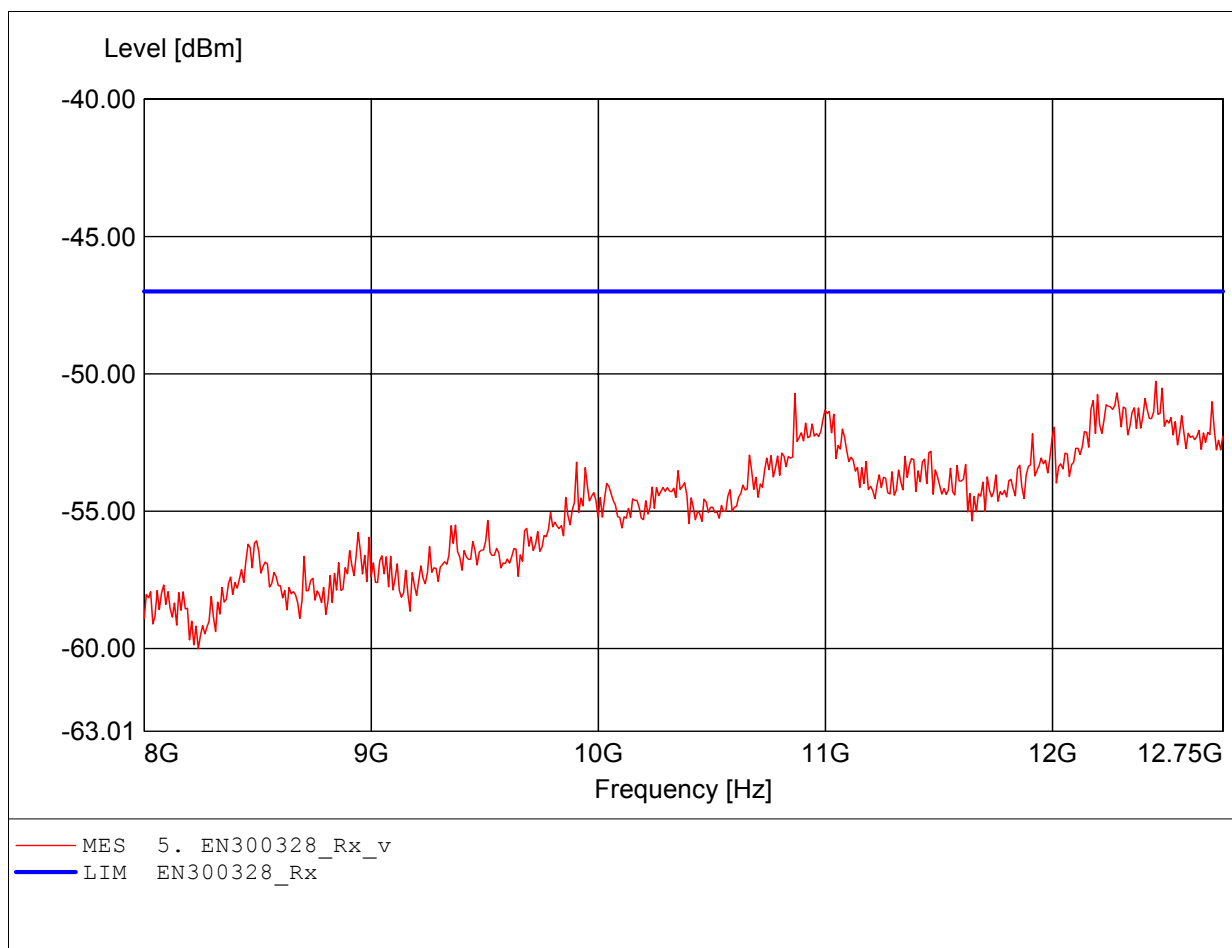

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:198.597MHz Pmax:-66.64dBm RBW: 100 kHz

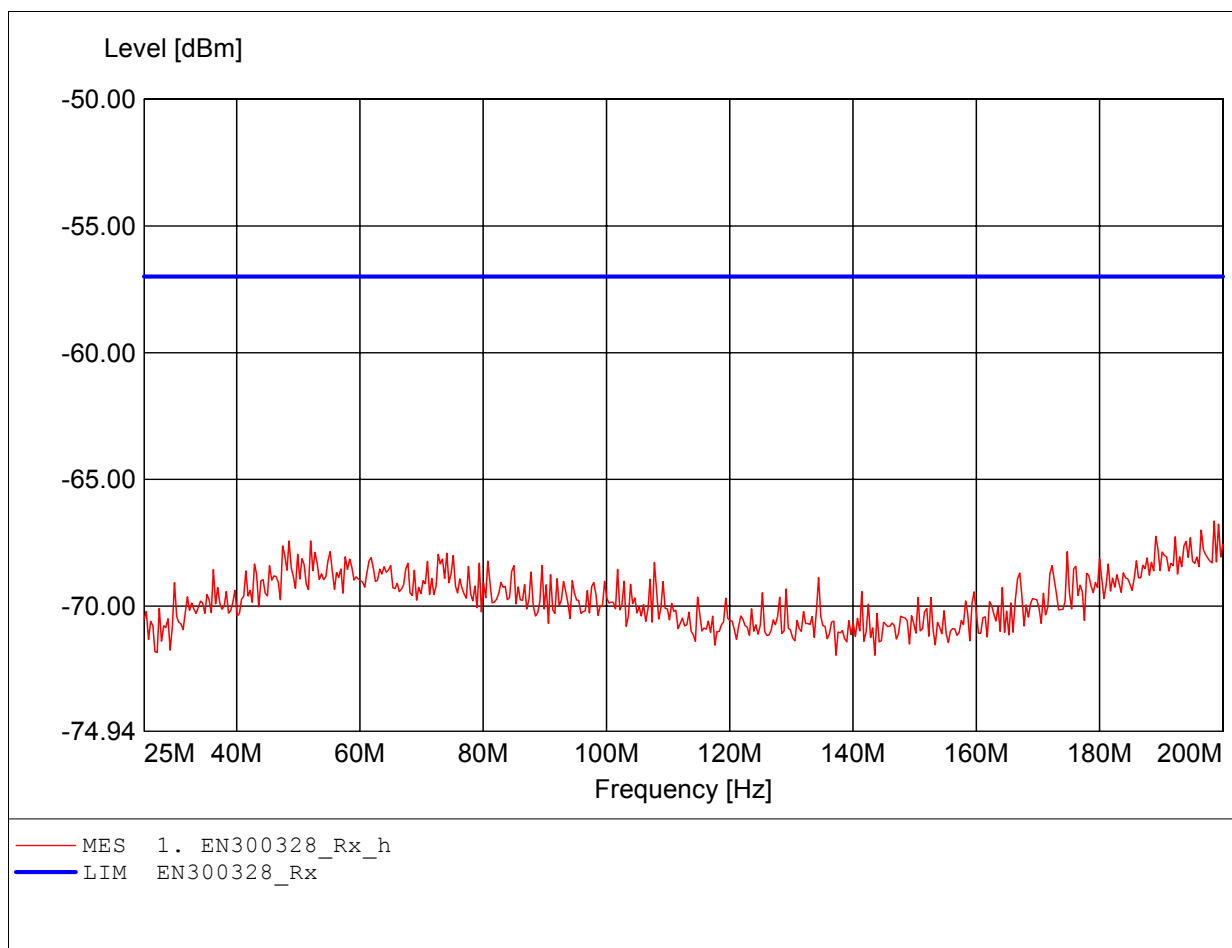

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:166.333MHz Pmax:-64.00dBm RBW: 100 kHz

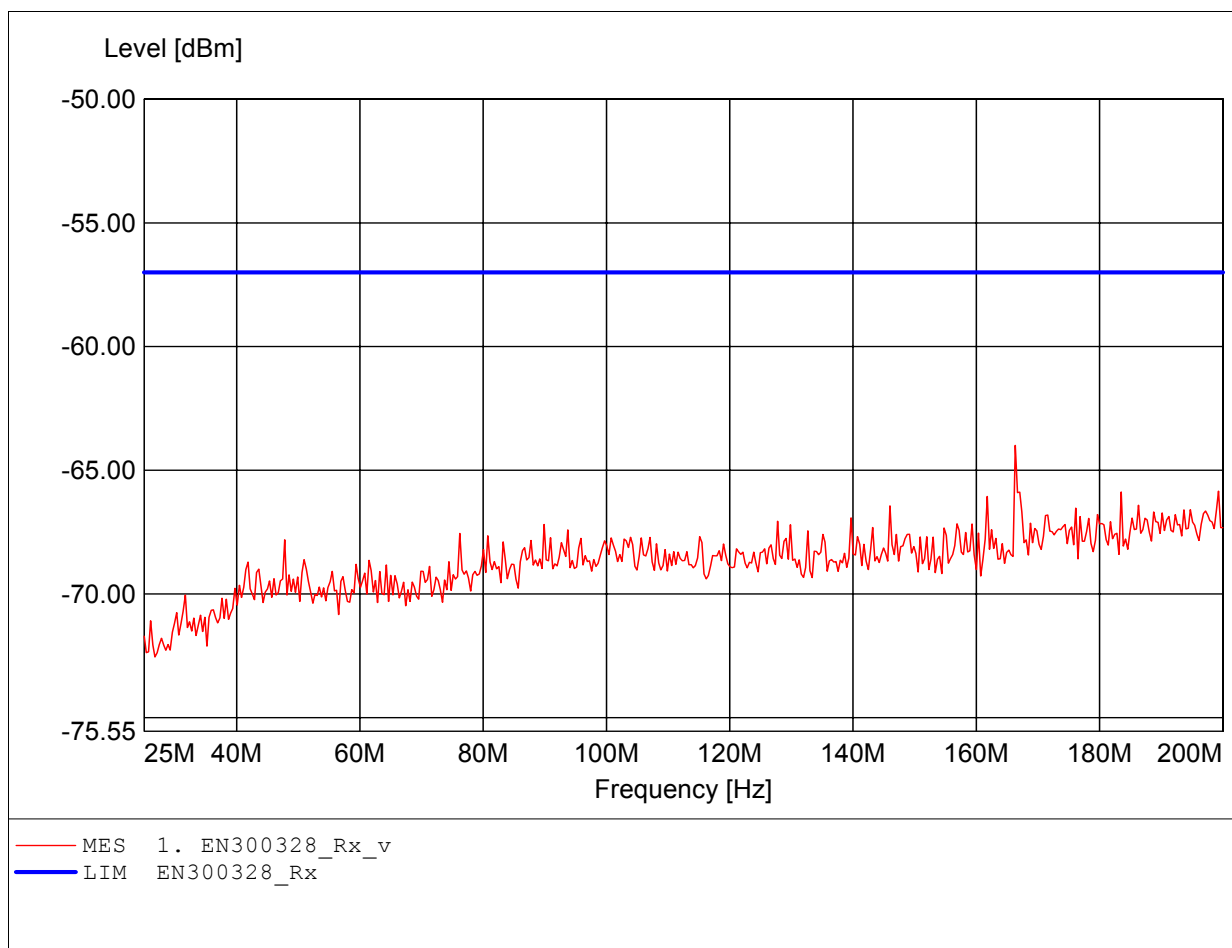

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq: 913.427MHz Pmax: -64.55dBm RBW: 100 kHz

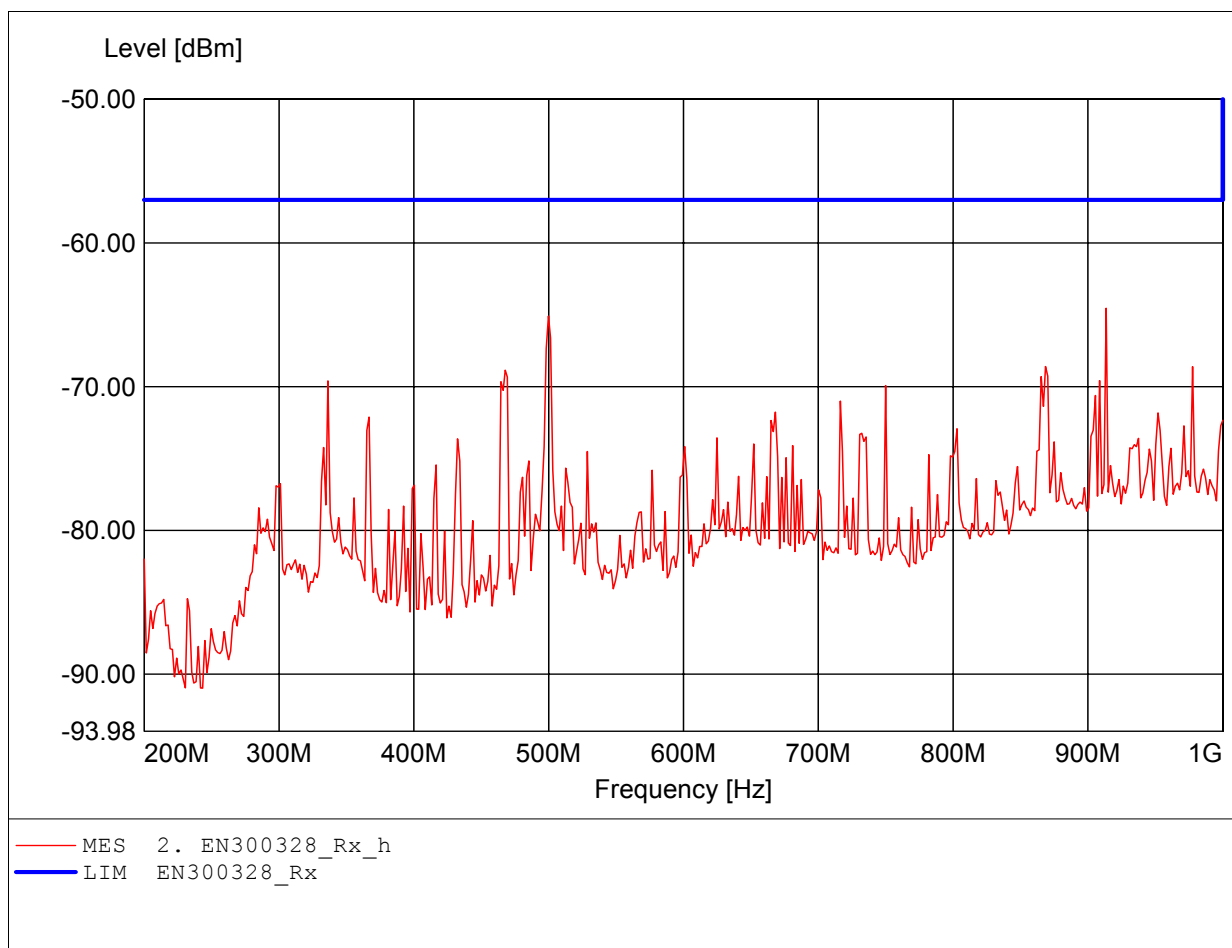

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq: 913.427MHz Pmax:-64.04dBm RBW: 100 kHz

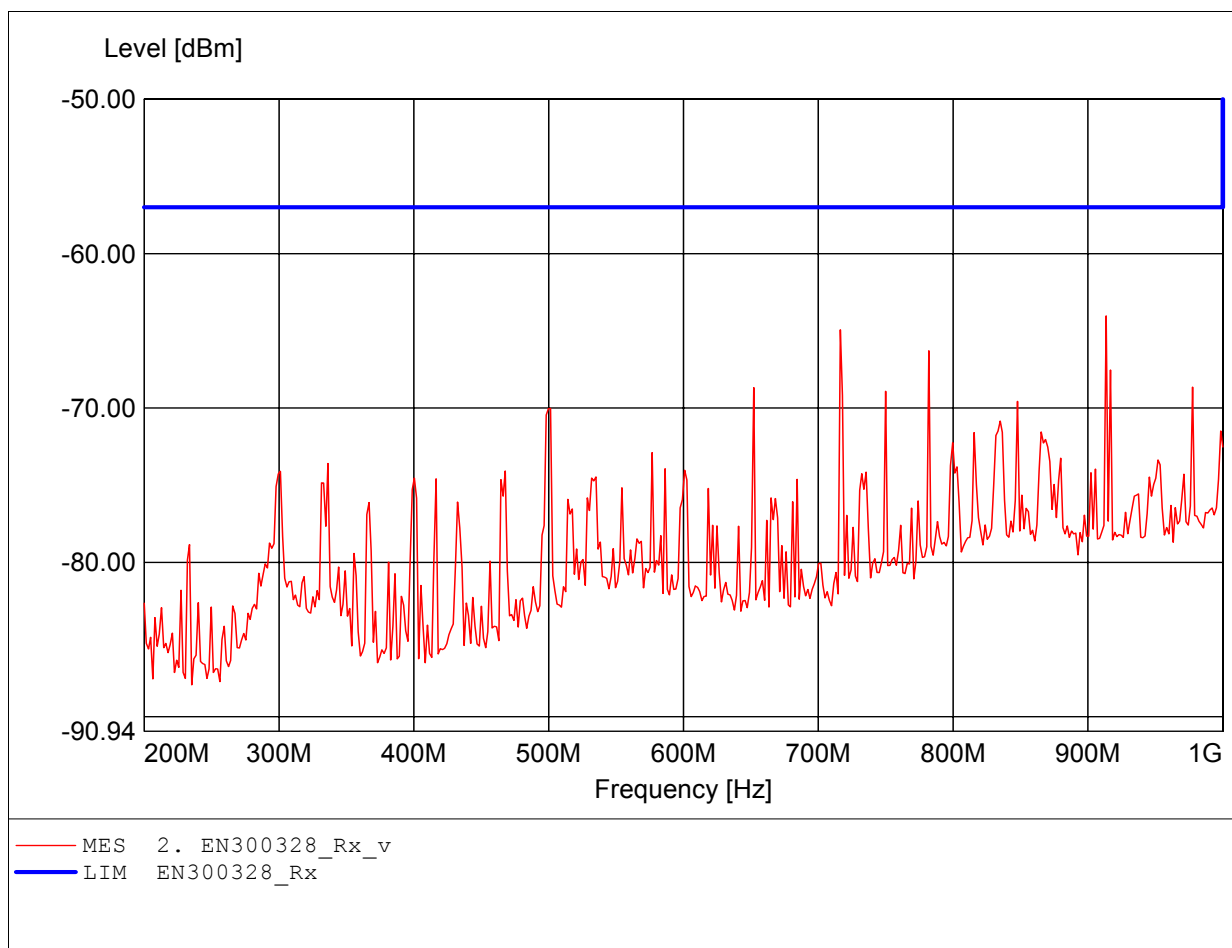

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:3.952GHz Pmax:-49.27dBm RBW: 100 kHz

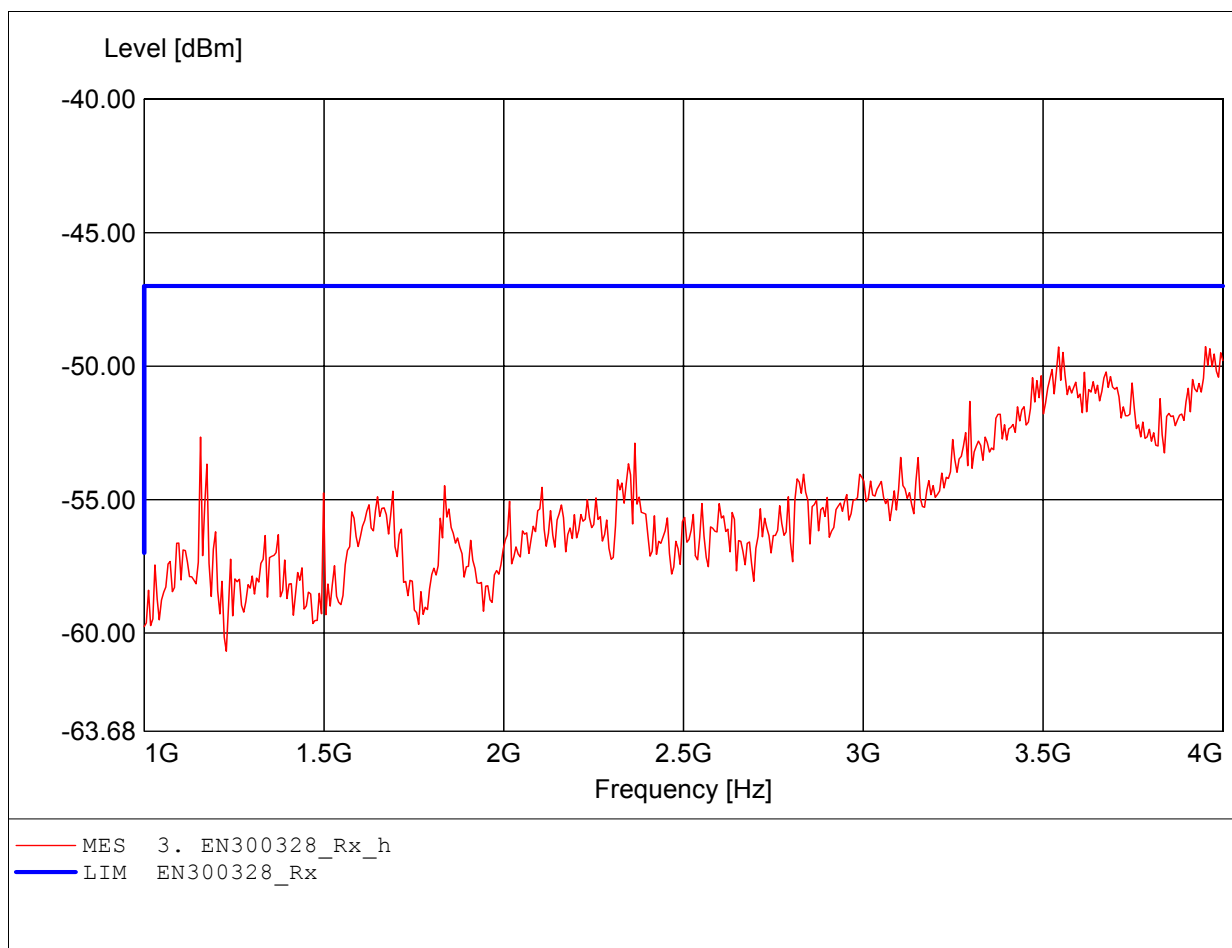

Spurious emissions under normal conditions


in accordance to the EN 300 328

Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:3.543GHz Pmax:-49.99dBm RBW: 100 kHz

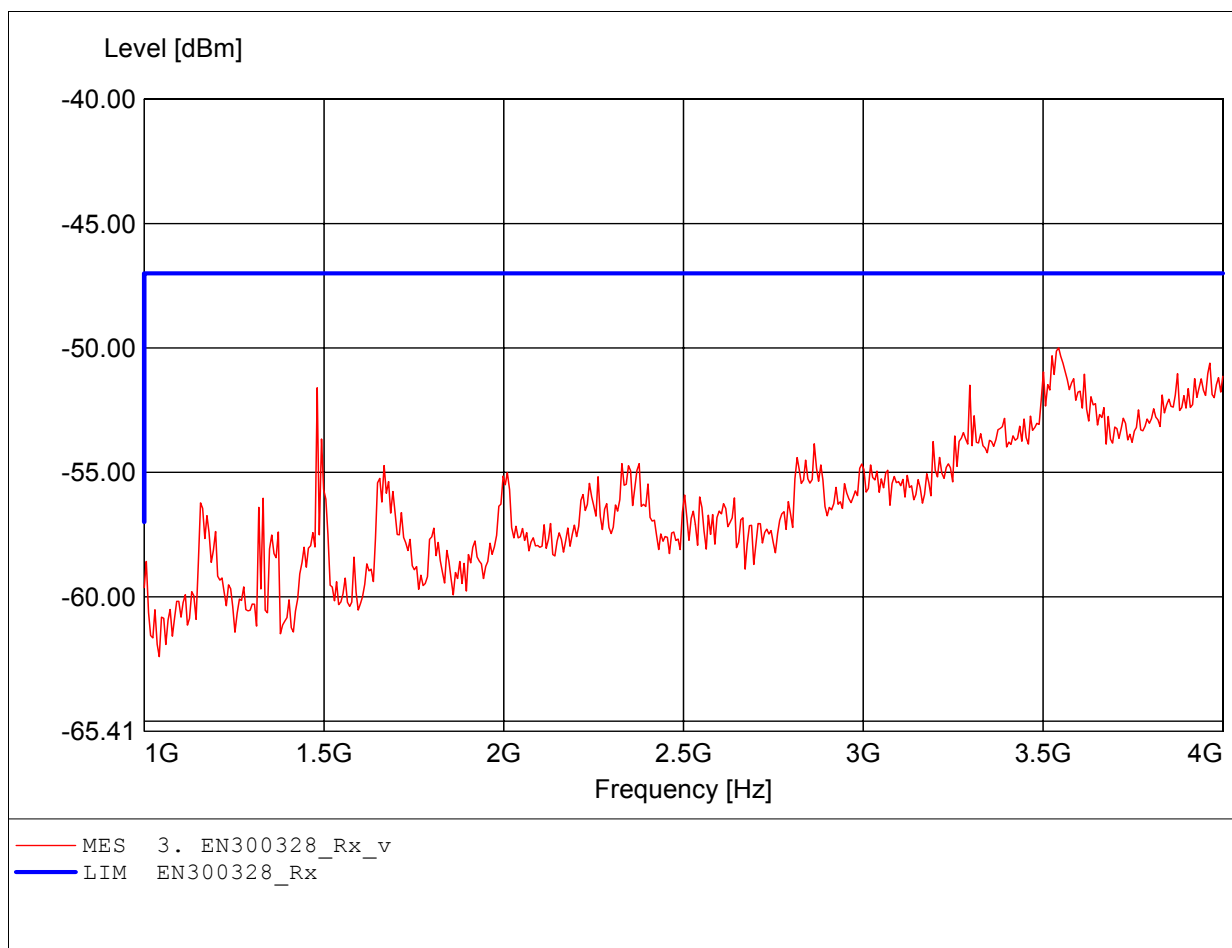


Spurious emissions under normal conditions
in accordance to the EN 300 328

Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq: 7.623GHz Pmax: -48.63dBm RBW: 100 kHz

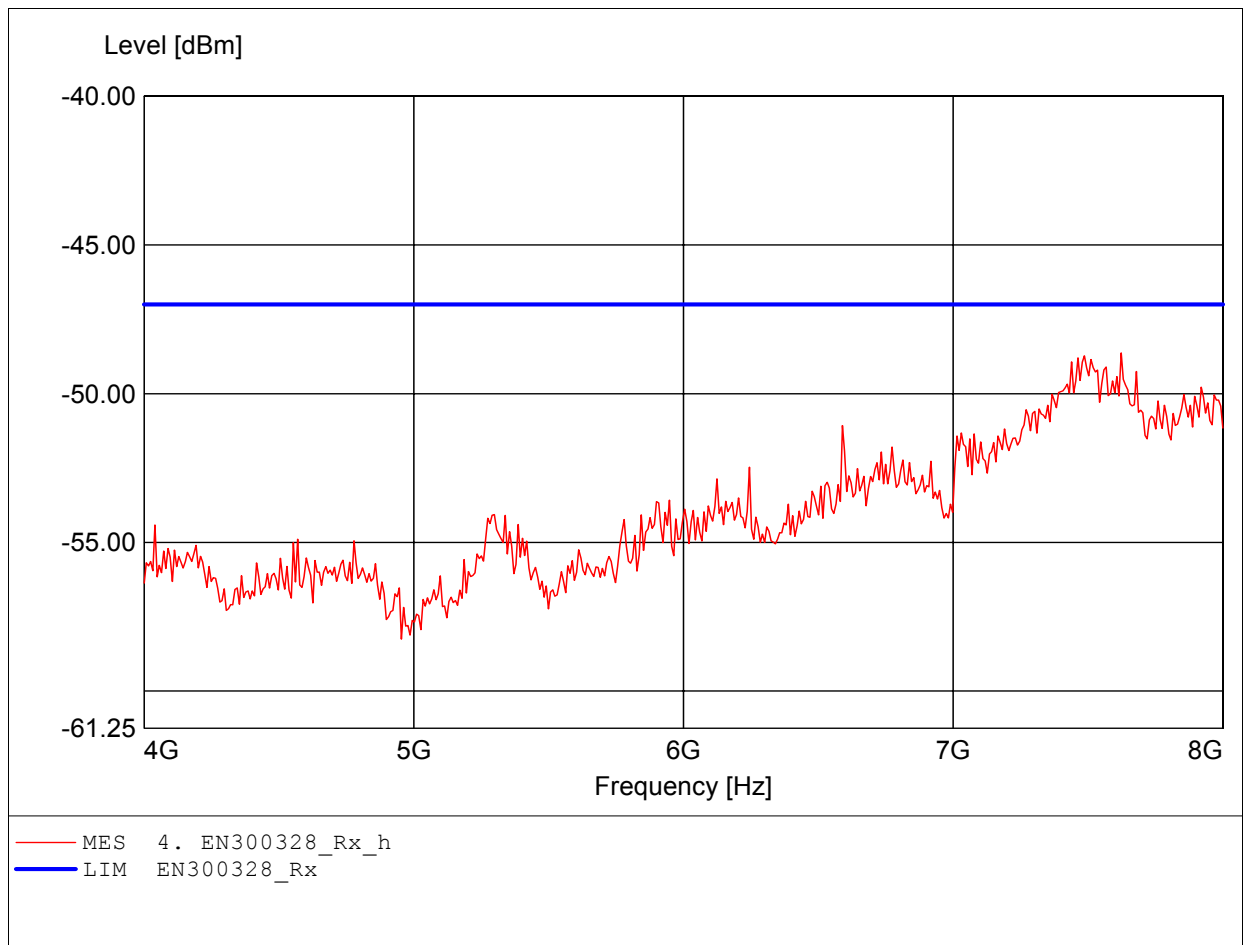

Spurious emissions under normal conditions
in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:7.535GHz Pmax:-48.74dBm RBW: 100 kHz

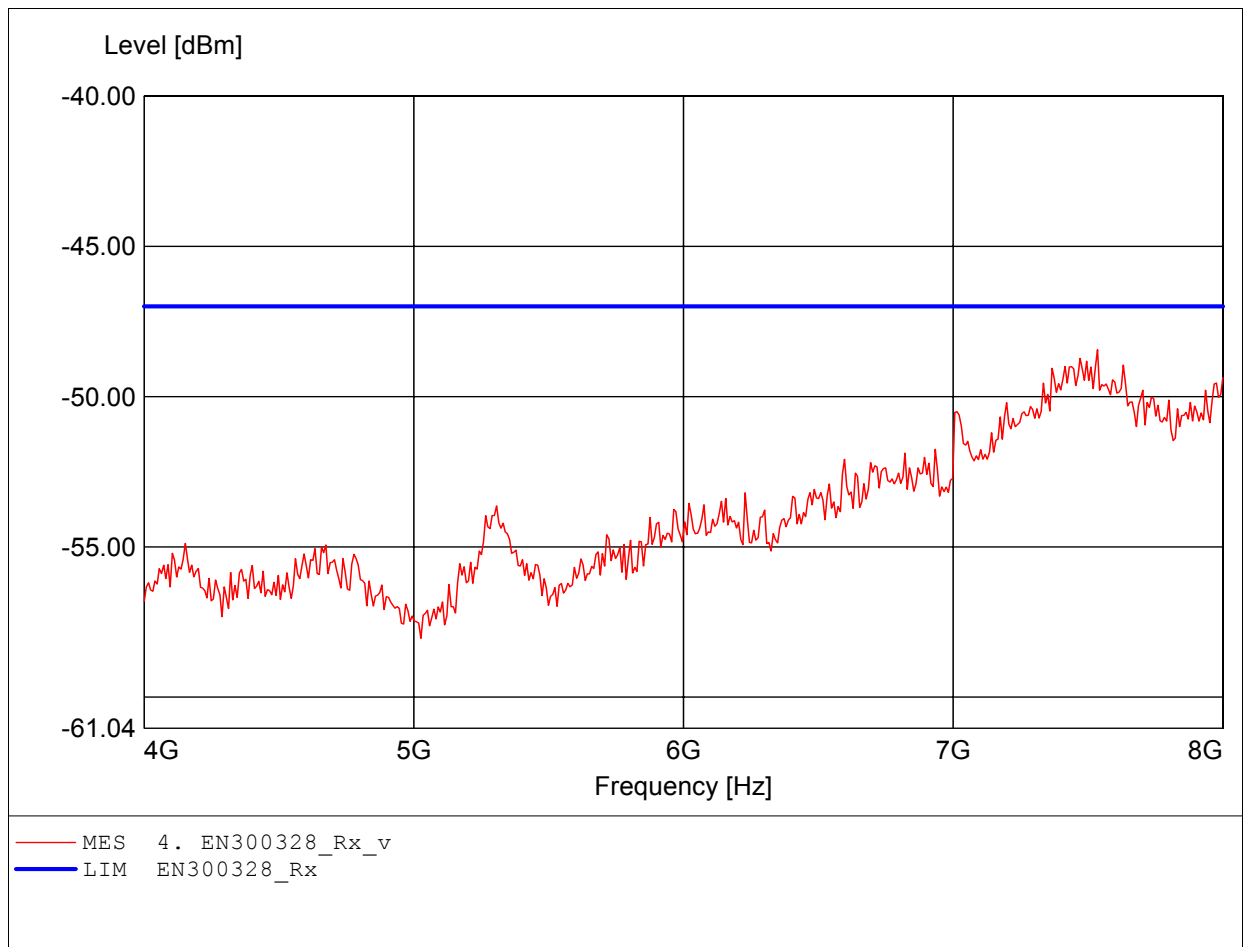

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.426GHz Pmax:-50.63dBm RBW: 100 kHz

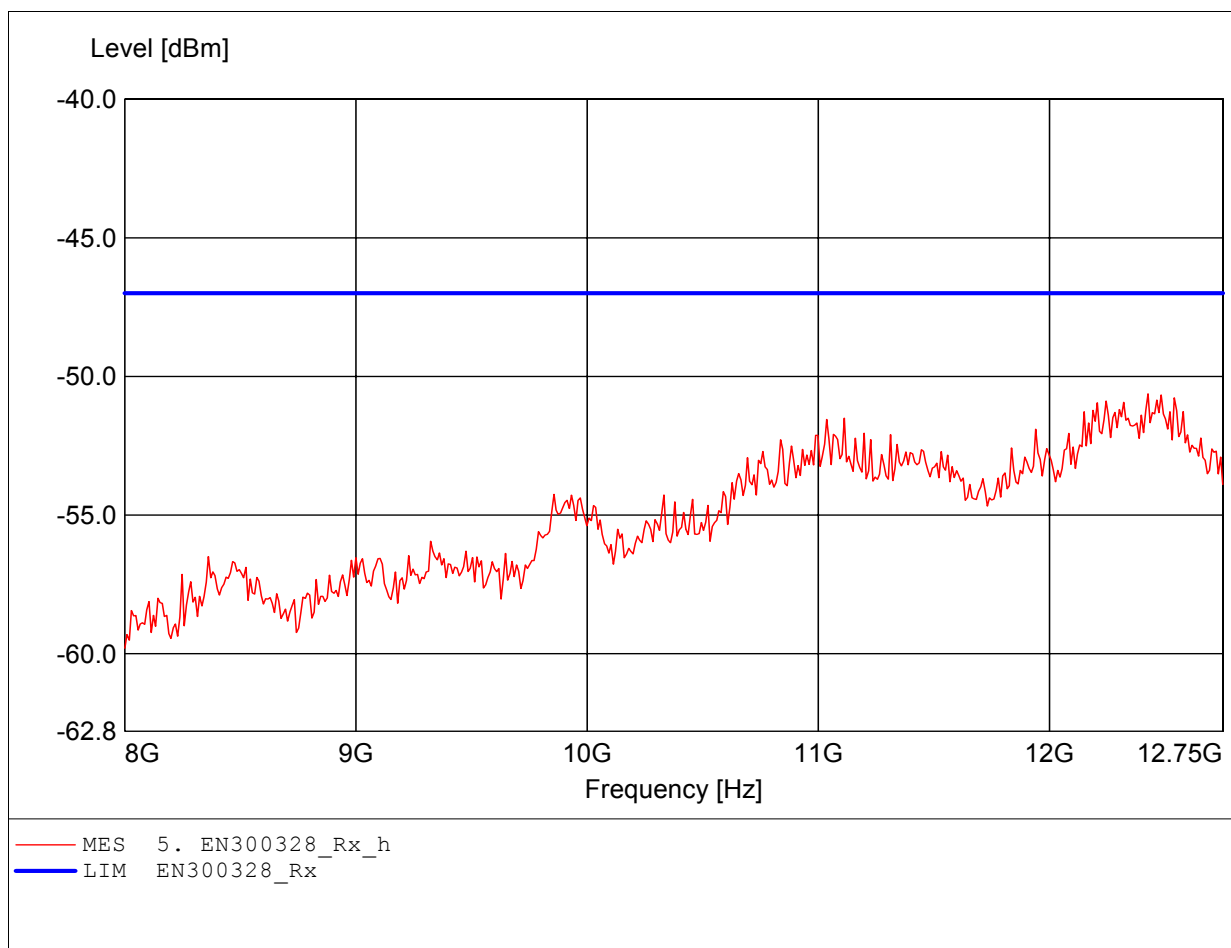

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11b ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.322GHz Pmax:-50.30dBm RBW: 100 kHz

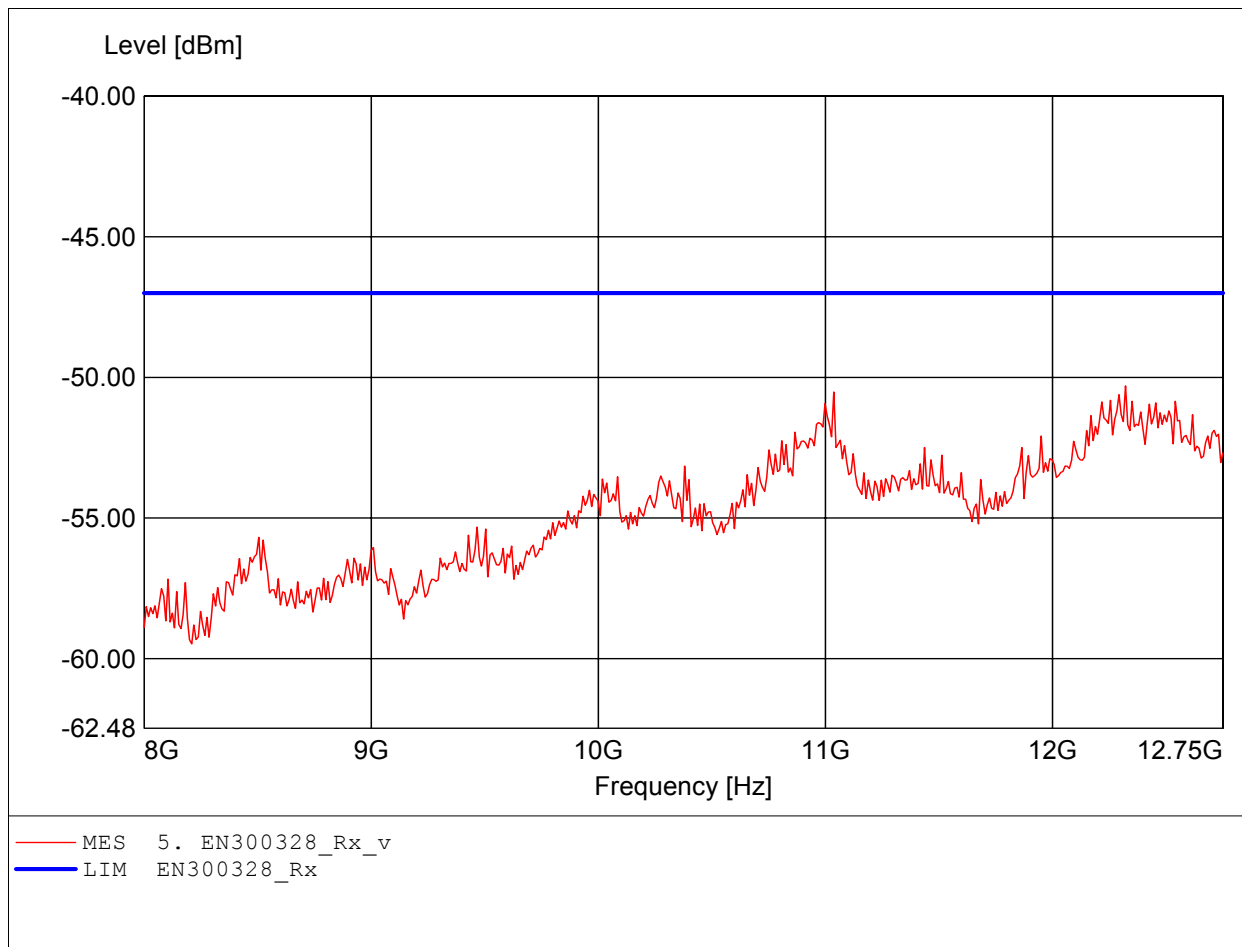

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:199.649MHz Pmax:-67.13dBm RBW: 100 kHz

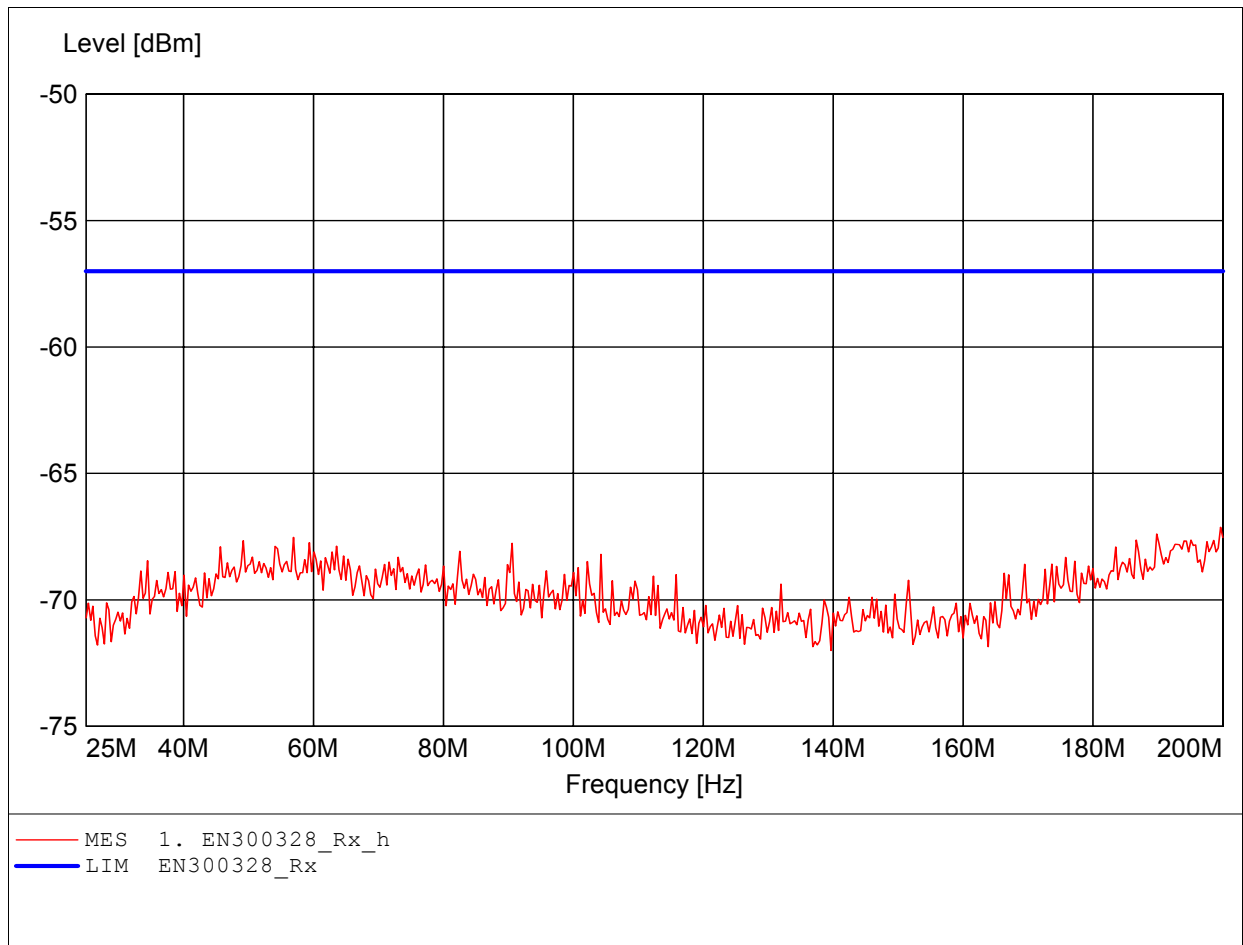

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:187.375MHz Pmax:-65.58dBm RBW: 100 kHz

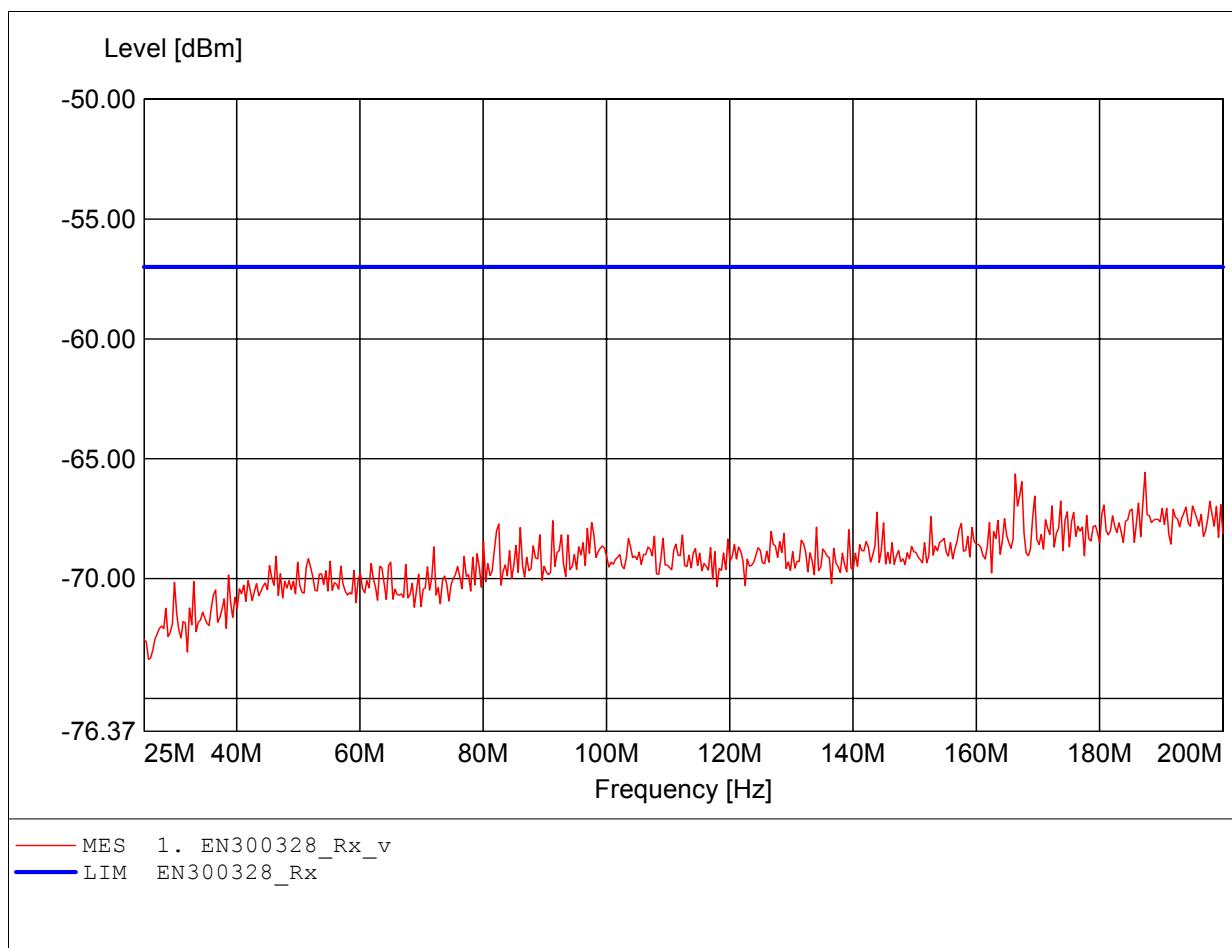

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:498.196MHz Pmax:-63.17dBm RBW: 100 kHz

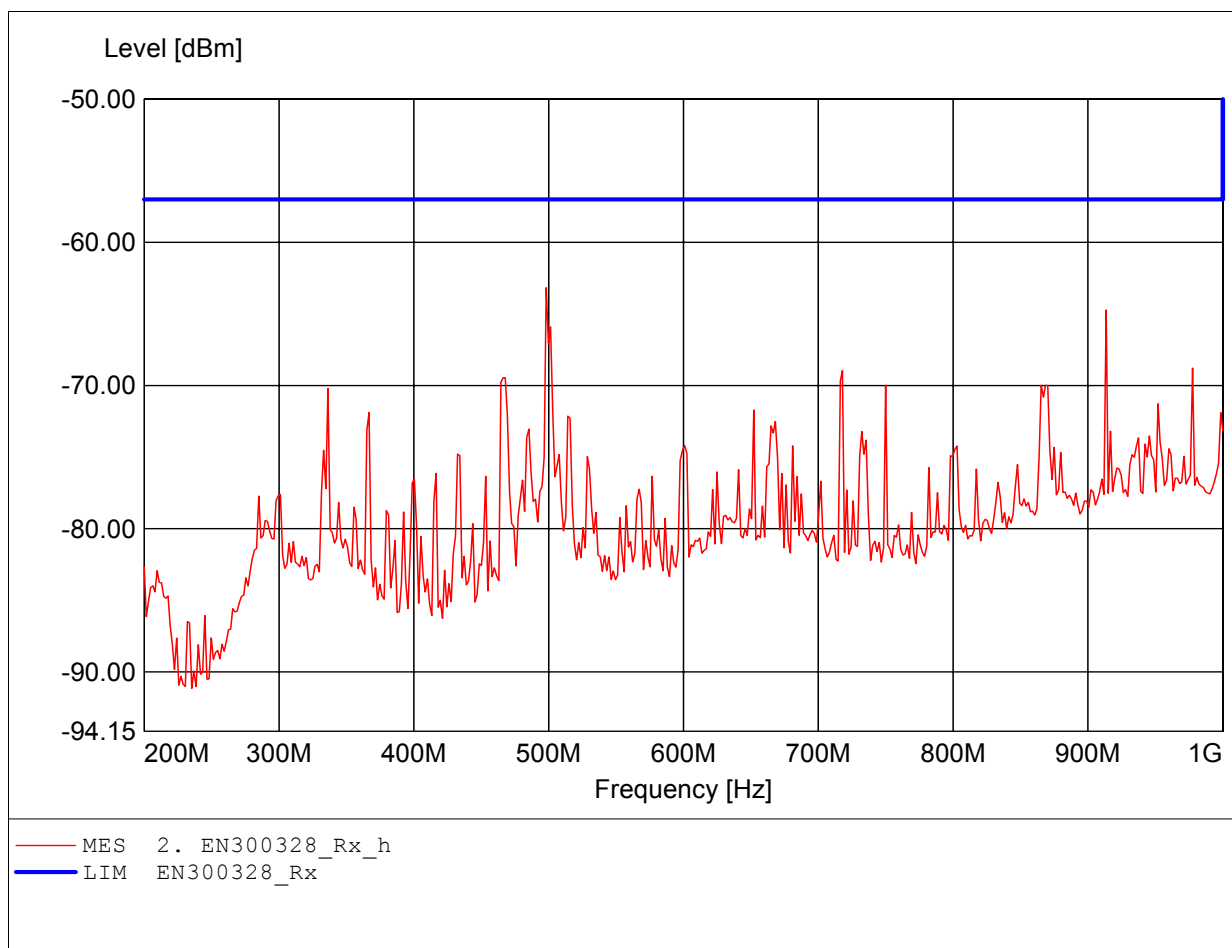

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq: 913.427MHz Pmax:-64.15dBm RBW: 100 kHz

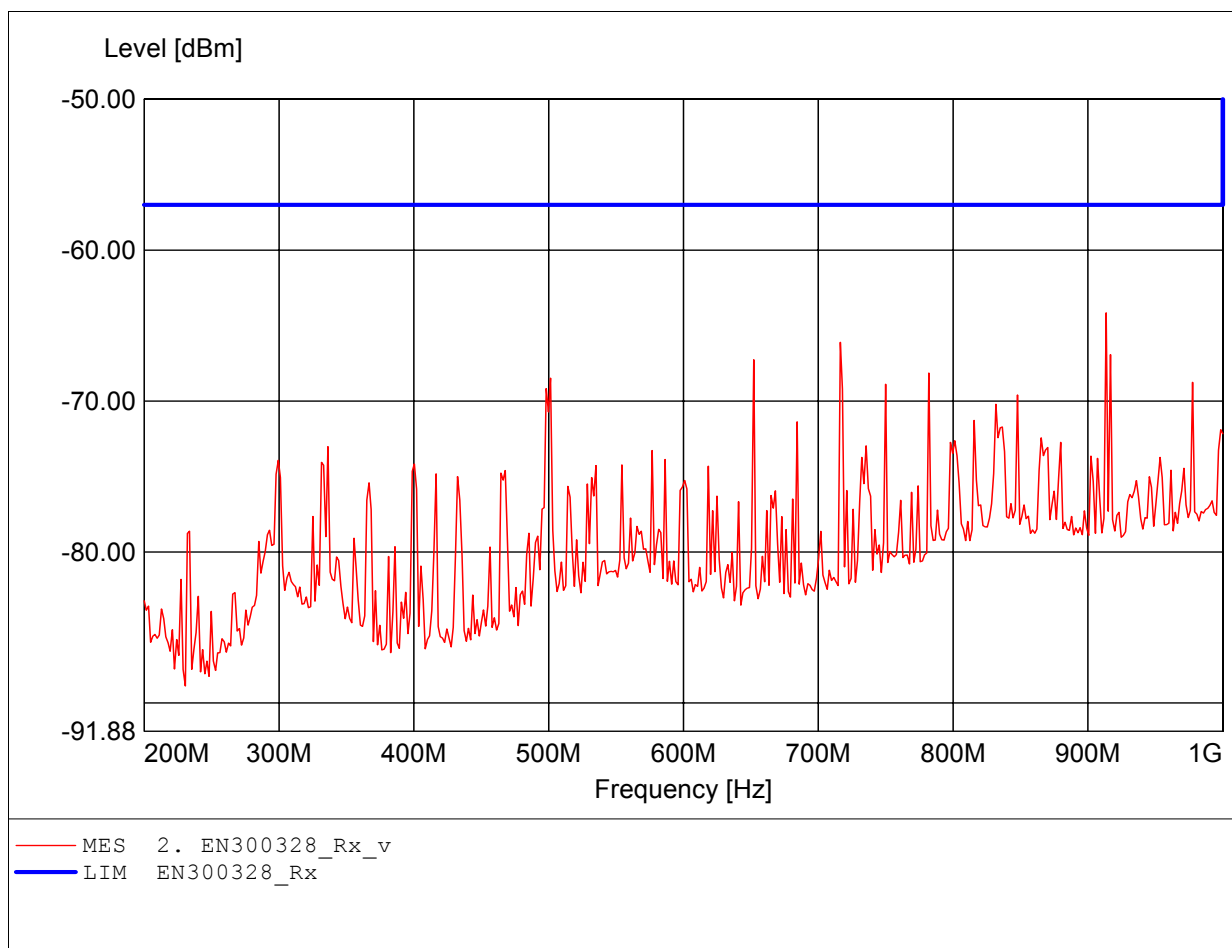

Spurious emissions under normal conditions


in accordance to the EN 300 328

Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:3.531GHz Pmax:-49.46dBm RBW: 100 kHz

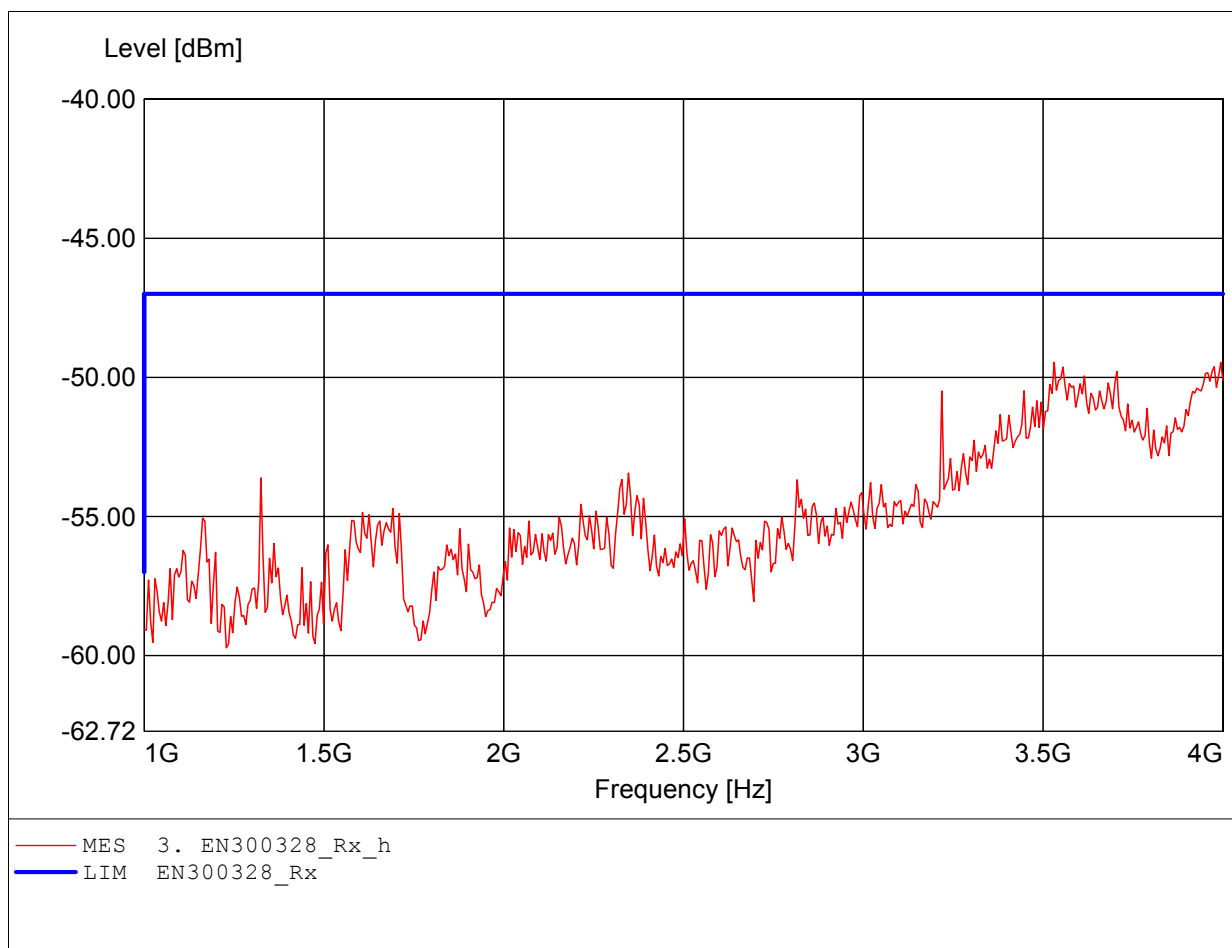

Spurious emissions under normal conditions
in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:3.531GHz Pmax:-50.01dBm RBW: 100 kHz

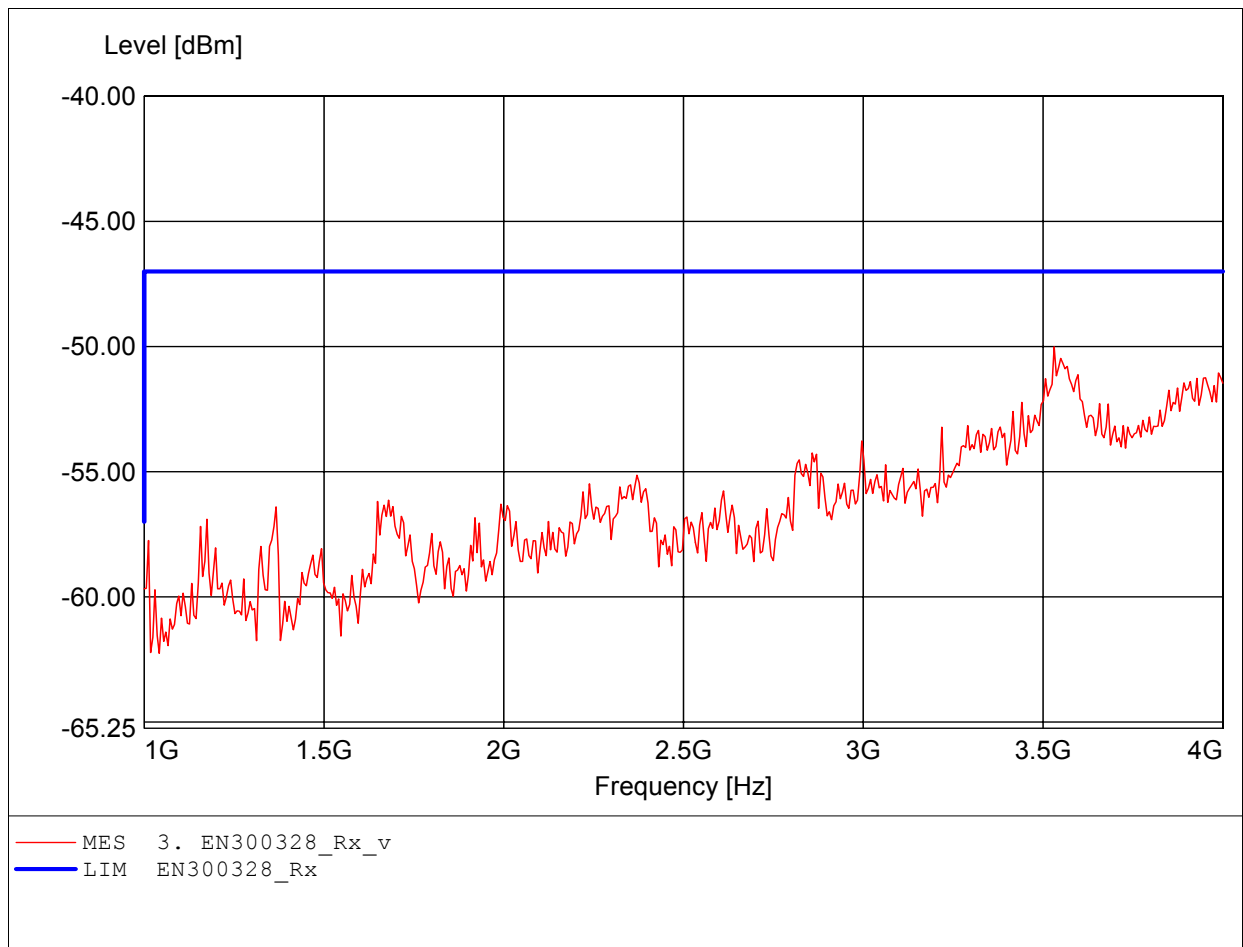

Spurious emissions under normal conditions


in accordance to the EN 300 328

Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:7.543GHz Pmax:-48.91dBm RBW: 100 kHz

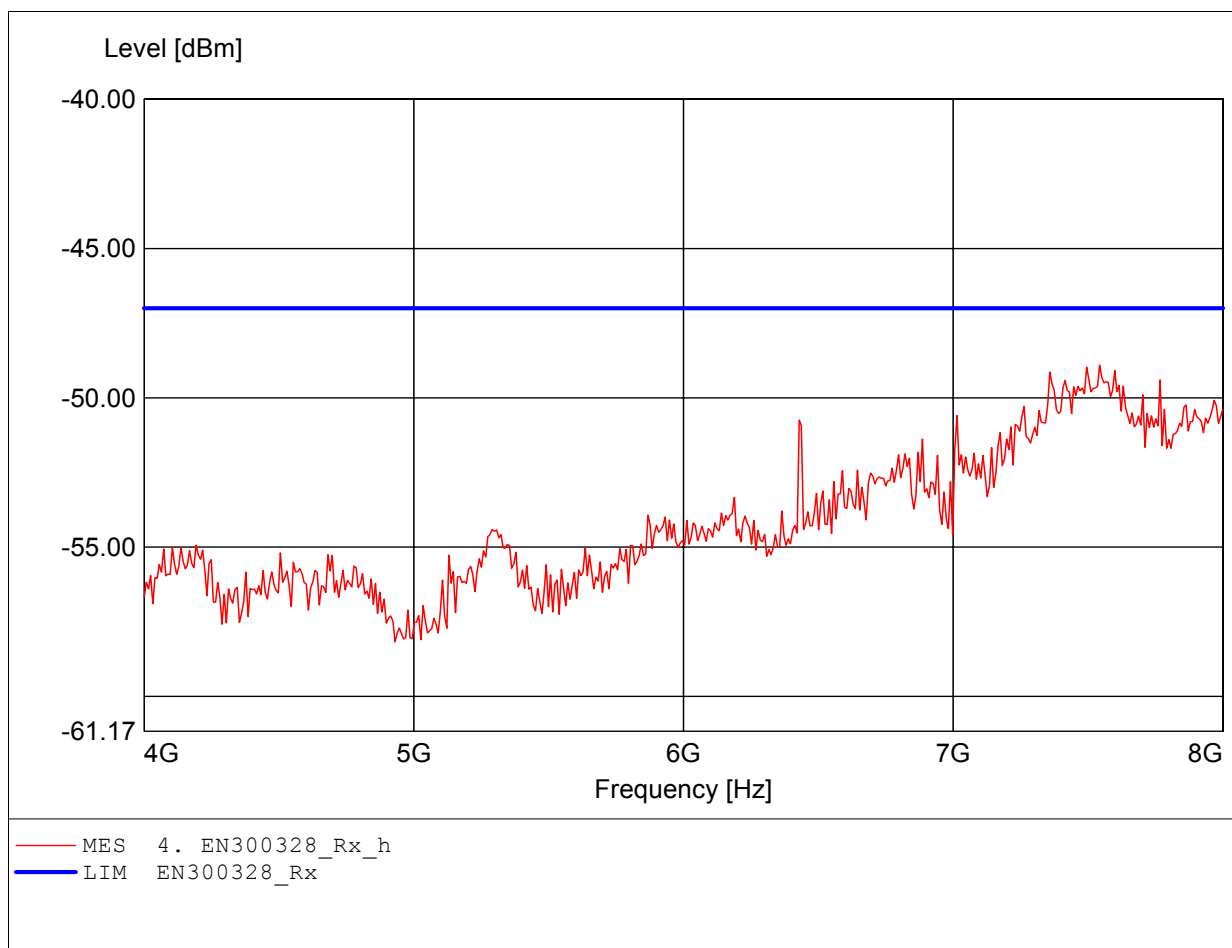

Spurious emissions under normal conditions
in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:7.471GHz Pmax:-48.73dBm RBW: 100 kHz

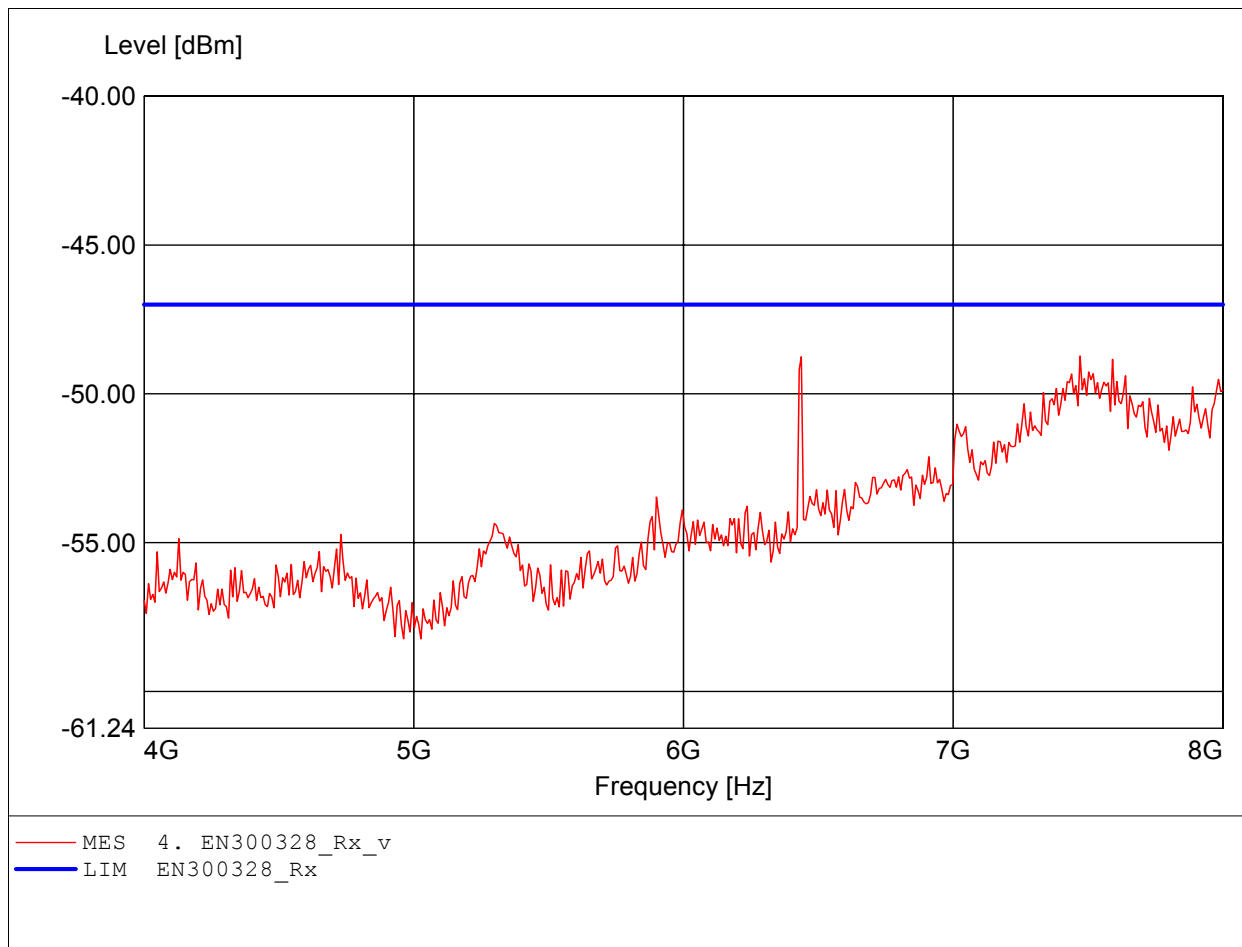

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.474GHz Pmax:-50.26dBm RBW: 100 kHz

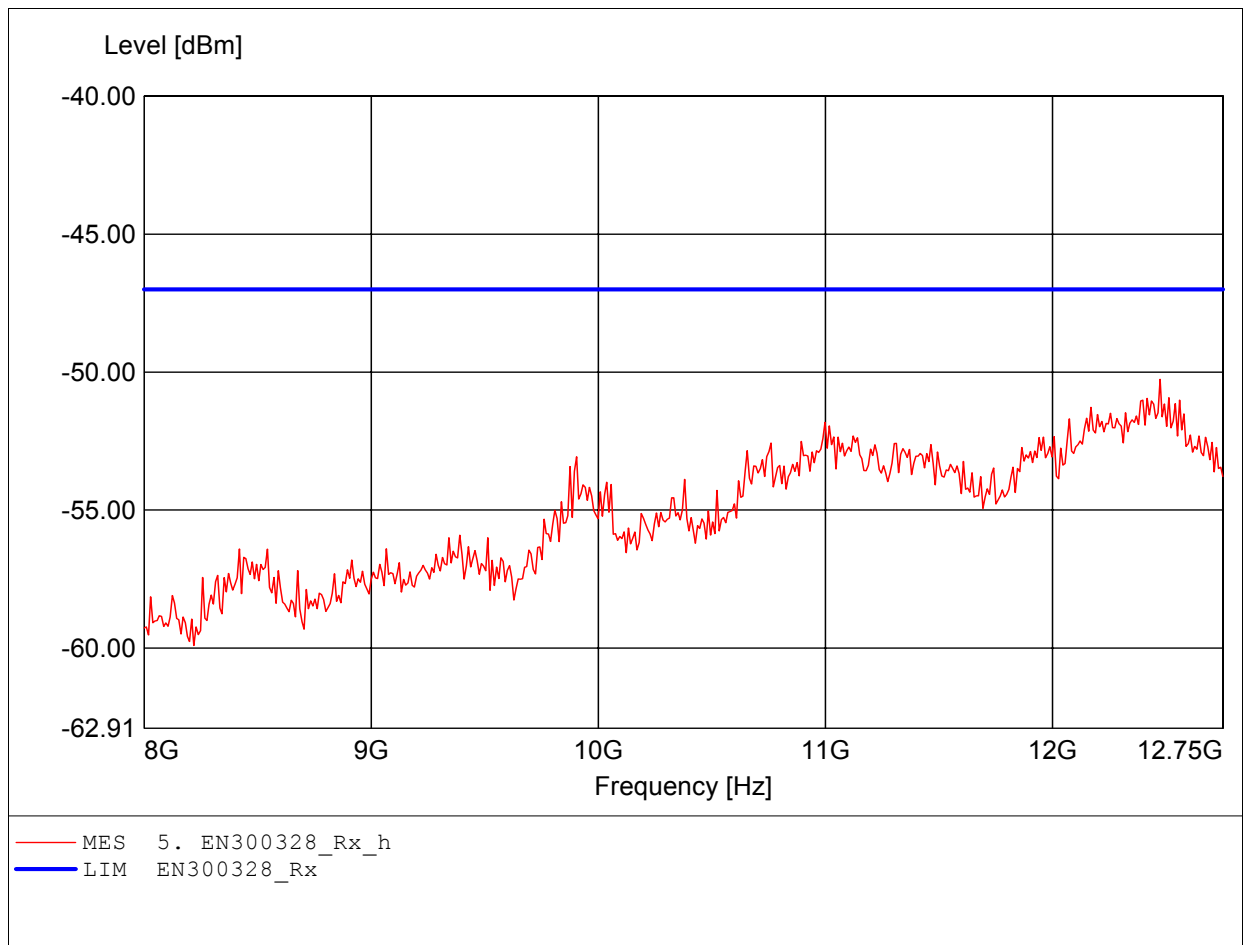

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.493GHz Pmax:-50.30dBm RBW: 100 kHz

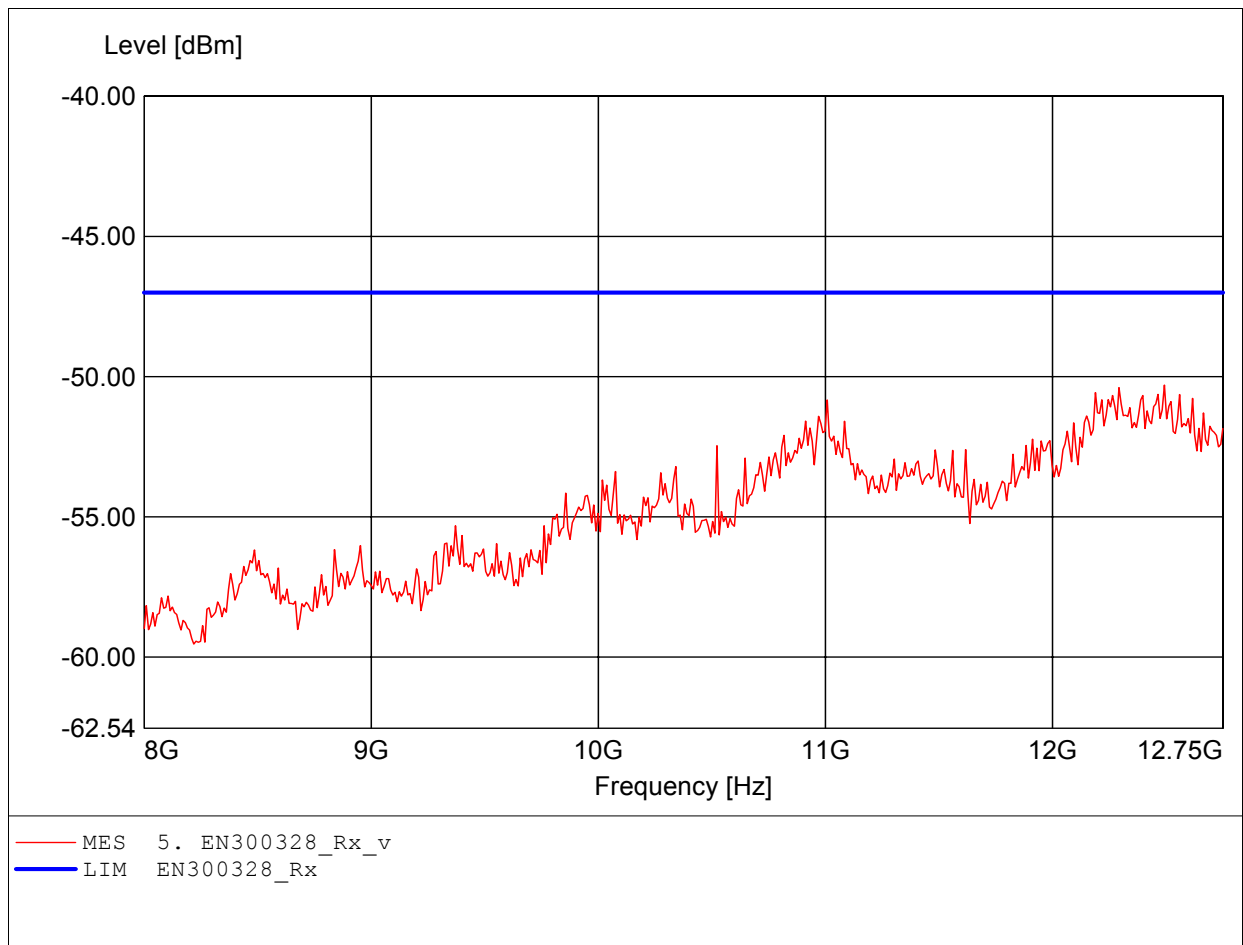

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:199.299MHz Pmax:-66.58dBm RBW: 100 kHz

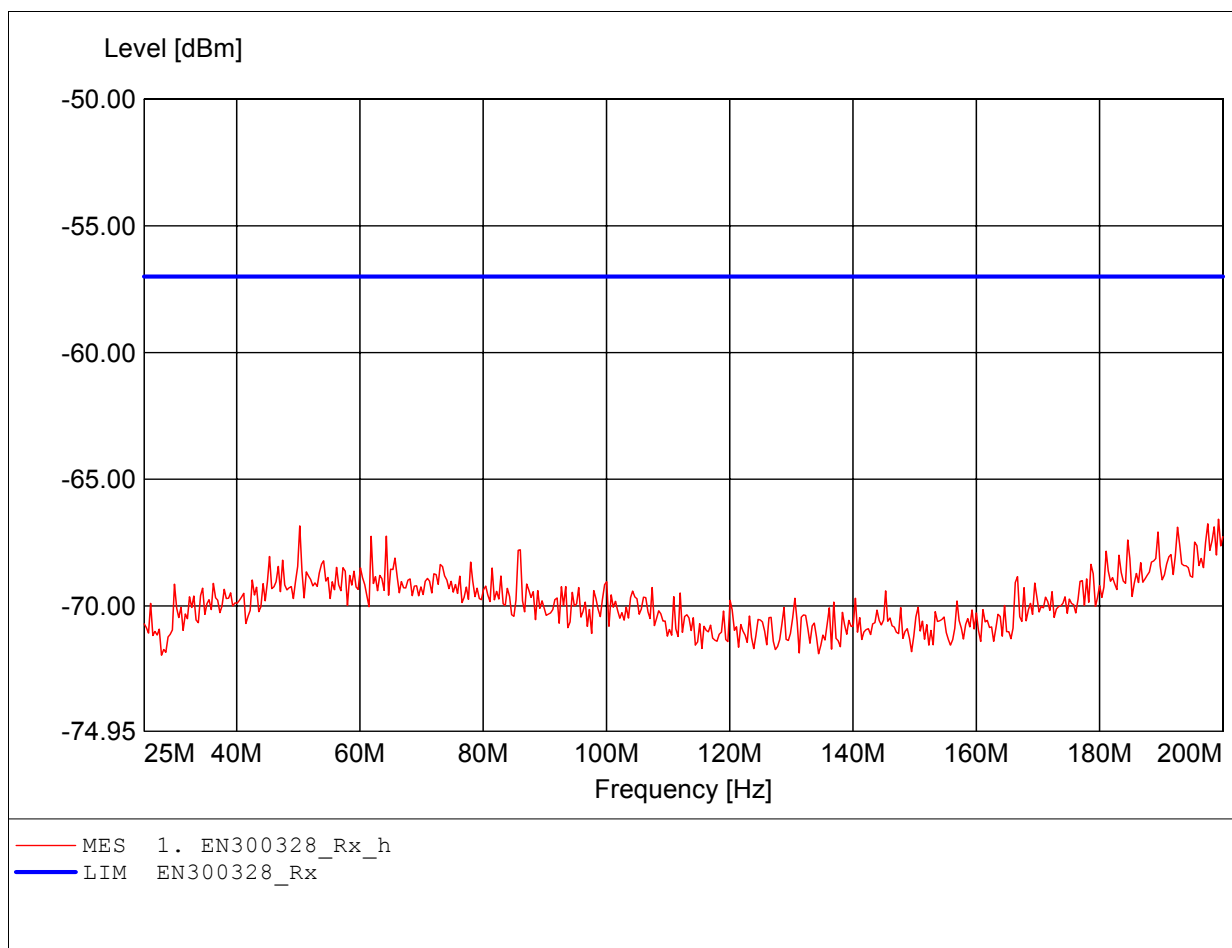

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:166.683MHz Pmax:-63.83dBm RBW: 100 kHz

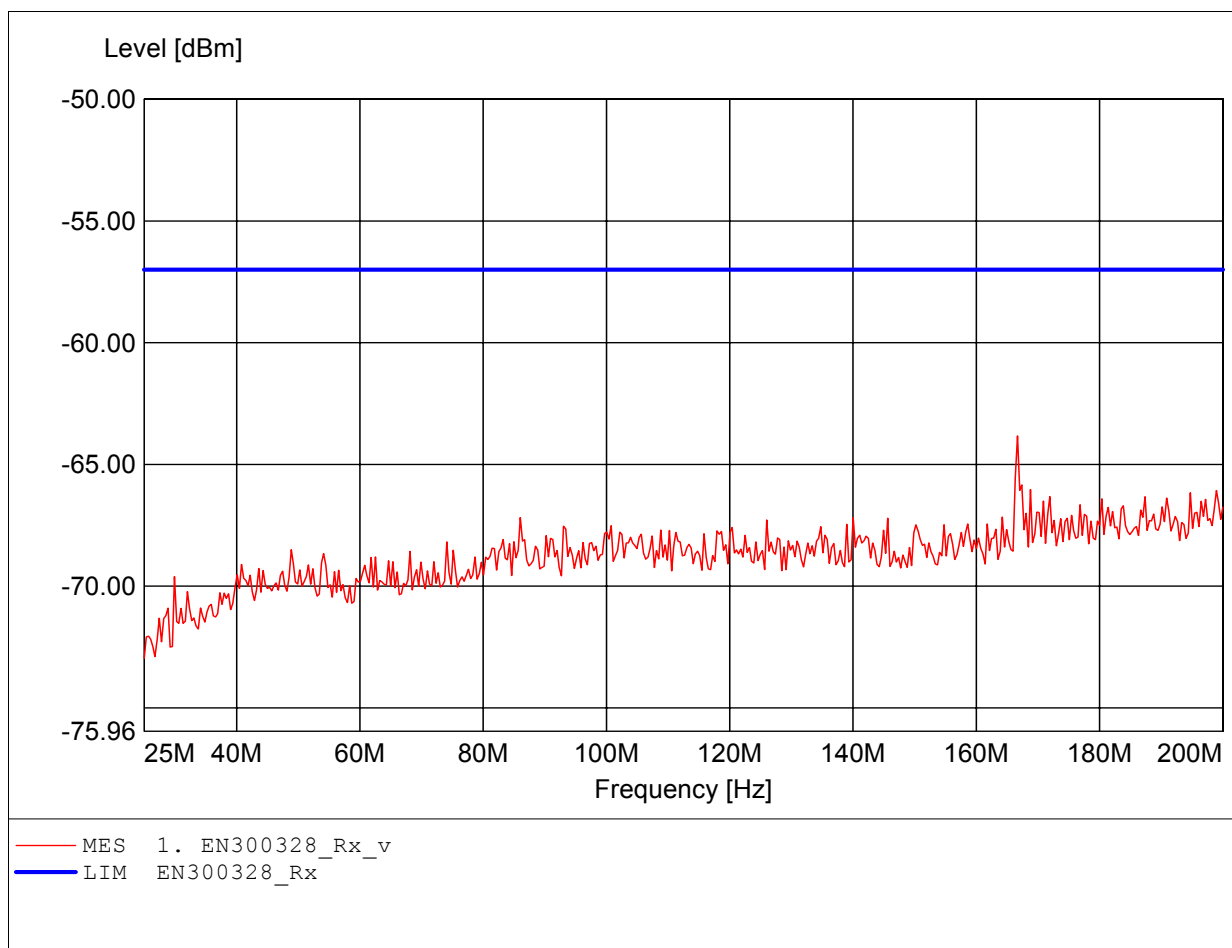

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:499.800MHz Pmax:-65.65dBm RBW: 100 kHz

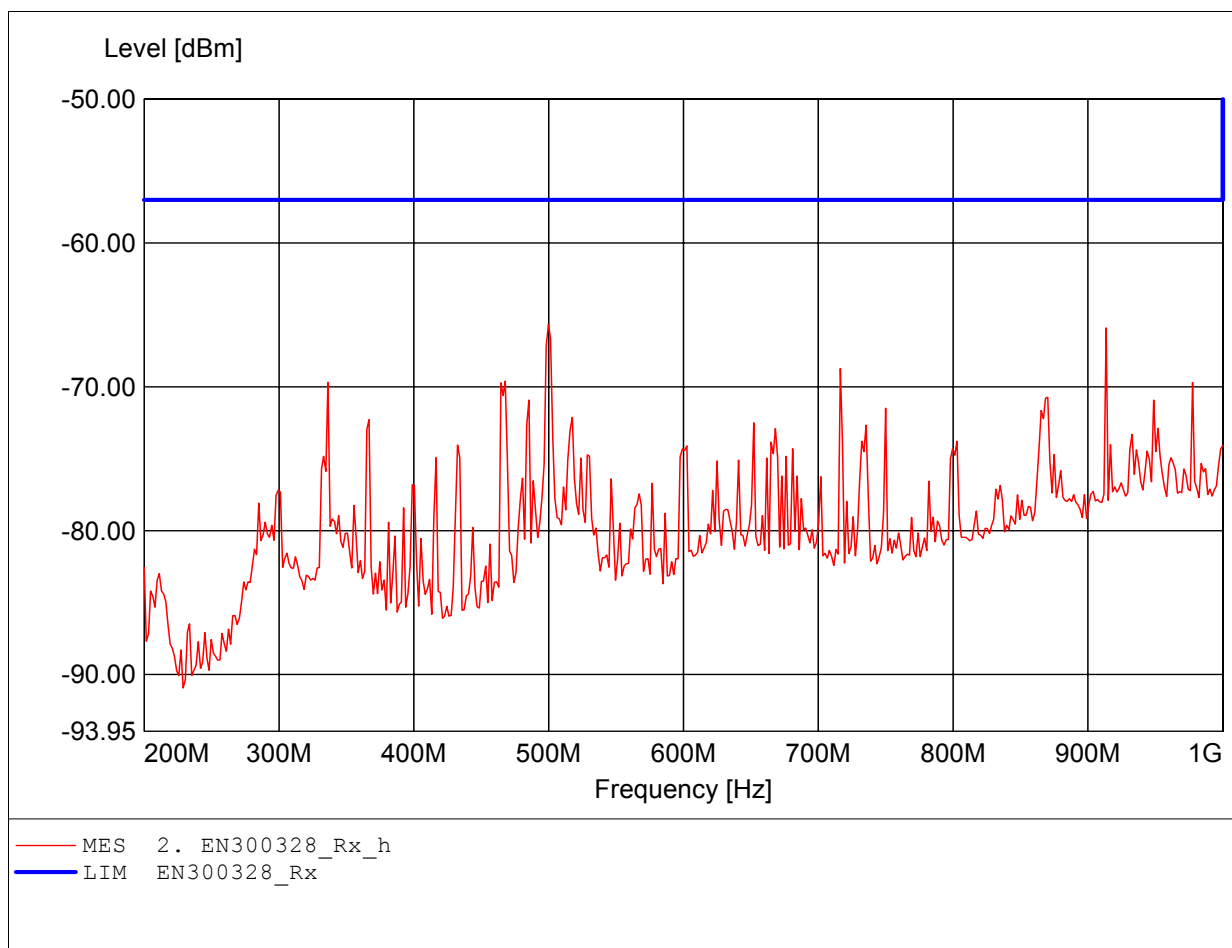

Spurious emissions under normal conditions


in accordance to the EN 300 328

Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq: 716.232MHz Pmax: -65.45dBm RBW: 100 kHz

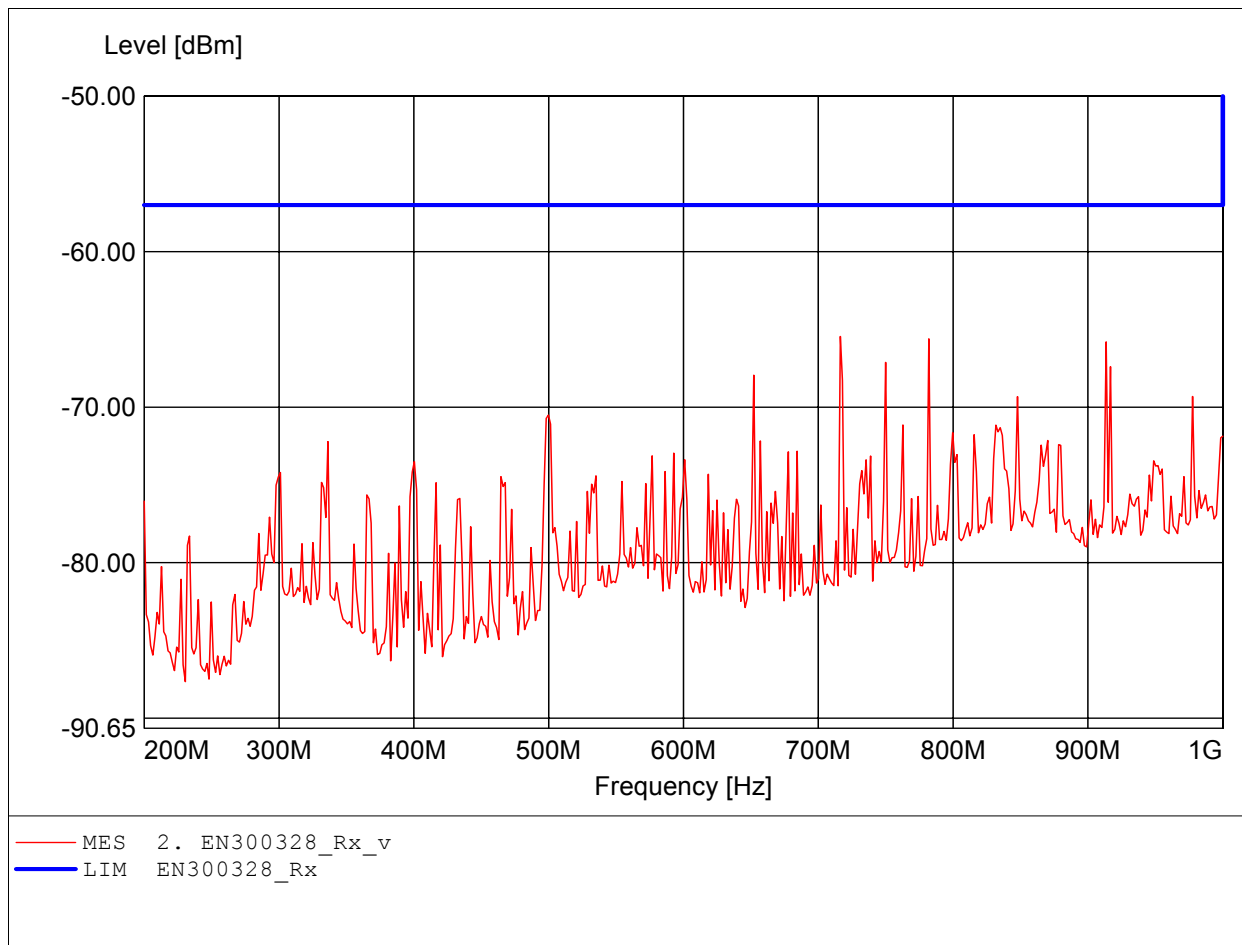

Spurious emissions under normal conditions
in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:3.555GHz Pmax:-49.42dBm RBW: 100 kHz

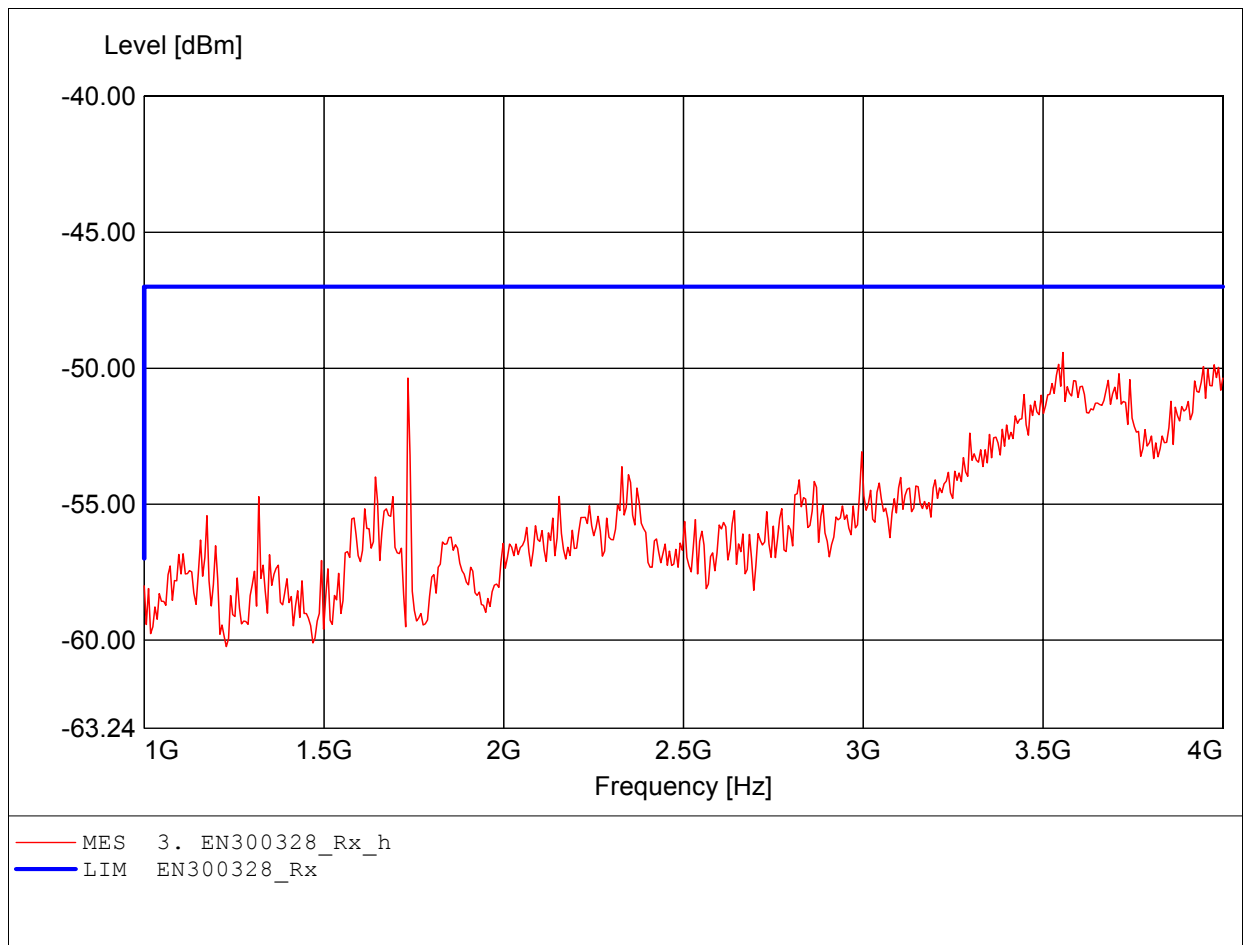

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:3.543GHz Pmax:-49.35dBm RBW: 100 kHz

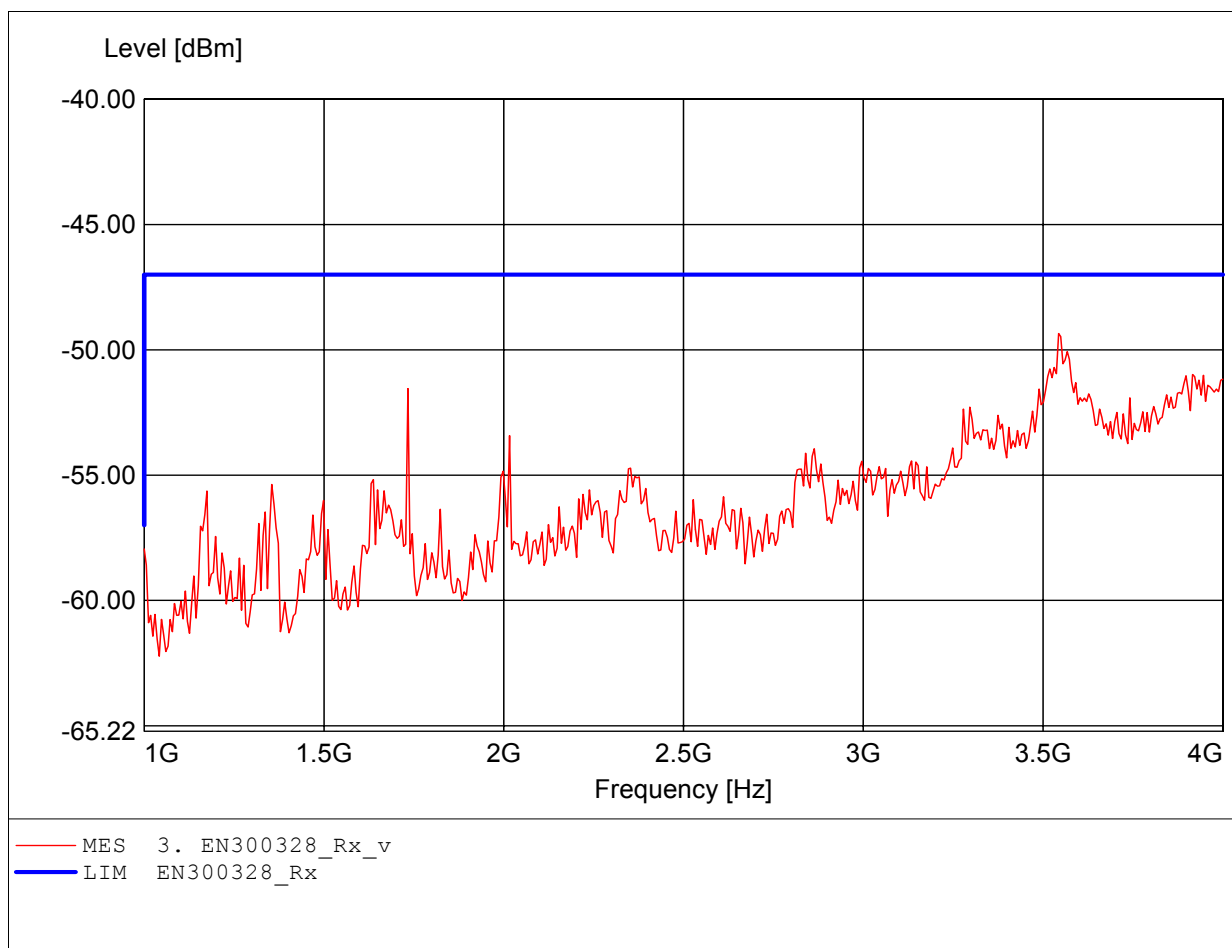

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:7.599GHz Pmax:-48.59dBm RBW: 100 kHz

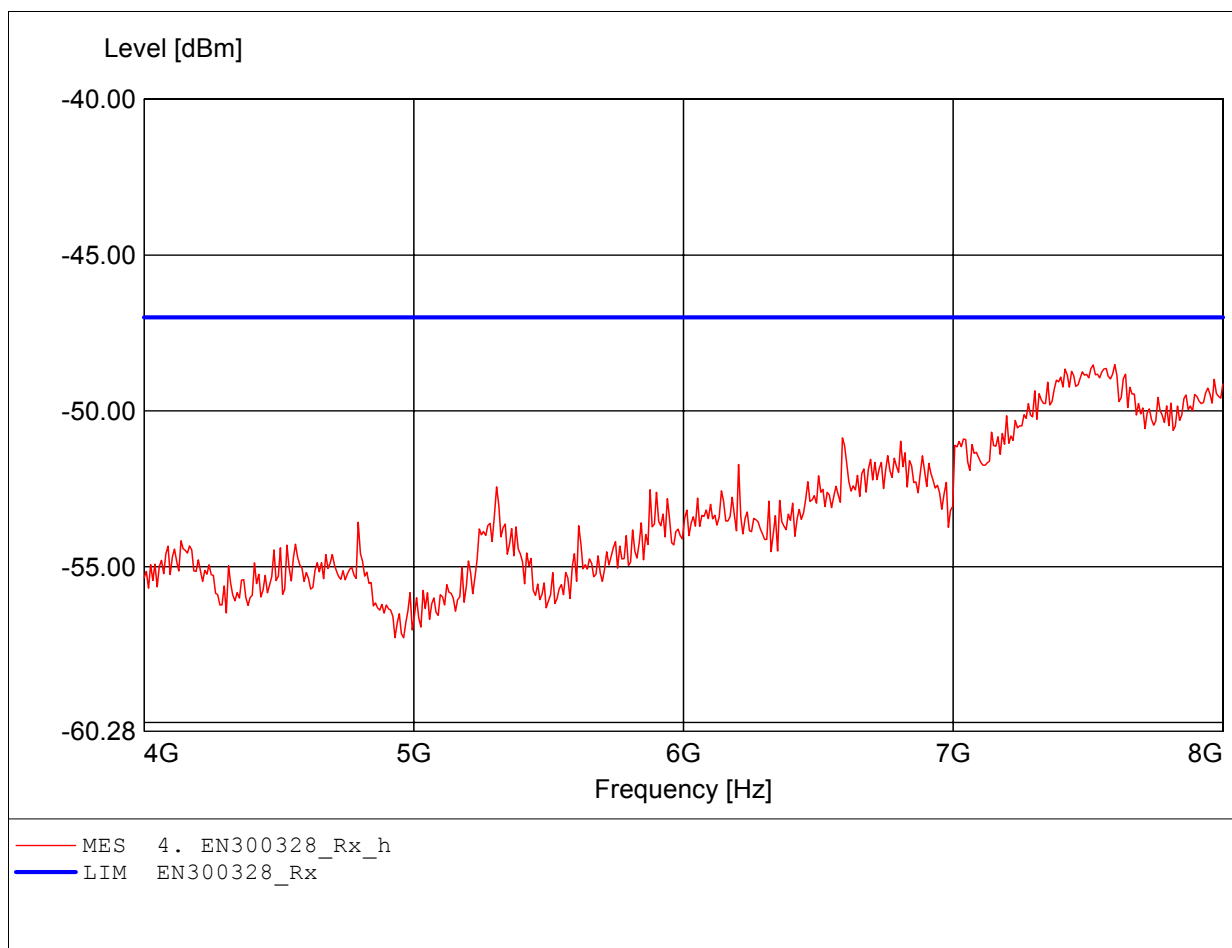

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:7.503GHz Pmax:-48.83dBm RBW: 100 kHz

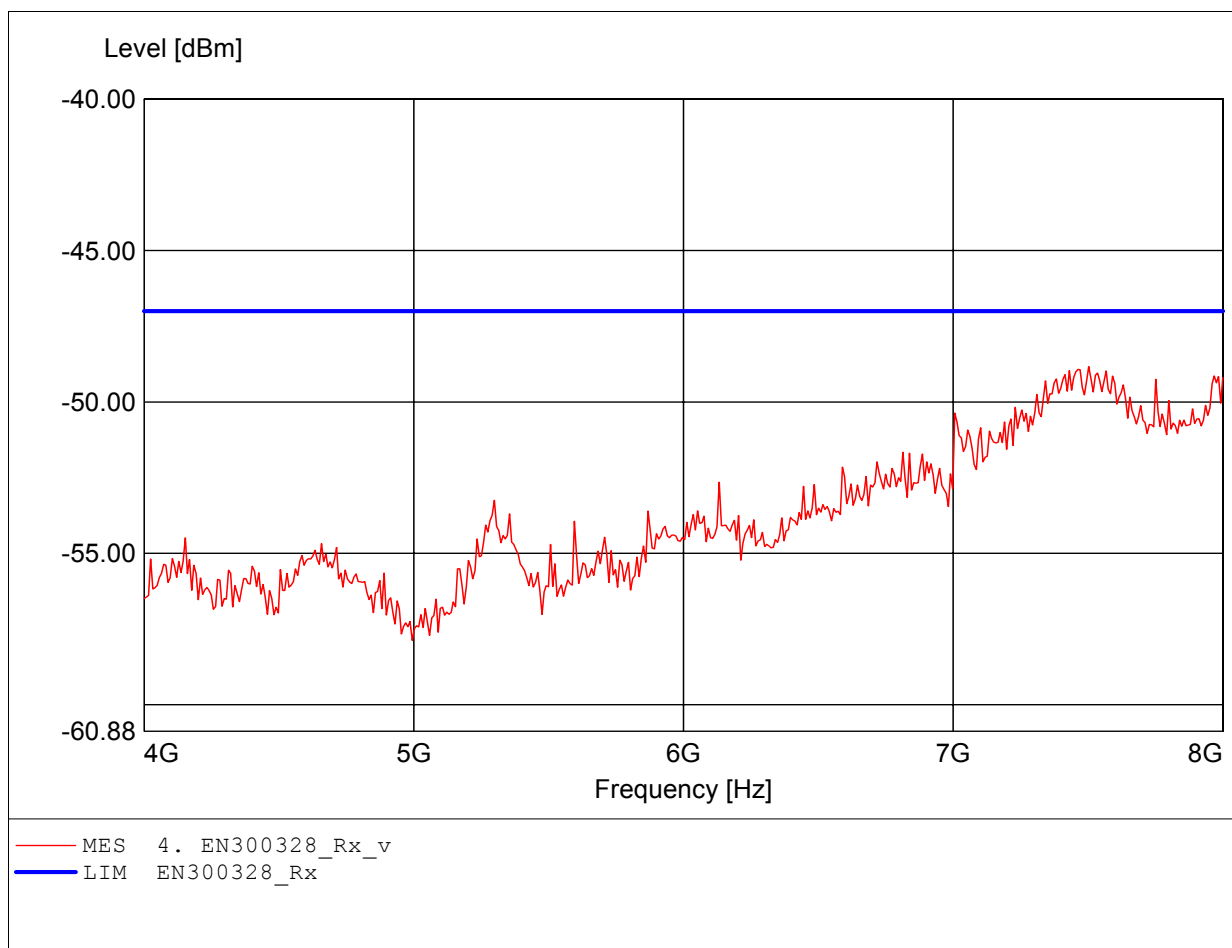

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.284GHz Pmax:-50.16dBm RBW: 100 kHz

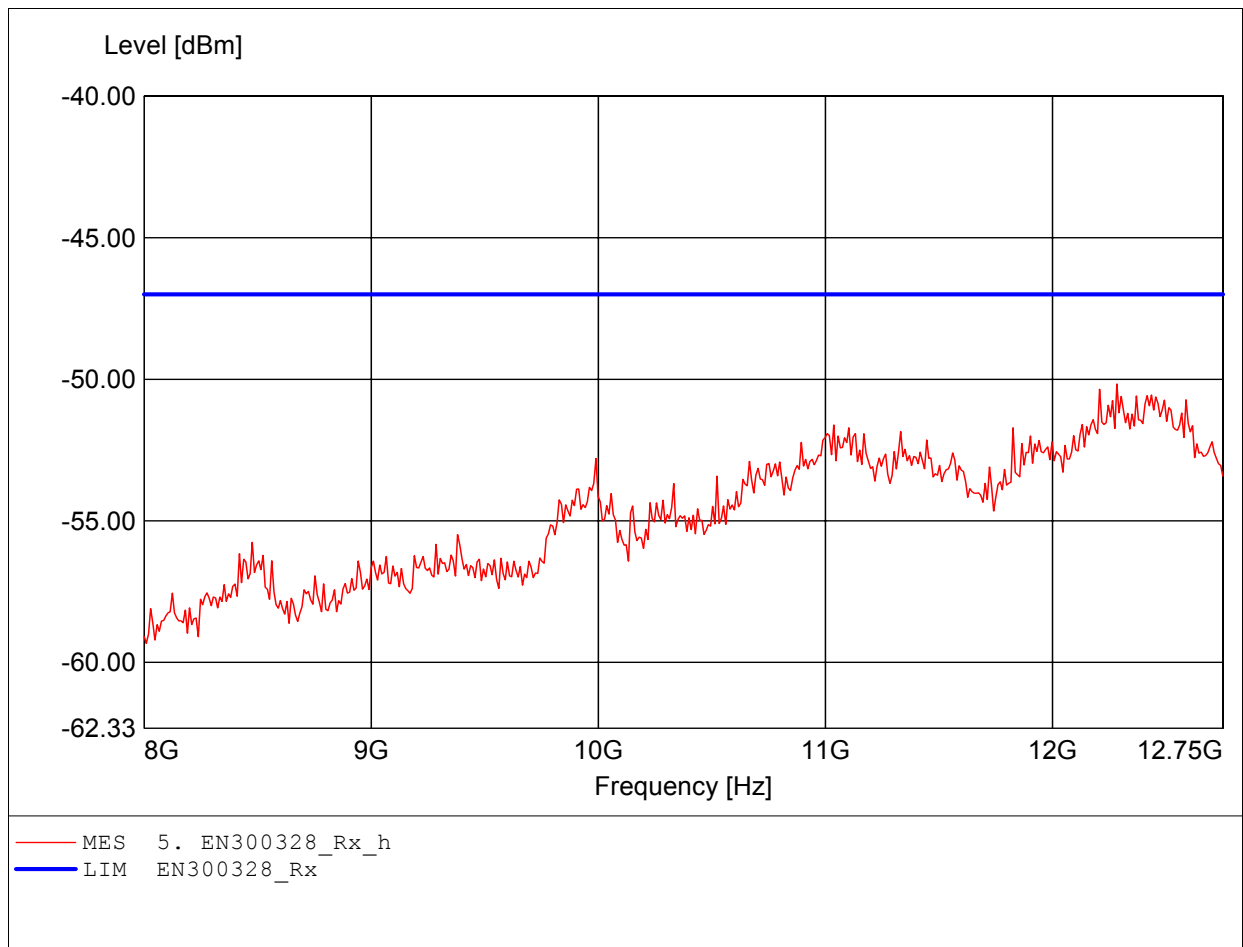

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11g ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.303GHz Pmax:-50.62dBm RBW: 100 kHz

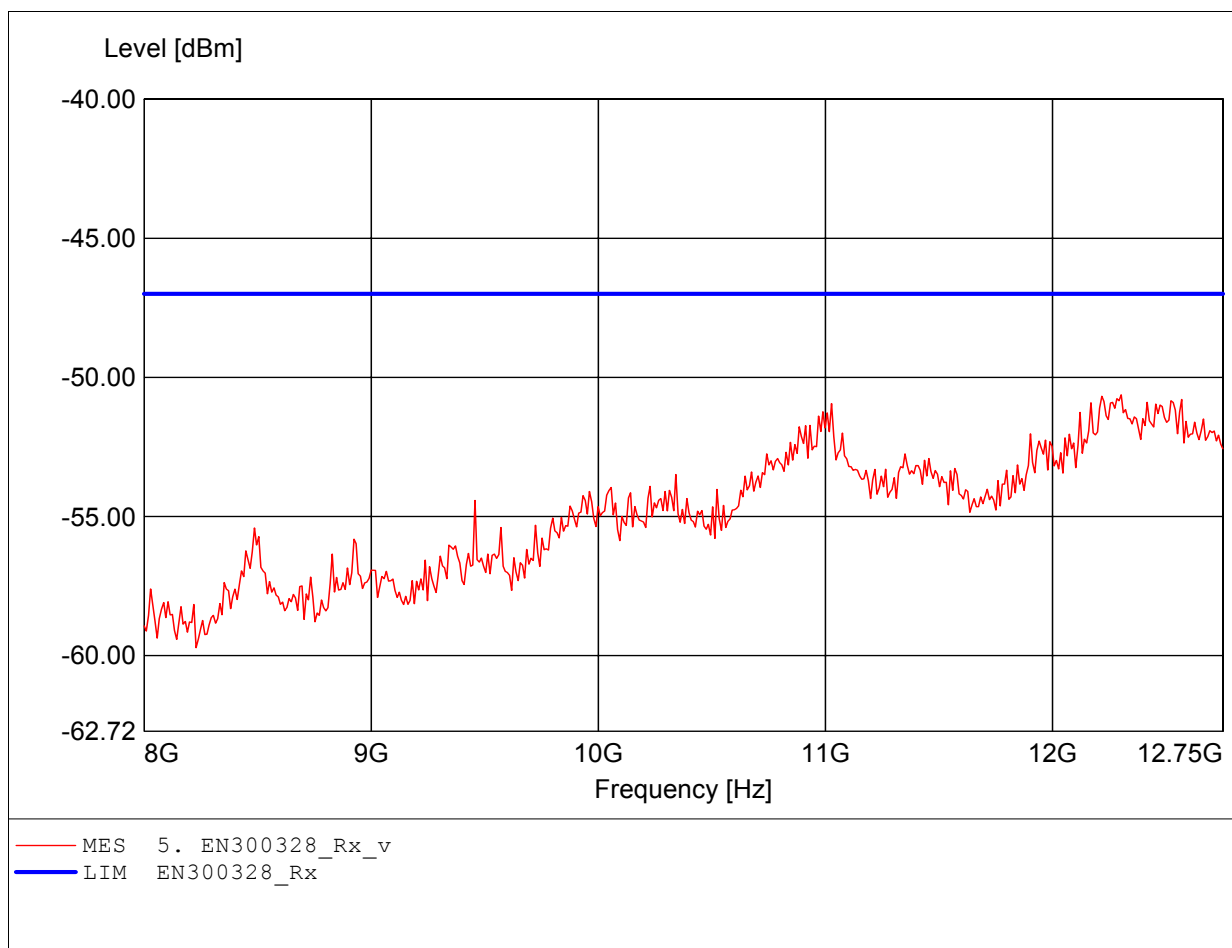

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:196.493MHz Pmax:-66.93dBm RBW: 100 kHz

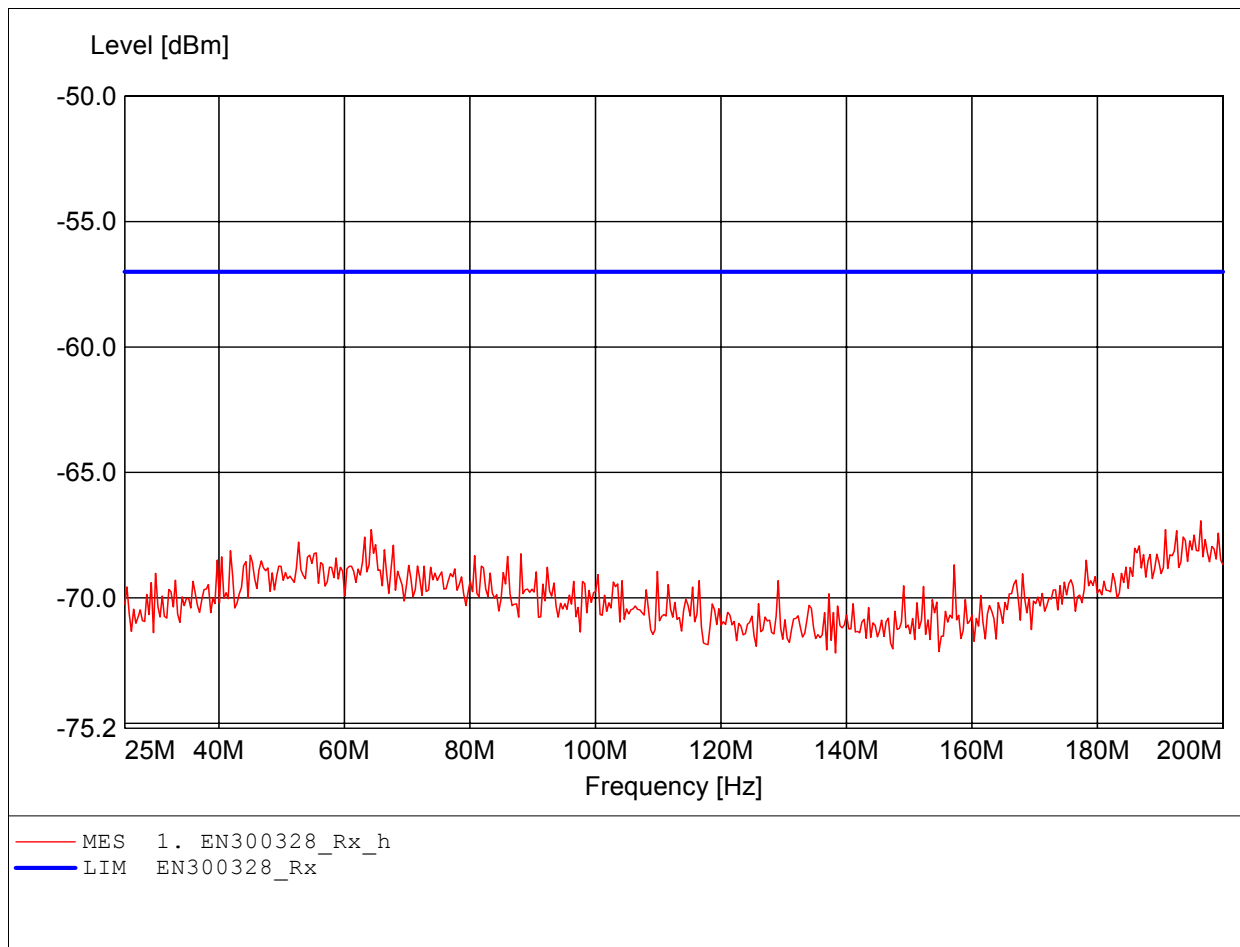

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:166.683MHz Pmax:-64.48dBm RBW: 100 kHz

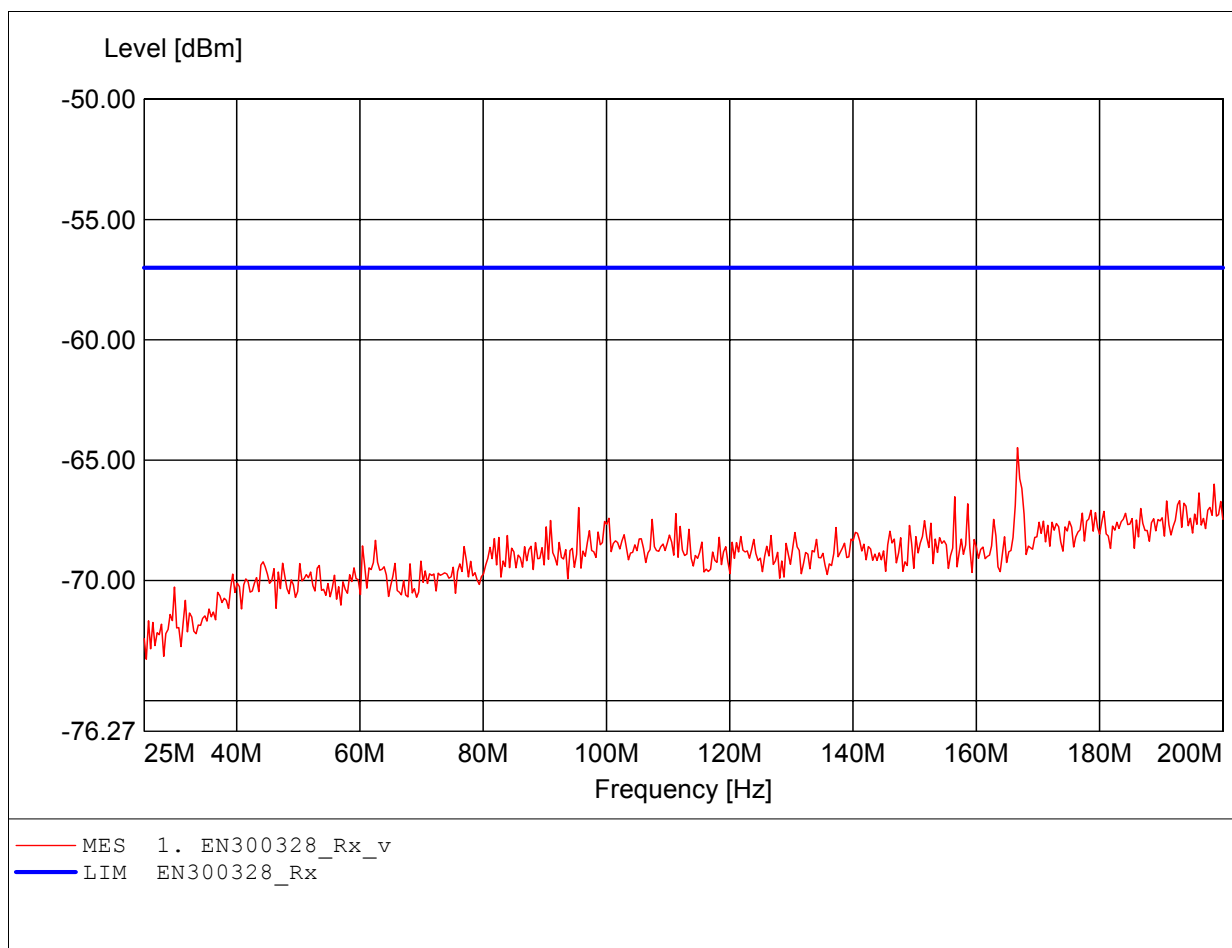

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:908.617MHz Pmax:-61.81dBm RBW: 100 kHz

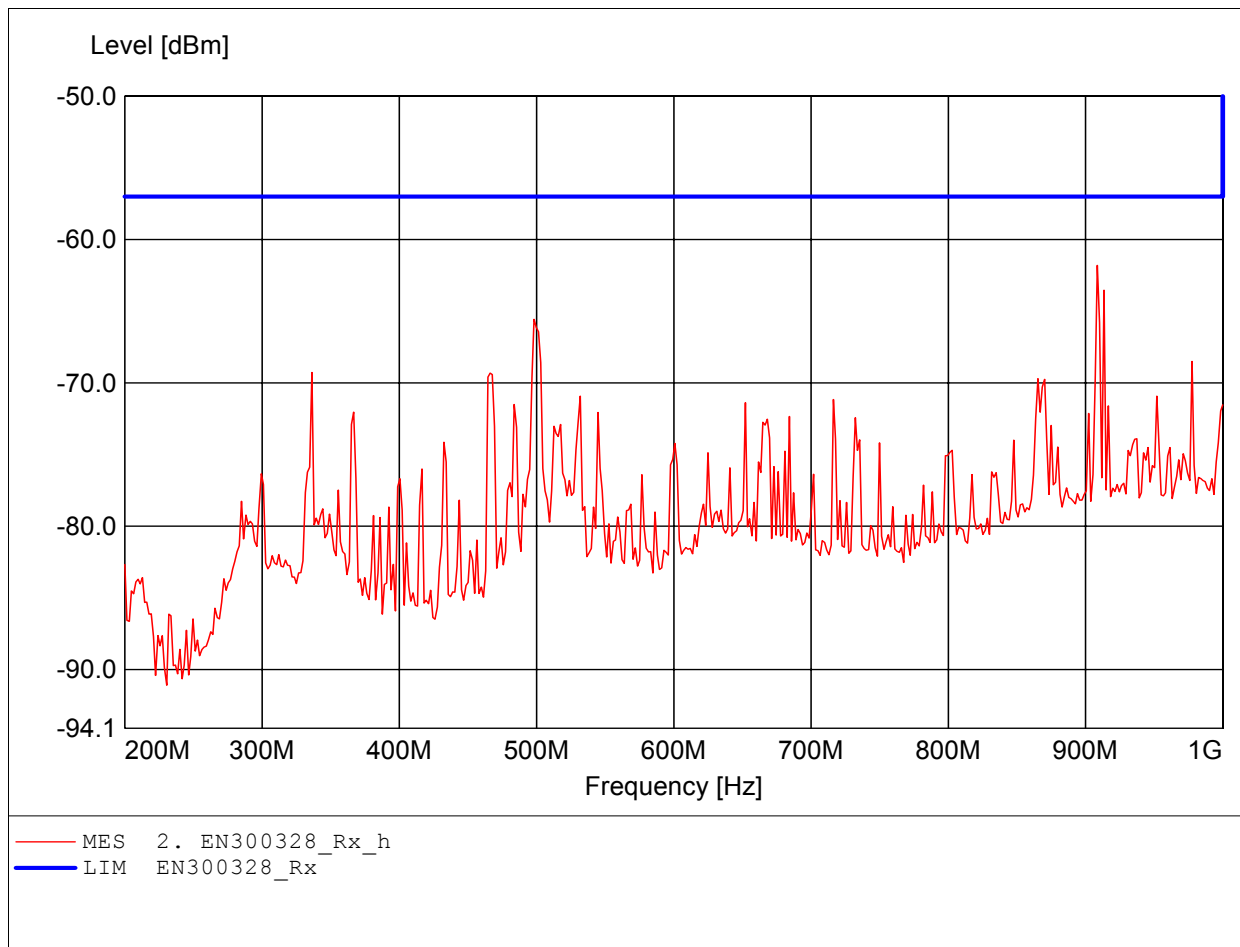

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:781.964MHz Pmax:-65.03dBm RBW: 100 kHz

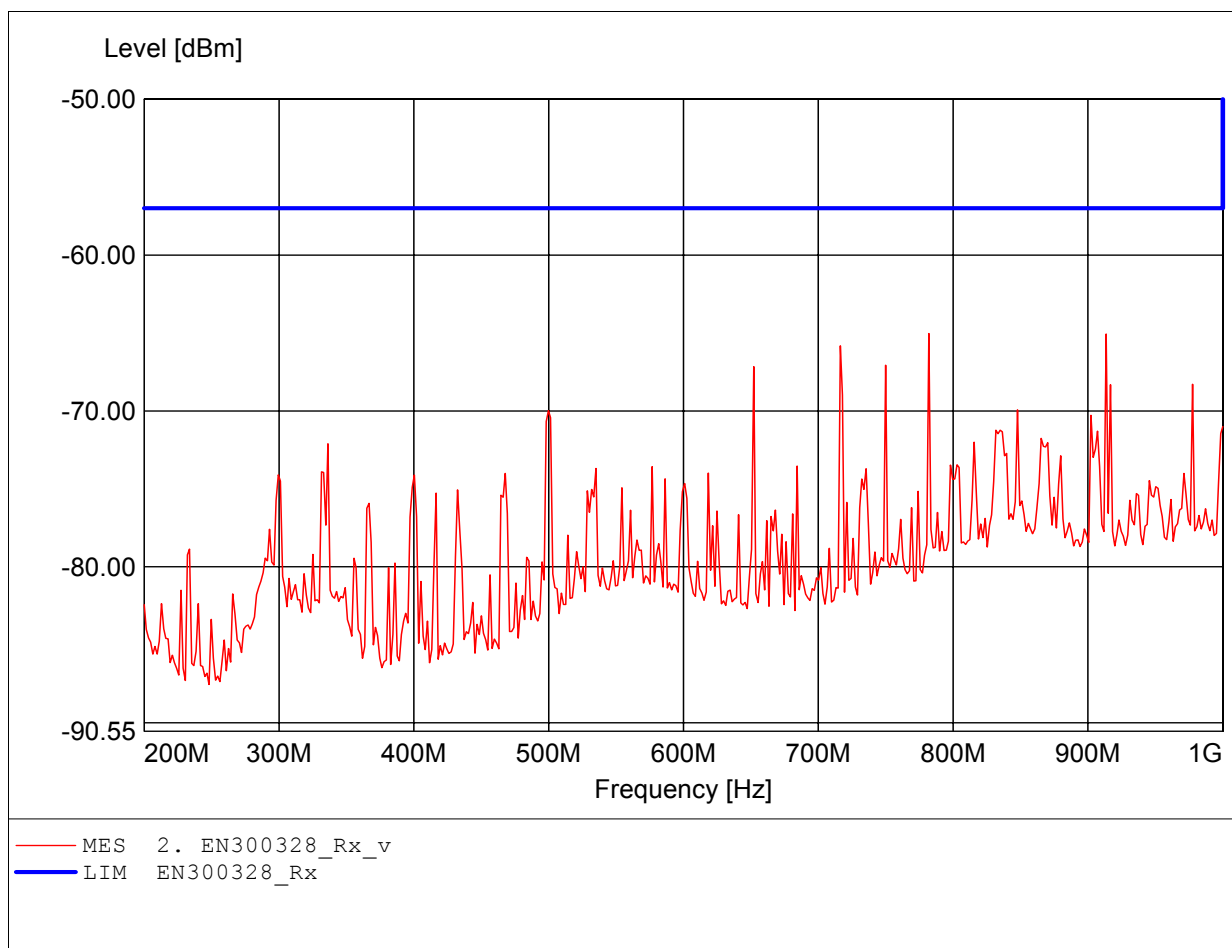

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:3.970GHz Pmax:-49.41dBm RBW: 100 kHz

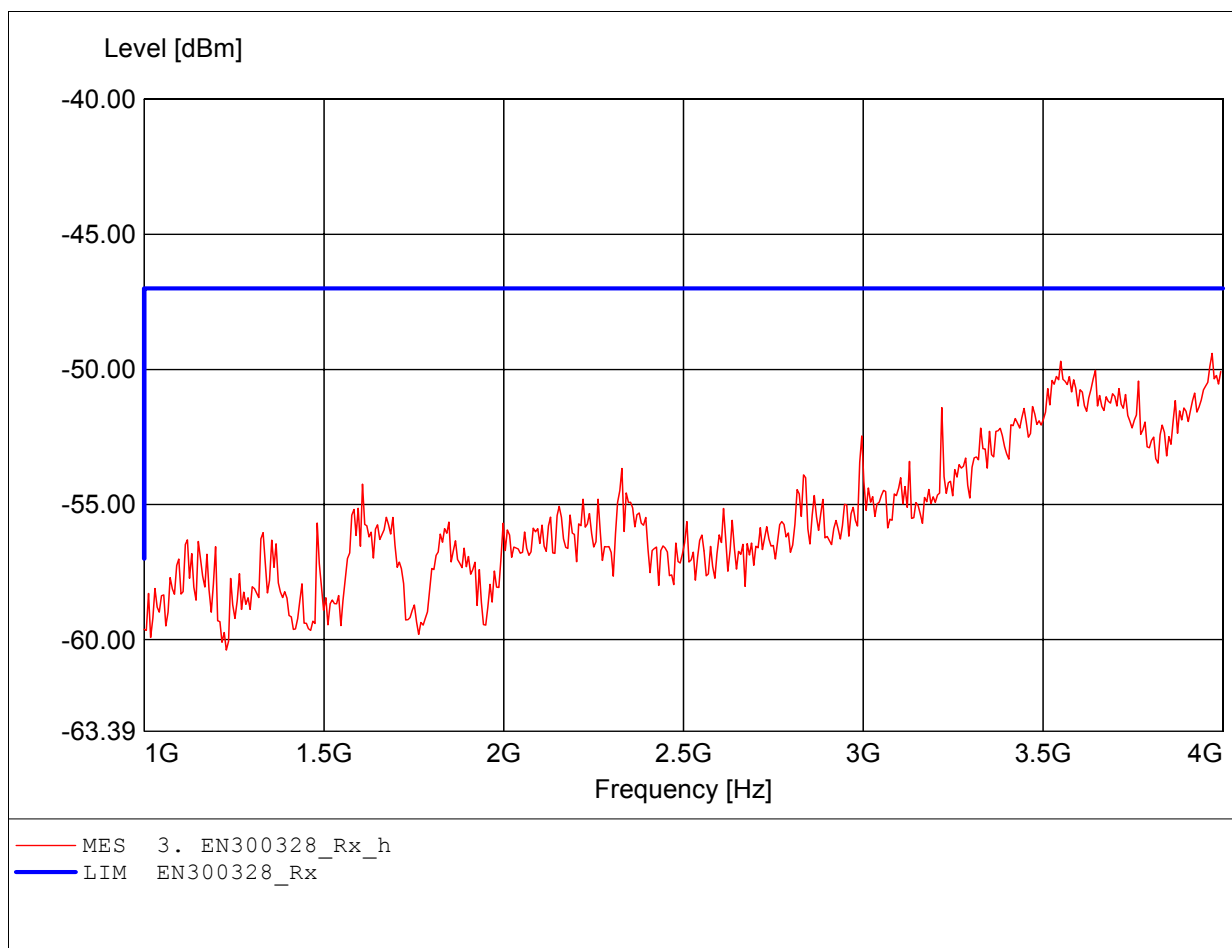

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:3.543GHz Pmax:-49.47dBm RBW: 100 kHz

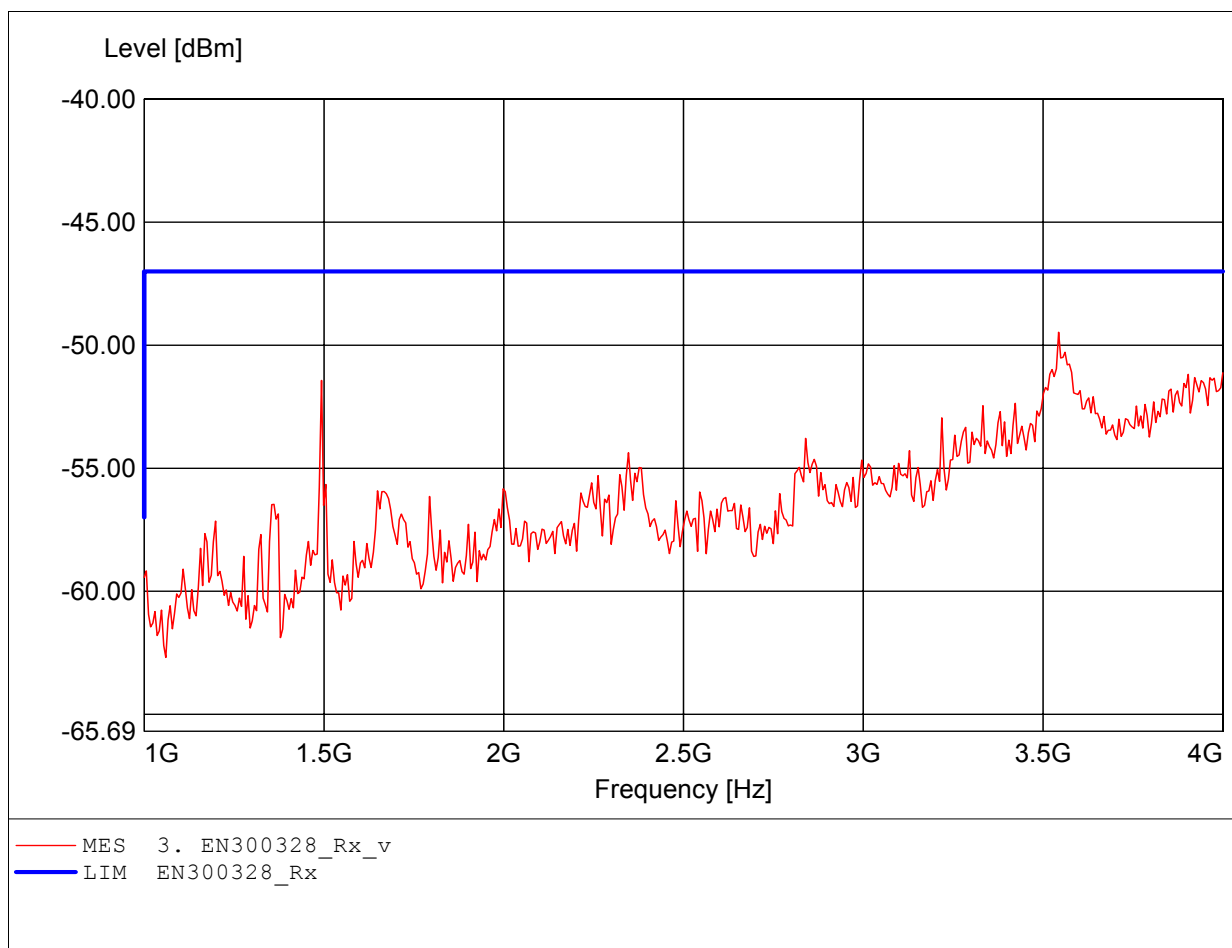

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:7.431GHz Pmax:-48.67dBm RBW: 100 kHz

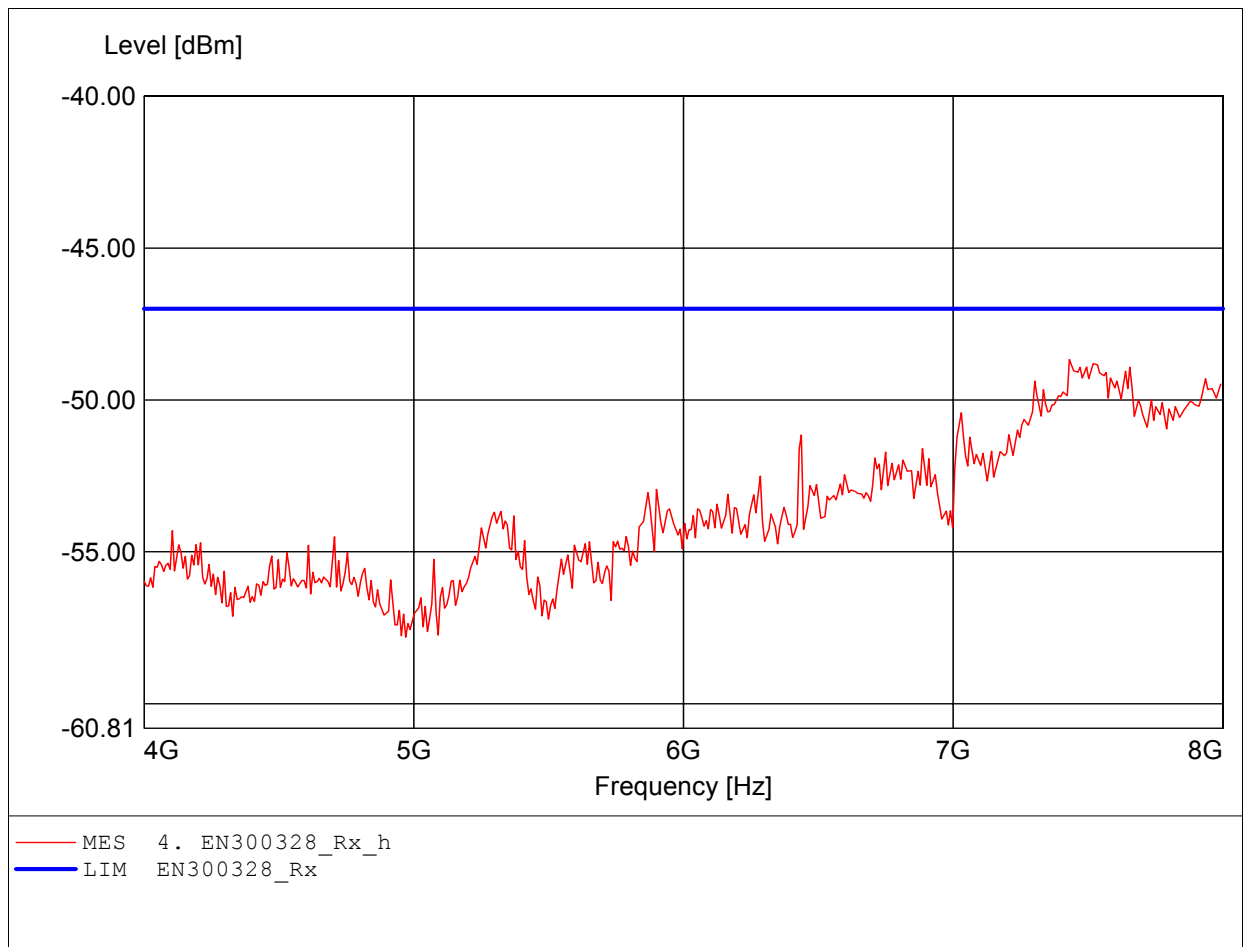

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:6.437GHz Pmax:-48.89dBm RBW: 100 kHz

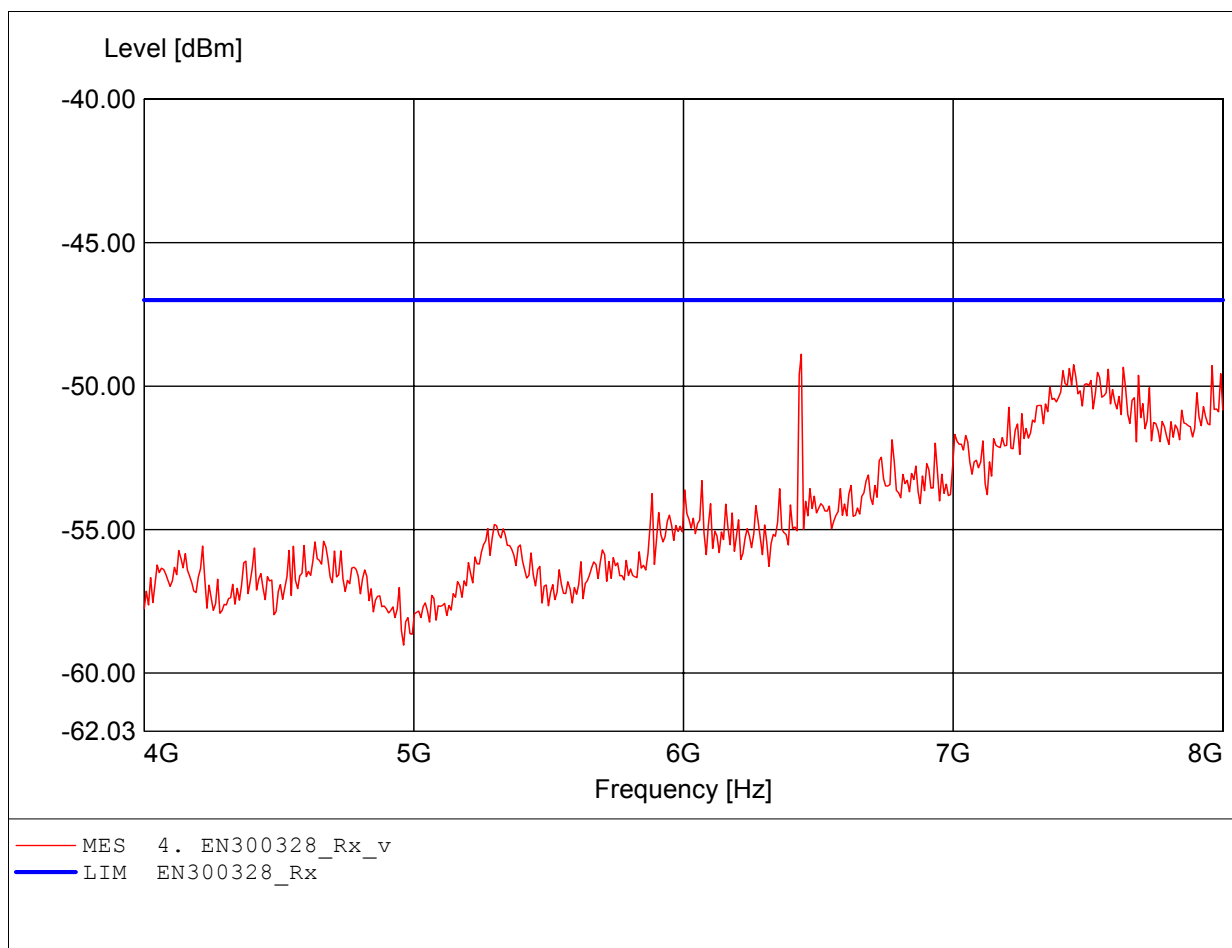

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.445GHz Pmax:-50.47dBm RBW: 100 kHz

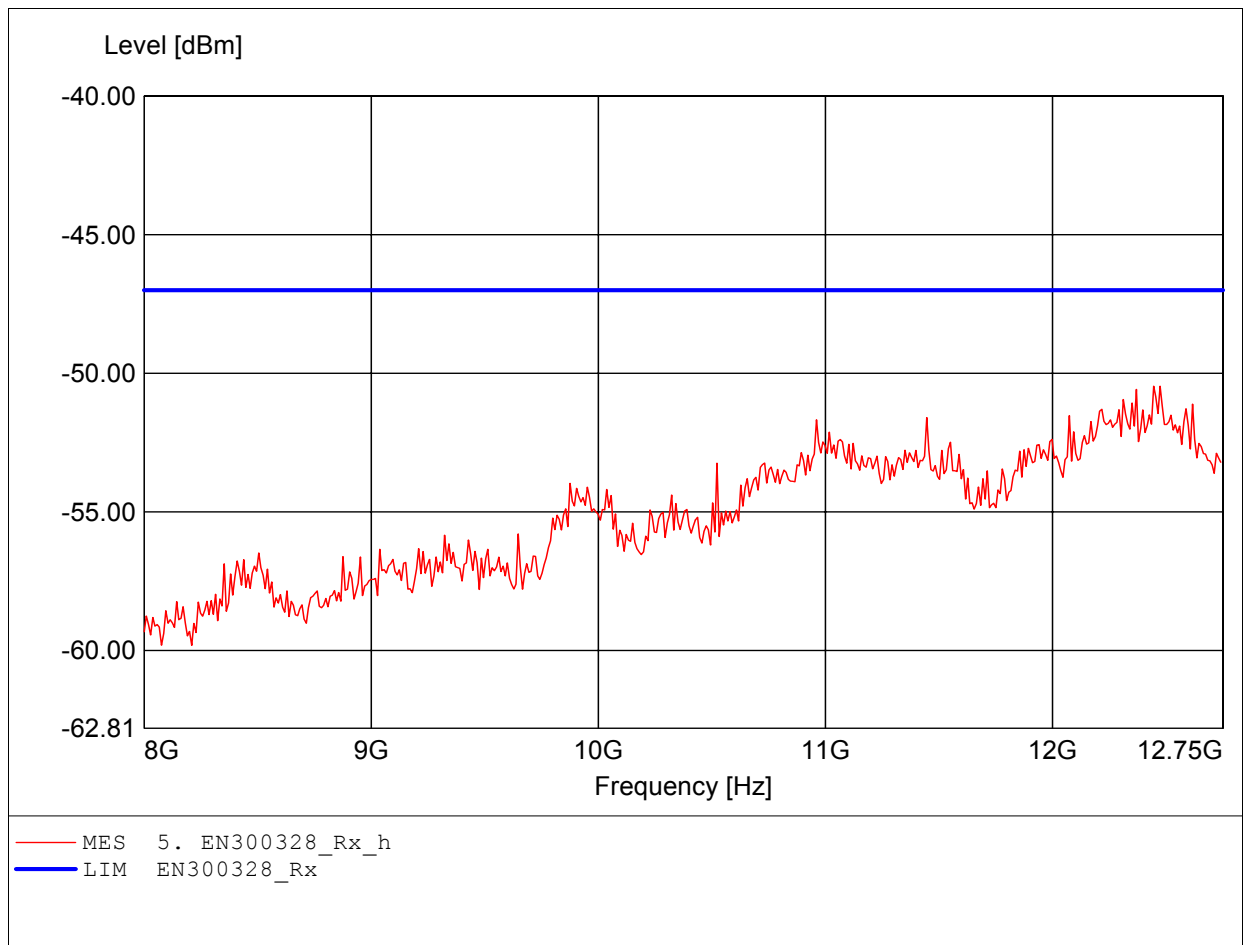

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.274GHz Pmax:-50.28dBm RBW: 100 kHz

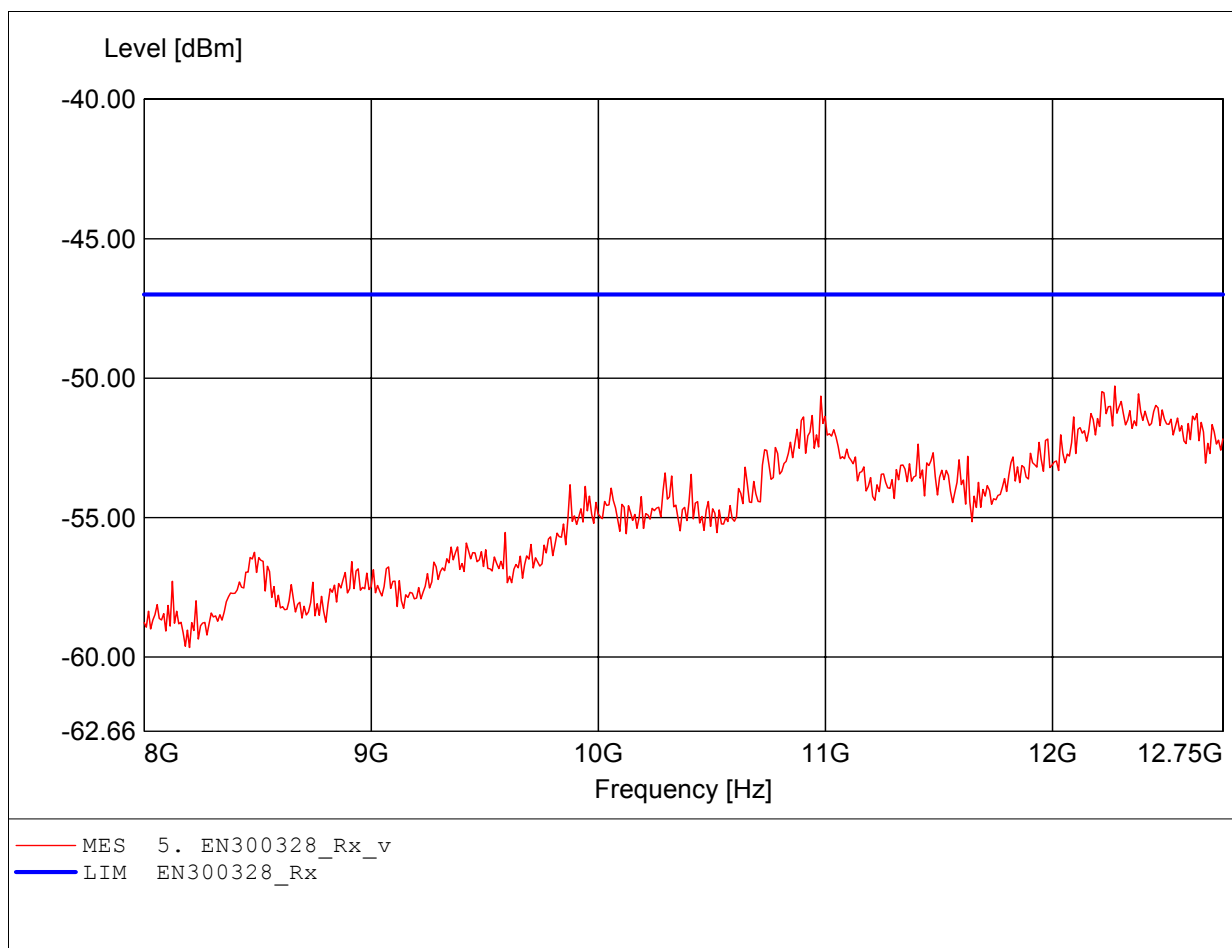

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:200.000MHz Pmax:-66.08dBm RBW: 100 kHz

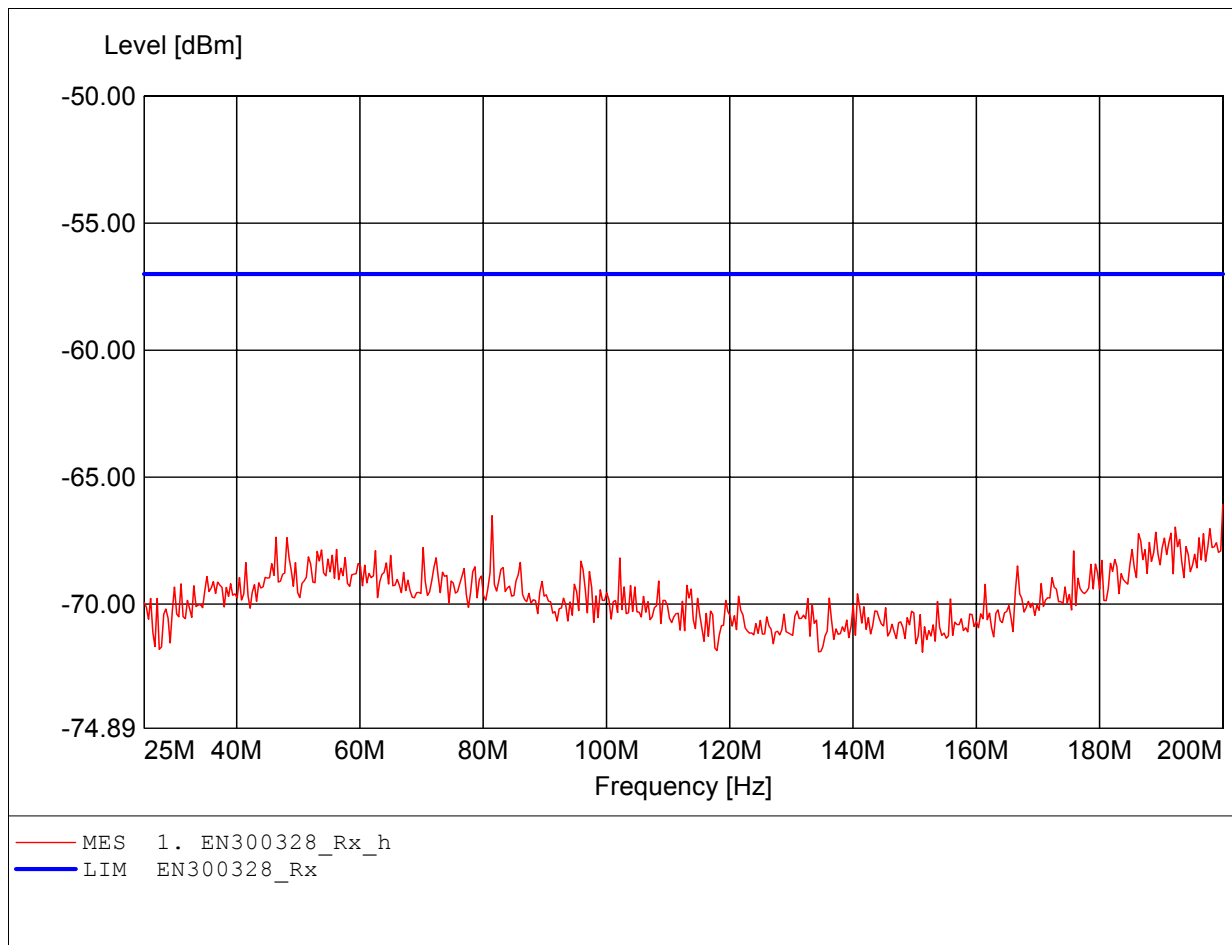

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:167.034MHz Pmax:-65.45dBm RBW: 100 kHz

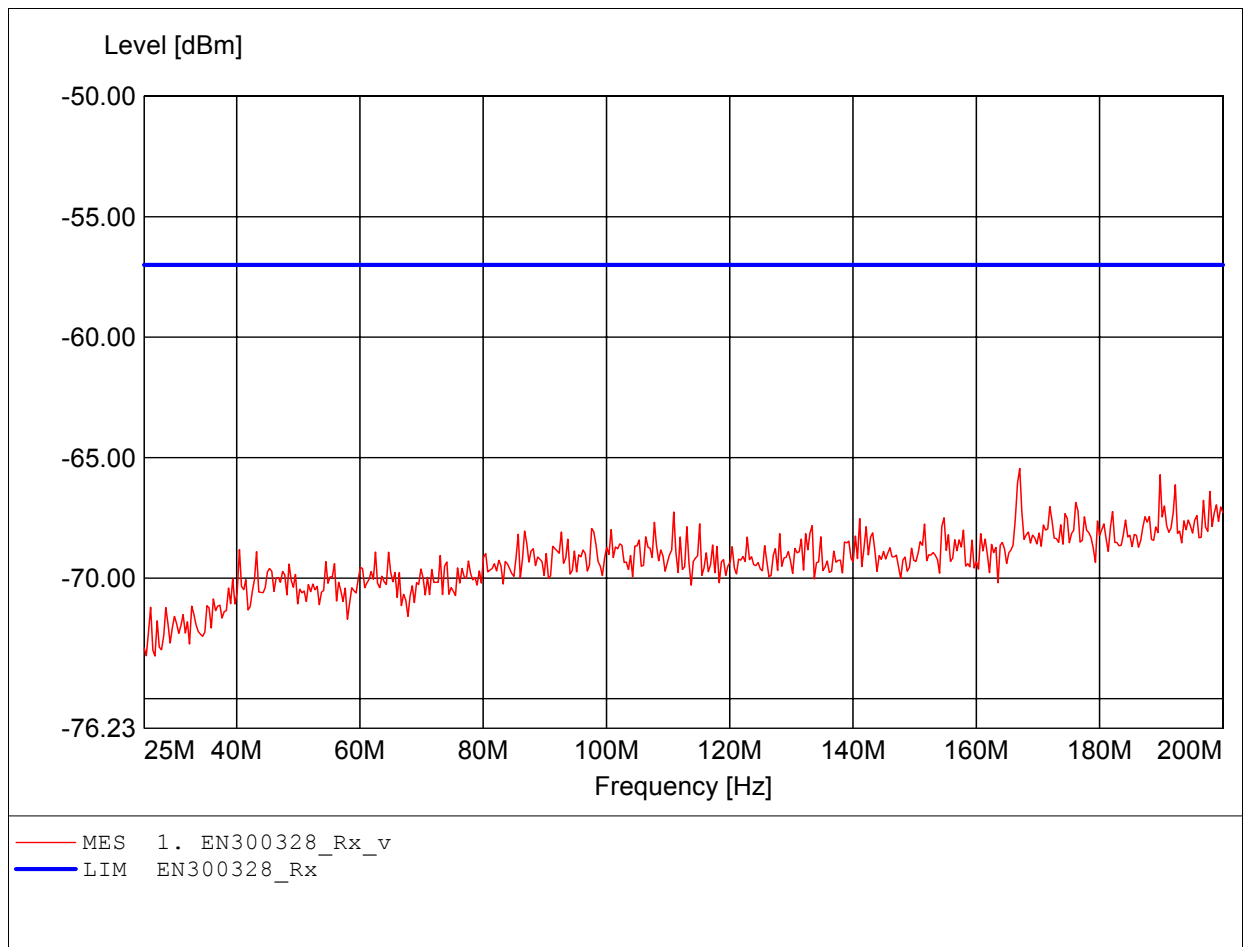

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:499.800MHz Pmax:-65.08dBm RBW: 100 kHz

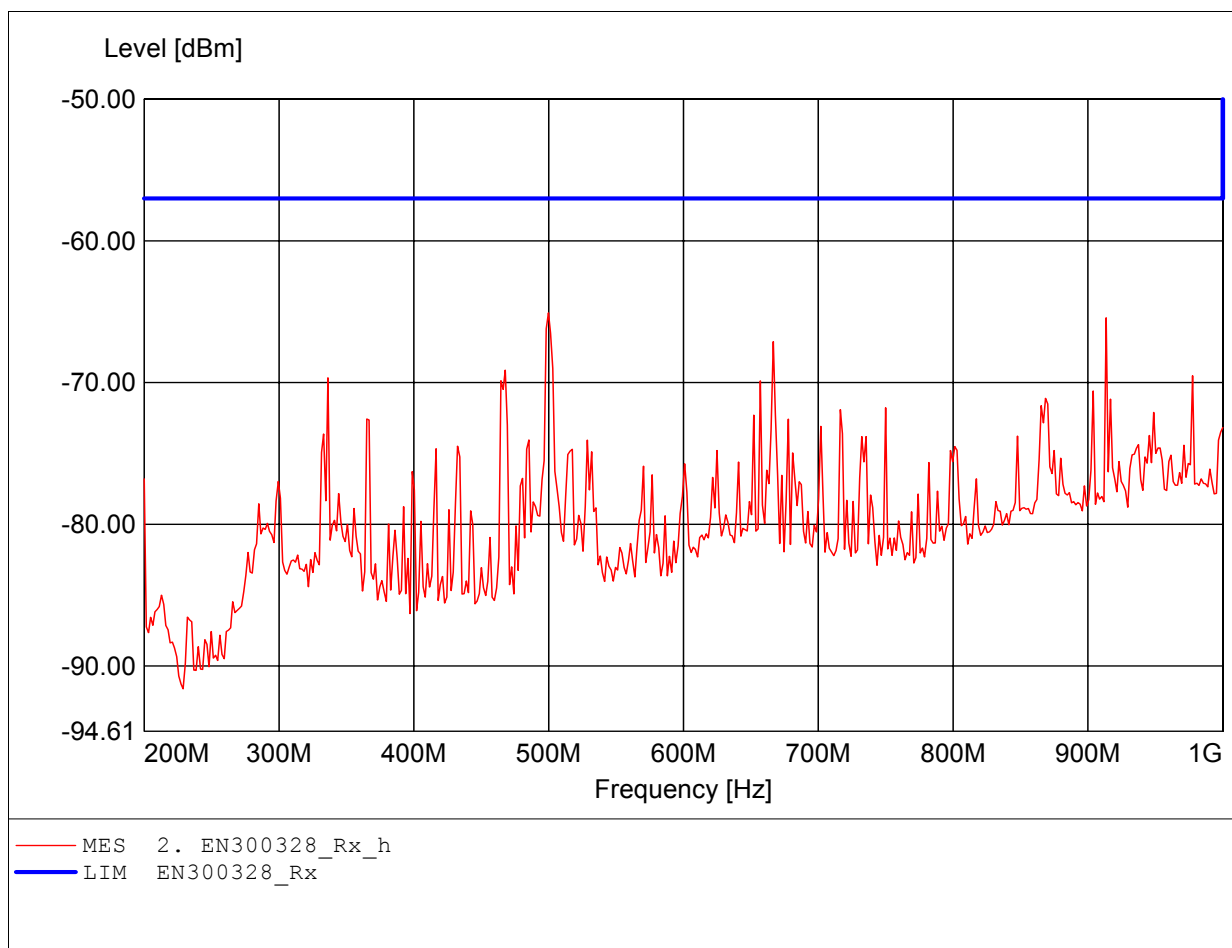

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:913.427MHz Pmax:-64.26dBm RBW: 100 kHz

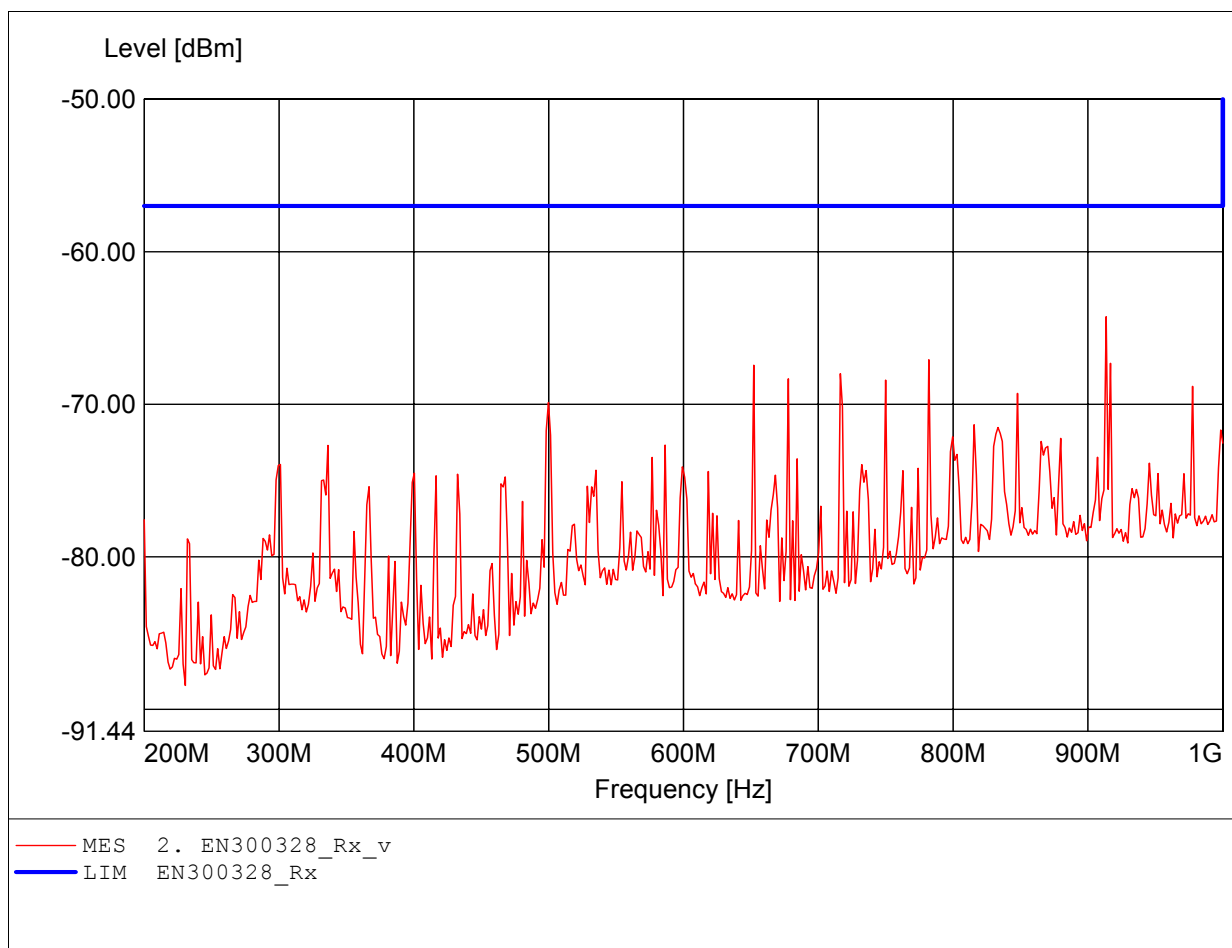

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:3.567GHz Pmax:-49.12dBm RBW: 100 kHz

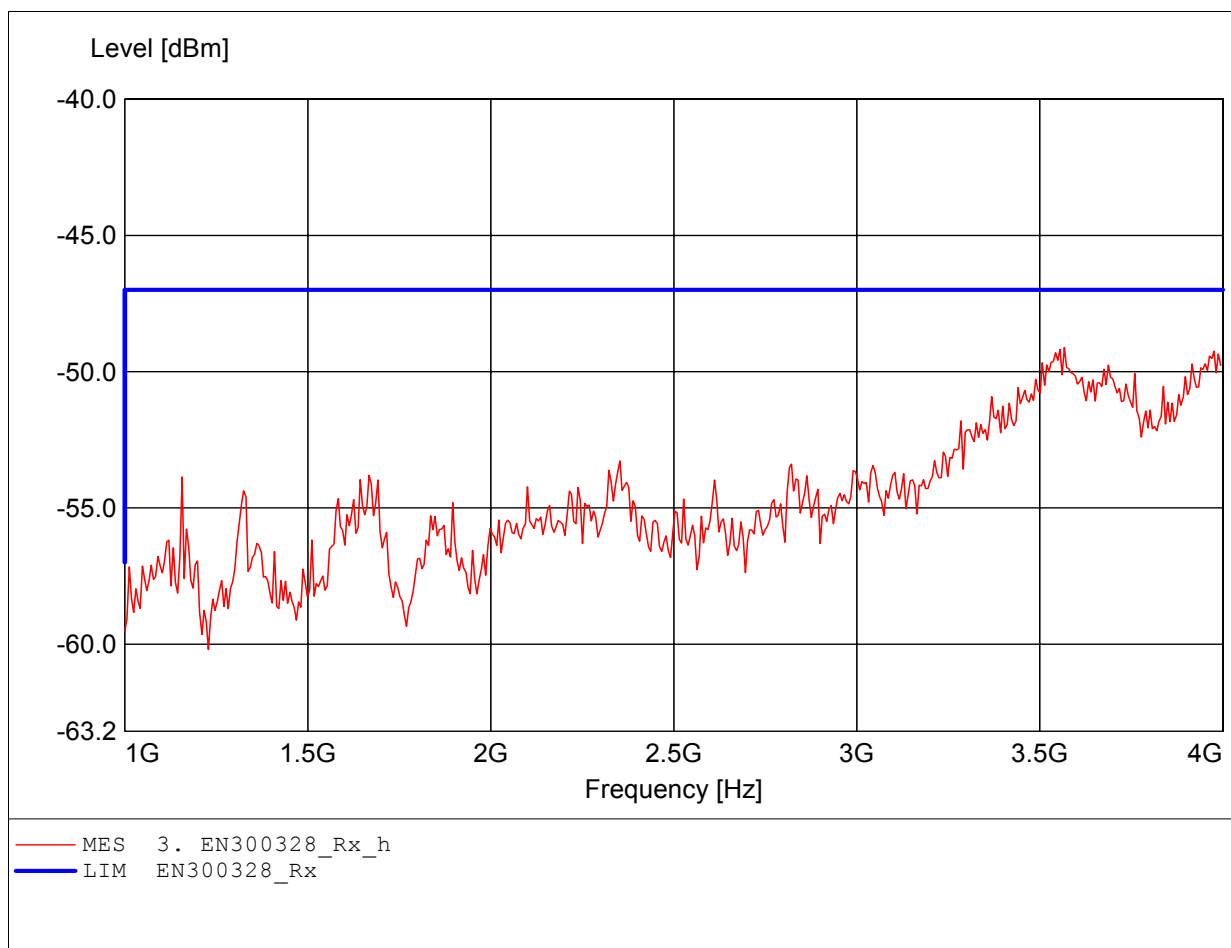

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:3.531GHz Pmax:-50.13dBm RBW: 100 kHz

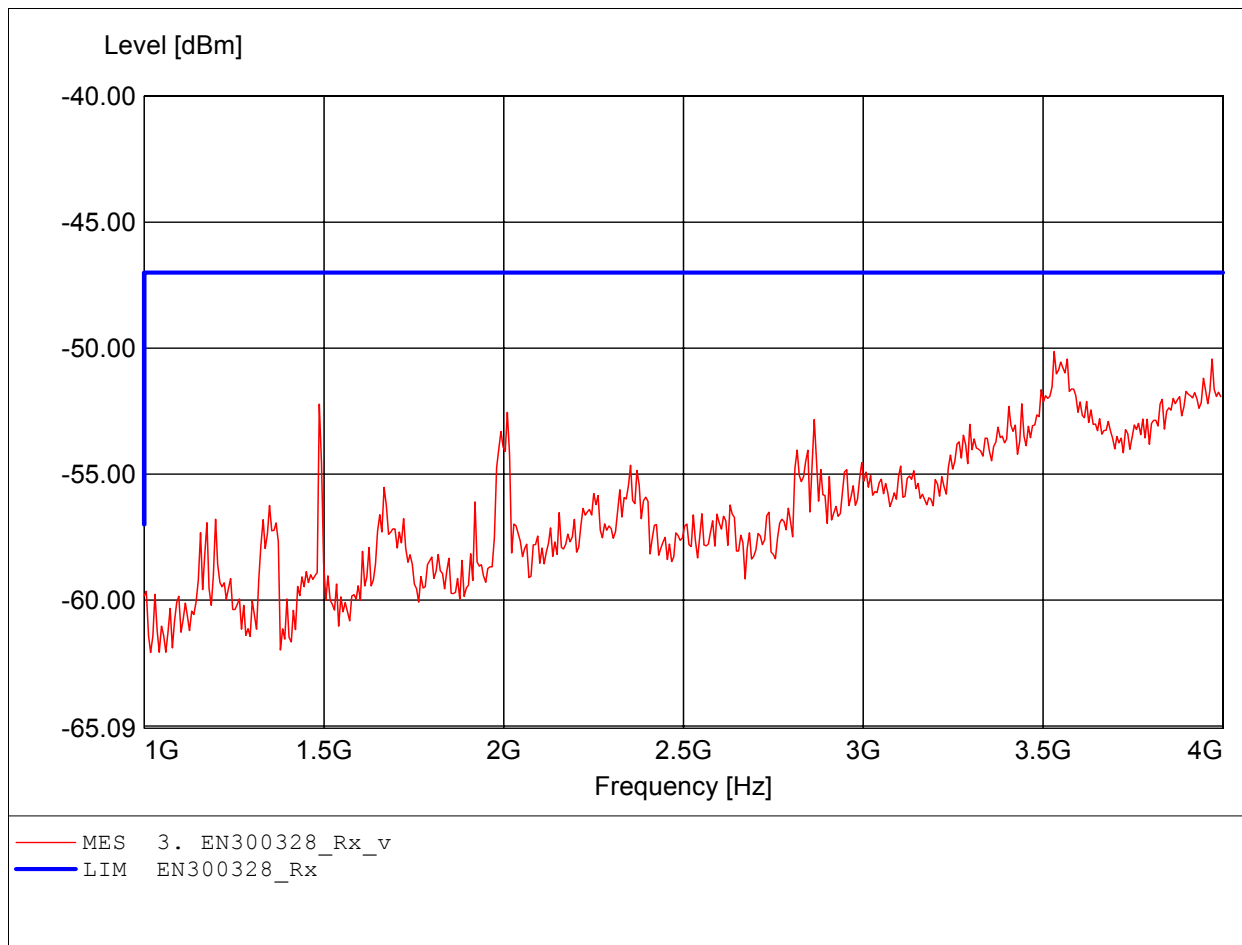

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:7.439GHz Pmax:-48.59dBm RBW: 100 kHz

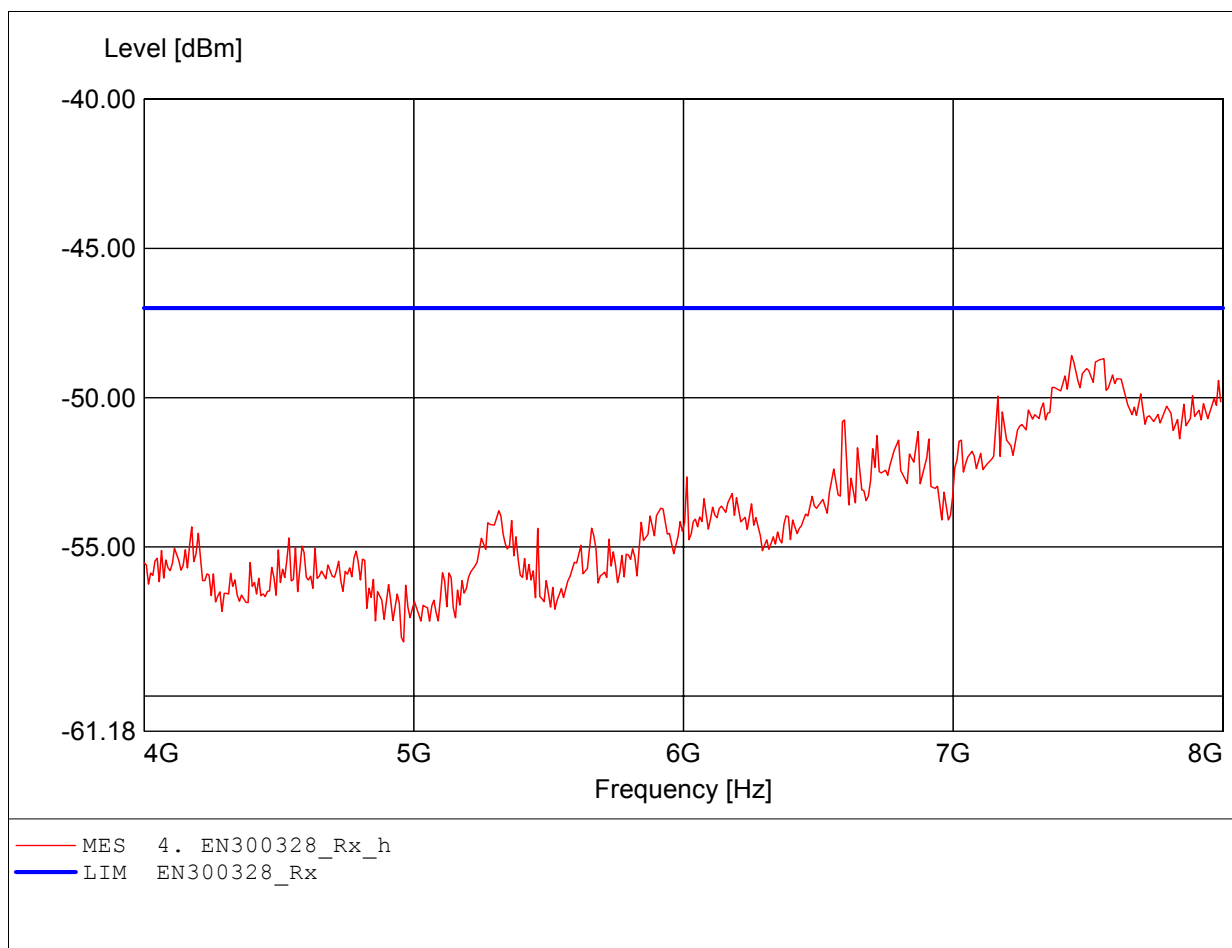

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq: 7.495GHz Pmax: -48.75dBm RBW: 100 kHz

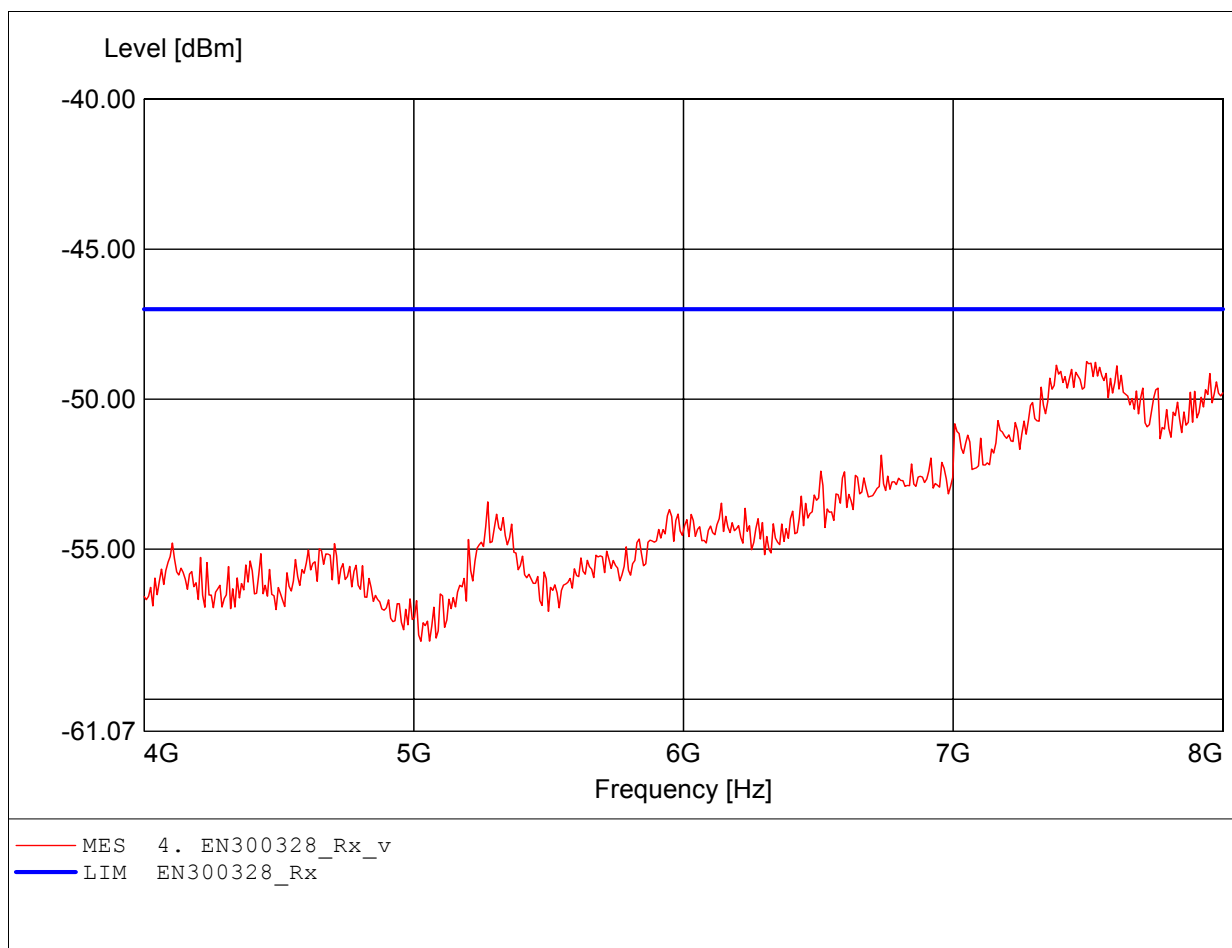

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.426GHz Pmax:-50.27dBm RBW: 100 kHz

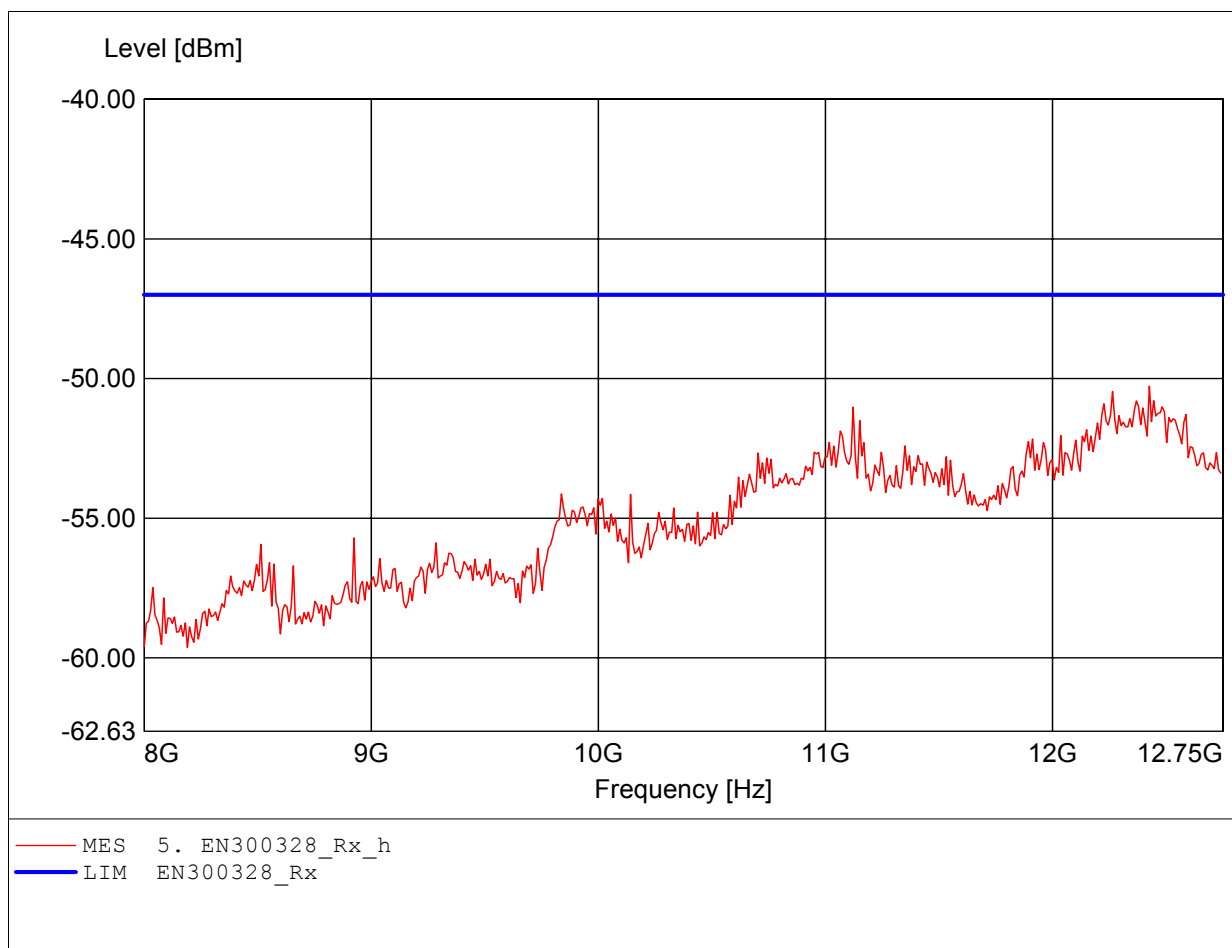

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 20M ch13
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.322GHz Pmax:-50.23dBm RBW: 100 kHz

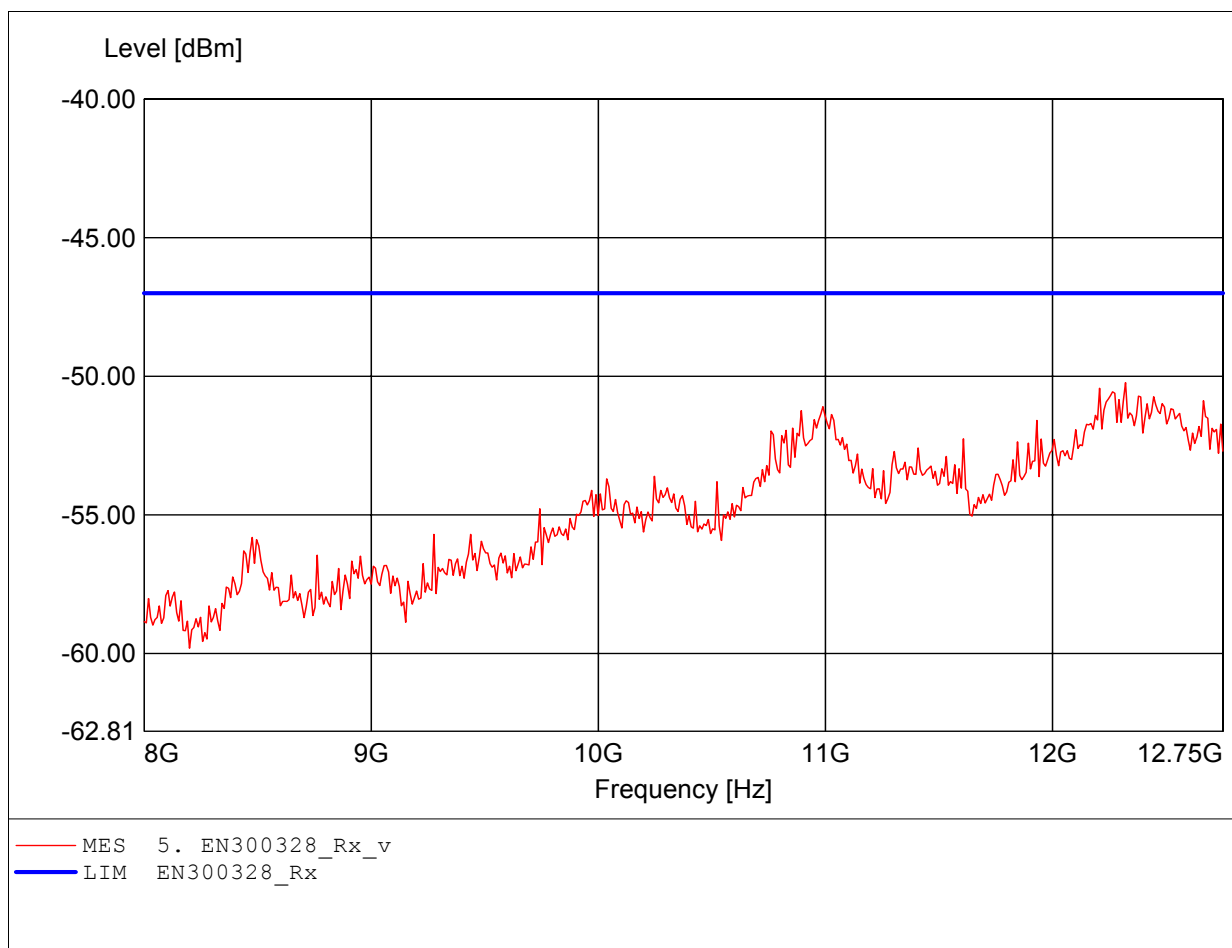

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:188.778MHz Pmax:-67.38dBm RBW: 100 kHz

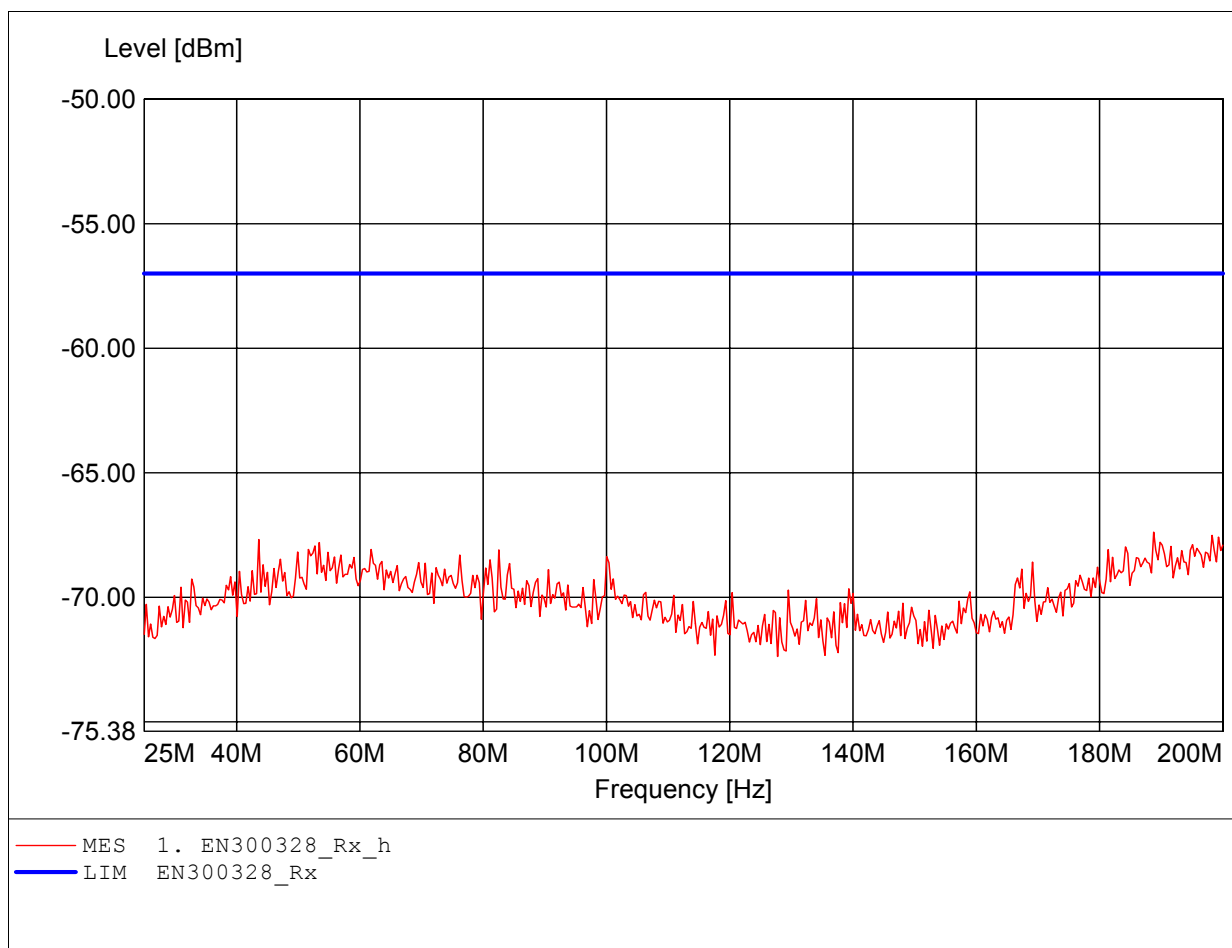

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:167.034MHz Pmax:-65.37dBm RBW: 100 kHz

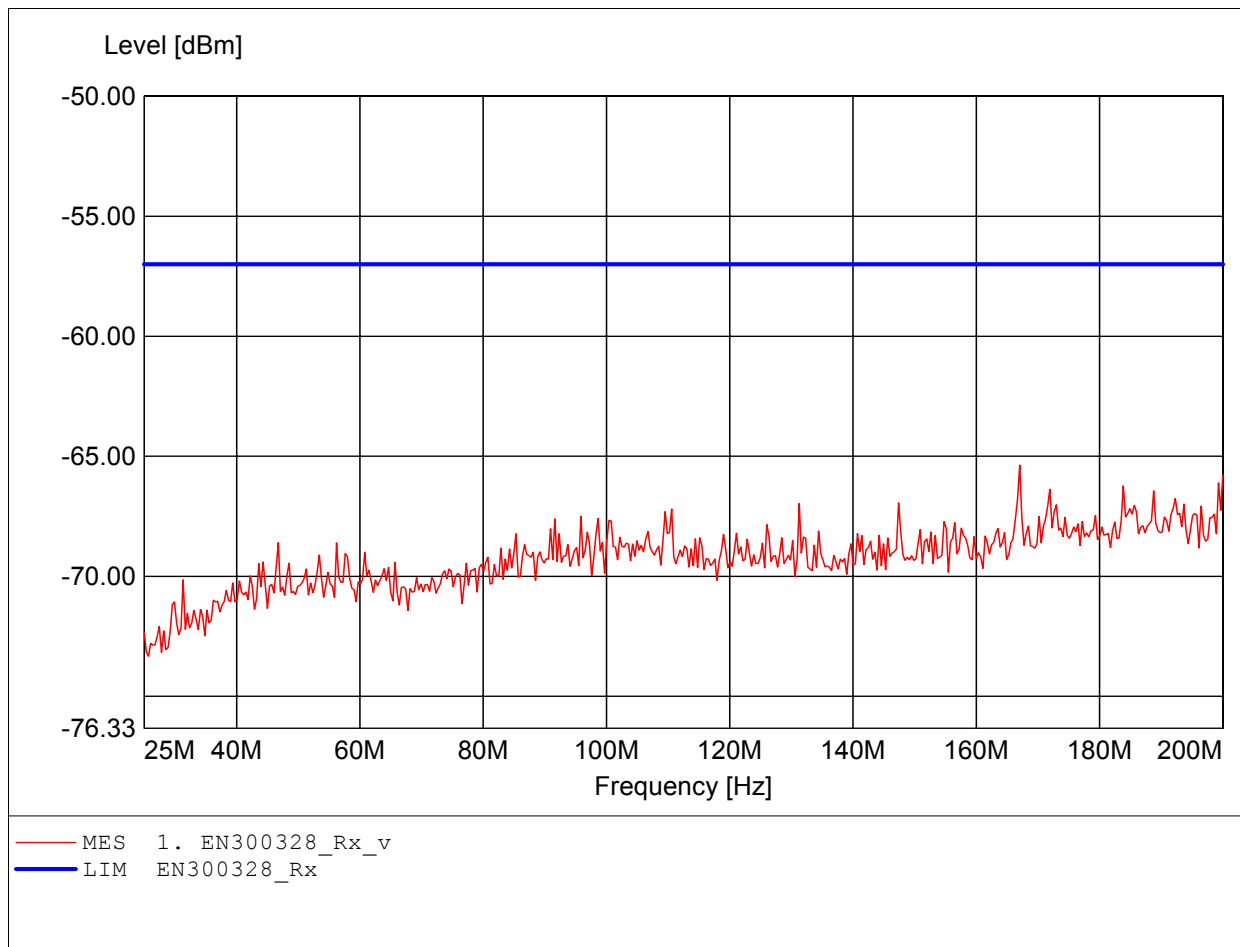

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:913.427MHz Pmax:-63.90dBm RBW: 100 kHz

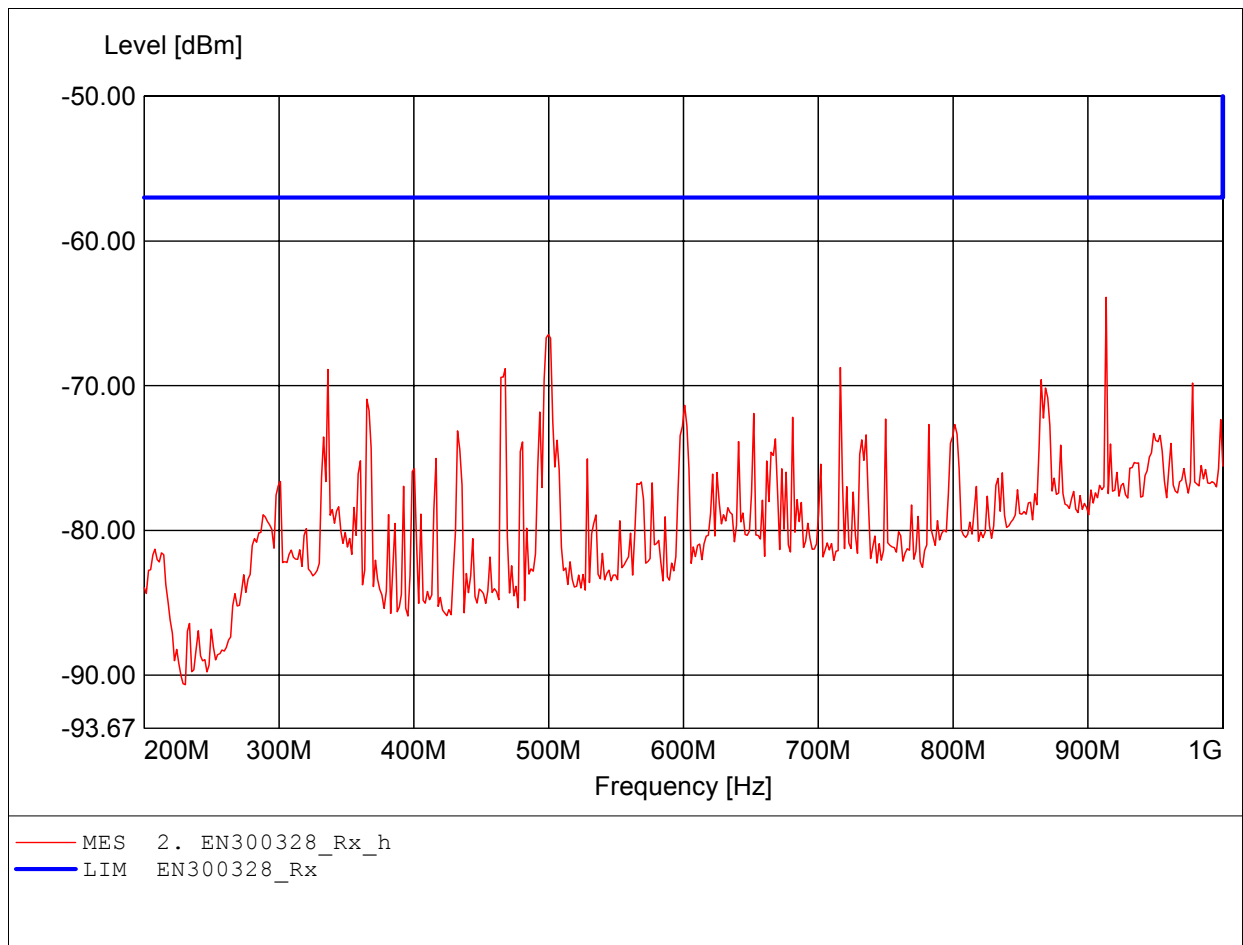

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:913.427MHz Pmax:-64.60dBm RBW: 100 kHz

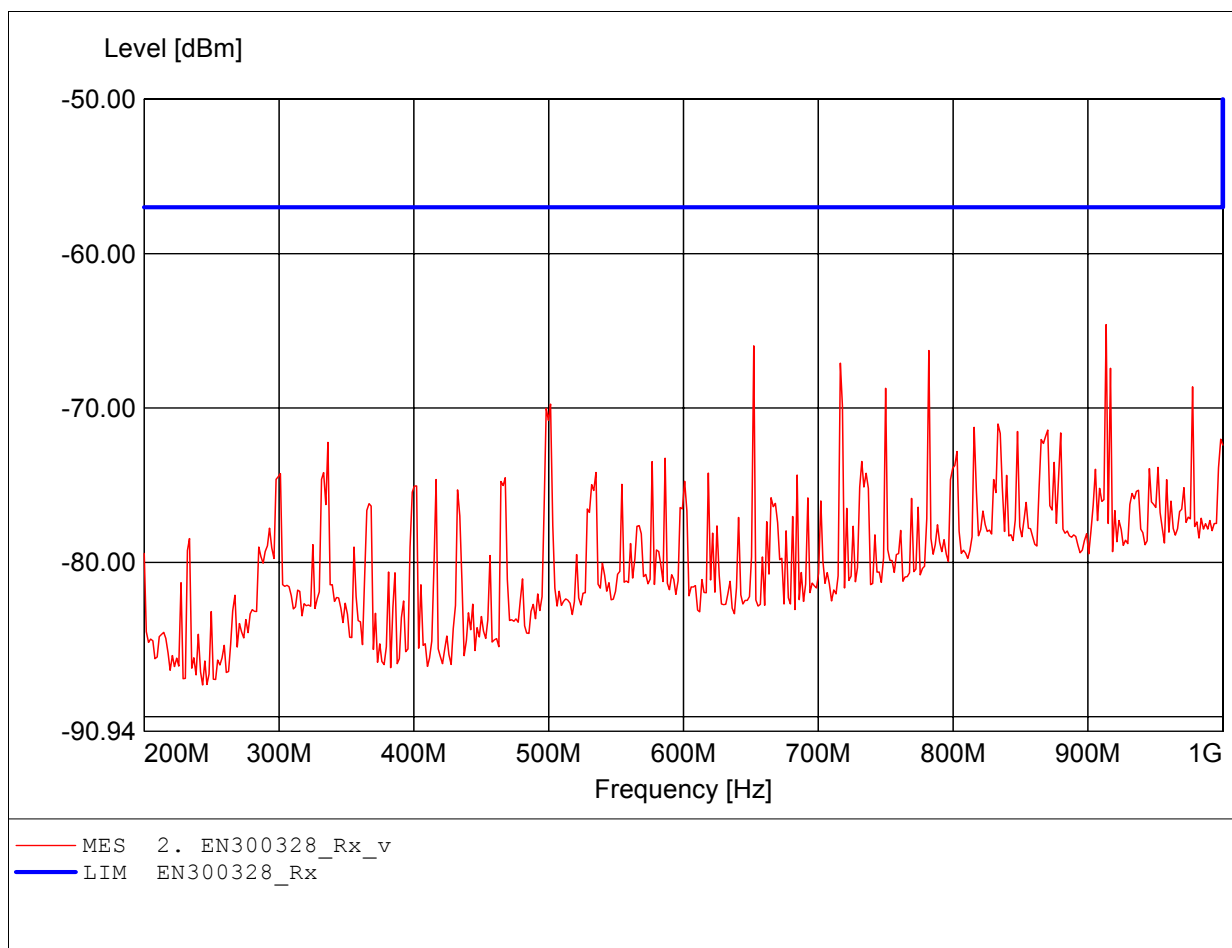

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:3.976GHz Pmax:-48.88dBm RBW: 100 kHz

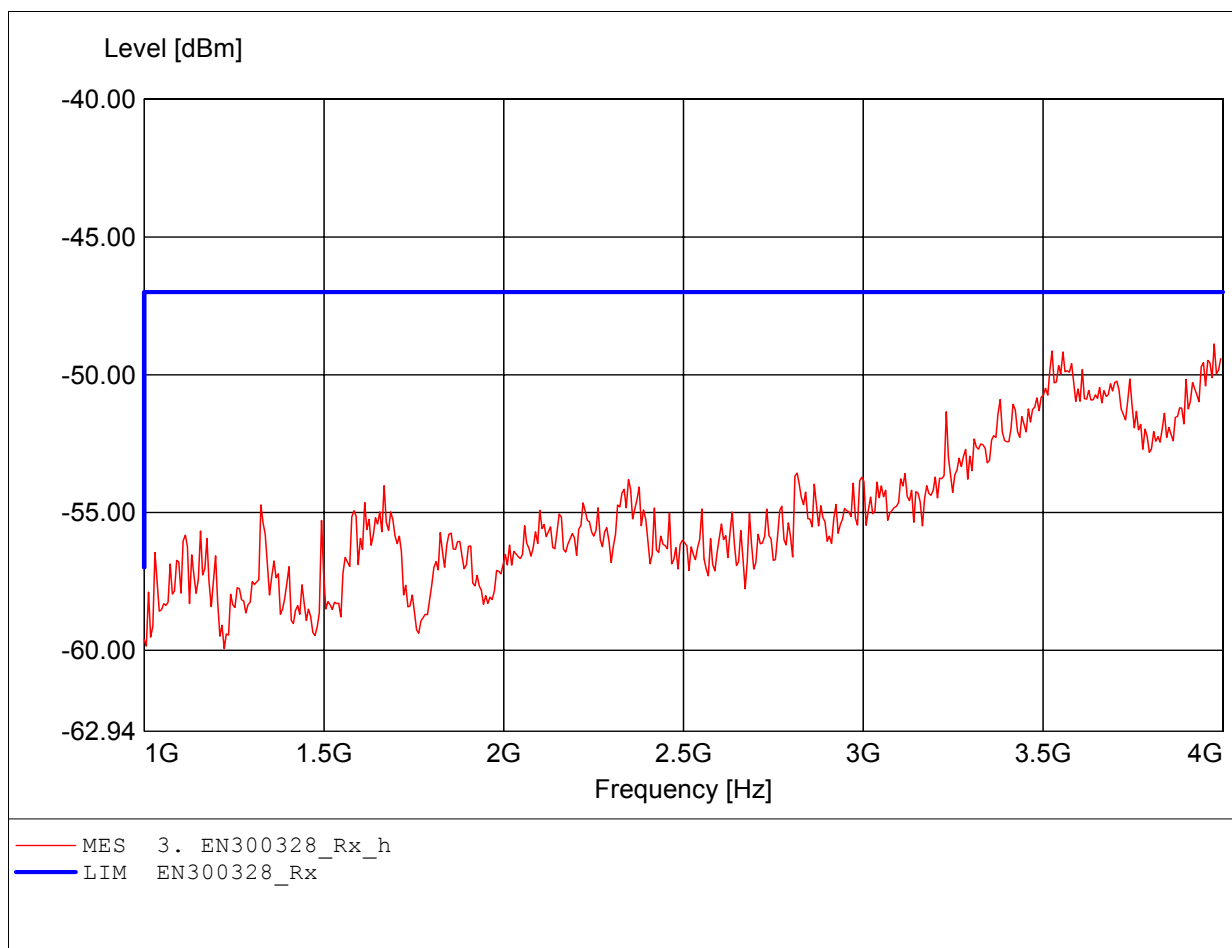

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:3.549GHz Pmax:-49.53dBm RBW: 100 kHz

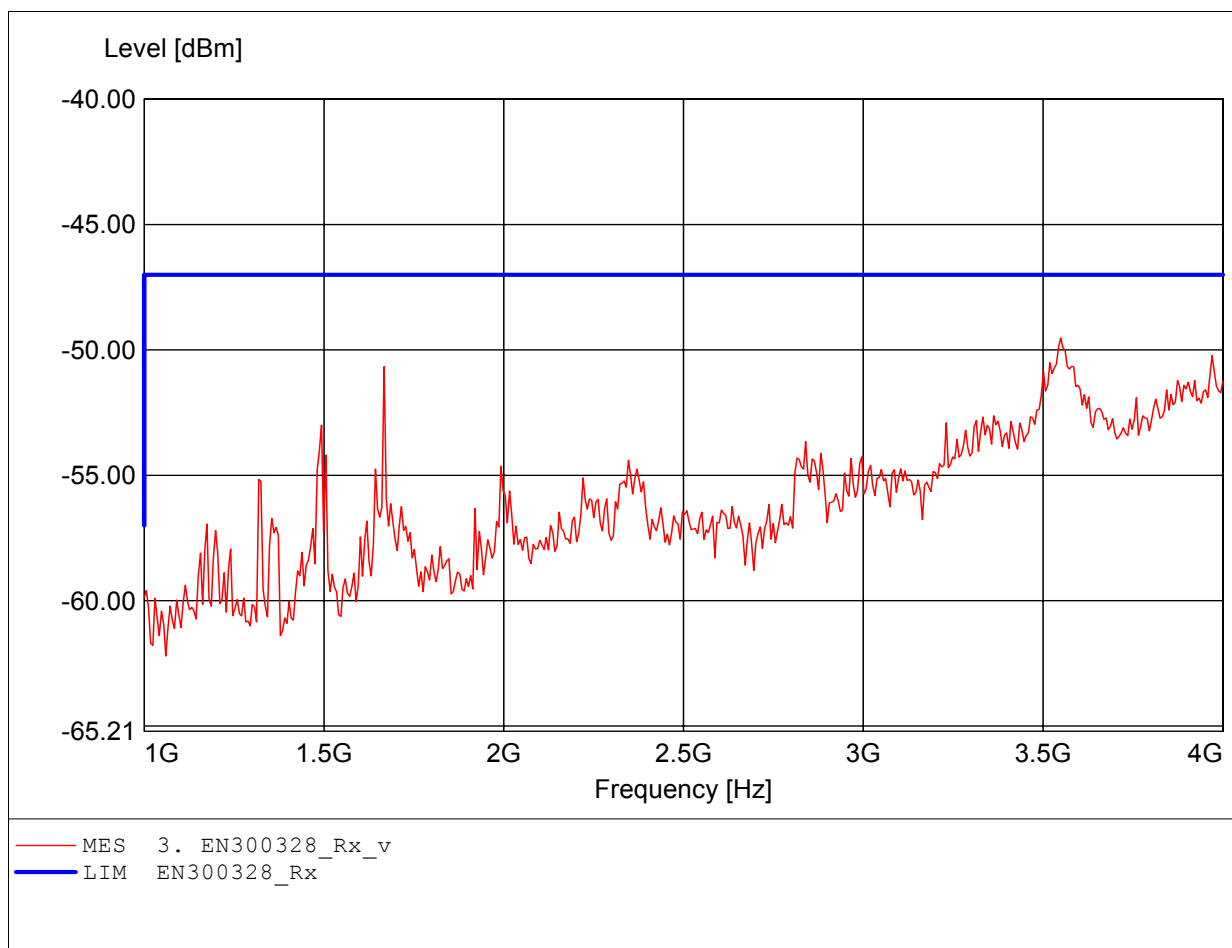

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:7.375GHz Pmax:-48.60dBm RBW: 100 kHz

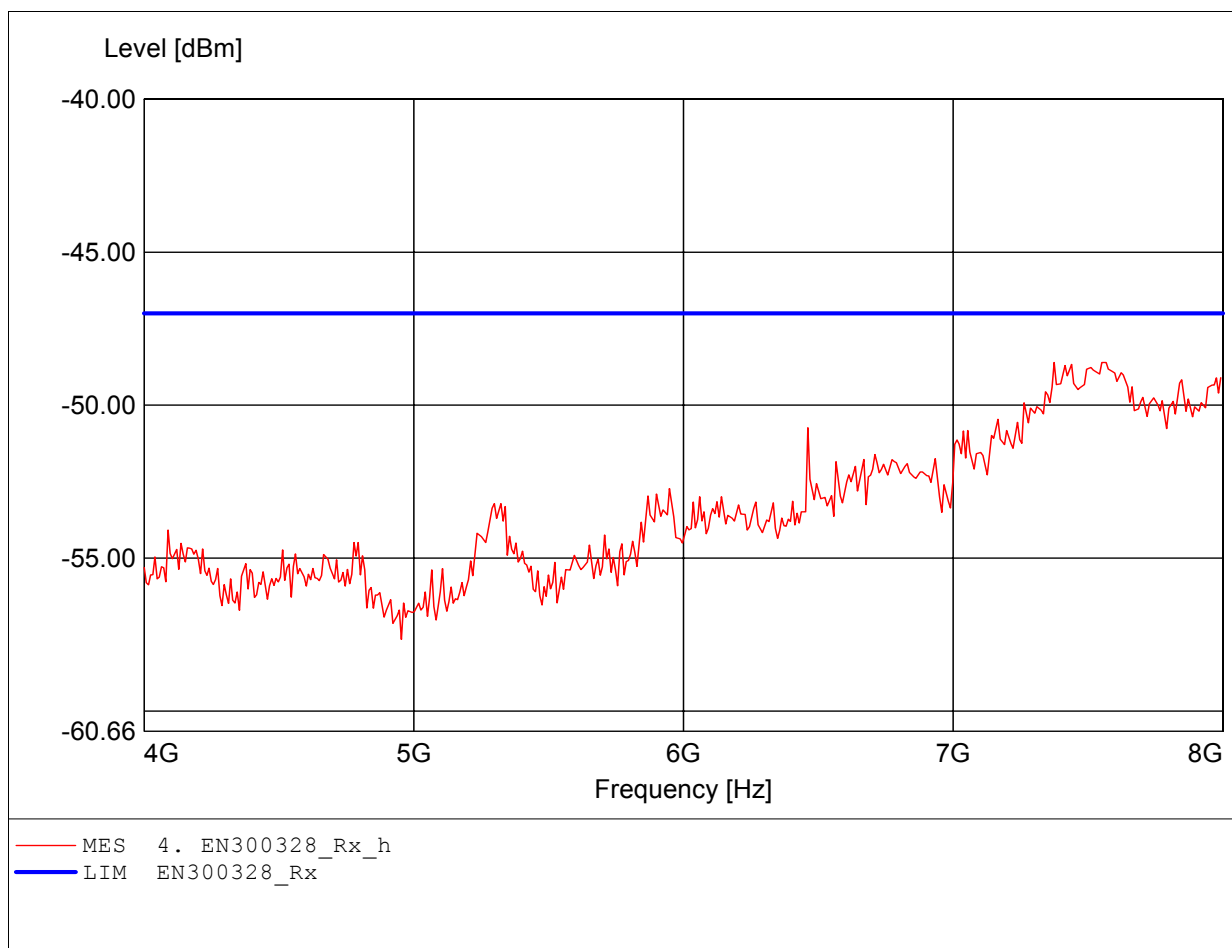

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq: 7.583GHz Pmax: -48.65dBm RBW: 100 kHz

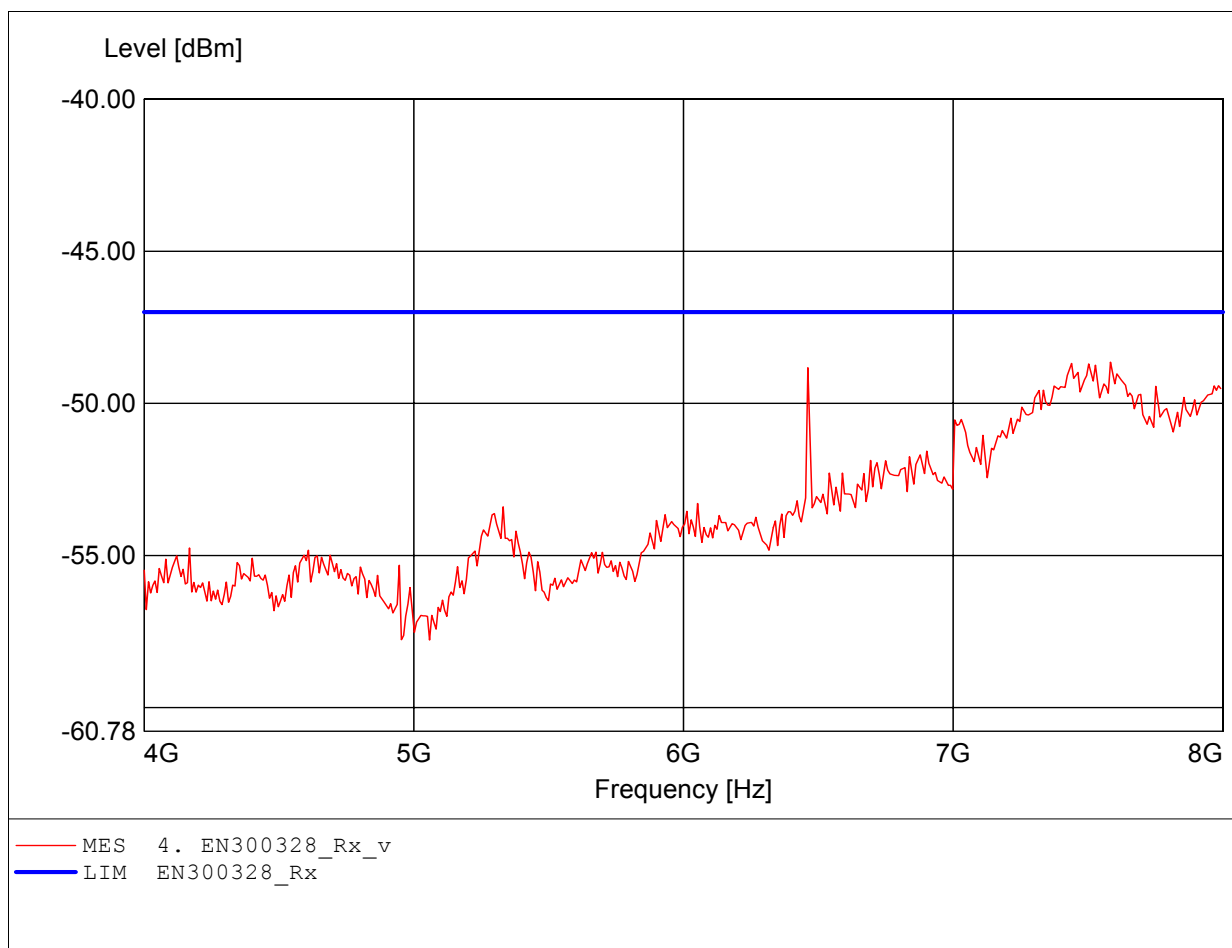

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.483GHz Pmax:-49.95dBm RBW: 100 kHz

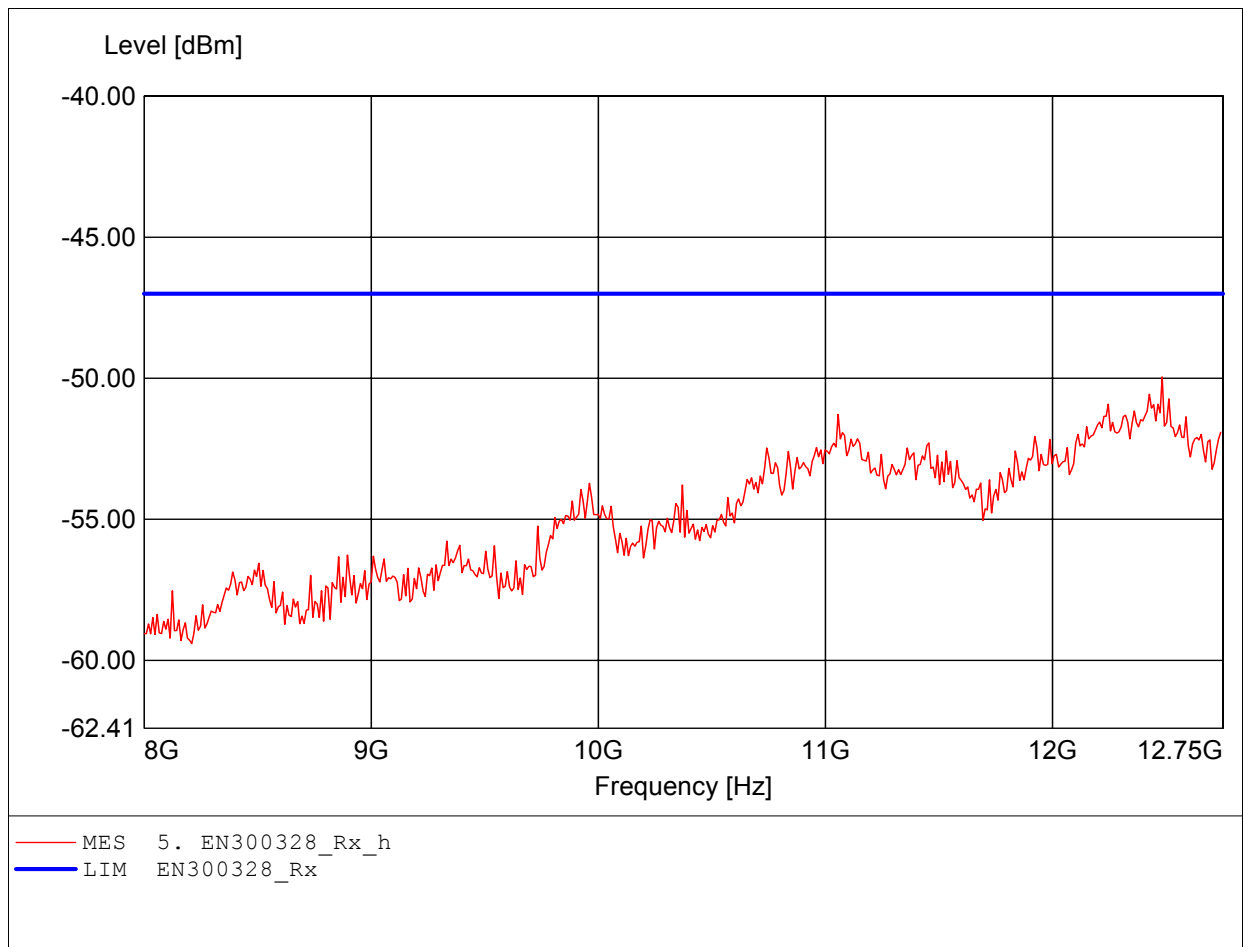

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.426GHz Pmax:-50.41dBm RBW: 100 kHz

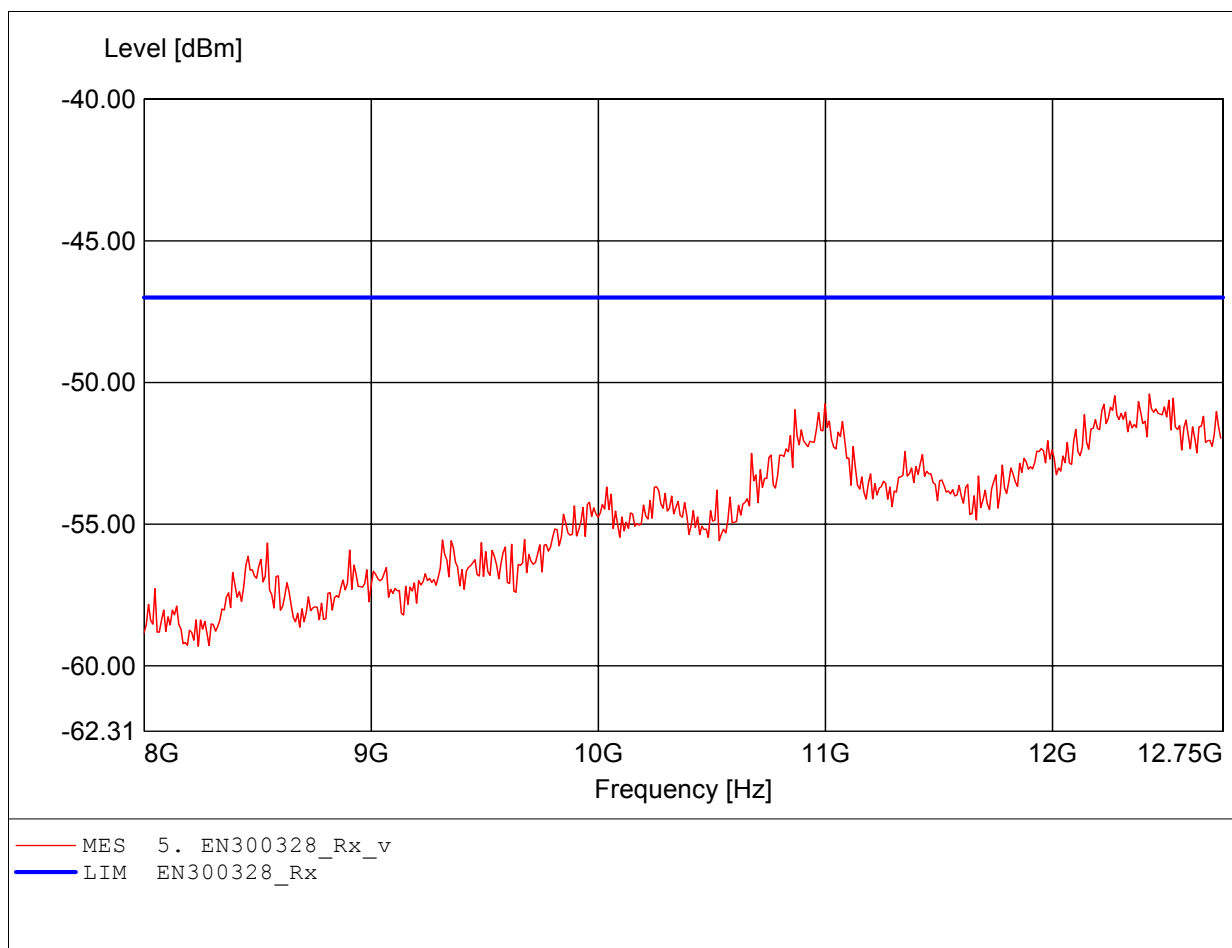

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:192.986MHz Pmax:-66.92dBm RBW: 100 kHz

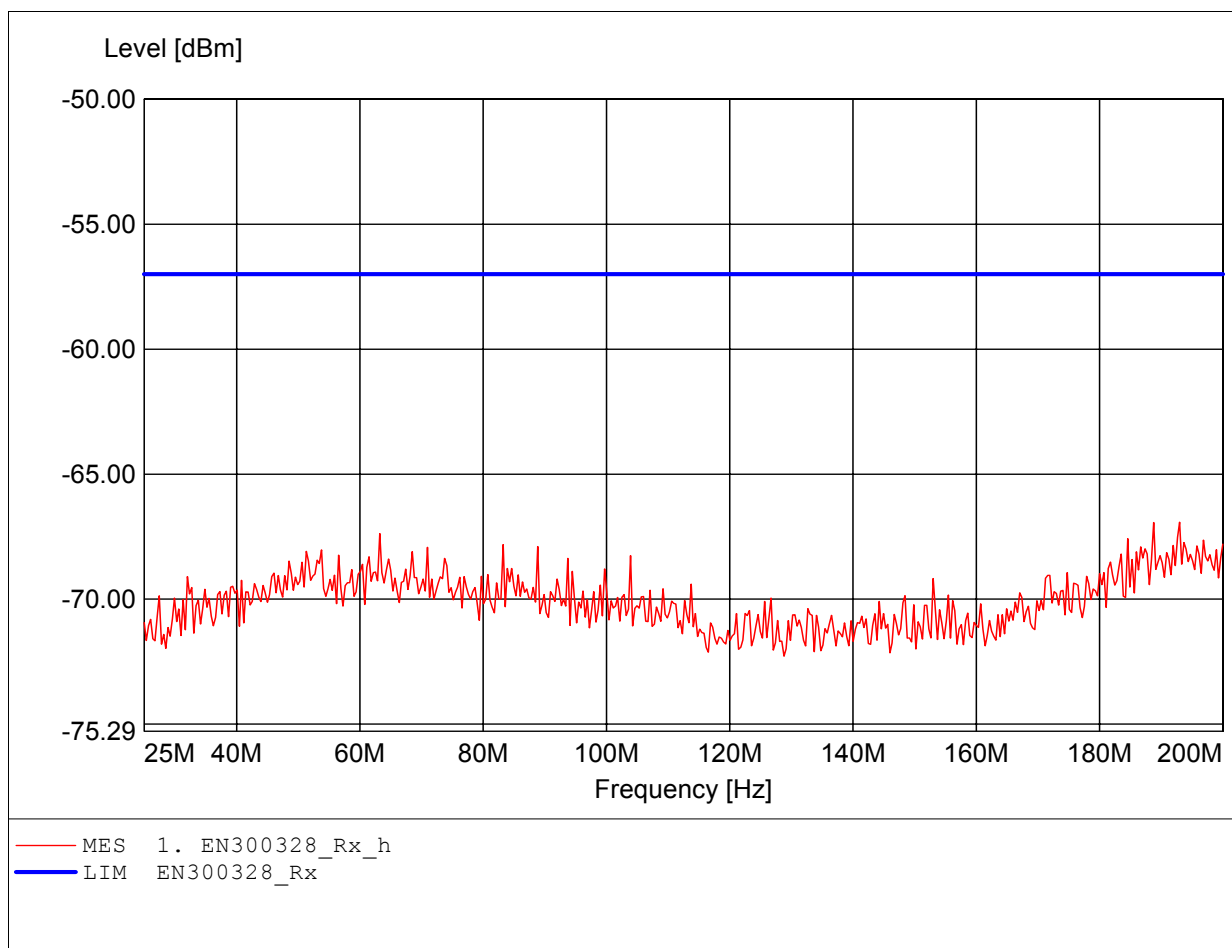

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:166.333MHz Pmax:-64.43dBm RBW: 100 kHz

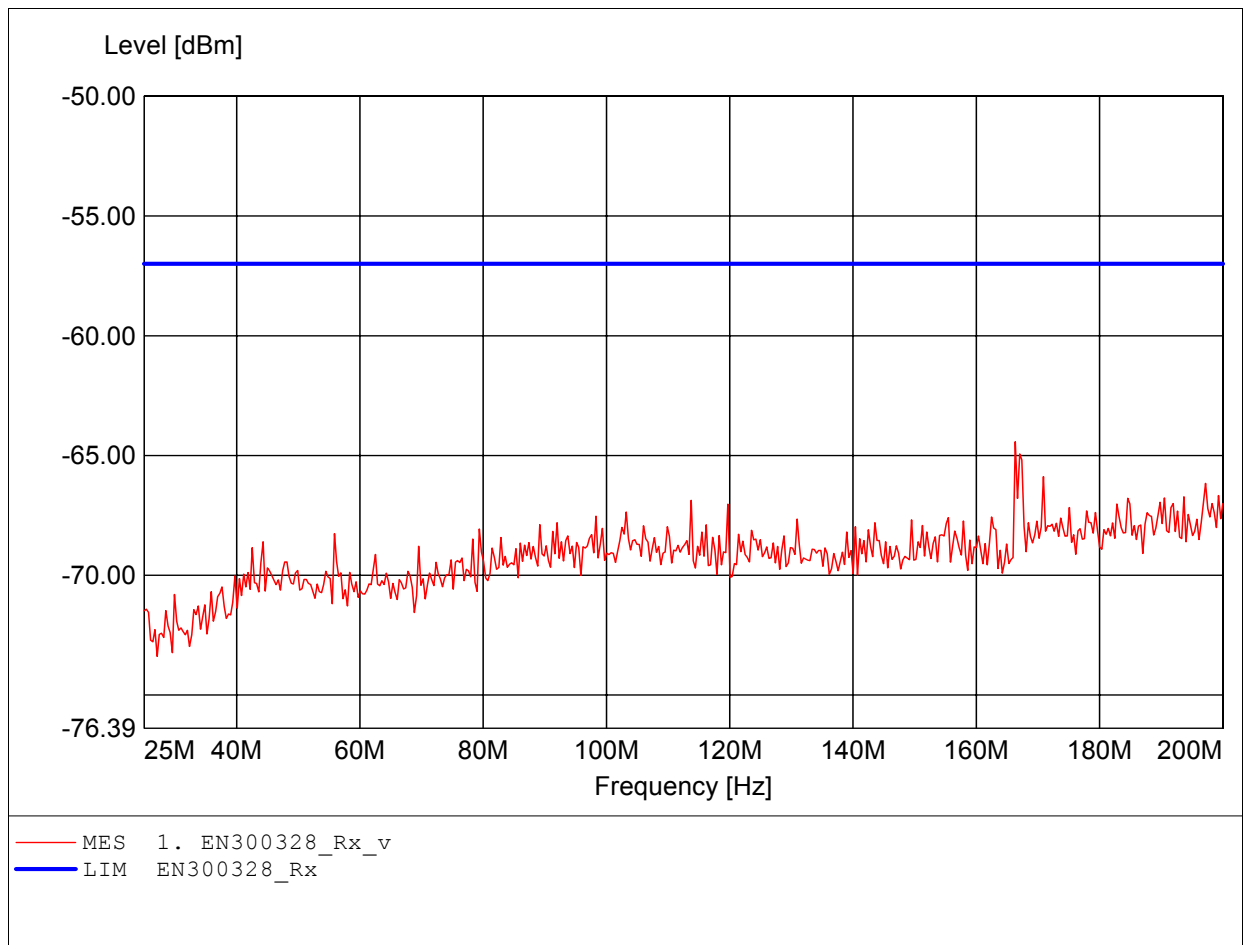

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:913.427MHz Pmax:-64.94dBm RBW: 100 kHz

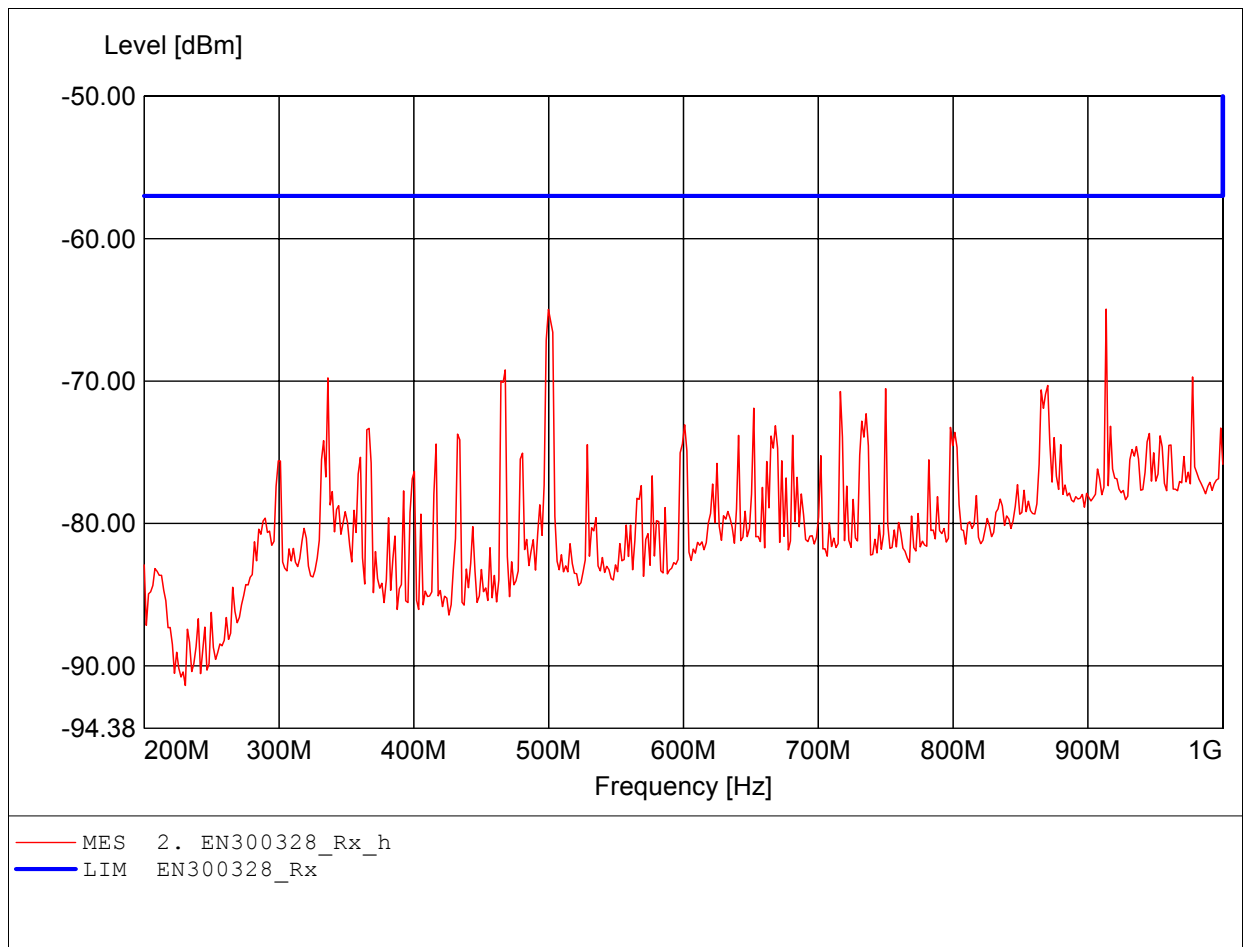

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:716.232MHz Pmax:-65.48dBm RBW: 100 kHz

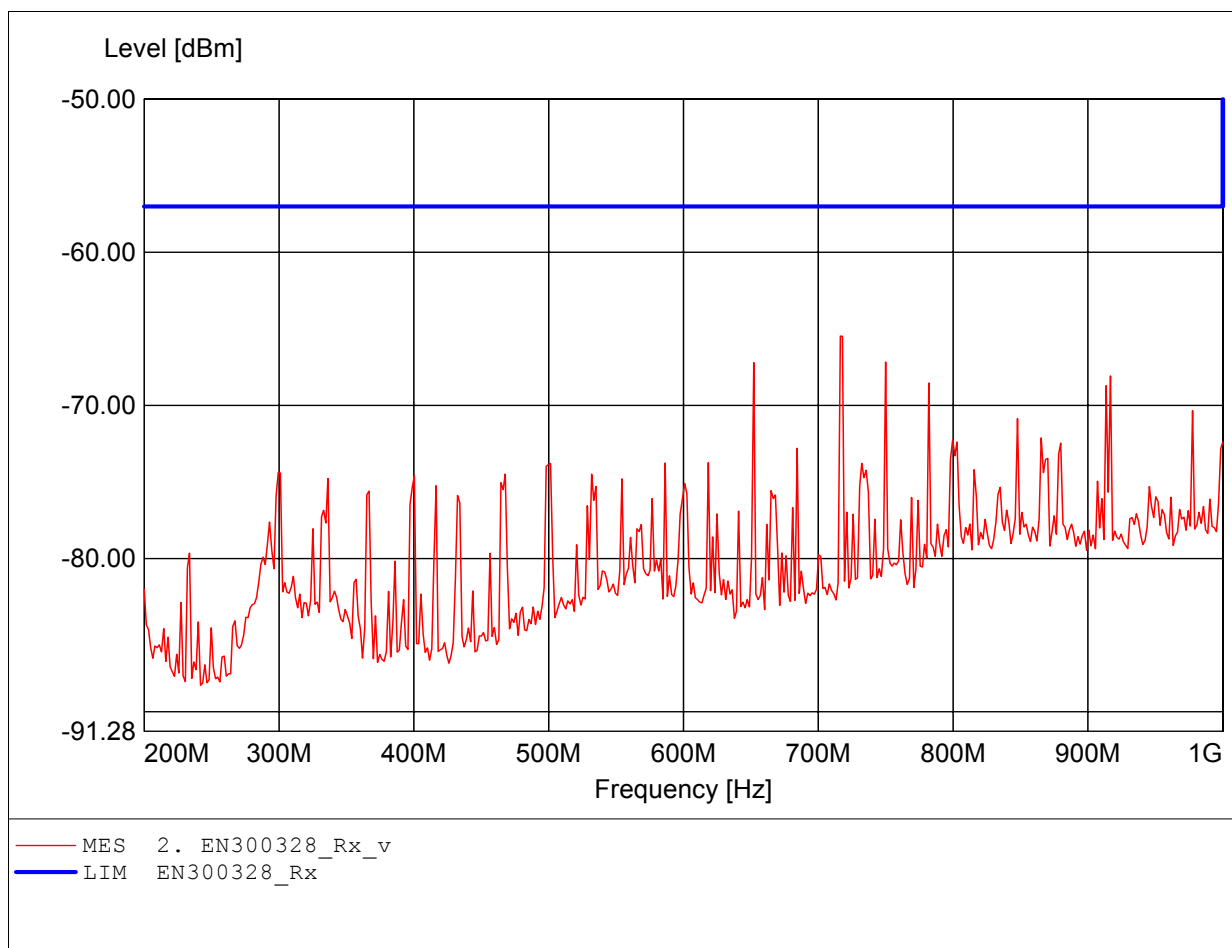

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:1.246GHz Pmax:-50.37dBm RBW: 100 kHz

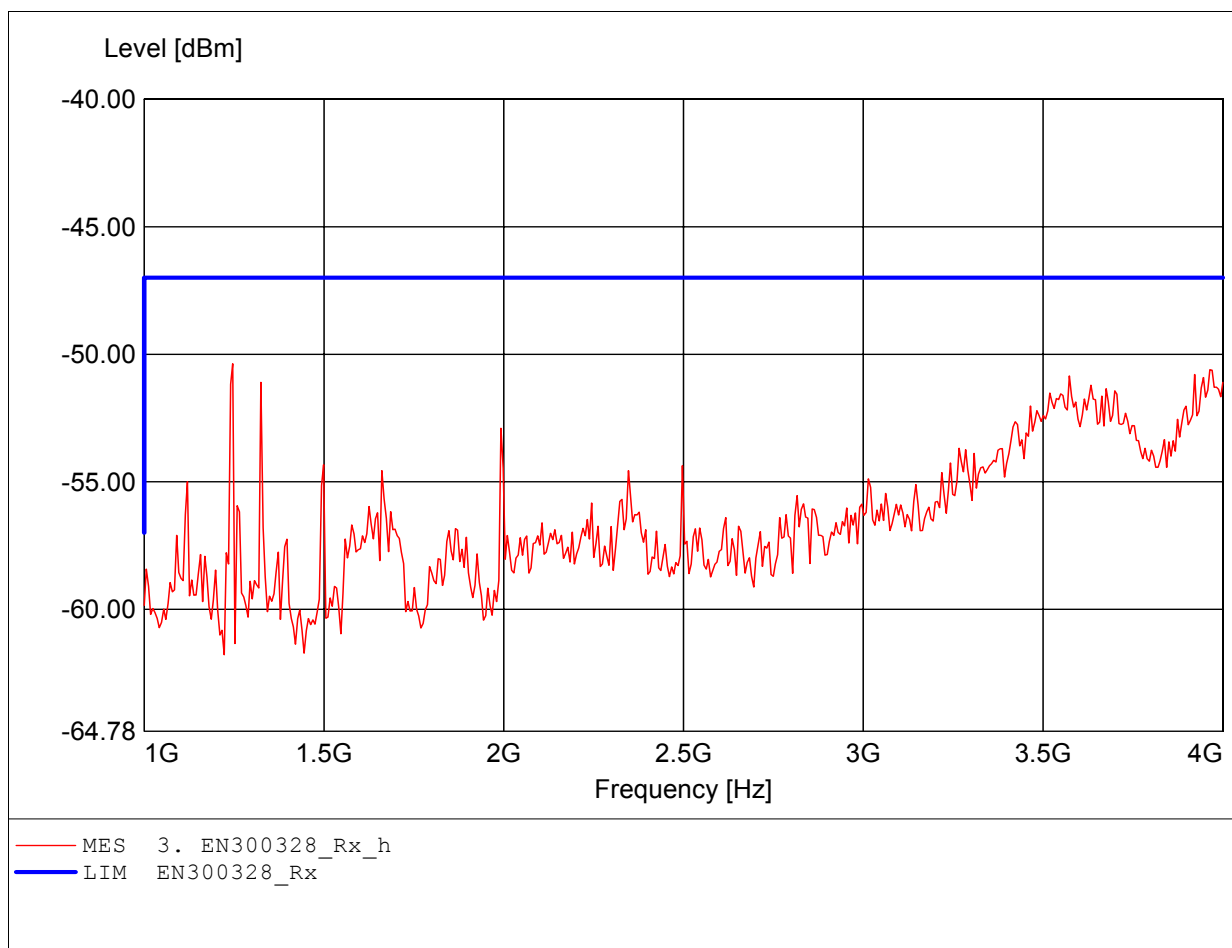

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:1.240GHz Pmax:-50.30dBm RBW: 100 kHz

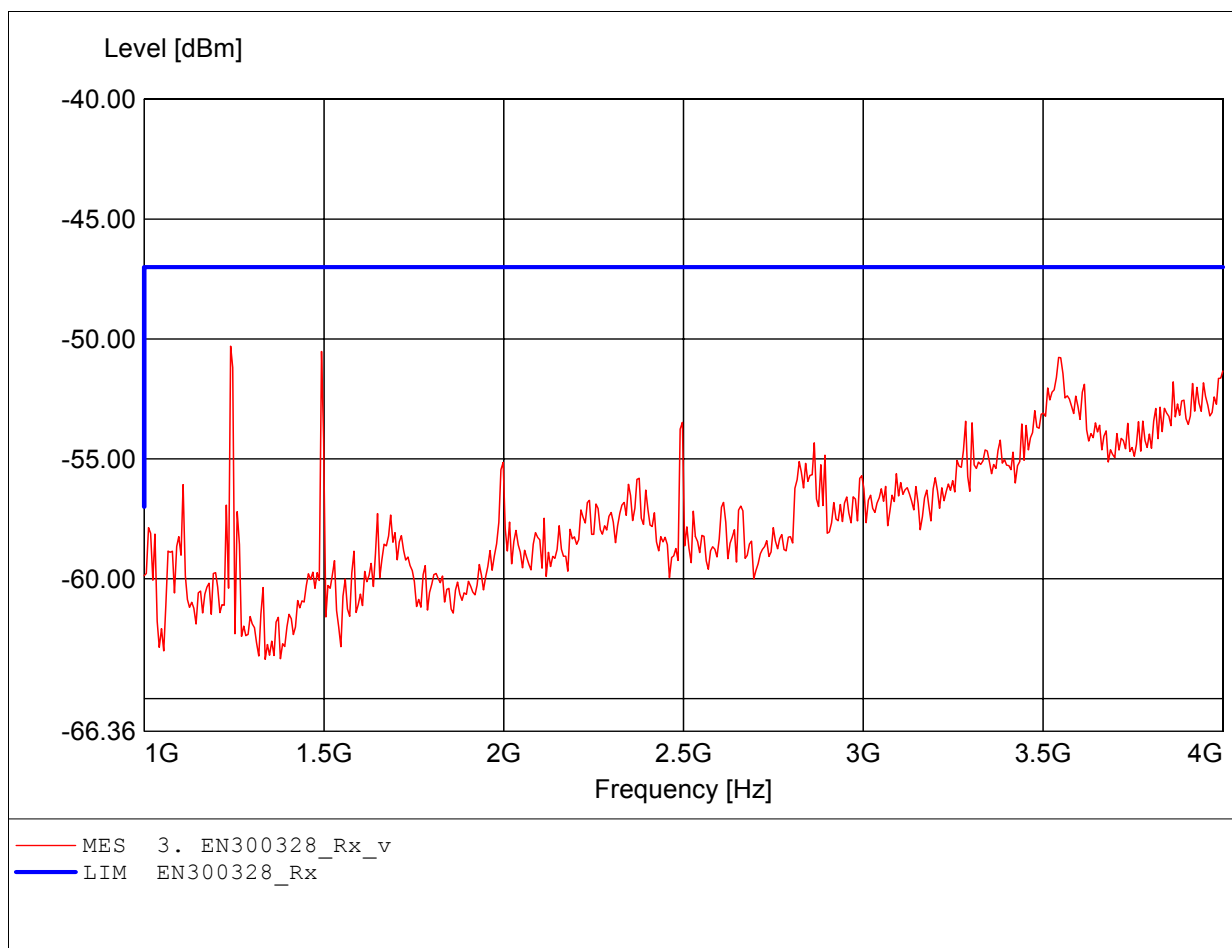

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:7.992GHz Pmax:-48.59dBm RBW: 100 kHz

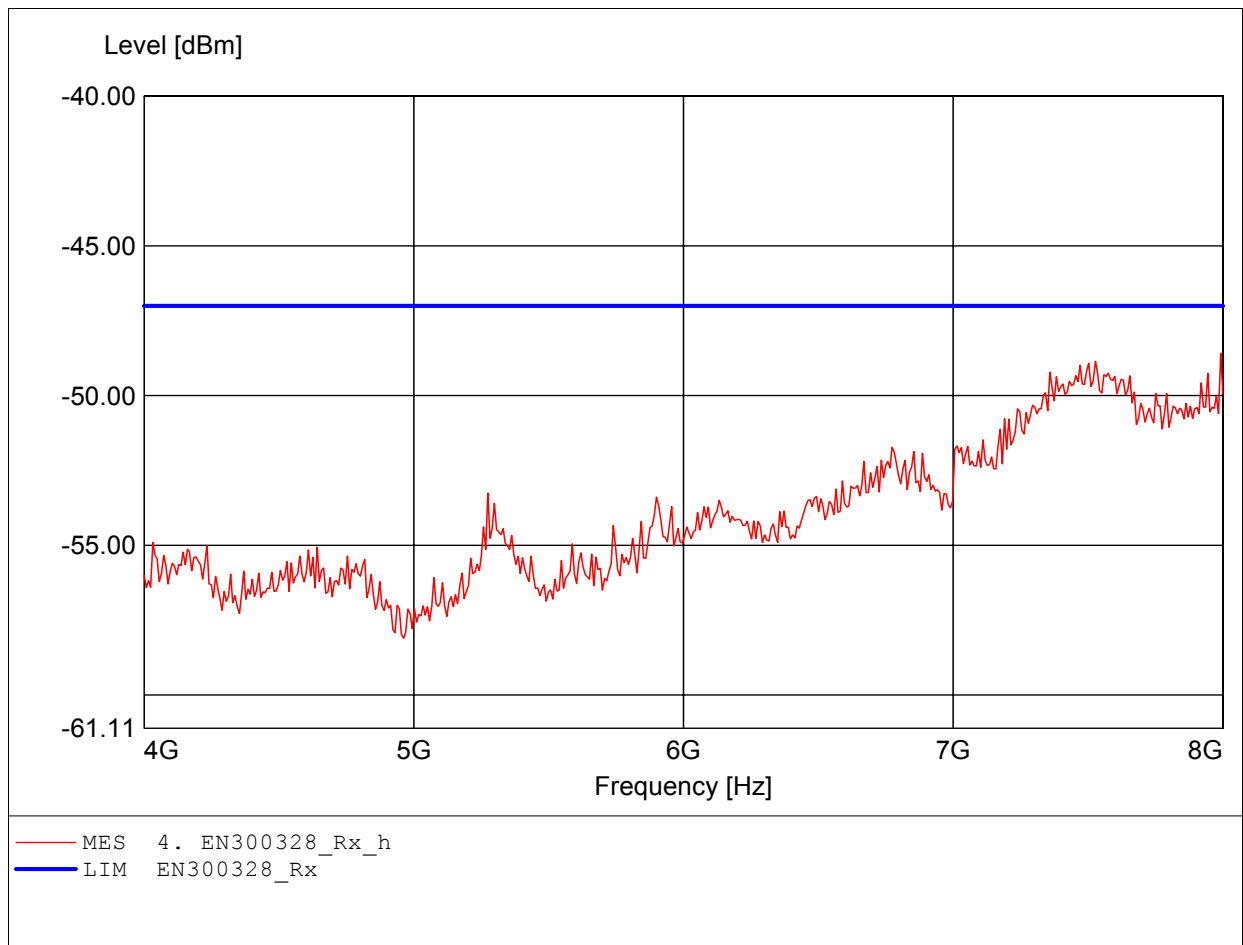

Spurious emissions under normal conditions

in accordance to the EN 300 328


Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:7.559GHz Pmax:-48.98dBm RBW: 100 kHz

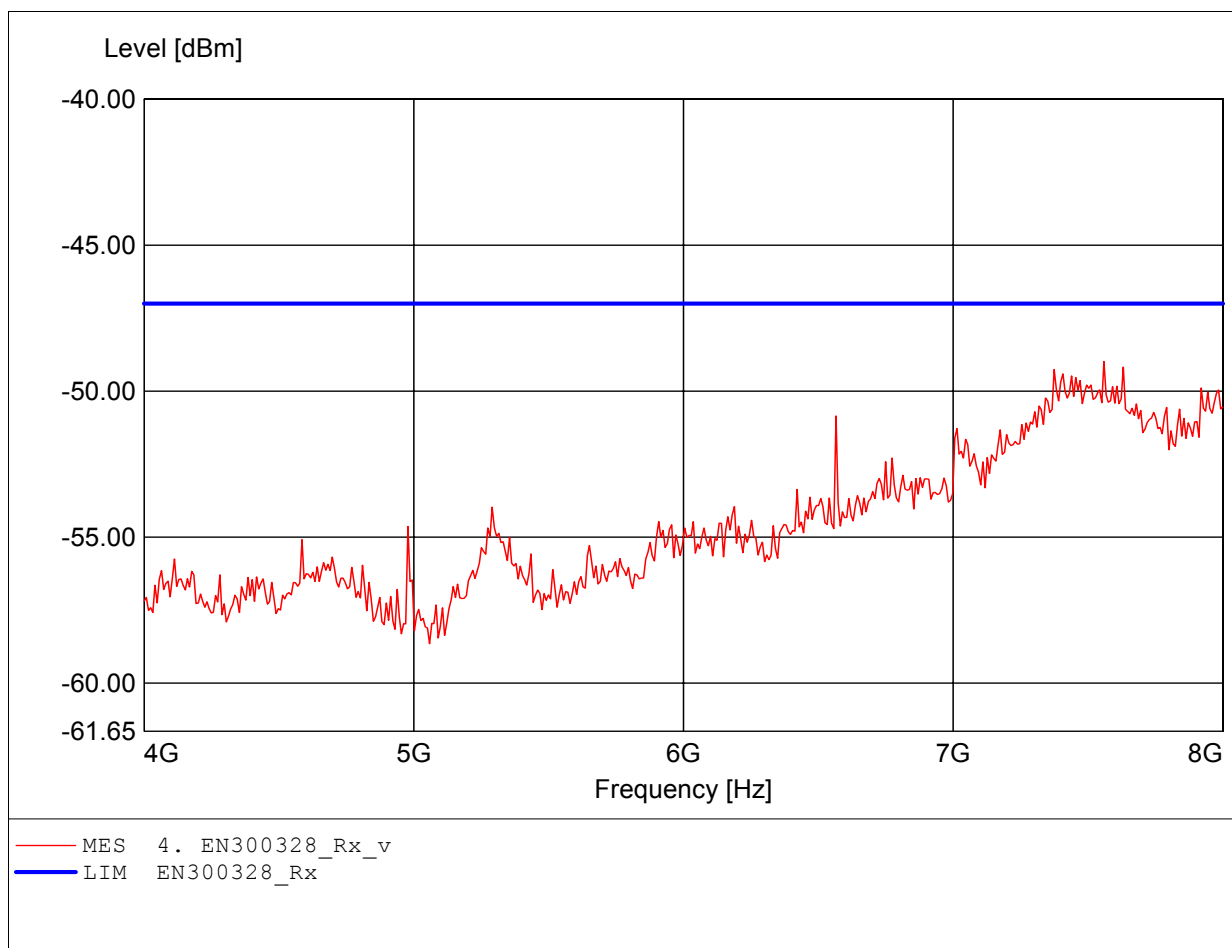

Spurious emissions under normal conditions

in accordance to the EN 300 328

Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.455GHz Pmax:-49.15dBm RBW: 100 kHz

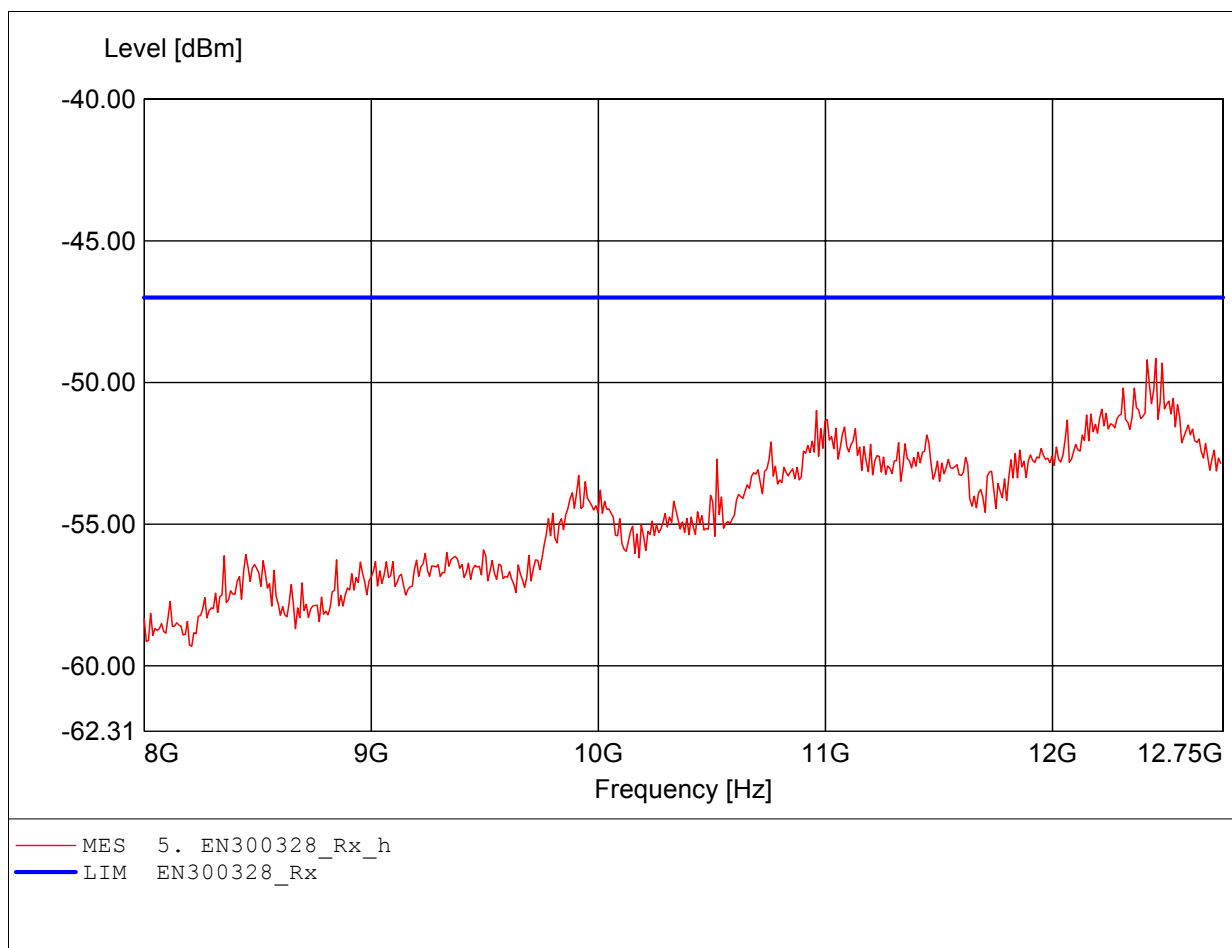

Spurious emissions under normal conditions

in accordance to the EN 300 328

Order Number: W6M20703-7954 802.11n 40M ch9
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Fully anechoic chamber / mode: RX
Freq:12.455GHz Pmax:-50.32dBm RBW: 100 kHz

