
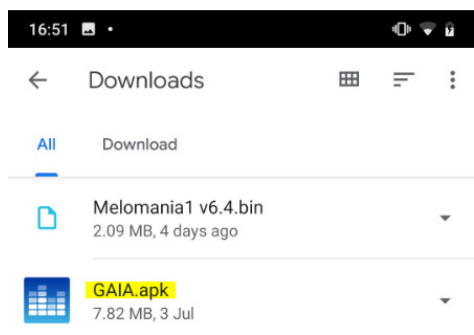


## Melomania1 Firmware Update Procedure

NOTE: This procedure can only be completed using an Android based phone/tablet.

1. On your Android device browse to <https://www.cambridgeaudio.com/m1v>
2. Click and download the following files:
  - a. Melomania 1- Update App (GAIA)
  - b. Melomania 1 – Firmware (vx.x)
3. Install the **GAIA Control App**
  - a. Navigate to the Downloads folder in the Files App (Settings – Files)
  - b. Click on GAIA.apk and install the app

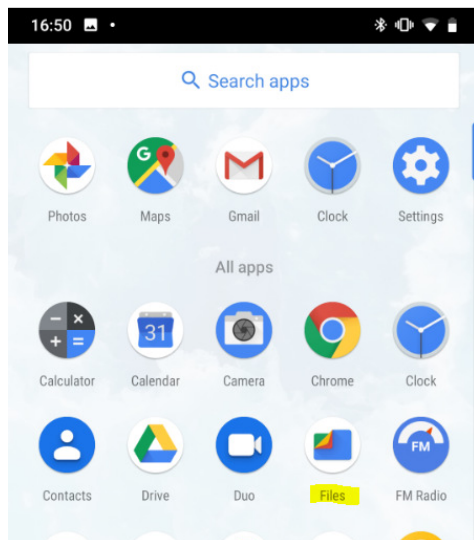

4. Take out the Melomania 1 Left earbud from the charging case. (The earphone will turn on automatically.)
5. Press & hold the button until the earbud LED turns to White/Blue colour.
6. Turn on Bluetooth on your Android device and pair it to your Melomania 1 Left earbud.
  - a. Press "CANCEL" when there is a prompt for pairing another device.


7. Open the GAIA Control app.



8. Select the "BONDED" tab


9. Select the checkbox next to "Melomania L // Cambridge".

10. Press CONNECT BR/EDR

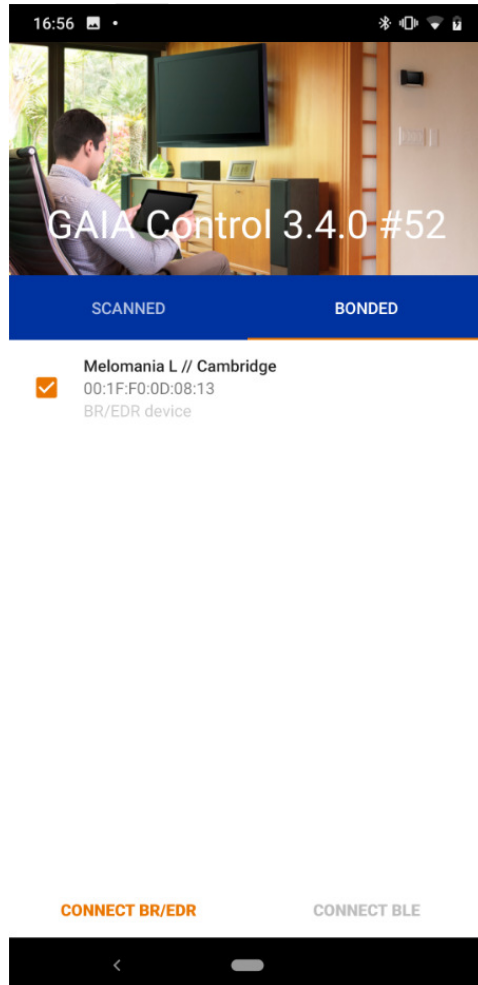


11. Top right-hand side should show ""Melomania L // Cambridge ... connected – bonded"


## 12. Press the “Upgrade” button

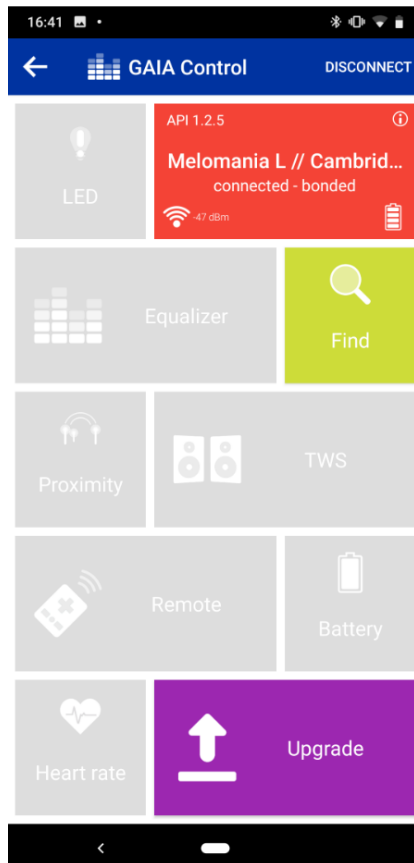


## 13. Browse to the file location (in this example the Downloads folder)

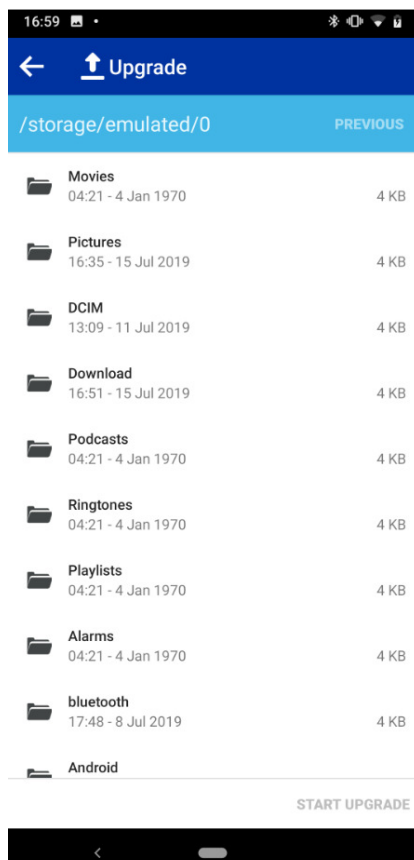


14. Select “Melomania1 v6.4.bin” and click “START UPGRADE”

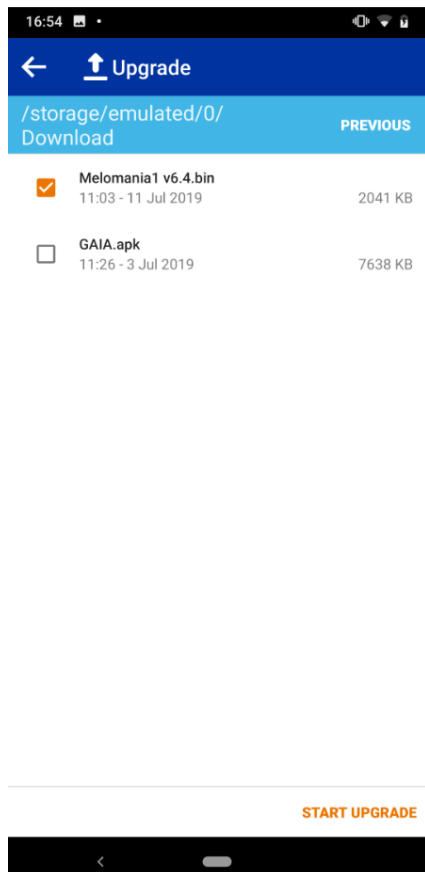



15. This upgrade stage takes 5-10 minutes to complete

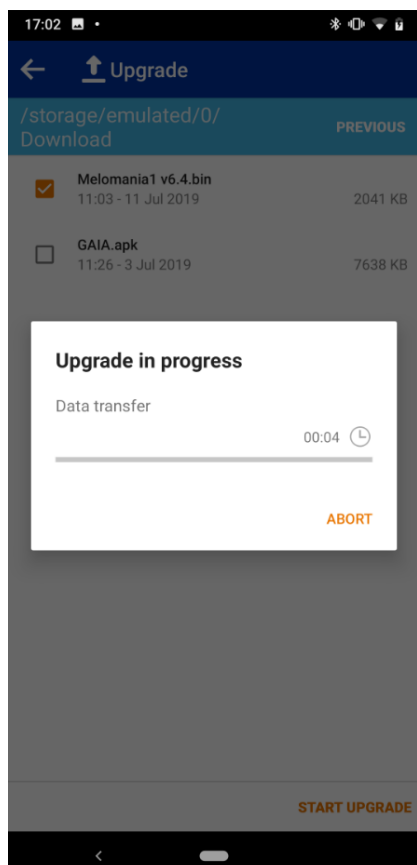


16. When the file transfer is completed, select CONTINUE

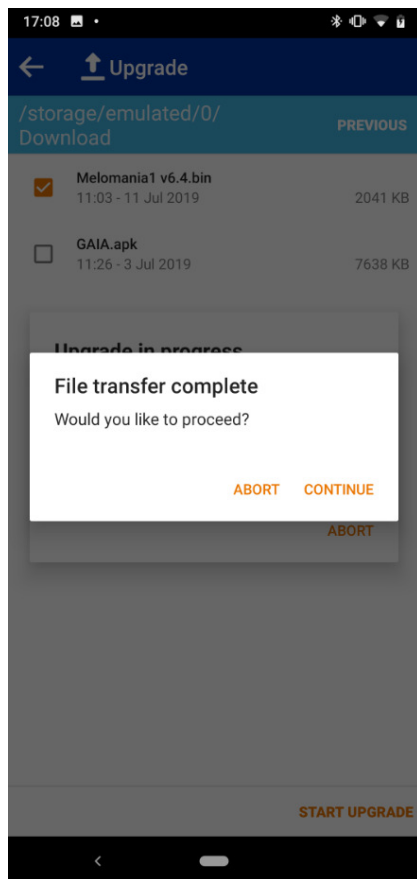

17. Following a brief update process select CONTINUE on the Data commit screen

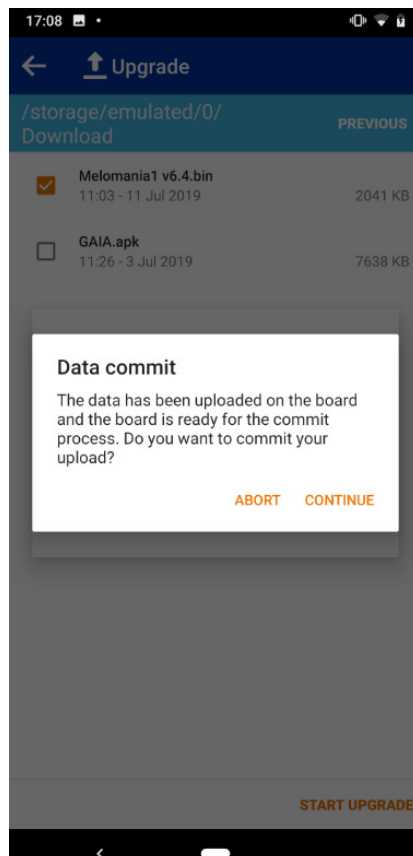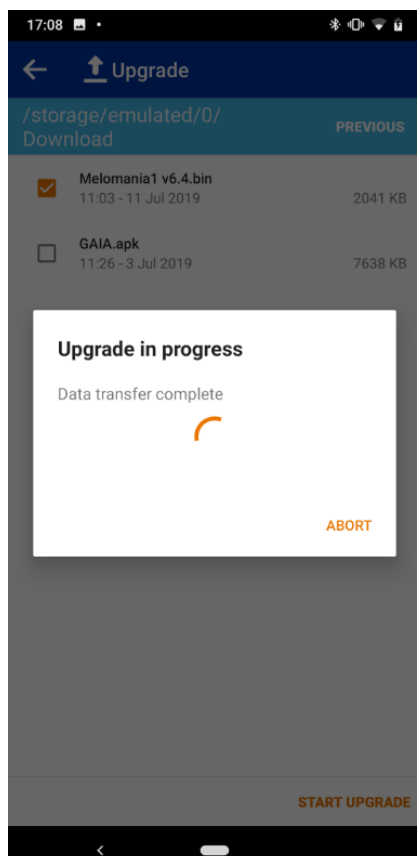

18. Upgrade Complete – press OK

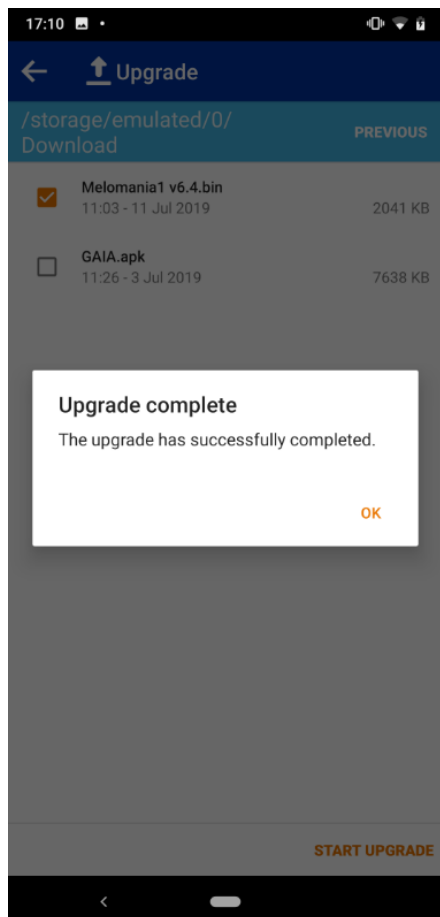

19. Close the GAIA Control App

20. Put the Melomania 1 Left earbud back to the charger case.

21. Take out Melomania 1 Right earbud from the charging case.

22. Repeat the step 5 to 20 for the right earbud.

23. With both upgraded earbuds in the charging case press & hold both buttons until the lights briefly turn blue, then release the buttons.

24. When both earbuds slowly flash White they are ready to use.

25. Well done!