


1006 SERIES HEAVY DUTY ELECTRIC STRIKES

INSTALLATION INSTRUCTIONS •

Please read carefully before attempting installation.

1006 SERIES DIMENSIONS

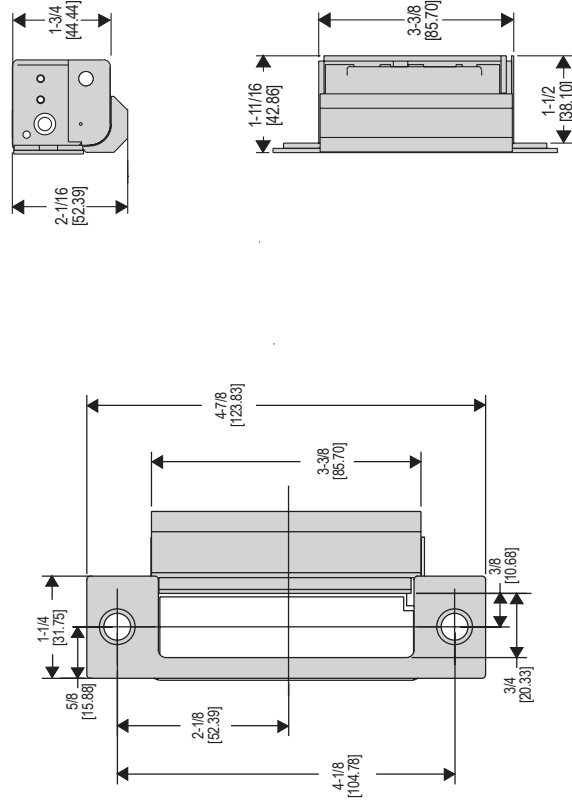


Hanchett Entry Systems, Inc.
22630 N. 17th Ave.
Phoenix, AZ 85027
www.hesinnovations.com


DIMENSIONS:
INCH/MM

Technical Service Dept. Helpline 800-626-7590 623-582-4626


AD, HD, ND, TD - OPTION FACEPLATE

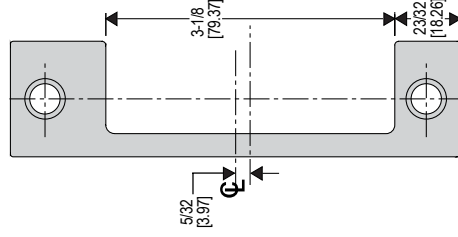


A, H, HT, N, T - OPTION FACEPLATE

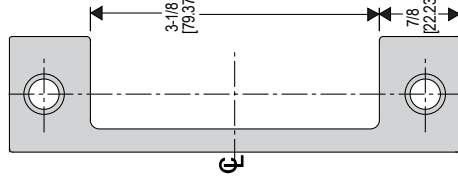


AM, HM, NM - OPTION FACEPLATE

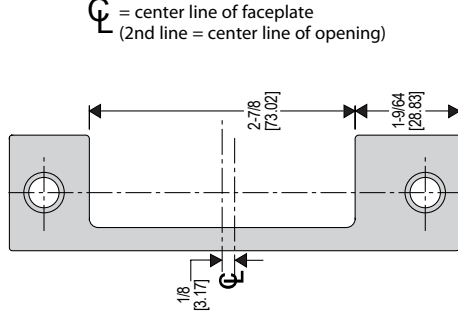


KD - OPTION FACEPLATE

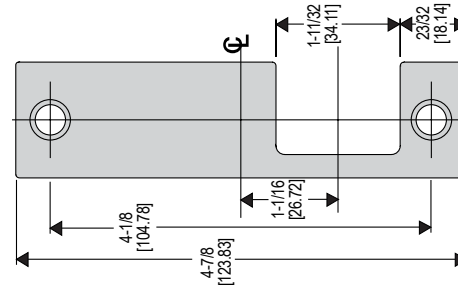


K - OPTION FACEPLATE

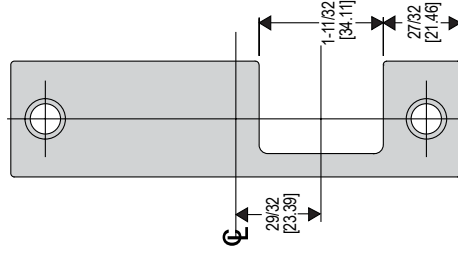


R - OPTION FACEPLATE

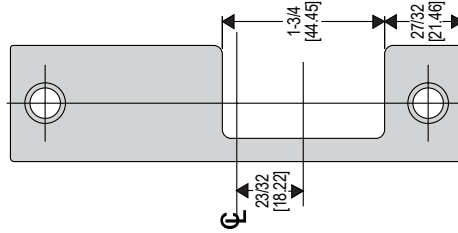


KM - OPTION FACEPLATE

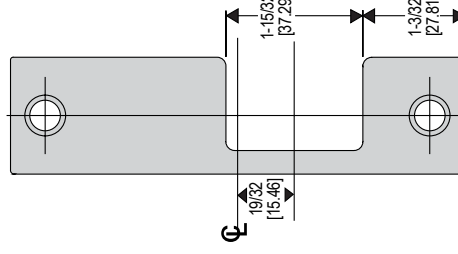

Z - OPTION FACEPLATE

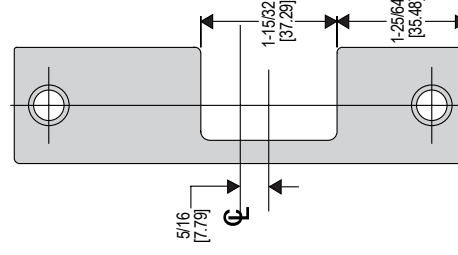

J, E - OPTION FACEPLATE

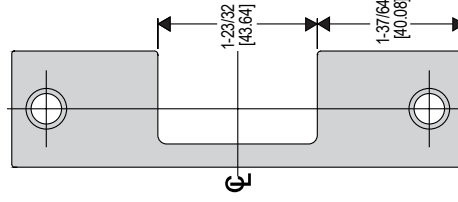

4036006.001 rev B

©HES 2005

NOTE: Drawings are not to scale. This information is subject to change without notice. For questions, consult HES technical service helpline, 800-626-7590.

ASSA ABLOY, the global leader in door opening solutions

2

Wiring diagram for 12/24 volts

FIG. A

12 VOLT DC


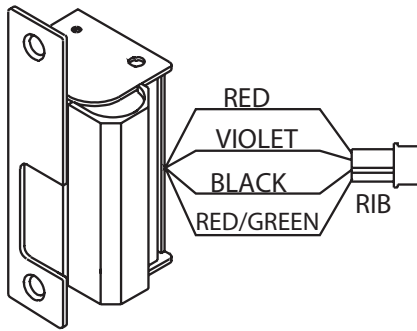


FIG. B

24 VOLT DC

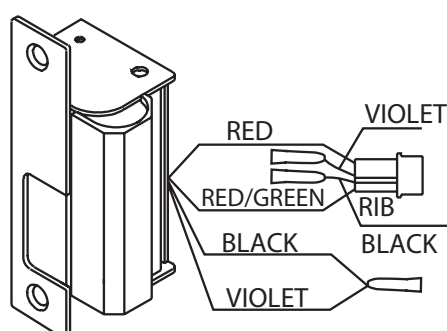

NOTE: The 1006 is supplied as a 12 volt DC unit. For 24 volts DC, see figure B.

INSTRUCTIONS:

1. Cut the violet and black wires.
2. Splice the violet and black wires together that are coming out of the strike. Connect the violet and black wires together with connector.
3. Individually cap the remaining two wires coming out of the pigtail.
4. The unit is now 24VDC.

(Wiring methods and materials shall be in accordance with the National Electric Code, ANSI/NFPA 70, 1996. This unit must be powered from a UL listed limited energy power source.)

CAUTION! Before connecting any device at the installation site, verify input voltage and current using a multimeter. Many power supplies and transformers operate at higher levels than listed. Any input voltage exceeding 10% of the solenoid rating may cause severe damage to the unit and will void the warranty.

- U.L. and U.L.C. listed for fire door accessory, category 10C (file #843X), for use with 3 hour "A" labeled doors (fail secure only)

- U.L. listed for burglary resistance, category 1034 (file #51WK)

- ANSI A250.13-2003 Windstorm Resistant

U.L. Tested
Standard UL 1034 listed for:

- 1500 lbs. static strength rating
- 70 foot-lbs dynamic strength rating
- 250,000 cycles endurance rating

Note: At the request of HES this model was tested and verified by UL for the following voluntary (not required) ratings:


- 3,000 lbs static strength rating
- 2,000,000 cycles of operation

ELECTRICAL RATINGS FOR SOLENOID	Continuous Duty	
	24 VDC (± 10%)	12 VDC (± 10%)
Resistance in Ohms	100	25
Watts Seated	6	6
Amps Seated	.24	.48

Solenoids are rated at +/- 10% indicated value

MINIMUM WIRE GAUGE REQUIREMENTS	Solenoid Voltage	
	24 VDC	12 VDC
200 feet or less	18 gauge	18 gauge
200 - 300 feet	18 gauge	16 gauge
300 - 400 feet	16 gauge	14 gauge

1006 LATCHBOLT MONITOR:

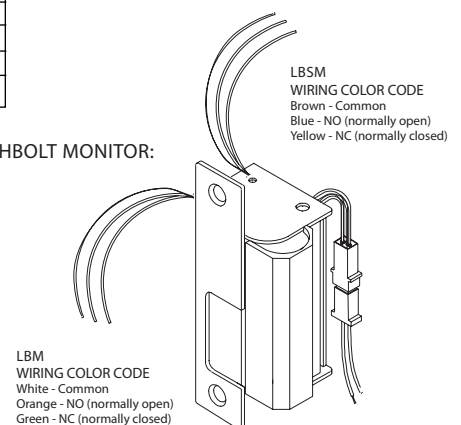


Optional LBM/LBSM Wiring Information
(LBM/LBSM ordered separately)

FIVE YEAR LIMITED WARRANTY

For any questions regarding this information, call our Technical Service Line at 1-800-626-7590

1000 Series Full Keeper Shims

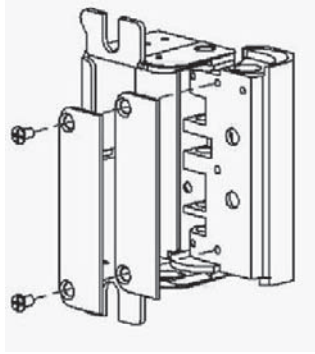

Designed to provide horizontal adjustment to reduce the width of the strike cavity. Install one or both of the shims on the inside of the keeper as needed.