



Contact me about this UPS

→ See all Eaton 9PX Documentation

→ Back to Family Page



9PX11K

Interact with the 9PX


Eaton 9PX rack/tower UPS. 11,000 VA/10,00W, 208V, hardwired input; hardwired & (3) L6-30R output ENERGY STAR® qualified UPS

List Pricing

List Price* \$9,281

General

Topology	Double-conversion online
Configuration	Rack/Tower
Catalog Number	9PX11K
Color	Black and silver
Rating (VA/Watts)	11000/10000
Diagnostics	Full system self test at power up
Efficiency	94% with resistive load

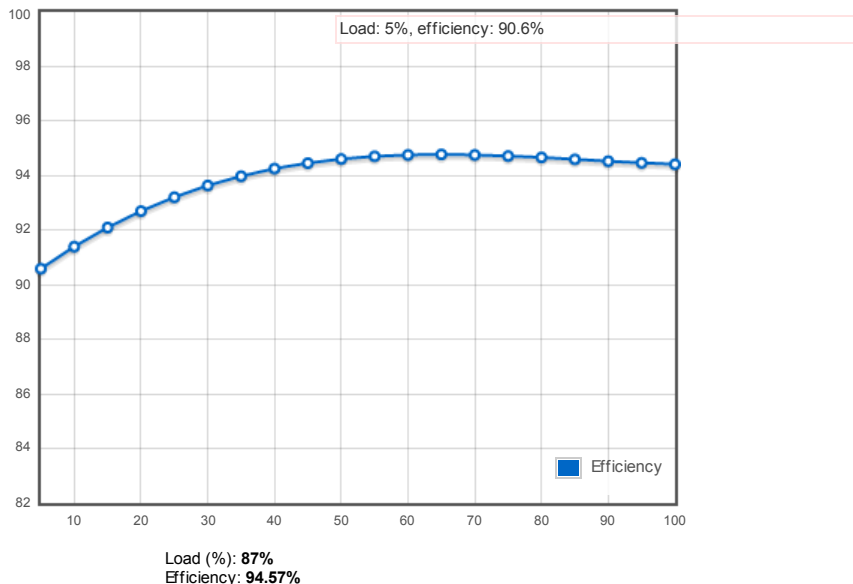

UPS Bypass	Yes, ships with MBP11K208
Dimensions (H x W x D, inches)	10.2 (6U) x 17.3 x 30.0
Dimensions (H x W x D, mm)	259 (6U) x 439 x 762
Weight (kg)	93
Weight (lbs)	205
Warranty	2 years
Rail Kit Included	4-post rail kit and tower pedestals included
Remote Emergency Power off (REPO)	ROO/RPO: Rear deck emergency stop connectors (for remote on/off and power off)
Contents (Ships with the following items)	9PX11KPM 11 kVA 3U UPS power module 9PXEPM240RT 3U extended battery module MBP11K208 rear-mount maintenance bypass Network-MS Web/SNMP card 4-post rail kit User manual Quick start guide Tower pedestals Intelligent Power Software Suite CD RS-232 serial cable USB cable Cable gland for hardware connection Phillips head screw driver

Electrical Input

Connection: Hardwired - see manual for terminal block layout



Input Cord	None; hardwired
Input Voltage Range	Full load: 176-276V, Derating: 100-276V
Nominal Voltage	208V default (200/208/220/230/240/250V)
Frequency	50/60 Hz
Frequency Range	60 Hz: 50-70 Hz, 50 Hz: 40-60 Hz
Input Power Factor	>99
Input Current Distortion	<5%


Electrical Output

Nominal Voltage	208V default (200/208/220/230/240/250V)
Output voltage regulation	±1% steady-state
Voltage THD	<2% for linear loads
Output Receptacles	(3) NEMA L6-30R Hardwired - see manual for terminal block layout




Power Factor	0.9+
Transfer Time	0 ms
Circuit Breaker	(3) 30A for L6-30R

Battery

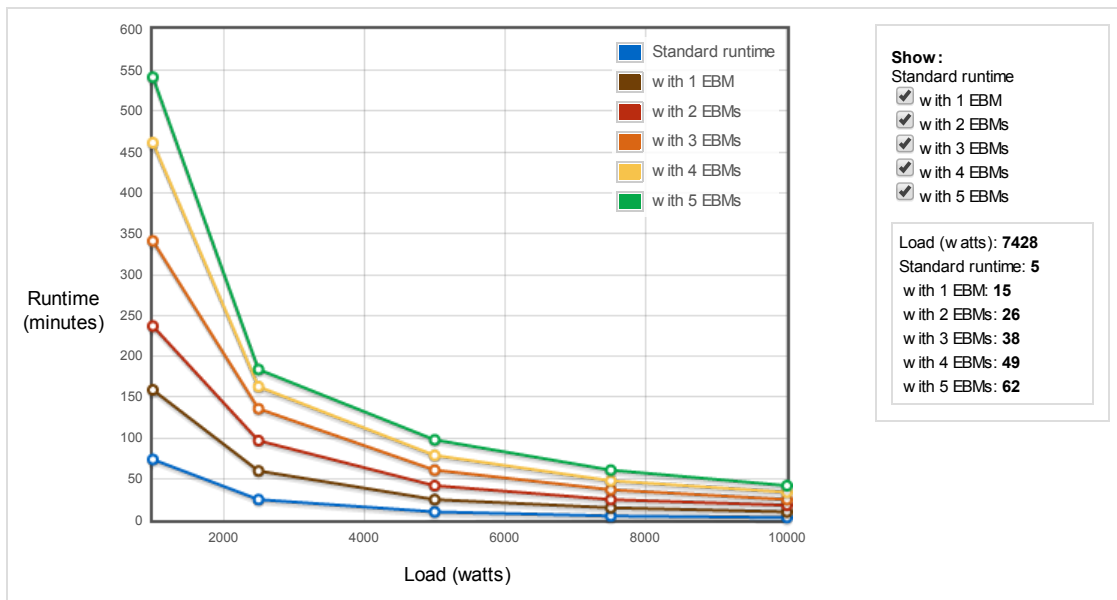

Battery runtimes are approximate and may vary with equipment, configuration, battery age, temperature, etc.

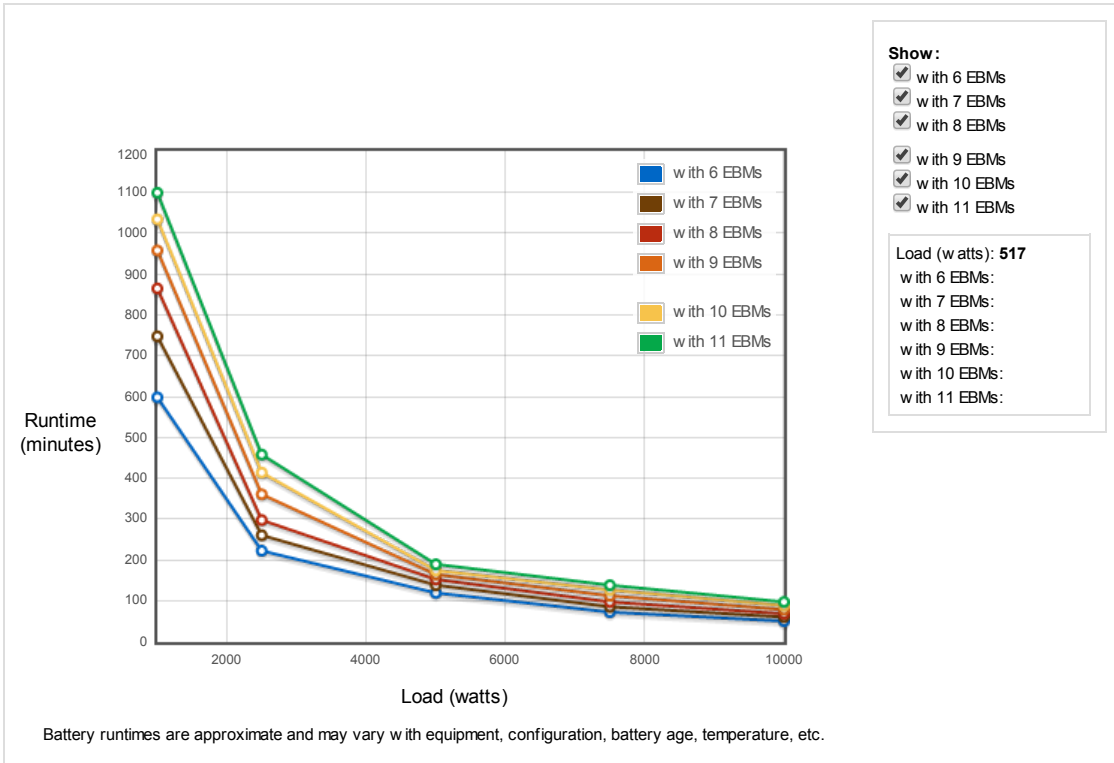

Battery runtimes are approximate and may vary with equipment, configuration, battery age, temperature, etc.

Note	Configurations with more than 5 EBMs require the SC240RT super charger module
Optional Extended Battery Module	9PXEbm240RT
Battery Description	Sealed, lead-acid; maintenance free
Maximum number of extended battery modules (EBM)	Add up to 5 extended battery modules (EBM) with UPS; add up to 12 EBMs with SC240RT supercharger module
Battery Management	ABM technology; 3-stage charging extends battery service life by 50% and provides advance warning for battery replacement
Battery Replacement	Hot-swappable extended battery modules (EBMs); no internal batteries in UPS module
Start On Battery	Cold-start enabled; first cold start is always forbidden

Communications

User Interface	Graphical display. UPS status in a single view.
LEDs	4 status-indicating LEDs
Communication Ports	RS-232 (RJ45) ports; USB port as standard (HD). 6-foot RS-232 and USB cables included
Communications Card Slots	Network Card-MS included
Power Management Software	Eaton Intelligent Power Software Suite CD (included)

Environmental & Standards

RoHS Compliance	Yes
Surge Protection	IEEE ANSI C62.41 Cat B2
Heat Dissipation (BTU)	Online: 1920 Battery: 2900 (BTU/hr; battery full charged, resistive load)
Audible Noise	<45 dB at 1 meter
Operating Temperature	0 to 40°C (32°F to 104°F)
Safety markings	CE / cULus / NOM
EMC Markings	IEC 62040-2:2006 Cat C2 / CISPR22 Class A / FCC part 15 Class A
Storage Temperature	0 to 35°C (32°F to 95°F); without batteries: -15 to 60°C (5°F to 140°F)
Relative Humidity	0 to 95%
Altitude	<1,000 meters for nominal power; 10% power derating every 1000 meters (up to 3000 meters)

Options

Services

Flex Plans

Onsite 1YR Service Coverage

Onsite 3YR Service Coverage

Scheduled Onsite Services and Monitoring

Onsite 7x24 Startup

Onsite UPS PM 7x25

eNotify Remote Monitoring Per Year

Scheduled Assembly Service 7x25

Extended Warranty Advanced Exchange Coverage for UPS (includes Battery in UPS)

Warranty-3: 3-year-total warranty (UPS) for new product purchase

Warranty-5: 5-year-total warranty (UPS) for new product purchase

Batteries

Option

8/11 kVA EBM

Extended battery module (EBM) for 8 and 11 kVA 9PX UPS models. Includes 4-post rail kit, quick start guide, joining brackets for tower configuration and 1-foot EBM connector cable. Add up to 5 EBMs with UPS; add up to 12 EBMs with SC240RT supercharger module.

EBM supercharger

240V supercharger module to add up to 12 EBMs to 8 and 11 kVA 9PX UPS models. Includes 4-post rail kit. HxWxD, inches: 5.1 (3U) x 17.3 x 26.8. 34 lb.

EBM Cable

6-foot EBM cable for 8 and 11 kVA 9PX UPS models.

8/11 kVA EBM cable adapter

Adapter cable from Eaton 9135, MX and EX RT UPS EBMs to 8 and 11 kVA 9PX UPS models.

Power Management Software



UPS and ePDU Supervisory Software

Intelligent Power Manager

Enables monitoring and management of multiple network power devices and integrates seamlessly with VMware's vCenter Server and Microsoft's SCVMM. [View demo](#)



UPS Protection Software

Intelligent Power Protector

Provides automatic, graceful shutdown of PCs, servers and virtual machines during extended power outages. Compatible with ESXi, Hyper-V, Xen and KVM. [View demo](#)

Power Distribution and Bypass

Option

Maintenance Bypass

Rear-mount 3U, 208V maintenance bypass module for 8 and 11 kVA 9PX UPS models. Hardwired input. Hardwired and (3) L6-30R output.

Basic ePDU

Basic ePDU for additional output receptacles. 15-ft. cord with L6-30P input. (16) C13 and (4) C19 output. 1U form factor. HxWxD, inches: 1.7x17.0x5.1.

Basic ePDU

Basic ePDU for additional output receptacles. 9-ft. cord with L6-30P input. (4) L6-20R output. 2U form factor. HxWxD, inches: 3.5x19.0x6.0.

Mounting Hardware

Option

Integration/caster kit

Battery integration system and caster kit.

Racks and Enclosures

Option

Eaton S-Series Rack

Eaton S-Series Racks support a broad range of rack accessories, as well as power distribution, management and protection products, to provide a proven platform that you can depend on to support your critical IT operations. Available in 42U and 48U heights.

Part Number	List Price*
FLN71XXX-11000UC	\$935
FLN73XXX-11000UC	\$2,017
Part Number	List Price*
SU05NXXX-11000UC	\$1,303
0005NXXX-11000UC	\$1,110
XXXXNEXX-11000UC	\$200
AS00NXXX-11000UC	\$834
Part Number	List Price*
9SW3Y-11000UC	\$885
9SW5Y-11000UC	\$2,130

Part Number	List Price*
9PXEbm240RT	\$1,529
SC240RT	\$799
EBMCBL240	\$167
CBLADAPT240	\$132

Part Number	List Price*
free download	free
66925 (Silver)	\$569
66926 (Gold)	\$2,765

Part Number	List Price*
free download	free

Part Number	List Price*
MBP11K208	\$950
ePBZ79	\$259
PW105BA2U420	\$579

Part Number	List Price*
BINTSYS	\$535

Part Number	List Price*
-------------	-------------

* List Prices are not a reflection of the actual product Street Price. Check with your Eaton reseller or partner to get actual pricing.



[Privacy Policy](#)
[Terms & Conditions](#)
[Copyright](#)

© 2014 Eaton
 All Rights Reserved