

HEAVY DUTY GROUND CONNECTORS FOR THREE PARALLEL COPPER CABLES




Suitable for direct burial in earth or concrete.

CATALOG NO.	UPC CODE	PIPE SIZE (INCHES)	CABLE RANGE	CARTON QTY.
UC-314	10860	1	2/0 - 4	6
UC-315	10861	1	250 - 2/0	6
UC-320	10862	1 ¼	2/0 - 4	6
UC-321	10863	1 ¼	250 - 2/0	6
UC-326	10864	1 ½	2/0 - 4	6
UC-327	10865	1 ½	250 - 2/0	6
UC-332	10866	2	2/0 - 4	6
UC-333	10867	2	250 - 2/0	3
UC-337	10868	2 ½	2/0 - 4	3
UC-338	10869	2 ½	250 - 2/0	3
UC-342	10870	3	2/0 - 4	3
UC-343	10871	3	250 - 2/0	3

COPPER 'C' TAPS



Copper "C"-Taps are range-taking compression connectors made from high conductivity copper alloy. They are used for making tap or parallel copper connections from 8 SOL to 4/0 STR conductors. C-Tap connectors provide consistent reliability with heavy wall construction that prevents relaxation of the joint after installation. Installation time is reduced because of its "C" shape. UL CU486A, 467 suitable for direct burial and CSA rated Electrical and Grounding.

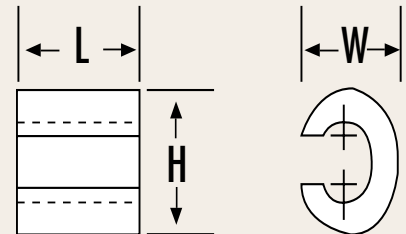

CATALOG NO.	BAR CODE	CONDUCTOR RANGE		APPROX DIMENSIONS (IN)			INSTALLATION TOOLING				
		RUN	TAP	L	H	W	TPU-12B DIE INDEX	NO. CRIMPS	DIELESS TOOL PRESS. SETTING	NO. CRIMPS	STRIP LENGTH
CTH-46	02214	6 sol - 4 str	6 sol - 6 str	5/8	3/4	7/16	BG	1	2	1	3/4
CTH-44	02215	6 sol - 4 str	4 sol - 4 str	5/8	13/16	7/16	BG	1	2	1	3/4
CTH-24	02216	2 sol - 2 str	8 sol - 4 str	3/4	1	5/8	C	1	4	1	7/8
CTH-22	02217	2 sol - 2 str	2 sol - 2 str	3/4	1	5/8	C	1	4	1	7/8
CTH-2020	02218	1/0 str - 2/0 str	1/0 str - 2/0 str	15/16	13/8	13/16	0	1	5	1	1 1/16
CTH-4020	02219	3/0 str - 4/0 str	1/0 str - 2/0 str	1 1/16	1 5/8	1	D3	1	5	1	1 3/16
CTH-4040	02220	3/0 str - 4/0 str	3/0 str - 4/0 str	1 1/16	1 1/16	1	D3	1	5	1	1 3/16