



PRODUCT CATALOG
WWW.FSCLIGHTING.COM

2012

INDUCTION LED FLUORESCENT WAREHOUSE ADVANCED LIGHTING CONTROLS
SENSORS COMMERCIAL PARKING GARAGE HIGH BAYS RETROFIT KITS

TABLE OF CONTENTS

HIGH BAYS / LOW BAY SERIES

INDUCTION HIGH BAY - HBi SERIES	40
INDUCTION HIGH BAY - HBi2 SERIES	41
INDUCTION HIGH BAY - HBi3 SERIES	41
INDUCTION HIGH BAY - HBi4 SERIES	42
ACRYLIC HI/LO BAY - 6400 SERIES	4
ECONOBAY - 6500 SERIES	4
VAPORTITE HIGH BAY - 7900 SERIES	5
CLASSIC HIGH BAY - 8800 SERIES	5
ARCHITECTURAL HIGH BAY - 8900 SERIES	6

LINEAR PENDANT SERIES

HALF MOON - 5800 SERIES	6
WHITE CONTEMPORARY - 6100 SERIES	7
INDIRECT BASKET - 6200 SERIES	7
ARCHITECTURAL INDIRECT THIN LINE - 6900 SERIES	8

RECESSED SERIES

RDI SIDE BASKET TROFFER - 5700 SERIES	8
RDI CENTER BASKET TROFFER - 5900 SERIES	9
TROFFER - 7400 SERIES	9
RDI CENTER BASKET WITH BAFFLE - 9500 SERIES	10

LINEAR SURFACE MOUNT

SOLID OAK SURFACE MOUNT - 1100 SERIES	10
SOLID OAK WITH DROPPED DIFFUSER - 1300 SERIES	11
DECORATIVE SQUARE EDGED CLOUD - 5000 SERIES	11
SQUARE EDGED CLOUD - 5100 SERIES	12
TRADITIONAL CLOUD - 5200 SERIES	12
STEP CLOUD - 5300 SERIES	13
STEEL SIDED SURFACE MOUNT - 5500 SERIES	13
STEEL WRAPAROUND - 5600 SERIES	14
RADIAL WRAPAROUND - 6000 SERIES	14
DIRECT INDIRECT LINEAR BASKET - 6300 SERIES	15
DECORATIVE THIN PROFILE WRAPAROUND - 25700 SERIES	15

CEILING MOUNT

DECORATIVE LOW PROFILE SAUCER - 2000 SERIES	16
SOLID OAK DECORATIVE SURFACE MOUNT - 6700 SERIES	16
DECORATIVE SQUARE PUFF - 6800 SERIES	17
ENCLOSED MUSHROOM - 7100 SERIES	17
ENCLOSED DRUM - 7200 SERIES	18
DECORATIVE NICKEL TRIM SURFACE MOUNT - 7300 SERIES	18

STRIPS

ACRYLIC INDUSTRIAL STRIP - 6600 SERIES	19
MINI STRIP T8 OR T5 - 8100 SERIES	19
NARROW STRIP T8 - 8200 SERIES	20
T8 SIDE MOUNT STRIP 1 LAMP - 8300 SERIES	20
T8 SIDE MOUNT STRIP 2 LAMP - 8400 SERIES	21
TWO LAMP STRIP T8 - 8500 SERIES	21
INDUSTRIAL STRIP WITH REFLECTOR - 8600 SERIES	22
COMPACT STRIP T8 OR T5 - 28100 SERIES	22
T5 MINI SIDE MOUNT STRIP 1 LAMP - 28300 SERIES	23
T5 MINI SIDE MOUNT STRIP 2 LAMP - 28400 SERIES	23
STAGGERED T5 OR T8 COMPACT - 28700 SERIES	24

UNDER CABINET SERIES

THINCAB - 3000 SERIES	24
CLASSICAB - 3100 SERIES	25
MINICAB - 3500 SERIES	25
MINI CLASSICAB - 23100 SERIES	26

WALL MOUNT

TRADITIONAL ONE LAMP VANITY - 4100 SERIES	26
TRADITIONAL TWO LAMP VANITY - 4200 SERIES	27
BOX VANITY - 4300 SERIES	27
ARCHITECTURAL VANITY - 4400 SERIES	28
PUFF VANITY - 4500 SERIES	28

TUBE VANITY - 4600 SERIES	29
ROUNDED SCONCE - 4700 SERIES	29
COMPACT WALL PACK - 9200 SERIES	30
EXTERIOR WALL LANTERN - 9300 SERIES	30
BULKHEADS - 9400 / 9600 SERIES	31
DECORATIVE TRIANGULAR SCONCE - 9800 SERIES	31
DECORATIVE FROSTED GLASS SCONCE - 9900 SERIES	32

LANTERNS

NAPLES LANTERN - NP SERIES	32
VENICE LANTERN - VN SERIES	33
EXTERIOR WALL LANTERN - 9300 SERIES	30

VAPORTITE VANDAL RESISTANT SERIES

VAPORTITE ENCLOSED STRIP - 7500 SERIES	33
COMPACT VAPORTITE ENCLOSED STRIP - 7600 SERIES	34
ROUND GASKETED LOCATION FIXTURE - 7700 SERIES	34
SQUARE GASKETED LOCATION FIXTURE - 7800 SERIES	34
VAPORTITE HIGH BAY - 7900 SERIES	5

INDUCTION

INDUCTION ARCHITECTURAL FLOOD - AFi SERIES	35
INDUCTION ARCHITECTURAL AREA LIGHT - ALi SERIES	35
INDUCTION AREA LIGHT - ALi2 SERIES	36
INDUCTION AREA LIGHT - ALi3 SERIES	36
INDUCTION BULB - iBULB SERIES	44
INDUCTION COBRA HEAD - iCOBRA SERIES	37
INDUCTION COBRA HEAD - iCOBRA2 SERIES	37
INDUCTION SMALL FLOOD - FLi SERIES	38
INDUCTION SQUARE GARAGE LIGHT - GLi SERIES	38
INDUCTION ROUND GARAGE LIGHT - GLi2 SERIES	39
INDUCTION DESIGNER GARAGE LIGHT - GLi4 SERIES	39
INDUCTION GAS STATION - GSi SERIES	40
INDUCTION HIGH BAY - HBi SERIES	40
INDUCTION HIGH BAY - HBi2 SERIES	41
INDUCTION HIGH BAY - HBi3 SERIES	41
INDUCTION HIGH BAY - HBi4 SERIES	42
INDUCTION LARGE CANOPY LIGHT - LCi SERIES	42
INDUCTION SHOEBOX - PLi SERIES	43
INDUCTION TUNNEL LIGHT - TLi SERIES	43
INDUCTION WALL PACK - WPi SERIES	44

WALL PACK

INDUCTION WALL PACK - WPi SERIES	44
COMPACT WALL PACK - 9200 SERIES	30

RETROFIT KITS

RETROFIT KITS	45-47
---------------	-------

ADDITIONAL INDUCTION HOUSINGS

ADDITIONAL INDUCTION HOUSINGS	48
-------------------------------	----

LAMPS AND BALLAST

LAMP AND BALLAST UPGRADES	49
---------------------------	----

OPTIONS

OPTIONS AND ACCESSORIES	50
-------------------------	----

TERMS & CONDITIONS

TERMS	51
CREDIT POLICIES	51
FREIGHT	51
CLAIMS	51
RETURNS	51

INDEX BY SERIES NUMBER

1100	10	5500	13	7900	5	GLi4	39
1300	11	5600	14	8100	19	GSi	40
2000	16	5700	8	8200	20	HBi	40
23100	26	5800	6	8300	20	HBi2	41
25700	15	5900	9	8400	21	HBi3	41
28100	22	6000	14	8500	21	HBi4	42
28300	23	6100	7	8600	22	iBULB	44
28400	23	6200	7	8800	5	iCOBRA	37
28700	24	6300	15	8900	6	iCOBRA2	37
3000	24	6400	4	9200	30	LCi	42
3100	25	6500	4	9300	30	NP	32
3500	25	6600	19	9400	31	PLi	43
4100	26	6700	16	9500	10	TLi	43
4200	27	6800	17	9600	31	VN	33
4300	27	6900	8	9800	31	WPi	44
4400	28	7100	17	9900	32	74 - RFK	45
4500	28	7200	18	AFi	35	85 - RFK	45
4600	29	7300	18	ALi	35	RDI BFL	46
4700	29	7400	9	ALi2	36	RDI BSK	47
5000	11	7500	33	ALi3	36	RDI RXL	47
5100	12	7600	34	FLi	38	RDI XL	46
5200	12	7700	34	GLi	38		
5300	13	7800	34	GLi2	39		



MISSION STATEMENT

Our mission is to be a leading manufacturer and innovator of energy efficient lighting products to; commercial, residential and utility markets. As a team, we will achieve the highest customer service standards in the industry. We will accomplish this by exceeding the expectations of our distributors and customers while using every resource to ensure a quality product. We will attract, hire and retain quality employees and representatives to make sure our customers know that they are number one. When our customers speak, FSC listens.

FSC LIGHTING


FSC has been a leader in the residential market for over 40 years. We also offer a full line of commercial, Induction and LED fixtures of superior quality and reliability. Most of our products are manufactured in the USA and qualify for the Buy America Act instituted by the Federal Government. Our exceptional products and outstanding customer service makes FSC the best choice for your lighting needs.

ACRYLIC HI/LO BAY • 6400 SERIES

A modern design that utilizes both acrylic and metal reflector technology for exceptional performance. This unique design is suitable for both high and low bay applications and gives off both direct and indirect light. Comes standard with Miro4™ reflector.



6448-454

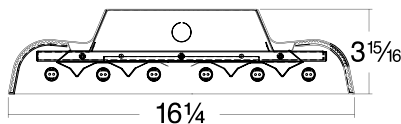

T5 / T8 Lamps		
Item #	Lamps	W-L-D
6448-432/1	4-F32T8	13 5/8" - 48" - 3 15/16"
6448-432/2	4-F32T8	13 5/8" - 48" - 3 15/16"
6448-454/1	4-F54T5HO	13 5/8" - 48" - 3 15/16"
6449-632/2	6-F32T8	16 1/4" - 48" - 3 15/16"
6449-632/3	6-F32T8	16 1/4" - 48" - 3 15/16"
6449-654/2	6-F54T5HO	16 1/4" - 48" - 3 15/16"

OPTIONS*



- 480 (480 volt)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- WL ( GE Lamps Installed)
- WLCG ( GE Covrguard Shatter Resistant Lamps)

ECONOBAY • 6500 SERIES

The Miro4™ or White reflector system of the EconoBay delivers a new level of performance and control for High and Low Bay applications. Uses either T5 or T8 lamps. Simple design provides excellent optical performance in an economical high bay package. T5 standard with Miro4™ reflector and T8 with white reflector.



6549-632/2-W



T5 / T8 Lamps		
Item #	Lamps	W-L-D
6548-232/1	2-F32T8	12 3/8" - 48" - 3 7/8"
6548-254/1	2-F54T5HO	12 3/8" - 48" - 3 7/8"
6548-332/1	3-F32T8	12 3/8" - 48" - 3 7/8"
6548-354/1	3-F54T5HO	12 3/8" - 48" - 3 7/8"
6548-432/1	4-F32T8	12 3/8" - 48" - 3 7/8"
6548-454/1	4-F54T5HO	12 3/8" - 48" - 3 7/8"
6549-632/2	6-F32T8	14 1/4" - 48" - 3 7/8"
6549-654/2	6-F54T5HO	14 1/4" - 48" - 3 7/8"

OPTIONS*

- 480 (480 volt)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- HK 72" (Hanging Kit w/ Paddle)
- LSB ( GE Load Shedding Ballast)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- WL ( GE Lamps Installed)
- WLCG ( GE Covrguard Shatter Resistant Lamps)
- OS (Occupancy Sensor)
- OSD (Occupancy Sensor with Daylight)

VAPORTITE HIGH BAY • 7900 SERIES

Suitable for wet location and IP65 rated, this fixture is appropriate for those applications that may require wash ability or hose down. Stainless steel latches provide durability and chemical resistance. Multiple latches can be made tamper resistant. Lens is made of impact resistant acrylic for maximum light transmission, longevity, temperature extremes and impact resistance. This fixture comes standard with V hooks.


T5 / T8 Lamps		
Item #	Lamps	W-L-D
7948-432/1	4-F32T8	14 1/8" - 52 1/4" - 6"
7948-454/1	4-F54T5H0	14 1/8" - 52 1/4" - 6"
7949-632/2	6-F32T8	14 1/8" - 52 1/4" - 6"
7949-654/2	6-F54T5H0	14 1/8" - 52 1/4" - 6"



7948-454

OPTIONS*

- 480 (480 volt)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- MB (Mounting Brackets)
- OS (Occupancy Sensor)
- OSD (Occupancy Sensor w/ Daylight)
- PC (Polycarbonate Lens)
- SPR (Specular Reflector)
- WL ( GE Lamps Installed)

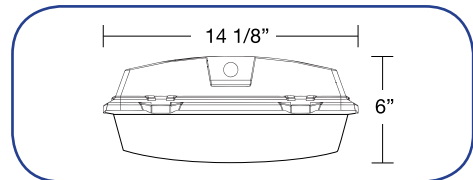

CLASSIC HIGH BAY • 8800 SERIES

An energy efficient fixture for cost effective lighting of medium and hi bay warehouses, manufacturing plants, sports facilities and retail spaces. Post painted white powder coat steel housing for extreme durability in harsh environments. T5 standard with Miro4™ reflector and T8 with white reflector.

T8 Lamps		
Item #	Lamps	W-L-D
8848-332/1	3-F32T8	12 5/8" - 48" - 3 7/8"
8848-432/1	4-F32T8	12 5/8" - 48" - 3 7/8"
8849-632/2	6-F32T8	19 7/8" - 48" - 3 7/8"
8849-832/2	8-F32T8	19 7/8" - 48" - 3 7/8"



T5 Lamps		
Item #	Lamps	W-L-D
8848-354/1	3-F54T5H0	12 5/8" - 48" - 3 7/8"
8848-454/1	4-F54T5H0	12 5/8" - 48" - 3 7/8"
8849-654/2	6-F54T5H0	19 7/8" - 48" - 3 7/8"
8849-854/2	8-F54T5H0	19 7/8" - 48" - 3 7/8"



8848-454-M

OPTIONS*

- 480 (480 volt)
- DFL (Doorframe and Lens)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- HK 72" (Hanging Kit w/ Paddle)
- LSB ( GE Load Shedding Ballast)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- WG (Wireguard)
- WL ( GE Lamps Installed)
- WLCG ( GE Covrguard Shatter Resistant Lamps)
- OS (Occupancy Sensor)
- OSD (Occupancy Sensor with Daylight)

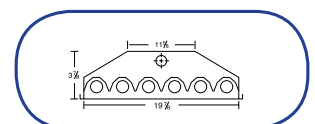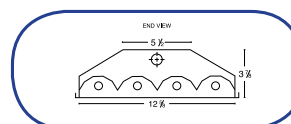


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

ARCHITECTURAL HIGH BAY • 8900 SERIES

An energy effective architectural Hibay with reflector and decorative louver provides maximum light output. Ideal for a variety of applications including office buildings and classrooms



8948-332/1

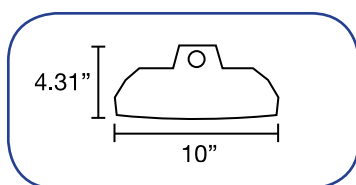

T5 / T8 Lamps		
Item #	Lamps	W-L-D
8948-332/1	3-F32T8	10" - 48" - 4 1/3"
8948-354/1	3-F54T5HO	10" - 48" - 4 1/3"
8948-432/1	4-F32T8	10" - 48" - 4 1/3"
8948-454/1	4-F54T5HO	10" - 48" - 4 1/3"

OPTIONS*


- 480 (480 volt)
- DC (Dual Cable)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- WL (GE Lamps Installed)
- WLCG (GE Covrguard Shatter Resistant Lamps)

HALF MOON • 5800 SERIES

Modern direct/indirect fixture in a bright white finish for glare free lighting in offices, conference rooms, reception areas and classrooms. Dual cable and joiner available.



5848-232-DC

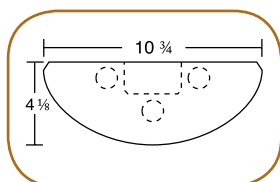

T8 Lamps		
Item #	Lamps	W-L-D
5848-132	1-F32T8	10 3/4" - 48" - 4 1/8"
5848-232	2-F32T8	10 3/4" - 48" - 4 1/8"
5848-332/1	3-F32T8	10 3/4" - 48" - 4 1/8"
5848-332/2	3-F32T8	10 3/4" - 48" - 4 1/8"
5896-132T/1	2-F32T8	10 3/4" - 96" - 4 1/8"
5896-232T/1	4-F32T8	10 3/4" - 96" - 4 1/8"
5896-232T/2	4-F32T8	10 3/4" - 96" - 4 1/8"
5896-332T/2	6-F32T8	10 3/4" - 96" - 4 1/8"
5896-332T/4	6-F32T8	10 3/4" - 96" - 4 1/8"

T5 Lamps		
Item #	Lamps	W-L-D
5848-128	1-F28T5	10 3/4" - 48" - 4 1/8"
5848-228	2-F28T5	10 3/4" - 48" - 4 1/8"
5848-328	3-F28T5	10 3/4" - 48" - 4 1/8"
5848-154	1-F54T5HO	10 3/4" - 48" - 4 1/8"
5848-254	2-F54T5HO	10 3/4" - 48" - 4 1/8"
5848-354/1	3-F54T5HO	10 3/4" - 48" - 4 1/8"
5896-128T/1	2-F28T8	10 3/4" - 96" - 4 1/8"
5896-228T/2	4-F28T5	10 3/4" - 96" - 4 1/8"
5896-328T/3	6-F28T5	10 3/4" - 96" - 4 1/8"
5896-154T/1	2-F54T5HO	10 3/4" - 96" - 4 1/8"
5896-254T/1	4-F54T5HO	10 3/4" - 96" - 4 1/8"
5896-354T/2	6-54T5HO	10 3/4" - 96" - 4 1/8"

OPTIONS*

- DC (Dual Cable)
- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- JNR (Joiner)
- UNV (120/277 volt)
- WL (GE Lamps Installed)

WHITE CONTEMPORARY LINEAR • 6100 SERIES


Modular steel fixture finished in white. Perfect for open plan offices and conference rooms where task surfaces are the focus.

T8 Lamps		
Item #	Lamps	W-L-D
6148-132	1-F32T8	12 1/4" - 48" - 5 1/4"
6148-232	2-F32T8	12 1/4" - 48" - 5 1/4"
6196-132T/1	2-F32T8	12 1/4" - 96" - 5 1/4"
6196-232T/1	4-F32T8	12 1/4" - 96" - 5 1/4"

T5 Lamps		
Item #	Lamps	W-L-D
6148-128	1-F28T5	12 1/4" - 48" - 5 1/4"
6148-228	2-F28T5	12 1/4" - 48" - 5 1/4"
6148-154	1-F54T5HO	12 1/4" - 48" - 5 1/4"
6148-254	2-F54T5HO	12 1/4" - 48" - 5 1/4"
6196-128T/1	2-F28T5	12 1/4" - 96" - 5 1/4"
6196-154T/1	2-F54T5HO	12 1/4" - 96" - 5 1/4"
6196-228T/1	4-F28T5	12 1/4" - 96" - 5 1/4"
6196-254T/1	4-F54T5HO	12 1/4" - 96" - 5 1/4"



6148-232-DC

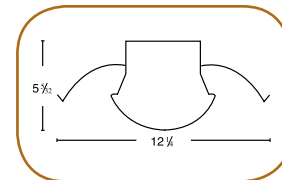

OPTIONS*

- DC (Dual Cable)
- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- FFL (Fine/Fluted Lens)
- JNR (Joiner)
- SWL (Smooth White Lens)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

INDIRECT BASKET • 6200 SERIES


Contemporary fixture finished in bright white to complement almost any office, lobby or public area. Dual cable mounting available.

T8 Lamps		
Item #	Lamps	W-L-D
6248-132	1-F32T8	14 1/2" - 48" - 4 3/8"
6248-232	2-F32T8	14 1/2" - 48" - 4 3/8"
6296-132T/1	2-F32T8	14 1/2" - 96" - 4 3/8"
6296-232T/1	4-F32T8	14 1/2" - 96" - 4 3/8"

T5 Lamps		
Item #	Lamps	W-L-D
6248-128	1-F28T5	14 1/2" - 48" - 4 3/8"
6248-228	2-F28T5	14 1/2" - 48" - 4 3/8"
6248-154	1-F54T5HO	14 1/2" - 48" - 4 3/8"
6248-254	2-F54T5HO	14 1/2" - 48" - 4 3/8"
6296-128T/1	2-F28T5	14 1/2" - 96" - 4 3/8"
6296-228T/1	4-F28T5	14 1/2" - 96" - 4 3/8"
6296-154T/1	2-F54T5HO	14 1/2" - 96" - 4 3/8"
6296-254T/1	4-F54T5HO	14 1/2" - 96" - 4 3/8"



6248-232-DC

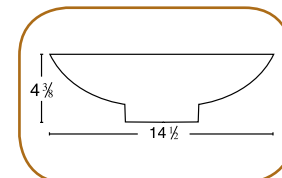

OPTIONS*

- DC (Dual Cable)
- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- JNR (Joiner)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

ARCHITECTURAL INDIRECT THIN LINE • 6900 SERIES


This Architectural fixture provides ambient lighting for virtually glare free and shadow free illumination. Comes standard in perforated white powder coat housing, also available with an overlay lens, semi-specular or white louver. Other finish options available. A companion to our Architectural Vanity 4400 series.



6948-232
Finish codes, see pg. 50



6948-232-OL

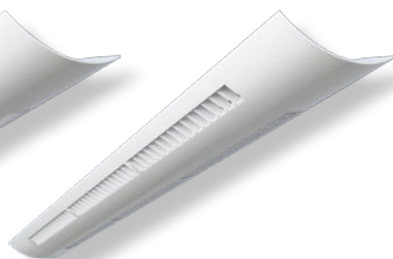


6948-232-LV-W

T8 Lamps		
Item #	Lamps	W-L-D
6948-232	2-F32T8	7 3/4" - 56 1/2" - 2"
6996-232T/1	4-F32T8	7 3/4" - 104 1/2" - 2"

T5 Lamps		
Item #	Lamps	W-L-D
6948-228	2-F28T5	7 3/4" - 56 1/2" - 2"
6948-328	3-F28T5	7 3/4" - 56 1/2" - 2"
6948-254	2-F54T5HO	7 3/4" - 56 1/2" - 2"
6948-354	3-F54T5HO	7 3/4" - 56 1/2" - 2"
6996-228T/2	4-F54T5HO	7 3/4" - 104 1/2" - 2"
6996-328T/2	6-F54T5HO	7 3/4" - 104 1/2" - 2"
6996-254T/1	4-F54T5HO	7 3/4" - 104 1/2" - 2"
6996-354T/2	6-F54T5HO	7 3/4" - 104 1/2" - 2"

OPTIONS*


- DC (Dual Cable)
- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 800 (800 Lumen Emergency Ballast)
- LV-SS (Semi-specular Louver)
- LV-W (White Louver)
- OL (Overlay Lens)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)




END VIEW

RDI SIDE BASKET TROFFER • 5700 SERIES

An attractive and contemporary recessed fixture that provides soft, balanced illumination for a comfortable and appealing light environment. Side mounting of lamps allows for a unique appearance with no visible glare.

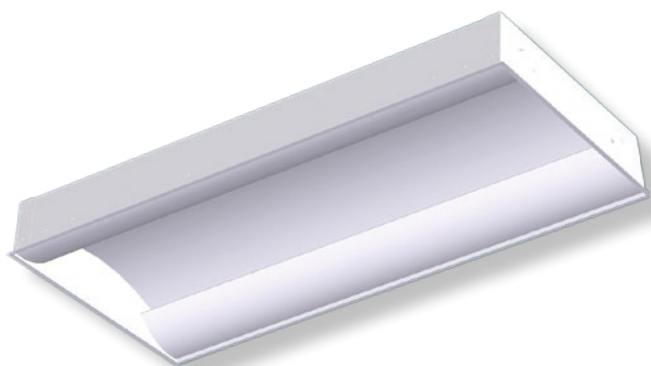

5724-428/2

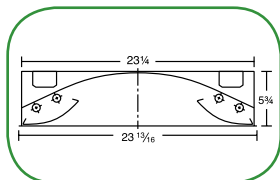

Item #	Lamps	W-L-D
5722-240	2-F40BX	23 13/16" - 24" - 5 1/2"
5722-424/2	4-F24T5HO	23 13/16" - 24" - 5 1/2"
5724-428/2	4-F28T5	23 13/16" - 48" - 5 1/2"
5724-454/1	4-F54T5HO	23 13/16" - 48" - 5 1/2"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

RDI CENTER BASKET TROFFER • 5900 SERIES


An attractive and contemporary recessed fixture that provides soft, balanced illumination for a comfortable and appealing light environment.

T8 Lamps		
Item #	Lamps	W-L-D
5922-140	1-F40BX	23 13/16" - 24" - 5 1/2"
5922-240	2-F40BX	23 13/16" - 24" - 5 1/2"
5922-340	3-F40BX	23 13/16" - 24" - 5 1/2"
5922-117	1-F17T8	23 13/16" - 24" - 5 1/2"
5922-217	2-F17T8	23 13/16" - 24" - 5 1/2"
5922-317	3-F17T8	23 13/16" - 24" - 5 1/2"
5924-132	1-F32T8	23 13/16" - 48" - 5 1/2"
5924-232	2-F32T8	23 13/16" - 48" - 5 1/2"
5924-332/1	3-F32T8	23 13/16" - 48" - 5 1/2"
5924-332/2	3-F32T8	23 13/16" - 48" - 5 1/2"

T5 Lamps		
Item #	Lamps	W-L-D
5922-114	1-F14T5	23 3/4" - 24" - 5 1/2"
5922-214	2-F14T5	23 3/4" - 24" - 5 1/2"
5922-314/2	3-F14T5	23 3/4" - 24" - 5 1/2"
5922-124	1-F24T5HO	23 3/4" - 24" - 5 1/2"
5922-224	2-F24T5HO	23 3/4" - 24" - 5 1/2"
5922-324/1	3-F24T5HO	23 3/4" - 24" - 5 1/2"
5924-128	1-F28T5	23 3/4" - 48" - 5 1/2"
5924-228	2-F28T5	23 3/4" - 48" - 5 1/2"
5924-328/2	3-F28T5	23 3/4" - 48" - 5 1/2"
5924-154	1-F54T5HO	23 3/4" - 48" - 5 1/2"
5924-254	2-F54T5HO	23 3/4" - 48" - 5 1/2"
5924-354/1	3-F54T5HO	23 3/4" - 48" - 5 1/2"



5922-240



OPTIONS*

- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- UNV (120/277 volt)
- WL (GE Lamps Installed)

TROFFER • 7400 SERIES




Framed troffer with clear prismatic acrylic diffuser. Hinged and flush mounted metal door frame for quick and easy maintenance. Available as either a suspended unit for T-bar applications or flange type fixture for drywall applications. Several Parabolic louver options are also available.

T8 Lamps		
Item #	Lamps	W-L-D
7414-232	2-F32T8	12" - 48" - 6"
7422-217	2-F17T8	24" - 24" - 6"
7422-317	3-F17T8	24" - 24" - 6"
7422-417	4-F17T8	24" - 24" - 6"
7422-232-U6	2-F32T8-U6	24" - 24" - 6"
7424-332/1	3-F32T8	24" - 48" - 4"
7424-332/2	3-F32T8	24" - 48" - 4"
7424-432/1	4-F32T8	24" - 48" - 4"
7424-432/2	4-F32T8	24" - 48" - 4"
7414-232-FL	2-F32T8	12" - 48 1/4" - 5 1/8"
7422-232-U6-FL	2-F32T8-U6	24" - 24 1/4" - 5 1/8"
7424-432/1-FL	4-F32T8	24" - 48 1/4" - 5 1/8"
7424-432/2-FL	4-F32T8	24" - 48 1/4" - 5 1/8"

T5 Lamps		
Item #	Lamps	W-L-D
7414-228	2-F28T5	12" - 48" - 6"
7414-254	2-F24T5HO	12" - 48" - 6"
7422-214	2-F14T5	24" - 24" - 6"
7422-314	3-F14T5	24" - 24" - 6"
7422-414/1	4-F14T5	24" - 24" - 6"
7422-224	2-F24T5HO	24" - 24" - 6"
7422-324	3-F24T5HO	24" - 24" - 6"
7422-424/1	4-F24T5HO	24" - 24" - 6"
7424-428/2	4-F28T5	24" - 48" - 4"
7424-454/1	4-F54T5HO	24" - 48" - 4"
7414-228-FL	2-F28T5	12" - 48 1/4" - 5 1/8"
7414-254-FL	2-F24T5HO	12" - 48 1/4" - 5 1/8"
7422-414/1-FL	4-F14T5	24" - 24 1/4" - 5 1/8"
7422-424/1-FL	4-F24T5HO	24" - 24 1/4" - 5 1/8"
7422-428/2-FL	4-F28T5	24" - 48 1/4" - 5 1/8"
7424-454/1-FL	4-F54T5HO	24" - 48 1/4" - 5 1/8"



7424-432/1-FL-P2



OPTIONS*

- DIM (Dimming Ballast)
- DHS (Daylight Harvesting)
- Deep Cell configurations available, contact factory
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- P1 (1/2 Parabolic Louver)
- P2 (1 1/2 Parabolic Louver)
- RFLR (Energy Saving Reflector)
- UNV (120/277 volt)
- WL (GE Lamps Installed)


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

RDI CENTER BASKET WITH BAFFLE • 9500 SERIES

Recessed fixture with radius and perforated metal diffuser for indirect light, as well as louvers along the center for ample direct light.



9524-332/1

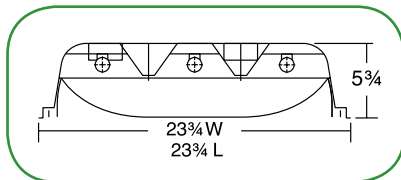

T8 Lamps		
Item #	Lamps	W-L-D
9522-117	1-F17T8	23 3/4" - 24" - 5 3/4"
9522-217	2-F17T8	23 3/4" - 24" - 5 3/4"
9522-317/1	3-F17T8	23 3/4" - 24" - 5 3/4"
9524-132	1-F32T8	23 3/4" - 48" - 5 3/4"
9524-232	2-F32T8	23 3/4" - 48" - 5 3/4"
9524-332/1	3-F32T8	23 3/4" - 48" - 5 3/4"

T5 Lamps		
Item #	Lamps	W-L-D
9522-114	1-F14T5	23 3/4" - 24" - 5 3/4"
9522-214	2-F14T5	23 3/4" - 24" - 5 3/4"
9522-314/2	3-F14T5	23 3/4" - 24" - 5 3/4"
9522-124	1-F24T5H0	23 3/4" - 24" - 5 3/4"
9522-224	2-F24T5H0	23 3/4" - 24" - 5 3/4"
9522-324/2	3-F24T5H0	23 3/4" - 24" - 5 3/4"
9524-128	1-F28T5	23 3/4" - 48" - 5 3/4"
9524-228	2-F28T5	23 3/4" - 48" - 5 3/4"
9524-328/2	3-F28T5	23 3/4" - 48" - 5 3/4"
9524-154	1-F54T5H0	23 3/4" - 48" - 5 3/4"
9524-254	2-F54T5H0	23 3/4" - 48" - 5 3/4"
9524-354/1	3-F54T5H0	23 3/4" - 48" - 5 3/4"

OPTIONS*

- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- UNV (120/277 volt)
- WL (GE Lamps Installed)


SOLID OAK SURFACE MOUNT • 1100 SERIES

Hand crafted solid oak frame in your choice of finishes. Smooth white acrylic diffuser for soft, uniform illumination with crown molding and/or lattice options.



1122-232-40

Finish codes, see pg. 50

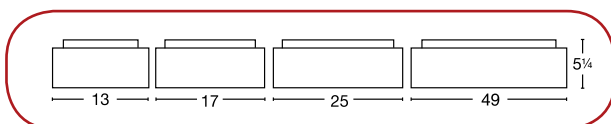

T8 Lamps		
Item #	Lamps	W-L-D
1112-217	2-F17T8	13" - 25" - 5 1/4"
1114-232	2-F32T8	13" - 49" - 5 1/4"
1136-225	2-F25T8	13" - 38" - 5 1/4"
1117-432/1	4-F32T8	17" - 49" - 5 1/4"
1117-432/2	4-F32T8	17" - 49" - 5 1/4"
1118-232T/1	4-F32T8	13" - 96" - 5 1/4"
1118-232T/2	4-F32T8	13" - 96" - 5 1/4"
1122-232	2-F32T8-U6	25" - 25" - 5 1/4"
1124-432T/1	4-F32T8	25" - 49" - 5 1/4"
1124-432T/2	4-F32T8	25" - 49" - 5 1/4"
1172-225T/1	4-F25T8	13" - 74" - 5 1/4"
1172-225T/2	4-F25T8	13" - 74" - 5 1/4"
1173-425T/2	8-F25T8	17" - 74" - 5 1/4"
1173-425T/4	8-F25T8	17" - 74" - 5 1/4"
1128-432T/2	8-F32T8	17" - 96" - 5 1/4"

T8 Lamps		
Item #	Lamps	W-L-D
1128-432T/4	8-F32T8	17" - 96" - 5 1/4"
1144-632/2	6-F32T8	49" - 49" - 5 1/4"
1144-632/3	6-F32T8	49" - 49" - 5 1/4"
1145-832/2	8-F32T8	49" - 49" - 5 1/4"
1145-832/3	8-F32T8	49" - 49" - 5 1/4"

OPTIONS*

- CM (Crown Molding)
- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- LAT (Lattice)
- PA (Prismatic Acrylic Diffuser)
- UNV (120/277 volt)
- WL (GE Lamps Installed)

SOLID OAK WITH DROPPED DIFFUSER • 1300 SERIES

Hand crafted solid oak frame in your choice of finishes. Smooth white acrylic dropped diffuser for soft, uniform illumination. Crown molding available as an option.

T8 Lamps		
Item #	Lamps	W-L-D
1314-232	2-F32T8	13" - 49" - 6 1/4"
1317-432/1	4-F32T8	17" - 49" - 6 1/4"
1317-432/2	4-F32T8	17" - 49" - 6 1/4"
1322-232-U6	2-F32T8U6	25" - 25" - 6 1/4"
1324-432/1	4-F32T8	25" - 49" - 6 1/4"
1324-432/2	4-F32T8	25" - 49" - 6 1/4"




1314-232-50

Finish codes, see pg. 50

OPTIONS*

- CM (Crown Molding)
- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

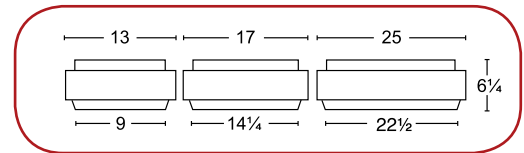

DECORATIVE SQUARE EDGED CLOUD • 5000 SERIES

Contemporary design with nickel finish for surface mounted applications. Also available in other finish options.

T8 Lamps		
Item #	Lamps	W-L-D
5012-217	2-F17T8	14" - 26" - 5"
5014-232	2-F32T8	14" - 50" - 5"
5022-232	2-F32T8U-6	26" - 26" - 5"
5024-432/1	4-F32T8	26" - 50" - 5"
5024-432/2	4-F32T8	26" - 50" - 5"

T5 Lamps		
Item #	Lamps	W-L-D
5012-214	2-F14T5	14" - 26" - 5"
5012-224	2-F24T5H0	14" - 26" - 5"
5014-228	2-F28T5	14" - 50" - 5"
5014-254	2-F54T5H0	14" - 50" - 5"
5022-414/2	4-F14T5	26" - 26" - 5"
5022-424/2	4-F24T5H0	26" - 26" - 5"
5024-428/2	4-F28T5	26" - 50" - 5"
5024-454/1	4-F54T5H0	26" - 50" - 5"




5024-432/1-NKL

Finish codes, see pg. 50

OPTIONS*

- BLK (Black Housing)
- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

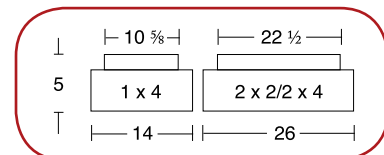


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

SQUARE EDGED CLOUD • 5100 SERIES

Contemporary design with squared edges for surface mounted applications.



5124-432/1

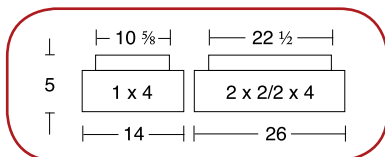

T8 Lamps		
Item #	Lamps	W-L-D
5112-217	2-F17T8	14" - 26" - 5"
5114-232	2-F32T8	14" - 50" - 5"
5122-232	2-F32T8U-6	26" - 26" - 5"
5124-432/1	4-F32T8	26" - 50" - 5"
5124-432/2	4-F32T8	26" - 50" - 5"

T5 Lamps		
Item #	Lamps	W-L-D
5112-214	2-F14T5	14" - 26" - 5"
5112-224	2-F24T5H0	14" - 26" - 5"
5114-228	2-F28T5	14" - 50" - 5"
5114-254	2-F54T5H0	14" - 50" - 5"
5122-414/2	4-F14T5	26" - 26" - 5"
5122-424/2	4-F24T5H0	26" - 26" - 5"
5124-428/2	4-F28T5	26" - 50" - 5"
5124-454/1	4-F54T5H0	26" - 50" - 5"

OPTIONS*


- BLK (Black Housing)
- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

TRADITIONAL CLOUD • 5200 SERIES

White acrylic diffuser with rounded edges which create soft uniform illumination.



5224-432/1

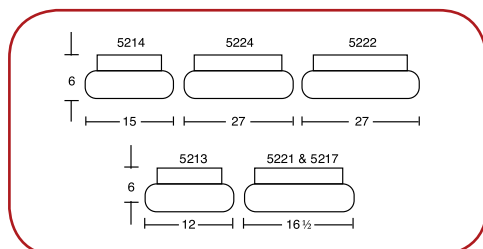

T8 Lamps		
Item #	Lamps	W-L-D
5213-232	2-F32T8	12" - 51" - 6"
5214-232	2-F32T8	15" - 51 1/4" - 6"
5217-432/1	4-F32T8	16 1/2" - 51" - 6"
5217-432/2	4-F32T8	16 1/2" - 51" - 6"
5221-417/1	4-F17T8	16 1/2" - 27 1/4" - 6"
5221-417/2	4-F17T8	16 1/2" - 27 1/4" - 6"
5222-232	2-F32T8U-6	27" - 27 1/4" - 6"
5224-432/1	4-F32T8	27" - 51 1/4" - 6"
5224-432/2	4-F32T8	27" - 51 1/4" - 6"

T5 Lamps		
Item #	Lamps	W-L-D
5214-228	2-F28T5	15" - 51 1/4" - 6"
5214-254	2-F54T5H0	15" - 51 1/4" - 6"
5222-414/2	4-F14T5	27" - 27 1/4" - 6"
5222-424/2	4-F24T5H0	27" - 27 1/4" - 6"
5224-428/2	4-F28T5	27" - 51 1/4" - 6"
5224-454/1	4-F54T5H0	27" - 51 1/4" - 6"

OPTIONS*

- BLK (Black Housing)
- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

STEP CLOUD • 5300 SERIES

A modern cloud light with a stepped white acrylic diffuser.


T8 Lamps		
Item #	Lamps	W-L-D
5313-232	2-F32T8	12" - 51" - 6"
5317-432/1	4-F32T8	16 1/2" - 51" - 6"
5317-432/2	4-F32T8	16 1/2" - 51" - 6"
5321-417/1	4-F17T8	16 1/2" - 27 1/4" - 6"
5321-417/2	4-F17T8	16 1/2" - 27 1/4" - 6"



5313-232

OPTIONS*

- BLK (Black Housing)
- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

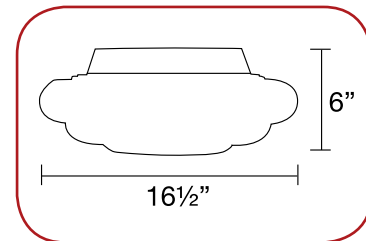

STEEL SIDED SURFACE MOUNT • 5500 SERIES

Made with solid steel sides and finished in baked white enamel with white acrylic diffuser and equipped with metal hinged door frame for quick and easy maintenance.

T8 Lamps		
Item #	Lamps	W-L-D
5512-217	2-F17T8	12 1/2" - 24" - 3 1/2"
5514-232	2-F32T8	12 1/2" - 48" - 3 1/2"
5522-232	2-F32T8U-6	24 7/16" - 24" - 3 1/2"
5524-432/1	4-F32T8	24 7/16" - 48" - 3 1/2"
5524-432/2	4-F32T8	24 7/16" - 48" - 3 1/2"
5544-632/2	6-F32T8	49 1/8" - 49 1/2" - 4"
5544-632/3	6-F32T8	49 1/8" - 49 1/2" - 4"
5545-832/2	8-F32T8	49 1/8" - 49 1/2" - 4"
5545-832/4	8-F32T8	49 1/8" - 49 1/2" - 4"


T5 Lamps		
Item #	Lamps	W-L-D
5512-214	2-F14T5	12 1/2" - 24" - 3 1/2"
5512-224	2-F24T5H0	12 1/2" - 24" - 3 1/2"
5514-228	2-F28T5	12 1/2" - 48" - 3 1/2"
5514-254	2-F54T5H0	12 1/2" - 48" - 3 1/2"
5522-414/2	4-F14T5	24 7/16" - 24" - 3 1/2"
5522-424/2	4-F24T5H0	24 7/16" - 24" - 3 1/2"
5524-428/2	4-F28T5	24 7/16" - 48" - 3 1/2"
5524-454/1	4-F54T5H0	24 7/16" - 48" - 3 1/2"
5544-628/3	6-F28T5	49 1/8" - 49 1/2" - 4"
5544-654/2	6-F54T5H0	49 1/8" - 49 1/2" - 4"
5545-828/4	8-F28T5	49 1/8" - 49 1/2" - 4"
5545-854/2	8-F54T5H0	49 1/8" - 49 1/2" - 4"



5524-432/1

OPTIONS*

- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- DWA (Drop White Acrylic Diffuser)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- P1 (1/2 Parabolic Louver)
- P2 (1 1/2 Parabolic Louver)
- PA (Prismatic Acrylic)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

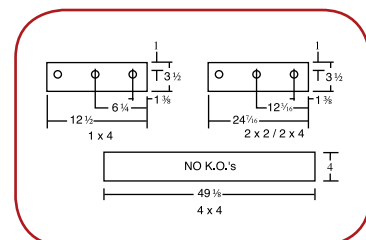

*Additional Charge
Dimensions subject to change without notification. Contact factory for verification


STEEL WRAPAROUND • 5600 SERIES

Baked white enamel steel wraparound with extruded prismatic acrylic diffuser. Also available in a variety of wood finish ends for those decorative applications.



5647-232

Wood finish codes, see pg. 50

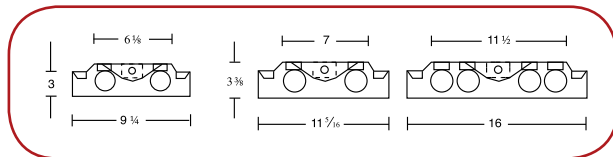

T8 Lamps		
Item #	Lamps	W-L-D
5623-217	2-F17T8	9 1/4" - 24" - 3 3/8"
5624-217	2-F17T8	11 5/16" - 24" - 3 3/8"
5625-417/1	4-F17T8	16" - 24" - 3 3/8"
5625-417/2	4-F17T8	16" - 24" - 3 3/8"
5636-225	2-F25T8	11 5/16" - 36" - 3 3/8"
5637-425/1	4-F25T8	16" - 36" - 3 3/8"
5637-425/2	4-F25T8	16" - 36" - 3 3/8"
5647-232	2-F32T8	9 1/4" - 48" - 3 3/8"
5648-232	2-F32T8	11 5/16" - 48" - 3 3/8"
5649-432/1	4-F32T8	16" - 48" - 3 3/8"
5649-432/2	4-F32T8	16" - 48" - 3 3/8"
5672-225T/1	4-F25T8	11 5/16" - 72" - 3 3/8"
5672-225T/2	4-F25T8	11 5/16" - 72" - 3 3/8"
5673-425T/2	8-F25T8	16" - 72" - 3 3/8"
5673-425T/4	8-F25T8	16" - 72" - 3 3/8"
5696-232T/1	4-F32T8	11 5/16" - 96" - 3 3/8"
5696-232T/2	4-F32T8	11 5/16" - 96" - 3 3/8"
5697-432T/2	8-F32T8	16" - 96" - 3 3/8"
5697-432T/4	8-F32T8	16" - 96" - 3 3/8"

T5 Lamps		
Item #	Lamps	W-L-D
5624-214	2-F14T5	11 5/16" - 24" - 3 3/8"
5624-224	2-F24T5HO	11 5/16" - 24" - 3 3/8"
5625-414/2	4-F14T5	16" - 24" - 3 3/8"
5625-424/2	4-F24T5HO	16" - 24" - 3 3/8"
5636-221	2-F21T5	11 5/16" - 36" - 3 3/8"
5636-239	2-F39T5HO	11 5/16" - 36" - 3 3/8"
5637-421/2	4-F21T5	16" - 36" - 3 3/8"
5637-439/2	4-F39T5HO	16" - 36" - 3 3/8"
5648-228	2-F28T5	11 5/16" - 48" - 3 3/8"
5648-254	2-F54T5HO	11 5/16" - 48" - 3 3/8"
5649-428/2	4-F28T5	16" - 48" - 3 3/8"
5649-454/1	4-F54T5HO	16" - 48" - 3 3/8"

OPTIONS*


- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- UNV (120/277 volt)
- WE (Wood Ends)
- WL ( GE Lamps Installed)

RADIAL WRAPAROUND • 6000 SERIES

The 6000 Series is a baked white enamel steel radial wraparound with an acrylic diffuser. Ideal for stairwells and multi-deck parking.



6048-232

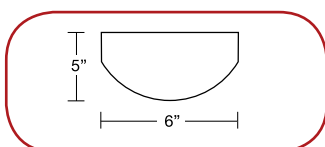

Item #	Lamps	W-L-D
6048-132	1-F32T8	6" - 48" - 5"
6048-232	2-F32T8	6" - 48" - 5"
6048-128	1-F28T5	6" - 48" - 5"
6048-228	2-F28T5	6" - 48" - 5"
6048-154	1-F54T5HO	6" - 48" - 5"
6048-254	1-F54T5HO	6" - 48" - 5"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- OS (Occupancy Sensor)
- OSD (Occupancy Sensor with Daylight)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

DIRECT INDIRECT LINEAR BASKET • 6300 SERIES


Contemporary surface mount steel fixture finished in bright white to blend in with almost any office, lobby or public area. Sloping reflector helps create a uniform light spread.

T8 Lamps		
Item #	Lamps	W-L-D
6348-132	1-F32T8	14 1/2" - 48" - 5 1/2"
6348-232	2-F32T8	14 1/2" - 48" - 5 1/2"

T5 Lamps		
Item #	Lamps	W-L-D
6348-128	1-F28T5	14 1/2" - 48" - 5 1/2"
6348-228	2-F28T5	14 1/2" - 48" - 5 1/2"
6348-154	1-F54T5HO	14 1/2" - 48" - 5 1/2"
6348-254	2-F54T5HO	14 1/2" - 48" - 5 1/2"



6348-228

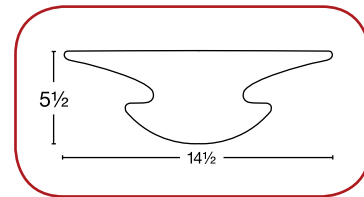

OPTIONS*

- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

DECORATIVE THIN PROFILE WRAPAROUND • 25700 SERIES


Low profile wraparound with extruded white acrylic diffuser. Comes standard with white ends. A variety of colored end options are available for an added decorative touch.

T8 Lamps		
Item #	Lamps	W-L-D
25712-217	2-F17T8	11 9/16" - 29 7/8" - 2 3/4"
25713-232	2-F32T8	11 9/16" - 53 7/8" - 2 3/4"
25717-432/1	4-F32T8	17" - 53 7/8" - 3 5/16"
25717-432/2	4-F32T8	17" - 53 7/8" - 3 5/16"
25721-417/1	4-F17T8	17" - 29 7/8" - 3 5/16"
25721-417/2	4-F17T8	17" - 29 7/8" - 3 5/16"



25713-232-10

Finish codes, see pg. 50

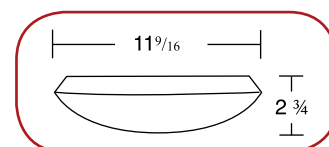

OPTIONS*

- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

DECORATIVE LOW PROFILE SAUCER • 2000 SERIES

Decorative saucer fixture with white acrylic lens for soft, glare free illumination. Suitable for either ceiling or wall mount.



20213Q-EL-WHT-20

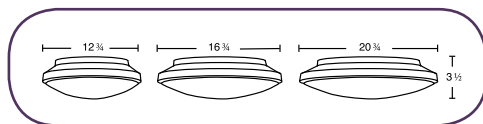

Item #	Lamps	W-L-D
2013Q-EL	1-F13DX4P	12 3/4" - 12 3/4" - 3 1/2"
2018Q-EL	1-F18DBX4P	12 3/4" - 12 3/4" - 3 1/2"
2022-EL	1-FC8T9	12 3/4" - 12 3/4" - 3 1/2"
20213Q-EL	2-F13DBX4P	12 3/4" - 12 3/4" - 3 1/2"
2032-EL	1-FC12T9	16 3/4" - 16 3/4" - 3 1/2"
20218Q-EL	2-F18DBX4P	16 3/4" - 16 3/4" - 3 1/2"
20313Q-EL	3-F13DBX4P	16 3/4" - 16 3/4" - 3 1/2"
2054-EL	1-FC8T9	16 3/4" - 16 3/4" - 3 1/2"
	1-FC12T9	
20318Q-EL	3-F18DBX4P	20 3/4" - 20 3/4" - 3 1/2"
2072-EL	1-FC12T9	20 3/4" - 20 3/4" - 3 1/2"
	1-FC16T9	

FINISH CODES

- BRS (Brass)
- NKL (Nickel)

LENS CODES

- 10 (Clear Prismatic Acrylic)
- 20 (Smooth Opal Acrylic)

OPTIONS*

- LED (Light-Emitting Diode)
- UNV (120/277 volt)
- WL (GE Lamps Installed)


SOLID OAK DECORATIVE SURFACE MOUNT • 6700 SERIES

Hand crafted solid oak frame in your choice of finishes. Available with lattice and/or crown molding options. Smooth white acrylic diffuser for soft, uniform illumination.



6722-EL-60

Finish codes, see pg. 50

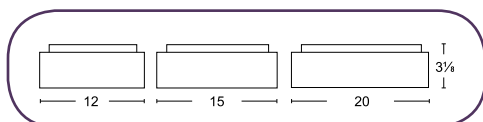

Item #	Lamps	W-L-D
6713Q-EL	1-F13DBX4P	12" - 12" - 3 1/8"
6718Q-EL	1-F18DBX4P	12" - 12" - 3 1/8"
6722-EL	1-FC8T9	12" - 12" - 3 1/8"
67213Q-EL	2-F13DBX4P	15" - 15" - 3 1/8"
67126Q-EL	1-FC26DBX4P	12" - 12" - 3 1/8"
6732-EL	1-FC12T9	15" - 15" - 3 1/8"
67218Q-EL	2-F18DBX4P	15" - 15" - 3 1/8"
67313Q-EL	3-F13DBX4P	15" - 15" - 3 1/8"
67226Q-EL	2-F26DBX4P	15" - 15" - 3 1/8"
6754-EL	1-FC12T9	15" - 15" - 3 1/8"
	1-FC8T9	
67318Q-EL	3-F18DBX4P	20" - 20" - 3 1/8"
6772-EL	1-FC12T9	20" - 20" - 3 1/8"
	1-FC16T9	

OPTIONS*

- CM (Crown Molding)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- LAT (Lattice)
- UNV (120/277 volt)
- WL (GE Lamps Installed)

DECORATIVE SQUARE PUFF • 6800 SERIES

Square diffuser and extremely shallow housing allows maximum light output with minimum energy usage. The low profile design allows for various mounting angles. Suitable for ceiling or wall mount.


Item #	Lamps	W-L-D
6813Q-EL	1-F13DBX4P	12 1/8" - 12 1/8" - 2 3/4"
6818Q-EL	1-F18DBX4P	12 1/8" - 12 1/8" - 2 3/4"
6822-EL	1-FC8T9	12 1/8" - 12 1/8" - 2 3/4"
68213Q-EL	2-F13DBX4P	14 1/2" - 14 1/2" - 2 3/4"
68126Q-EL	1-FC26DBX4P	12 1/8" - 12 1/8" - 2 3/4"
6832-EL	1-FC12T9	14 1/2" - 14 1/2" - 2 3/4"
68218Q-EL	2-F18DBX4P	14 1/2" - 14 1/2" - 2 3/4"
68313Q-EL	3-F13DBX4P	14 1/2" - 14 1/2" - 2 3/4"
6854-EL	1-FC8T9	14 1/2" - 14 1/2" - 2 3/4"
	1-FC12T9	
6872-EL	1-FC12T9	19 1/2" - 19 1/2" - 2 3/4"
	1-FC16T9	



6832-EL

OPTIONS*

- LED (Light-Emitting Diode)
- UNV (120/277 volt)
- WL (GE Lamps Installed)

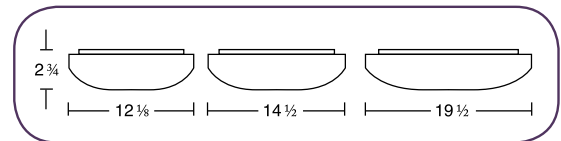

ENCLOSED MUSHROOM • 7100 SERIES

Decorative mushroom shaped puff fixture with white acrylic lens for soft, glare free illumination. Suitable for ceiling or wall mount. Comes standard with lamps installed.


Item #	Lamps	W-L-D
7118Q-EL	1-F18DBX4P	11" - 11" - 3 1/4"
7122-EL	1-FC8T9	11" - 11" - 3 1/4"
71213Q-EL	2-F13DBX4P	11" - 11" - 3 1/4"
71126Q-EL	1-F26DBX4P	11" - 11" - 3 1/4"
7132-EL	1-FC12T9	14" - 14" - 3 1/4"
71218Q-EL	2-F18DBX4P	11" - 11" - 3 1/4"
71313Q-EL	3-F13DBX4P	14" - 14" - 3 1/4"
7154-EL	1-FC8T9	14" - 14" - 3 1/4"
	1-FC12T9	
71226Q-EL	2-F26DBX4P	19" - 19" - 3 1/4"
71318Q-EL	3-F18DBX4P	19" - 19" - 3 1/4"
7172-EL	1-FC12T9	19" - 19" - 3 1/4"
	1-FC16T9	



71213Q-EL

OPTIONS*

- EMR (Emergency Ballast)
Only available on 14" and 19"
- LED (Light-Emitting Diode)
- UNV (120/277 volt)

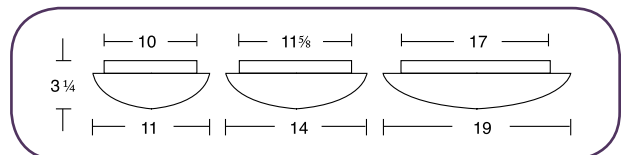


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

ENCLOSED DRUM • 7200 SERIES

Enclosed drum fixture with white acrylic lens for soft, glare free illumination. Suitable for either ceiling wall mount. Comes standard with lamps installed.



7222-EL

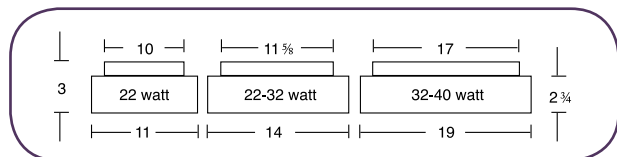

Item #	Lamps	W-L-D
7213Q-EL	1-F13DBX4P	11" - 11" - 3 1/4"
7218Q-EL	1-F18DBX4P	11" - 11" - 3 1/4"
7222-EL	1-FC8T9	11" - 11" - 3 1/4"
72213Q-EL	2-F13DBX4P	11" - 11" - 3 1/4"
72126Q-EL	1-26DBX4P	11" - 11" - 3 1/4"
7232-EL	1-FC12T9	14" - 14" - 3 1/4"
72218Q-EL	2-F18DBX4P	11" - 11" - 3 1/4"
72313Q-EL	3-F13DBX4P	14" - 14" - 3 1/4"
72226Q-EL	2-F26DBX4P	19" - 19" - 3 1/4"
7254-EL	1-FC8T9	14" - 14" - 3 1/4"
	1-FC12T9	
72318Q-EL	3-F18DBX4P	19" - 19" - 3 1/4"
7272-EL	1-FC12T9	19" - 19" - 3 1/4"
	1-FC16T9	

OPTIONS*


- EMR (Emergency Ballast)
Only available on 14" and 19"
- LED (Light-Emitting Diode)
- UNV (120/277 volt)

DECORATIVE NICKEL TRIM SURFACE MOUNT • 7300 SERIES

Decorative double trimmed nickel fixture with acrylic lens for soft glare free illumination. Suitable for ceiling or wall mount. Comes standard with lamps included.



7322-EL

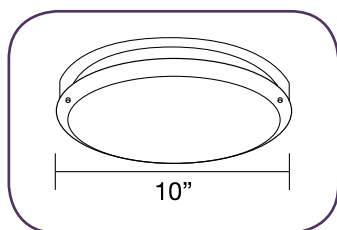

Item #	Lamps	W-L-D
7332-EL	1-FC12T9	17" - 17" - 2"
73218Q-EL	2-F18DBX4P	17" - 17" - 2"
73313Q-EL	3-F13DBX4P	17" - 17" - 2"
73226Q-EL	2-F26DBX4P	17" - 17" - 2"
7354-EL	1-FC8T9	17" - 17" - 2"
	1-FC12T9	17" - 17" - 2"

OPTIONS*

- EMR (Emergency Ballast) - Only available on 14" and 19"
- LED (Light-Emitting Diode)
- UNV (120/277 volt)

ACRYLIC INDUSTRIAL STRIP • 6600 SERIES


A modern design that utilizes both acrylic and metal reflector technology for exceptional performance coming from both direct and indirect light. This unique design is ideal for low to mid hang heights and can be ordered in a wide variety of configurations.

T8 Lamps		
Item #	Lamps	W-L-D
6648-132	1-F32T8	9 3/8" - 48" - 3 7/8"
6648-232	2-F32T8	9 3/8" - 48" - 3 7/8"
6696-132T/1	2-F32T8	9 3/8" - 96" - 3 7/8"
6696-232T/1	4-F32T8	9 3/8" - 96" - 3 7/8"
6696-232T/2	4-F32T8	9 3/8" - 96" - 3 7/8"

T5 Lamps		
Item #	Lamps	W-L-D
6648-128	1-F28T5	9 3/8" - 48" - 3 7/8"
6648-228	2-F28T5	9 3/8" - 48" - 3 7/8"
6648-154	1-F54T5HO	9 3/8" - 48" - 3 7/8"
6648-254	2-F54T5HO	9 3/8" - 48" - 3 7/8"
6696-128T/1	2-F28T5	9 3/8" - 96" - 3 7/8"
6696-228T/2	4-F28T5	9 3/8" - 96" - 3 7/8"
6696-154T/1	2-F54T5HO	9 3/8" - 96" - 3 7/8"
6696-254T/1	4-F54T5HO	9 3/8" - 96" - 3 7/8"
6696-254T/2	4-F54T5HO	9 3/8" - 96" - 3 7/8"



6648-232



OPTIONS*

- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)


MINI STRIP T8 OR T5 • 8100 SERIES

A miniature strip finished in baked white enamel, fits into the smallest spaces.

T5 / T8 Lamps		
Item #	Lamps	W-L-D
8104-EL	1-F4T5	1 3/8" - 6 1/8" - 2 1/8"
8106-EL	1-F6T5	1 3/8" - 9 1/8" - 2 1/8"
8108-EL	1-F8T5	1 3/8" - 12 1/8" - 2 1/8"
8113-EL	1-F13T5	1 3/8" - 21 1/8" - 2 1/8"
8115-EL	1-F15T8	1 3/8" - 19" - 2 1/8"



8108-EL



OPTIONS*

- 277 (277 Volt)
- PLG (6' SJT Grounded Cord & Plug)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)

*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

NARROW STRIP T8 OR T5 • 8200 SERIES


Our narrow body strip fixture is available in a large variety of configurations and may be mounted individually or in continuous rows.



8236-125

OPTIONS*

- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- UNV (120/277 volt)
- WG (Wireguard)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)



T8 Lamps		
Item #	Lamps	W-L-D
8218-EL	1-F15T8	3 1/8" - 18" - 3"
8224-117	1-F17T8	3 1/8" - 24" - 3"
8224-217	2-F17T8	3 1/8" - 24" - 3"
8236-125	1-F25T8	3 1/8" - 36" - 3"
8236-225	2-F25T8	3 1/8" - 36" - 3"
8248-132	1-F32T8	3 1/8" - 48" - 3"
8248-232	2-F32T8	3 1/8" - 48" - 3"
8272-125T/1	2-F25T8	3 1/8" - 72" - 3"
8272-225T/1	4-F25T8	3 1/8" - 72" - 3"
8272-225T/2	4-F25T8	3 1/8" - 72" - 3"
8284-EL	1-F25T8	3 1/8" - 84" - 3"
	1-F32T8	
8296-132T/1	2-F32T8	3 1/8" - 96" - 3"
8296-232T/1	4-F32T8	3 1/8" - 96" - 3"
8296-232T/2	4-F32T8	3 1/8" - 96" - 3"


T5 Lamps		
Item #	Lamps	W-L-D
8224-114	1-F14T5	3 1/8" - 24" - 3"
8224-214	2-F14T5	3 1/8" - 24" - 3"
8224-124	1-F24T5HO	3 1/8" - 24" - 3"
8224-224	2-F24T5HO	3 1/8" - 24" - 3"
8236-121	1-F21T5	3 1/8" - 36" - 3"
8236-221	2-F21T5	3 1/8" - 36" - 3"
8236-139	1-F39T5HO	3 1/8" - 36" - 3"
8236-239	2-F39T5HO	3 1/8" - 36" - 3"
8248-128	1-F28T5	3 1/8" - 48" - 3"
8248-228	2-F28T5	3 1/8" - 48" - 3"
8248-154	1-F54T5HO	3 1/8" - 48" - 3"
8248-254	2-F54T5HO	3 1/8" - 48" - 3"
8296-128T/2	2-F28T5	3 1/8" - 96" - 3"
8296-228T/2	4-F28T5	3 1/8" - 96" - 3"
8296-154T/1	2-F54T5HO	3 1/8" - 96" - 3"
8296-254T/1	4-F54T5HO	3 1/8" - 96" - 3"

T8 SIDE MOUNT STRIP 1 LAMP • 8300 SERIES

Low profile single lamp side mount strip for limited access areas. Fixture may be mounted individually or in continuous rows.



8348-132



T8 Lamps		
Item #	Lamps	W-L-D
8318-EL	1-F15T8	4 1/2" - 18" - 1 7/8"
8324-117	1-F17T8	4 1/2" - 24" - 1 7/8"
8336-125	1-F25T8	4 1/2" - 36" - 1 7/8"
8348-132	1-F32T8	4 1/2" - 48" - 1 7/8"
8372-125T	2-F25T8	4 1/2" - 72" - 1 7/8"
8396-132T	2-F32T8	4 1/2" - 96" - 1 7/8"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PLG (6' SJT Grounded Cord & Plug)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)

T8 SIDE MOUNT STRIP 2 LAMP • 8400 SERIES

Two lamp side mount strip that can be mounted individually or in continuous rows.


T8 Lamps		
Item #	Lamps	W-L-D
8418-EL	2-F15T8	6 1/4" - 18" - 1 7/8"
8424-217	2-F17T8	6 1/4" - 24" - 1 7/8"
8436-225	2-F25T8	6 1/4" - 36" - 1 7/8"
8448-232	2-F32T8	6 1/4" - 48" - 1 7/8"
8472-225T/1	4-F25T8	6 1/4" - 72" - 1 7/8"
8472-225T/2	4-F25T8	6 1/4" - 72" - 1 7/8"
8496-232T/1	4-F32T8	6 1/4" - 96" - 1 7/8"
8496-232T/2	4-F32T8	6 1/4" - 96" - 1 7/8"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PLG (6' SJT Grounded Cord & Plug)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)



8424-217



TWO LAMP STRIP T8 OR T5 • 8500 SERIES


Wider than our 8200 Series fixture, this strip fixture is available in a large variety of configurations from two to four lamps and may be mounted individually or in continuous rows.

T5 Lamps		
Item #	Lamps	W-L-D
8524-214	2-F14T5	4 1/2" - 24" - 3 9/16"
8524-224	2-F24T5HO	4 1/2" - 24" - 3 9/16"
8536-221	2-F21T5	4 1/2" - 36" - 3 9/16"
8536-239	2-F39T5HO	4 1/2" - 36" - 3 9/16"
8548-228	2-F28T5	4 1/2" - 48" - 3 9/16"
8548-254	2-F54T5HO	4 1/2" - 48" - 3 9/16"
8596-228T/2	4-F28T5	4 1/2" - 96" - 3 9/16"
8596-254T/1	4-F54T5HO	4 1/2" - 96" - 3 9/16"


T8 Lamps		
Item #	Lamps	W-L-D
8518-EL	2-F15T8	4 1/2" - 18" - 3 9/16"
8524-217	2-F17T8	4 1/2" - 24" - 3 9/16"
8536-225	2-F25T8	4 1/2" - 36" - 3 9/16"
8548-232	2-F32T8	4 1/2" - 48" - 3 9/16"
8572-225T/1	4-F25T8	4 1/2" - 72" - 3 9/16"
8572-225T/2	4-F25T8	4 1/2" - 72" - 3 9/16"
8596-232T/1	4-F32T8	4 1/2" - 96" - 3 9/16"
8596-232T/2	4-F32T8	4 1/2" - 96" - 3 9/16"
8596-T8-EL	2-F96T8	4 1/2" - 96" - 3 9/16"
8596-T12-EL	2-F96T12	4 1/2" - 96" - 3 9/16"
8596-T8-EL-HO	2-F96T8HO	4 1/2" - 96" - 3 9/16"
8596-T12-EL-HO	2-F96T12HO	4 1/2" - 96" - 3 9/16"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- UNV (120/277 volt)
- WG (Wireguard)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)

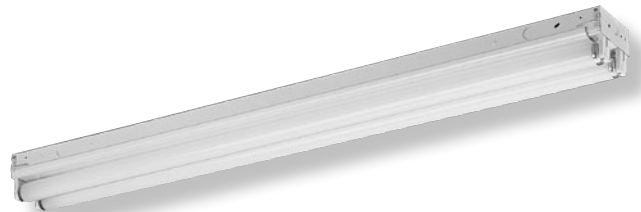

8548-232

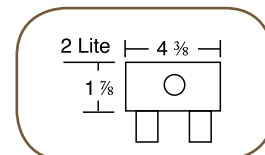


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

INDUSTRIAL STRIP WITH REFLECTOR • 8600 SERIES

Our industrial strip is equipped with a Steel reflector and the body is finished in baked white enamel. May be mounted individually or in continuous rows.



8648-232

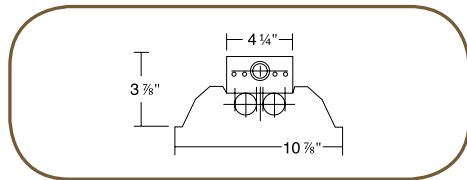

T8 Lamps		
Item #	Lamps	W-L-D
8624-217	2-F17T8	10 7/8" - 24" - 3 7/8"
8648-232	2-F32T8	10 7/8" - 48" - 3 7/8"
8696-232T/1	4-F32T8	10 7/8" - 96" - 3 7/8"
8696-232T/2	4-F32T8	10 7/8" - 96" - 3 7/8"
8696-T8-EL	2-F96T8	10 7/8" - 96" - 3 7/8"
8696-T12-EL	2-F96T12	10 7/8" - 96" - 3 7/8"
8696-T8-EL-HO	2-F96T8HO	10 7/8" - 96" - 4 3/4"
8696-T12-EL-HO	2-F96T12HO	10 7/8" - 96" - 4 3/4"

T5 Lamps		
Item #	Lamps	W-L-D
8624-214	2-F14T5	10 7/8" - 24" - 3 7/8"
8624-224	2-F24T5HO	10 7/8" - 24" - 3 7/8"
8648-228	2-F28T5	10 7/8" - 48" - 3 7/8"
8648-254	2-F54T5HO	10 7/8" - 48" - 3 7/8"
8696-228T/2	4-F28T5	10 7/8" - 96" - 3 7/8"
8696-254T/1	4-F54T5HO	10 7/8" - 96" - 3 7/8"

OPTIONS*


- ALM (Aluminum Reflector)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PLG (6' SJT Cord and Plug)
- PLG-277 (6' L7 Twist Lockcord and Plug)
- UNV (120/277 volt)
- WG (Wireguard)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)

COMPACT STRIP T8 OR T5 • 28100 SERIES

A compact T5 or T8 lamp single or double lamp strip is perfect for those tight locations.



28122

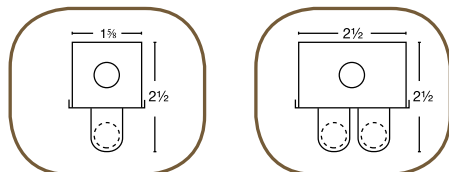

T8 Lamps		
Item #	Lamps	W-L-D
28124-117	1-F17T8	1 3/4" - 24" - 2 1/2"
28136-125	1-F25T8	1 3/4" - 36" - 2 1/2"
28148-132	1-F32T8	1 3/4" - 48" - 2 1/2"
28160-140	1-F40T8	1 3/4" - 60" - 2 1/2"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PLG (6' SJT Grounded Cord & Plug)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)

T5 Lamps		
Item #	Lamps	W-L-D
28122	1-F14T5	1 3/4" - 22" - 2 1/2"
28124	1-F24T5HO	1 3/4" - 22" - 2 1/2"
28134	1-F21T5	1 3/4" - 34" - 2 1/2"
28139	1-F39T5HO	1 3/4" - 34" - 2 1/2"
28146	1-F28T5	1 3/4" - 46" - 2 1/2"
28154	1-F54T5HO	1 3/4" - 46" - 2 1/2"
28158	1-F35T5	1 3/4" - 58" - 2 1/2"
28180	1-F80T5HO	1 3/4" - 58" - 2 1/2"
28192-128T/1	2-F28T5	1 3/4" - 92" - 2 1/2"
28192-154T/1	2-F54T5HO	1 3/4" - 92" - 2 1/2"
281222	2-F14T5	2 1/2" - 22" - 2 1/2"
281224	2-F24T5HO	2 1/2" - 22" - 2 1/2"
281234	2-F21T5	2 1/2" - 34" - 2 1/2"
281239	2-F39T5HO	2 1/2" - 34" - 2 1/2"
281246	2-F28T5	2 1/2" - 46" - 2 1/2"
281254	2-F54T5HO	2 1/2" - 46" - 2 1/2"

T5 MINI SIDE MOUNT STRIP 1 LAMP • 28300 SERIES

Miniature single lamp T5 side mount strip for limited access areas. Fixture may be mounted individually or in continuous rows.


T5 Lamps		
Item #	Lamps	W-L-D
28322	1-F14T5	2 3/4" - 22" - 1 5/8"
28324	1-F24T5H0	2 3/4" - 22" - 1 5/8"
28334	1-F21T5	2 3/4" - 34" - 1 5/8"
28339	1-F39T5H0	2 3/4" - 34" - 1 5/8"
28346	1-F28T5	2 3/4" - 46" - 1 5/8"
28354	1-F54T5H0	2 3/4" - 46" - 1 5/8"
28358	1-F35T5	2 3/4" - 58" - 1 5/8"
28380	1-F80T5H0	2 3/4" - 58" - 1 5/8"



28154

OPTIONS*

- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PLG (6' SJT Grounded Cord & Plug)
- UNV (120/277 Volt)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)

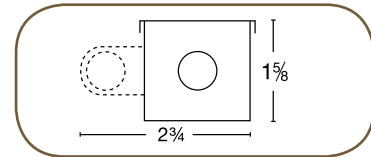

T5 MINI SIDE MOUNT STRIP 2 LAMP • 28400 SERIES

Two lamp mini side mount strip for limited access areas. May be mounted individually or in continuous rows.


T5 Lamps		
Item #	Lamps	W-L-D
28422	2-F14T5	3 1/2" - 22" - 1 5/8"
28434	2-F21T5	3 1/2" - 34" - 1 5/8"
28446	2-F28T5	3 1/2" - 46" - 1 5/8"
28458	2-F35T5	3 1/2" - 58" - 1 5/8"
28424	2-F24T5H0	3 1/2" - 22" - 1 5/8"
28439	2-F39T5H0	3 1/2" - 34" - 1 5/8"
28454	2-F54T5H0	3 1/2" - 46" - 1 5/8"
28480	2-F80T5H0	3 1/2" - 58" - 1 5/8"



28434

OPTIONS*

- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PLG (6' SJT Grounded Cord & Plug)
- WL ( GE Lamps Installed)
- WLCG ( GE CovrGuard Shatter Resistant Lamps)

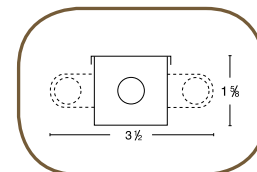


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

STAGGERED T5 OR T8 COMPACT • 28700

Compact Staggered Strip to help provide an uninterrupted pattern of light with no dark spots between lamp ends. Fixture is open on one end for continuous row mounting.



28722-214

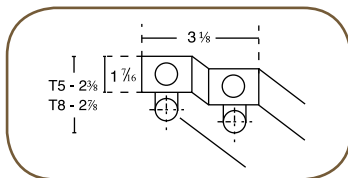

T8 Lamps		
Item #	Lamps	W-L-D
28724-117	1-F17T8	3 1/8" - 26" - 2 3/8"
28724-217	2-F17T8	3 1/8" - 26" - 2 3/8"
28736-125	1-F25T8	3 1/8" - 40" - 2 3/8"
28736-225	2-F25T8	3 1/8" - 40" - 2 3/8"
28748-132	1-F32T8	3 1/8" - 52" - 2 3/8"
28748-232	2-F32T8	3 1/8" - 52" - 2 3/8"
28760-140	1-F40T8	3 1/8" - 64" - 2 3/8"
28760-240	2-F40T8	3 1/8" - 64" - 2 3/8"


OPTIONS*

- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- END (For single fixture mounting)
- PLG (6' SJT Grounded Cord & Plug)
- UNV (120/277 volt)
- WL (3 GE Lamps Installed)
- WLCG (3 GE CovrGuard Shatter Resistant Lamps)


T5 Lamps		
Item #	Lamps	W-L-D
28722-114	1-F14T5	3 1/8" - 22" - 2 3/8"
28722-214	2-F14T5	3 1/8" - 26" - 2 3/8"
28722-124	1-F24T5HO	3 1/8" - 22" - 2 3/8"
28722-224	2-F24T5HO	3 1/8" - 26" - 2 3/8"
28734-121	1-F21T5	3 1/8" - 34" - 2 3/8"
28734-221	2-F21T5	3 1/8" - 38" - 2 3/8"
28734-139	1-F39T5HO	3 1/8" - 34" - 2 3/8"
28734-239	2-F39T5HO	3 1/8" - 38" - 2 3/8"
28746-128	1-F28T5	3 1/8" - 46" - 2 3/8"
28746-228	2-F28T5	3 1/8" - 50" - 2 3/8"
28746-154	1-F54T5HO	3 1/8" - 46" - 2 3/8"
28746-254	2-F54T5HO	3 1/8" - 50" - 2 3/8"
28758-135	1-F35T5	3 1/8" - 58" - 2 3/8"
28758-235	2-F35T5	3 1/8" - 62" - 2 3/8"
28780-180	1-F80T5HO	3 1/8" - 58" - 2 3/8"
28780-280	2-F80T5HO	3 1/8" - 62" - 2 3/8"

THINCAB • 3000 SERIES

Our 1" thin profile electronic fixture is ideal for under-cabinet applications where space is limited. Finished in baked white enamel with white ribbed acrylic diffuser to provide soft illumination. Comes standard with lamps installed.

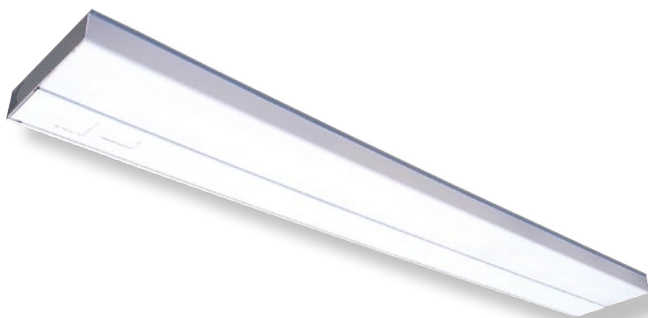

3021

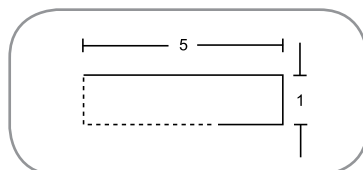

T5 Lamps		
Item #	Lamps	W-L-D
3012	1-F8T5	5" - 12 1/4" - 1"
3021	1-F13T5	5" - 21 1/4" - 1"
3024	2-F8T5	5" - 24 1/2" - 1"
3033	1-F8T5	5" - 33 1/2" - 1"
	1-F13T5	
3042	2-F13T5	5" - 42 1/2" - 1"
3046	1-F28T5	5" - 46 1/2" - 1"

OPTIONS*

- 277 (277 Volt)
- CO (Convenience Outlet)
- PLG (6' SJT Grounded Cord & Plug)
- RSW (Rocker Switch)
- WW (Warm White Lamps)

CLASSICAB • 3100 SERIES

Designed for kitchen cabinets, display cases, shelves, or any work area that requires task lighting. Finished in baked white enamel with white ribbed acrylic diffuser to provide soft illumination.


T5 / T8 Lamps		
Item #	Lamps	W-L-D
3108-EL	1-F8T5	4 1/2" - 12" - 1 1/4"
3118-EL	1-F15T8	5 1/4" - 18" - 1 3/4"
3124-117	1-F17T8	5 1/4" - 24" - 1 3/4"
3136-125	1-F25T8	5 1/4" - 36" - 1 3/4"
3148-132	1-F32T8	5 1/4" - 48" - 1 3/4"



3136-125

OPTIONS*

- CO (Convenience Outlet)
- DIM (Dimming Ballast)
- PLG (6' SJT Grounded Cord & Plug)
- RSW (Rocker Switch)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

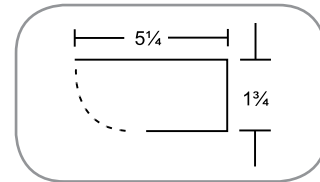

MINICAB • 3500 SERIES

The 3500 series is our most compact under-cabinet fixture. Finished in baked white enamel with a clear ribbed polycarbonate diffuser for optimal task lighting. Comes standard with lamps installed.


T5 Lamps		
Item #	Lamps	W-L-D
3510	1-F6T5	2 7/16" - 9 1/4" - 1"
3512	1-F8T5	2 7/16" - 12 1/4" - 1"
3521	1-F13T5	2 7/16" - 21 1/4" - 1"
3522	1-F14T5	2 7/16" - 22 1/2" - 1"
3524	2-F8T5	2 7/16" - 24 1/4" - 1"
3533	1-F8T5	2 7/16" - 33 1/2" - 1"
	1-F13T5	
3534	1-F21T5	2 7/16" - 34 1/2" - 1"
3542	2-F13T5	2 7/16" - 42 1/2" - 1"
3546	1-F28T5	2 7/16" - 46 1/2" - 1"



3546

OPTIONS*

- 277 (277 volt)
- PLG (6' SJT Grounded Cord & Plug)
- RSW (Rocker Switch)

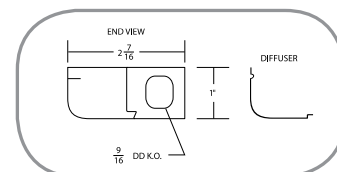


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

MINI CLASSICAB • 23100 SERIES

The 23100 series is a thin profile electronic under-cabinet fixture designed for under-cabinet applications where space is limited. Ideal for kitchen cabinets, display cases, shelves, or any work area that requires task lighting.



23136-125

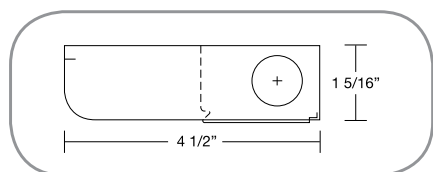

T5 Lamps		
Item #	Lamps	W-L-D
23108-EL	1- F8T5	4 1/2" - 12" - 1 5/16"
23118-EL	1- F15T8	4 1/2" - 18" - 1 5/16"
23124-117	1- F17T8	4 1/2" - 24" - 1 5/16"
23136-125	1- F25T8	4 1/2" - 36" - 1 5/16"
23148-132	1- F32T8	4 1/2" - 48" - 1 5/16"

OPTIONS*

- CO (Convenience Outlet)
- PLG (6' SJT Grounded Cord & Plug)
- RSW (Rocker Switch)
- WL (With Lamps)


TRADITIONAL ONE LAMP VANITY • 4100 SERIES

Wall mounted fixture with baked white ends and a ribbed white diffuser which provides soft, uniform illumination. Fixture can be mounted vertically or horizontally.



4124-117-ALM

Standard with white ends

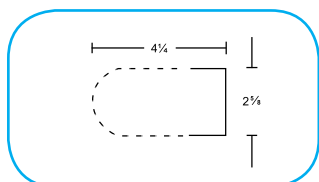

T8 Lamps		
Item #	Lamps	W-L-D
4115-EL-20	1-F14T8	4 1/4" - 15 1/4" - 2 5/8"
4118-EL-20	1-F15T8	4 1/4" - 18 1/4" - 2 5/8"
4124-117-20	1-F17T8	4 1/4" - 24 1/4" - 2 5/8"
4136-125-20	1-F25T8	4 1/4" - 36 1/4" - 2 5/8"
4148-132-20	1-F32T8	4 1/4" - 48 1/4" - 2 5/8"

OPTIONS*

- ALM (Aluminum)
- CO (Convenience Outlet)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PLG (6' SJT Grounded Cord & Plug)
- PLS (Switch & Pull Chain)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

TRADITIONAL TWO LAMP VANITY • 4200 SERIES

Wall mounted fixture with baked white ends and a ribbed white diffuser which provides soft, uniform illumination. Fixture can be mounted vertically or horizontally.


T8 Lamps		
Item #	Lamps	W-L-D
4218-EL-20	2-F15T8	5 3/8" - 18 1/4" - 3 1/4"
4224-217-20	2-F17T8	5 3/8" - 24 1/4" - 3 1/4"
4236-225-20	2-F25T8	5 3/8" - 36 1/4" - 3 1/4"
4248-232-20	2-F32T8	5 3/8" - 48 1/4" - 3 1/4"



4236-225-ALM
Standard with white ends

OPTIONS*

- ALM (Aluminum)
- CO (Convenience Outlet)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PLG (6' SJT Grounded Cord & Plug)
- PLS (Switch & Pull Chain)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

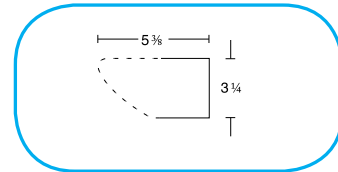

BOX VANITY • 4300 SERIES

Wall mounted fixture with baked white enamel ends and a smooth white acrylic diffuser to suit any lighting application. Fixture can be mounted vertically or horizontally. Ends also available in chrome, brass and a variety of wood finishes.


T8 Lamps		
Item #	Lamps	W-L-D
4318-EL-20	2-F15T8	4 1/4" - 18 1/4" - 4 1/2"
4324-217-20	2-F17T8	4 1/4" - 24 1/4" - 4 1/2"
4336-225-20	2-F25T8	4 1/4" - 36 1/4" - 4 1/2"
4348-232-20	2-F32T8	4 1/4" - 48 1/4" - 4 1/2"



4324-217-20
Finish codes, see pg. 50

OPTIONS*


- BFL (Front Baffle)
- CO (Convenience Outlet)
- CRM (Chrome Ends)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- PB (Polished Brass Ends)
- PLS (Switch & Pull Chain)
- UNV (120/277 volt)
- WE (Wood Ends)
- WL ( GE Lamps Installed)



*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

ARCHITECTURAL VANITY • 4400 SERIES

A companion to our Architectural Indirect Thin Line 6900 series, the 4400 is ideal for sconce applications, such as hospitality, restrooms, corridors or small offices. Available in perforated white powder coat housing, overlay lens, semi-specular or white louver.

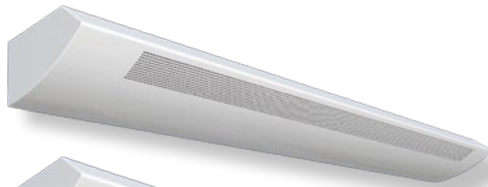


4436-225
Finish codes, see pg. 50



4436-225-OL



4436-225-LV-W



T8 Lamps		
Item #	Lamps	W-L-D
4424-217	2-F17T8	5" - 25 3/4" - 2 3/4"
4436-225	2-F25T8	5" - 37 3/4" - 2 3/4"
4448-232	2-F32T8	5" - 49 1/4" - 2 3/4"
4496-232T/1	4-F32T8	5" - 98" - 2 3/4"


T5 Lamps		
Item #	Lamps	W-L-D
4424-214	2-F14T5	5" - 25 3/4" - 2 3/4"
4424-224	2-F24T5HO	5" - 25 3/4" - 2 3/4"
4436-221	2-F21T5	5" - 37 3/4" - 2 3/4"
4436-239	2-F39T5HO	5" - 37 3/4" - 2 3/4"
4448-228	2-F28T5	5" - 49 1/4" - 2 3/4"
4448-254	2-F54T5HO	5" - 49 1/4" - 2 3/4"
4496-228T/2	4-F28T5	5" - 98" - 2 3/4"
4496-254T/1	4-F54T5HO	5" - 98" - 2 3/4"

OPTIONS*


- DHS (Daylight Harvesting)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- LV-SS (Semi-specular Louver)
- LV-W (White Louver)
- OL (Overlay Lens)
- OS (Occupancy Sensor)
- UNV (120/277 volt)
- WL (GE Lamps Installed)

PUFF VANITY • 4500 SERIES

Wall mounted fixture with decorative white acrylic diffuser and rounded edges for soft uniform illumination. Fixture can be wall or ceiling mounted.

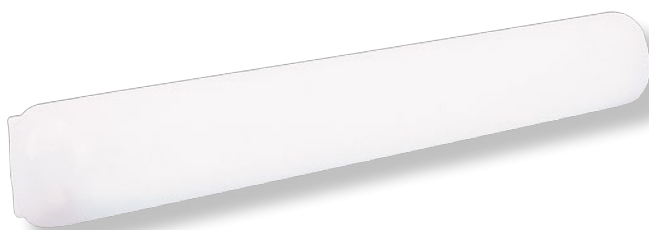

4548-232



T8 Lamps		
Item #	Lamps	W-L-D
4524-117	1-F17T8	6" - 26 13/16" - 4 1/2"
4524-217	2-F17T8	6" - 26 13/16" - 4 1/2"
4536-125	1-F25T8	6" - 38 13/16" - 4 1/2"
4536-225	2-F25T8	6" - 38 13/16" - 4 1/2"
4548-132	1-F32T8	6" - 50 13/16" - 4 1/2"
4548-232	2-F32T8	6" - 50 13/16" - 4 1/2"

T5 Lamps		
Item #	Lamps	W-L-D
4524-114	1-F14T5	6" - 26 13/16" - 4 1/2"
4524-214	2-F14T5	6" - 26 13/16" - 4 1/2"
4524-124	1-F24T5HO	6" - 26 13/16" - 4 1/2"
4524-224	2-F24T5HO	6" - 26 13/16" - 4 1/2"
4536-121	1-F21T5	6" - 38 13/16" - 4 1/2"
4536-221	2-F21T5	6" - 38 13/16" - 4 1/2"
4536-139	1-F39T5HO	6" - 38 13/16" - 4 1/2"
4536-239	2-F39T5HO	6" - 38 13/16" - 4 1/2"
4548-128	1-F28T5	6" - 50 13/16" - 4 1/2"
4548-228	2-F28T5	6" - 50 13/16" - 4 1/2"
4548-154	1-F54T5HO	6" - 50 13/16" - 4 1/2"
4548-254	2-F54T5HO	6" - 50 13/16" - 4 1/2"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- UNV (120/277 volt)
- WL (GE Lamps Installed)


TUBE VANITY • 4600 SERIES

Crescent shaped tubular design with either a smooth white acrylic diffuser or ribbed frosted diffuser.


T8 Lamps		
Item #	Lamps	W-L-D
4624	2-F17T8	4 13/16" - 25 15/16" - 4"
4636	2-F25T8	4 13/16" - 37 15/16" - 4"
4648	2-F32T8	4 13/16" - 49 15/16" - 4"

OPTIONS*

- BRS (Brass End Cap Accents)
- CR (Clear Ribbed Lens)
- CRM (Chrome End Cap Accents)
- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- FR (Frosted Ribbed Lens)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)
- WR (White Ribbed Lens)

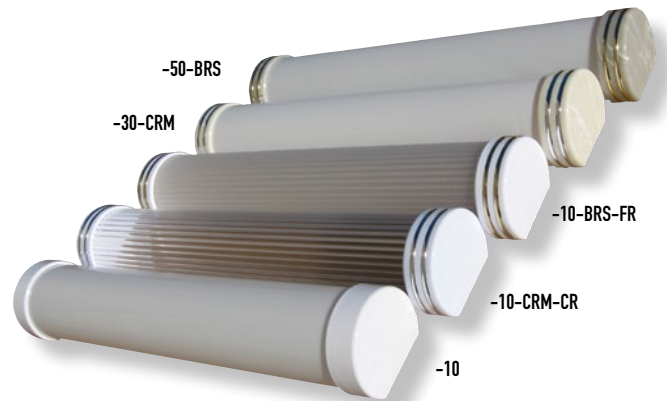

Finish codes, see pg. 50



ROUNDED SCONCE • 4700 SERIES

Decorative wall fixture in bright white acrylic for use in bathrooms, hallways or any other interior space to create great accent lighting. Meets ADA requirements.

Item #	Lamps	W-L-D
4713Q-EL	1-F13DBX4P	11 3/4" - 5 3/4" - 4"
4718Q-EL	1-F18DBX4P	11 3/4" - 5 3/4" - 4"
4726Q-EL	1-F26DBX4P	11 3/4" - 5 3/4" - 4"
47213Q-EL	2-F13DBX4P	14" - 5 3/4" - 4 1/2"
47218Q-EL	2-F18DBX4P	19" - 5 3/4" - 4 1/2"
47226Q-EL	2-F26DBX4P	19" - 5 3/4" - 4"




4713Q-EL-10

Finish codes, see pg. 50

OPTIONS*

- BRS (Brass Trim)
- CRM (Chrome Trim)
- DIM (Dimming Ballast)
- LED (Light-Emitting Diode)
- RIB (Ribbed Lens)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)



*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

COMPACT WALL PACK • 9200 SERIES


A low wattage fluorescent fixture designed for patios, walkways, stairwells or hallways. Can be wall or ceiling mounted. Steel backplate in black or white finish with prismatic lenses also available in clear or opal acrylic



9213Q-EL-WHT-20



9213Q-EL-BLK-10

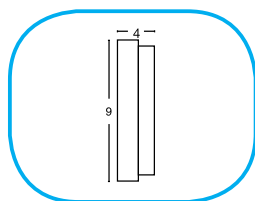

Item #	Lamps	W-L-D
9213Q-EL	1-F13BX4P	5" - 9" - 4"
9218Q-EL	1-F18DBX4P	5" - 9" - 4"
9226Q-EL	1-F26DBX4P	5" - 9" - 4"

FINISH CODES

- BLK (Black)
- WHT (White)

LENS CODES

- 10 (Clear Acrylic Lens)
- 20 (Opal Acrylic Lens)

OPTIONS*

- LED (Light-Emitting Diode)
- UNV (120/277 volt)
- WL (GE Lamps Installed)

EXTERIOR WALL LANTERN • 9300 SERIES


A low wattage fluorescent fixture that is perfectly suited for wall mounted applications on patios, walkways or porches. Available in white or black finish.



9326Q-EL-WHT



9326Q-EL-BLK

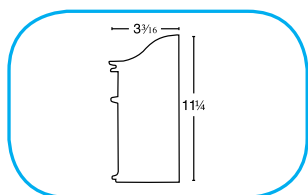

Item #	Lamps	W-L-D
9313Q-EL	1-F13DBX4P	7 3/4" - 11 1/4" - 3 3/16"
9318Q-EL	1-F18DBX4P	7 3/4" - 11 1/4" - 3 3/16"
9326Q-EL	1-F26DBX4P	7 3/4" - 11 1/4" - 3 3/16"

FINISH CODES

- BLK (Black)
- WHT (White)

OPTIONS*

- PC (Photo Cell)
- WL (GE Lamps Installed)

BULKHEADS • 9400 / 9600 SERIES


Our Bulkheads are constructed of a white powdercoat die cast housing and frosted glass lens. It is available as a compact fluorescent or low wattage led fixture. Suitable for a variety of applications including patios, walkways or porches. Standard in white, with lamps installed.

Item #	Lamps	W-L-D
9413Q-EL	1-F13DBX	10 1/2" - 6 1/2" - 5 1/2"
9418Q-EL	1-F18DBX	10 1/2" - 6 1/2" - 5 1/2"
94213Q-EL	2-F13DBX	10 1/2" - 6 1/2" - 5 1/2"
9409-LED	9 watt LED	10 1/2" - 6 1/2" - 5 1/2"

Item #	Lamps	W-L-D
9613Q-EL	1-F13DBX	9 1/2" - 9 1/2" - 5 1/4"
9618Q-EL	1-F18DBX	9 1/2" - 9 1/2" - 5 1/4"
96213Q-EL	2-F13DBX	9 1/2" - 9 1/2" - 5 1/4"
9614-LED	14 watt LED	9 1/2" - 9 1/2" - 5 1/4"



OPTIONS*

- LED (Light-Emitting Diode)

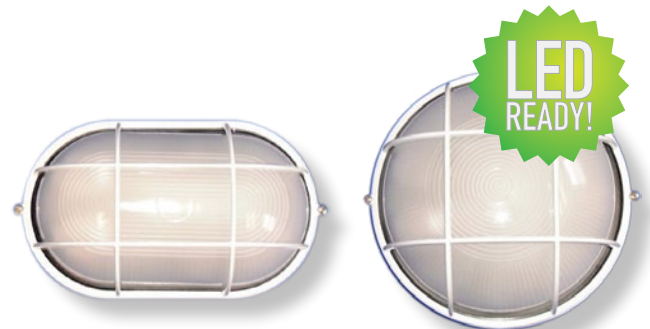

94213Q-EL

9613Q-EL

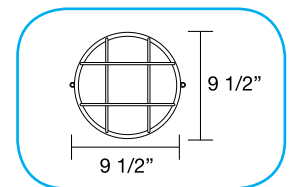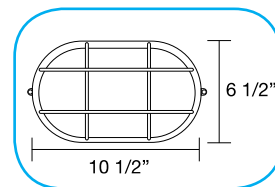

DECORATIVE TRIANGULAR SCONCE • 9800 SERIES

Triangular shaped wall fixture with design to help achieve that elegant look. Available in variety of finishes with brass or chrome trim options. Meets ADA requirements.


Item #	Lamps	W-L-D
9813Q-EL	1-F13BX4P	13 1/4" - 7 1/4" - 3 5/8"
9818Q-EL	1-F18BX4P	13 1/4" - 7 1/4" - 3 5/8"
9826Q-EL	1-F26BX4P	13 1/4" - 7 1/4" - 3 5/8"



9818Q-EL-50

OPTIONS*

- BRS (Brass Trim)
- CRM (Chrome Trim)
- LED (Light-Emitting Diode)
- RIB (Ribbed Lens)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)

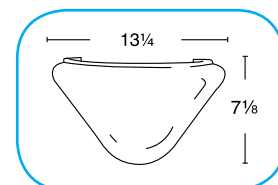


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

DECORATIVE FROSTED GLASS SCONCE • 9900 SERIES

This frosted glass sconce comes with brushed nickel accent. Open on both top and bottom for maximum light output. Comes standard with lamps installed. Meets ADA requirements.



99213Q-EL

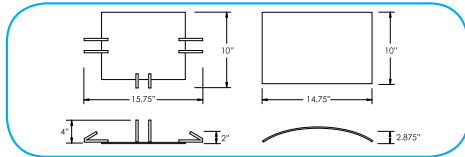

Item #	Lamps	W-L-D
99213Q-EL	2-F130BX4P	15 3/4" - 10 1/2" - 4"
99226Q-EL	2-F260BX4P	15 3/4" - 10 1/2" - 4"

OPTIONS*


- LED (Light-Emitting Diode)

NAPLES LANTERN • NP

The NP Series is a pole mount lantern suitable for outdoor applications. The NP Series is ideal for parks, apartment complexes and residential applications.



NP1326W-F

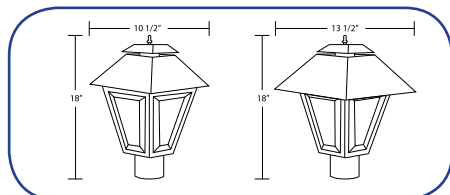

Item #	Watts	Dimensions
NP-10-26	(1 - 26 WT CFL)	10 1/2" - 18"
NP-10-32	(1 - 32 WT CFL)	10 1/2" - 18"
NP-13-26	(1 - 26 WT CFL)	13" - 18"
NP-13-32	(1 - 32 WT CFL)	13" - 18"

OPTIONS*

- B (Black)
- W (White)


VENICE LANTERN • VN

The VN Series is a wall mount lantern suitable for outdoor applications. The VN Series is ideal for parks, apartment complexes and residential applications.

Item #	Watts	Dimensions
VN-10-26	26 (1- 26 WT CFL)	10 1/2" - 18"
NP-13-32	32 (1- 32 WT CFL)	13" - 18"



VN18W-10

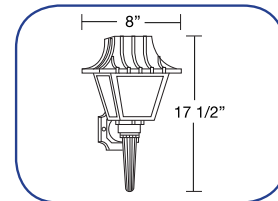

OPTIONS*

- B (Black)
- W (White)

VAPORTITE ENCLOSED STRIP • 7500 SERIES


Fiberglass housing with bonded gasket to seal against dust, moisture, and other corrosive elements. Clear acrylic diffuser with textured pattern to help keep light uniform. Mounting brackets included for easy installation.

T8 Lamps		
Item #	Lamps	W-L-D
7524-117	1-F17T8	6 5/8" - 25 13/16" - 4 7/8"
7524-217	2-F17T8	6 5/8" - 25 13/16" - 4 7/8"
7548-132	1-F32T8	6 5/8" - 49 13/16" - 4 7/8"
7548-232	2-F32T8	6 5/8" - 49 13/16" - 4 7/8"
7596-T8-EL	2-F96T8	6 5/8" - 97 13/16" - 4 7/8"
7596-232T/1	4-F32T8	6 5/8" - 97 13/16" - 4 7/8"
7596-232T/2	4-F32T8	6 5/8" - 97 13/16" - 4 7/8"
7596-T8EL-HO	2-F96T8-HO	6 5/8" - 97 13/16" - 4 7/8"
7596-T12EL-HO	2-F96T12-HO	6 5/8" - 97 13/16" - 4 7/8"

T5 Lamps		
Item #	Lamps	W-L-D
7524-214	2-F14T5	6 5/8" - 25 13/16" - 4 7/8"
7524-224	2-F24T5HO	6 5/8" - 25 13/16" - 4 7/8"
7548-228	2-F28T5	6 5/8" - 49 13/16" - 4 7/8"
7548-254	2-F54T5HO	6 5/8" - 49 13/16" - 4 7/8"
7596-228T/2	4-F28T5	6 5/8" - 97 13/16" - 4 7/8"
7596-254T/1	4-F54T5HO	6 5/8" - 97 13/16" - 4 7/8"



7548-232

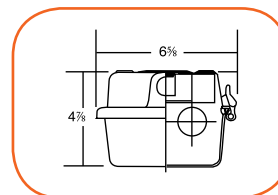

OPTIONS*

- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- OS (Occupancy Sensor)
- PC (Polycarbonate Diffuser)
- TPL (Tamper Proof Latches)
- UNV (120/277 volt)
- WL ( GE Lamps Installed)


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

COMPACT VAPORTITE ENCLOSED STRIP • 7600 SERIES

Fiberglass housing with bonded gasket to seal against dust, moisture, and other corrosive elements. UV stabilized ribbed polycarbonate diffuser to help keep light uniform. Mounting brackets included for easy installation.



7660-235



T8 Lamps		
Item #	Lamps	W-L-D
7624-117	1-F17T8	4 1/2" - 2' - 4 1/8"
7624-217	2-F17T8	7 1/3" - 2' - 4 1/8"
7648-132	1-F32T8	4 1/2" - 4' - 4 1/8"
7648-232	2-F32T8	7 1/3" - 4' - 4 1/8"
7660-140	1-F40T8	4 1/2" - 5' - 4 1/8"
7660-240	2-F40T8	7 1/3" - 5' - 4 1/8"
7696-232T/1	4-F32T8	7 1/3" - 8' - 4 1/8"
7696-232T/2	4-F32T8	7 1/3" - 8' - 4 1/8"

T5 Lamps		
Item #	Lamps	W-L-D
7624-114	1-F14T5	4 1/2" - 2' - 4 1/8"
7624-214	2-F14T5	7 1/3" - 2' - 4 1/8"
7624-124	1-F24T5H0	4 1/2" - 2' - 4 1/8"
7624-224	2-F24T5H0	7 1/3" - 2' - 4 1/8"
7648-128	1-F28T5	4 1/2" - 4' - 4 1/8"
7648-228	2-F28T5	7 1/3" - 4' - 4 1/8"
7648-154	1-F54T5H0	4 1/2" - 4' - 4 1/8"
7648-254	2-F54T5H0	7 1/3" - 4' - 4 1/8"
7660-135	1-F35T5	4 1/2" - 5' - 4 1/8"
7660-235	2-F35T5	7 1/3" - 5' - 4 1/8"
7660-180	1-F80T5H0	4 1/2" - 5' - 4 1/8"
7660-280	2-F80T5H0	7 1/3" - 5' - 4 1/8"
7696-228T/2	4-F28T5	7 1/3" - 8' - 4 1/8"
7696-254T/1	4-F54T5H0	7 1/3" - 8' - 4 1/8"

OPTIONS*

- DIM (Dimming Ballast)
- EMR (450 Lumen Emergency Ballast)
- EMR 1400 (1400 Lumen Emergency Ballast)
- OS (Occupancy Sensor)
- PC (Polycarbonate Diffuser)
- UNV (120/277 volt)
- WL (GE Lamps Installed)

ROUND/SQUARE GASKETED FIXTURE • 7700/7800 SERIES

A fully gasketed fixtures designed to prevent dust, moisture, and insects from entering the fixture. Round or square polycarbonate housing, available in black or white. The high-impact polycarbonate lens is available in either clear prismatic or white. Perfect for any wall or ceiling application that calls for a weather or vandal proof fixture.





7822-BLK-20

7722-BLK-10



ROUND		
Item #	Lamps	W-L-D
7722-EL	1-FC8T9CW	11 1/4" Rnd - 3 1/2"
7713Q-EL	1-F13BX4P	11 1/4" Rnd - 3 1/2"
77213Q-EL	2-F13BX4P	11 1/4" Rnd - 3 1/2"
7726Q-EL	1-F26DBXP	11 1/4" Rnd - 3 1/2"

SQUARE		
Item #	Lamps	W-L-D
7822-EL	1-FC8T9	10 1/2" SQ - 4"
7813Q-EL	1-F13DBX4P	10 1/2" SQ - 4"
78213Q-EL	2-F13DBX4P	10 1/2" SQ - 4"
7826Q-EL	1-F26DBX4P	10 1/2" SQ - 4"

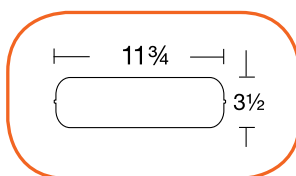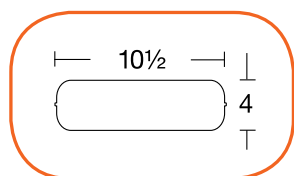

OPTIONS*

- WL (GE Lamps Installed)
- LED (Light-Emitting Diode)
- UNV (120/277 volt)

LENS CODES

- 10 (Clear Acrylic Lens)
- 20 (Opal Acrylic Lens)


FINISH CODES

- BLK (Black)
- WHT (White)

INDUCTION ARCHITECTURAL FLOOD • AFi

This rectangle induction flood provides general lighting to building perimeters. Equipped with a clear tempered glass lens and IP 65 rated for wet location, the AFi series is ideal for billboards, parks, pools, parking lots, plazas, tennis courts and building facades.

Item #	Watts	Initial Lumens	Dimensions
AFi-100	100	8,000	16 1/3" - 11 1/2" - 5 3/4"

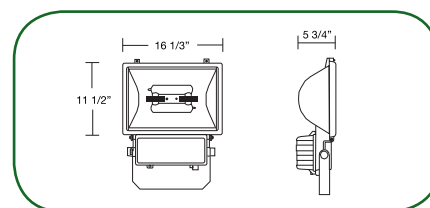


OPTIONS*

- DIM (Dimming Ballast)

INDUCTION ARCHITECTURAL AREA LIGHT • ALi

This Induction Architectural Area Light has a lamp life of 100,000 hours. Equipped with a gas-tight silicon rubber seal and IP54 rated for wet location applications. Ideal for Parking Lots, Plazas, Shopping Malls and Tennis Courts. Standard with 5000K lamps and clear tempered glass lens, optional UV stabilized and heat resistant polycarbonate lens also available.

Item #	Watts	Initial Lumens	Dimensions
ALi-200	200	17,000	21 1/2" - 31 1/3" - 9"
ALi-250	250	22,500	22 3/4" - 32 1/2" - 9 1/4"
ALi-300	300	27,000	22 3/4" - 32 1/2" - 9 1/4"

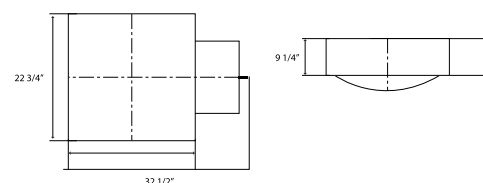


OPTIONS*

- 480 (480 volt)
- DIM (Dimming Ballast)
- PC (Photo Cell)
- UV (Heat Resistant Polycarbonate Lens)

*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

INDUCTION AREA LIGHT • ALi2

This induction area light provides general lighting to building perimeters. Ideal for parking lots, plazas, shopping malls, and tennis courts.

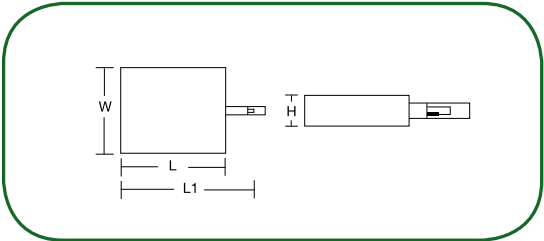


Item #	Watts	Initial Lumens	Dimensions (L - L1 - W - H)
ALi2-150	150	12,750	24 1/2" - 32 3/4" - 21 3/4" - 6 1/2"
ALi2-200	200	17,000	24 3/4" - 32 3/4" - 21 3/4" - 6 1/2"
ALi2-300	300	27,000	27" - 34" - 24" - 8"
ALi2-400	400	36,000	27" - 34" - 24" - 8"

OPTIONS*

- DIM (Dimming Ballast)
- PC (Photocell)

INDUCTION AREA LIGHT • ALi3

The FSC Area Light is an efficient, attractive, compact unit. Rugged die-cast aluminum construction is finished in metallic bronze on powder coating. Reflectors for all distributions are anodized aluminum.

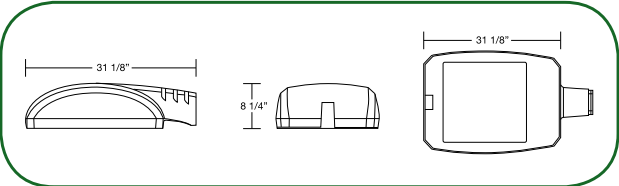

Item #	Watts	Initial Lumens	Dimensions
ALi3-80	80	8,000	31 1/8" - 25" - 8 1/4"
ALi3-120	120	9,600	31 1/8" - 25" - 8 1/4"
ALi3-150	150	12,000	31 1/8" - 25" - 8 1/4"


OPTIONS*

- DIM (Dimming Ballast)
- PC (Photocell)

INDUCTION COBRA HEAD / STREET LIGHTING • iCOBRA

This induction street light is designed for Freeways, Highways, Parking Lots, and Residential Street Lighting. This Die cast aluminum housing with corrosion resistant power coat finish is standard universal 120/277 volt and IP55 rated for wet location.

Item #	Watts	Initial Lumens	Dimensions
iCobra-40	40	2,800	14" - 30" - 10 1/4"
iCobra-70	70	5,250	14" - 30" - 10 1/4"
iCobra-100	100	8,000	14" - 30" - 10 1/4"

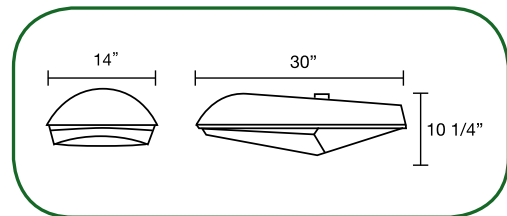


OPTIONS*

- 480 (480 volt)
- DIM (Dimming Ballast)
- PC (Photocell)

INDUCTION COBRA HEAD / STREET LIGHTING • iCOBRA2

Designed for residential streets our Cobra Street Light offers many advantages over traditional HPS or Metal Halide fixtures. Longer life, lighter weight, lower depreciation time, higher CRI, cooler operation temperature and higher scotopic lumens per watt. This architectural die cast aluminum housing is standard universal 120/277 volt and IP55 rated for wet location.

Item #	Watts	Initial Lumens	Dimensions
iCobra2-120	120	9,600	14 1/2" - 31 1/2" - 7 3/4"
iCobra2-150	150	12,000	14 1/2" - 31 1/2" - 7 3/4"
iCobra2-200	200	17,000	16 1/2" - 41 1/2" - 8 1/3"
iCobra2-250	250	22,500	16 1/2" - 41 1/2" - 8 1/3"

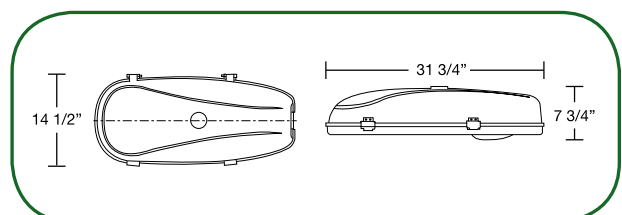


OPTIONS*

- 480 (480 volt)
- DIM (Dimming Ballast)
- GL (Glass Lens)
- PB (Polycarbonate Lens)
- PC (Photocell)

*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

INDUCTION SMALL FLOOD • FLi

This low wattage small induction flood is suitable for a variety of applications such as parks, pools and sporting facilities.

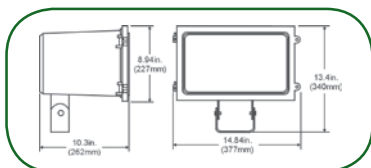


Item #	Watts	Initial Lumens	Dimensions
FLi-40	40	2,800	15" - 13 1/2" - 10 1/2"

OPTIONS*

- DIM (Dimming Ballast)
- HY (Handle Yoke)
- PC (Photocell)
- PCS (Polycarbonate Shield)
- SF (Slip Fitter)
- VSR (Visor)
- WG (Wireguard)

INDUCTION SQUARE GARAGE LIGHT • GLi

This induction square canopy is vandal resistant and is designed for a variety of applications, including multi-level parking garages.

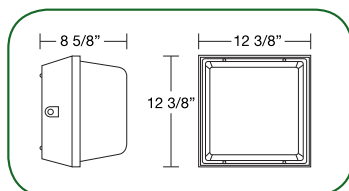

Item #	Watts	Initial Lumens	Dimensions
GLi-40	40	2,800	12 3/8" - 12 3/8" - 8 5/8"
GLi-70	70	5,250	12 3/8" - 12 3/8" - 8 5/8"
GLi-80	80	6,000	12 3/8" - 12 3/8" - 8 5/8"


OPTIONS*

- DIM (Dimming Ballast)

INDUCTION ROUND GARAGE LIGHT • GLi2

This round induction garage light is equipped with a vandal resistant cone lens. Suitable for a variety of applications.

Item #	Watts	Initial Lumens	Dimensions
GLi2-55	55	3,575	15" round - 11 1/4"
GLi2-80	80	6,000	15" round - 11 1/4"

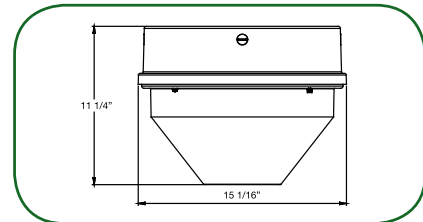


OPTIONS*

- DIM (Dimming Ballast)

INDUCTION DESIGNER GARAGE LIGHT • GLi4

This energy efficient designer induction garage light is suitable for a variety of applications including multi-level parking garages, walkways and retail establishments.

Item #	Watts	Initial Lumens	Dimensions
GLi4-40	40	2,800	15" round - 11 1/3"
GLi4-70	70	5,250	15" round - 11 1/3"
GLi4-80	80	6,000	15" round - 11 1/3"

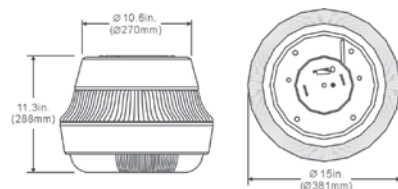


OPTIONS*

- DIM (Dimming Ballast)

*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

INDUCTION GAS STATION LIGHT • GSi

This rectangle induction gas station luminaire provides general lighting to building perimeters. Equipped with a clear curved tempered glass lens, it is ideal for gas stations and outdoor canopies.

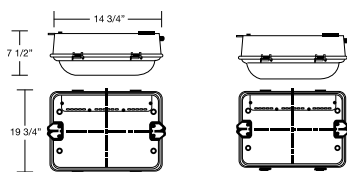


Item #	Watts	Initial Lumens	Dimensions
GSi-100	100	8,000	19 3/4" - 14 3/4" - 7 1/2"
GSi-150	150	12,000	

OPTIONS*

- DIM (Dimming Ballast)

INDUCTION HIGH BAY • HBi

Perfect for warehouses, gymnasiums and retail establishments. This induction high bay has a lamp life of 100,000 hours and is offered standard with a aluminum dome for maximum down light. Also offered in a acrylic dome for light dispersion as an option.

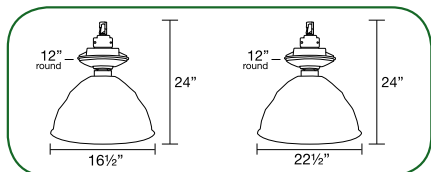

Item #	Watts	Initial Lumens	Diameter
HBi-70	70	5,250	16 1/2" Round
HBi-80	80	6,000	16 1/2" Round
HBi-100	100	8,000	16 1/2" Round
HBi-120	120	9,600	22 1/2" Round
HBi-150	150	12,000	22 1/2" Round
HBi-200	200	17,000	22 1/2" Round
HBi-250	250	22,500	22 1/2" Round

OPTIONS*

- 480 (480 volt)
- ACR (Acrylic Dome)
- DIM (Dimming Ballast)
- GL (Glass Lens)


INDUCTION HIGH BAY • HBi2

Specifically designed for warehouses, supermarkets, exhibition halls, and factories, our HBi2 400 watt induction high bay is constructed of aluminum; the housing is finished with a corrosion resistant power coat and the specular aluminum reflector provides maximum efficiency. Rated with lamp life of 100,000 hours this fixture comes standard in 5000K color temperature.

Item #	Watts	Initial Lumens	Dimensions
HBi2-400	400	36,000	14 1/4" - 48" - 6 3/4"



HBi2-400

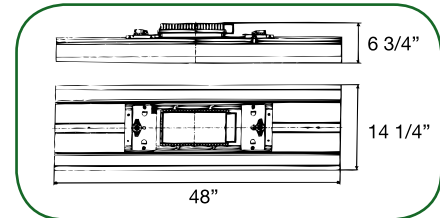

OPTIONS*

- 480 (480 volt)
- DIM (Dimming Ballast)


INDUCTION HIGH BAY - HBi3

This saucer shaped induction high bay provides general lighting to building perimeters. Ideal for warehouses, supermarkets, retail showrooms, exhibition halls and factories.

Item #	Watts	Initial Lumens	Dimensions
HBi3-70	70	5,250	19"
HBi3-80	80	6,000	19"
HBi3-100	100	8,000	19"
HBi3-120	120	9,600	22 1/2"
HBi3-150	150	12,000	22 1/2"
HBi3-200	200	17,000	22 1/2"
HBi3-250	250	22,500	22 1/2"



HBi-120

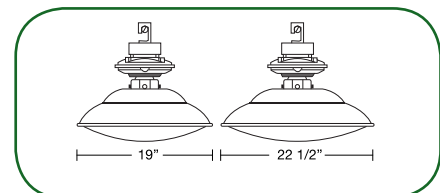

OPTIONS*

- DIM (Dimming Ballast)

*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

INDUCTION HIGH BAY - HBi4

Perfect for warehouses, gymnasiums and retail establishments. This induction high bay has a lamp life of 100,000 hours and is offered standard with acrylic dome for optimal light dispersion. Comes standard with a hook.




Item #	Watts	Initial Lumens	Dimensions
HBi4-120	120	9,600	16 1/4"
HBi4-150	150	12,000	16 1/4"

OPTIONS*

- DIM (Dimming Ballast)

INDUCTION LARGE CANOPY LIGHT • LCI

This induction canopy light is designed for a variety of applications including gas stations, loading docks, underpasses and parking garages.

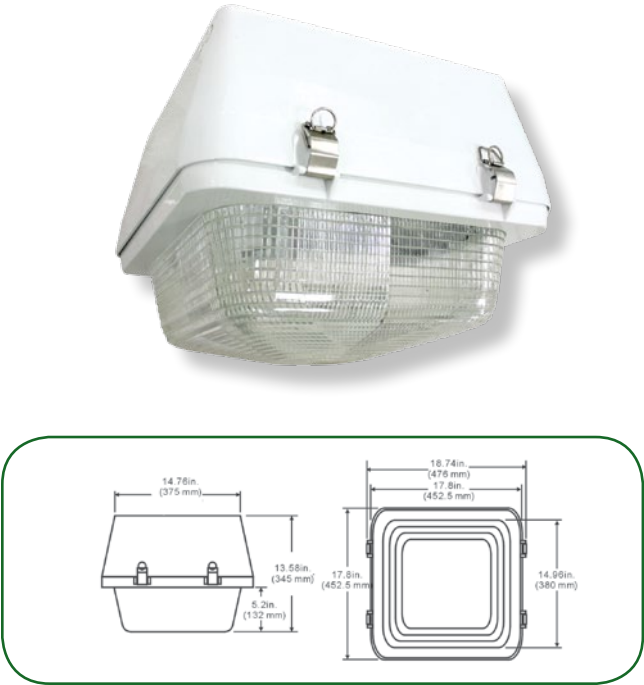

Item #	Watts	Initial Lumens	Dimensions
LCi-80	80	6,000	19" - 18" - 13 1/2"
LCi-120	120	9,600	19" - 18" - 13 1/2"
LCi-200	200	17,000	19" - 18" - 13 1/2"

OPTIONS*

- DIM (Dimming Ballast)


INDUCTION SHOEBOX • PLi

Induction Shoebox Fixture offers many advantages over traditional HID fixtures. Great for parking lots, tennis courts and areas requiring maximum light out.

Item #	Watts	Initial Lumens	Dimensions
PLi-80	80	6,000	16 1/2" - 17" - 6 5/8"
PLi-100	100	8,000	16 1/2" - 17" - 6 5/8"
PLi-120	120	9,600	16 1/2" - 17" - 6 5/8"
PLi-200	200	17,000	22 5/8" - 23 1/3" - 9 3/4"



PLi-100

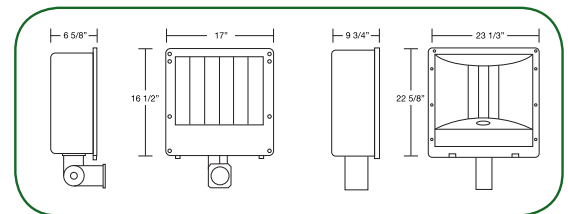


OPTIONS*

- DIM (Dimming Ballast)
- HY (Handle Yoke)
- PC (Photocell)
- PCS (Polycarbonate Shield)
- SF (Slip Fitter)
- VSR (Visor)
- WG (Wireguard)

INDUCTION TUNNEL LIGHT • TLi

This induction tunnel light provides general lighting to building perimeters. Ideal for tunnel, Freeway, parking lots, public entrances and off street areas.

Item #	Watts	Initial Lumens	Dimensions
TLi-100	100	6,000	18 1/2" - 15" - 6 1/2"
TLi-150	150	12,000	21 2/3" - 15 3/4" - 6 1/2"
TLi-200	200	17,000	28" - 19 2/3" - 6 1/2"

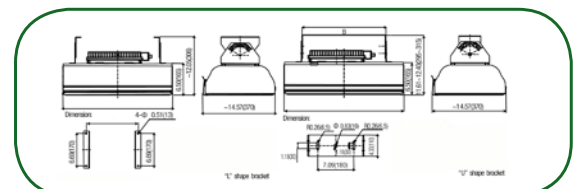

OPTIONS*

- DIM (Dimming Ballast)
- U (U shaped Bracket)
- L (L Shaped Bracket)


*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

INDUCTION WALL PACK • WPi

The classic wall pack provides general lighting to building perimeters. Ideal for walls of buildings, lobbies, corridors and vehicle underpasses. Lamp life is rated for 100,000 hours.



WPi-120

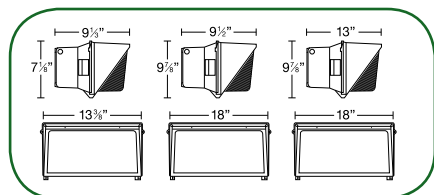

Item #	Watts	Initial Lumens	Dimensions
WPi-40	40	2,800	13 3/8" - 7 1/8" - 9 1/3"
WPi-55	55	3,575	18" - 9 7/8" - 9 1/2"
WPi-60	60	4,200	13 3/8" - 7 1/8" - 9 1/3"
WPi-70	70	5,250	18" - 9 7/8" - 9 1/2"
WPi-80	80	6,000	18" - 9 7/8" - 9 1/2"
WPi-100	100	8,000	18" - 9 7/8" - 13"
WPi-120	120	9,600	18" - 9 7/8" - 13"
WPi-150	150	12,000	18" - 9 7/8" - 13"

OPTIONS*


- PC (Photocell)
- PCS (Polycarbonate Shield)
- VSR (Visor)
- WG (Wireguard)

INDUCTION BULB • i-bulb

The iBulb uses the basic technology for induction. Essentially, the iBulb relies on the fundamental principles of electromagnetic induction and gas discharge to create light. The elimination of filaments and electrodes results in a lamp of unmatched life. Standard in 5000 kelvin temperature.



3 year warranty when installed base down

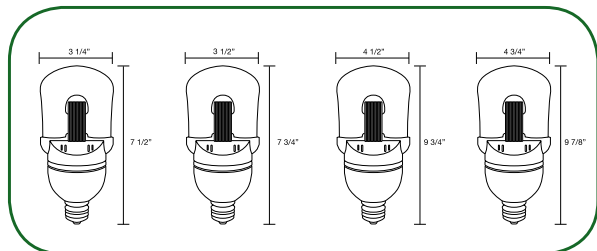


Item #	Dimensions
i-bulb-15-120	7 1/2" - 3 1/4"
i-bulb-15-277	7 1/2" - 3 1/4"
i-bulb-23-120	7 3/4" - 3 1/2"
i-bulb-23-277	7 3/4" - 3 1/2"
i-bulb-40-120	9 3/4" - 4 1/2"
i-bulb-40-227	9 3/4" - 4 1/2"
i-bulb-50-120	9 7/8" - 4 3/4"
i-bulb-50-227	9 7/8" - 4 3/4"

RETROFIT KIT – 85-RFK SERIES

This retro fit kit is for maximizing light output from a 2 lamp strip fixture. Designed for delamping from a 4 lamp strip to a 2 lamp strip lighting fixture. Your choice of a standard White reflector or an 86% reflectance Anodized Aluminum reflector. Fits standard 4 1/4" wide strips. Available in both T5 and T8 configurations.

Item #	Reflector	Lamps	W-L-D
85-RFK24-217-W	white reflector	2-F24T8	8 9/16" - 24" - 2"
85-RFK24-217-A	aluminum reflector	2-F24T8	8 9/16" - 24" - 2"
85-RFK24-224-W	white reflector	2-F24T5HO	8 9/16" - 24" - 2"
85-RFK24-224-A	aluminum reflector	2-F24T5HO	8 9/16" - 24" - 2"
85-RFK36-225-W	white reflector	2-F25T8	8 9/16" - 36" - 2"
85-RFK36-225-A	aluminum reflector	2-F25T8	8 9/16" - 36" - 2"
85-RFK36-239-W	white reflector	2-F39T5HO	8 9/16" - 36" - 2"
85-RFK36-239-A	aluminum reflector	2-F39T5HO	8 9/16" - 36" - 2"
85-RFK48-232-W	white reflector	2-F32T8	8 9/16" - 48" - 2"
85-RFK48-232-A	aluminum reflector	2-F32T8	8 9/16" - 48" - 2"
85-RFK48-254-W	white reflector	2-F54T5HO	8 9/16" - 48" - 2"
85-RFK48-254-A	aluminum reflector	2-F54T5HO	8 9/16" - 48" - 2"
85-RFK96-232T1-W	white reflector	4-F32T8	8 9/16" - 96" - 2"
85-RFK96-232T1-A	aluminum reflector	4-F32T8	8 9/16" - 96" - 2"
85-RFK96-254T1-W	white reflector	4-F54T5HO	8 9/16" - 96" - 2"
85-RFK96-254T1-A	aluminum reflector	4-F54T5HO	8 9/16" - 96" - 2"


*Standard Retrofit Kit includes 1-MVN Ballast and fluorescent sockets (lamps not included), see pg. 49 for upgrade options.

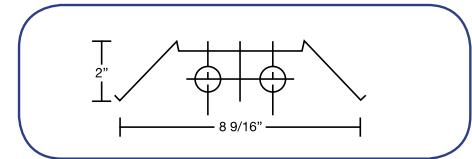

RETROFIT KIT – 74-RFK SERIES

This economical reflector kit reduces energy, improves efficiency and keeps light loss to a minimum. Used to de-lamp grid troffers from a 4 lamp to 2, 3 or 4 lamp fixture, your choice of a standard white reflector or an 96% reflectance Anodized Aluminum reflector. Customized to fit most standard recessed housing 2x2 and 2x4.

Item #	Reflector	Lamps	W-L-D
74-RFK-22-217-W	2-F17T8	White	21 1/2" - 21 1/2" - 1 3/4"
74-RFK-22-217-A	2-F17T8	Aluminum	21 1/2" - 21 1/2" - 1 3/4"
74-RFK-22-317-W	3-F17T8	White	21 1/2" - 21 1/2" - 1 3/4"
74-RFK-22-317-A	3-F17T8	Aluminum	21 1/2" - 21 1/2" - 1 3/4"
74-RFK-22-417-W	4-F17T8	White	21 1/2" - 21 1/2" - 1 3/4"
74-RFK-22-417-A	4-F17T8	Aluminum	21 1/2" - 21 1/2" - 1 3/4"
74-RFK-22-224-W	2-F24T5HO	White	21 1/2" - 21 1/2" - 1 3/4"
74-RFK-22-224-A	2-F24T5HO	Aluminum	21 1/2" - 21 1/2" - 1 3/4"
74-RFK-22-324-W	3-F24T5HO	White	21 1/2" - 21 1/2" - 1 3/4"
74-RFK-22-324-A	3-F24T5HO	Aluminum	21 1/2" - 21 1/2" - 1 3/4"
74-RFK-22-424-W	4-F24T5HO	White	21 1/2" - 21 1/2" - 1 3/4"
74-RFK-22-424-A	4-F24T5HO	Aluminum	21 1/2" - 21 1/2" - 1 3/4"
74-RFK-24-232-W	2-F32T8	White	21 1/2" - 45 3/8" - 1 3/4"
74-RFK-24-232-A	2-F32T8	Aluminum	21 1/2" - 45 3/8" - 1 3/4"
74-RFK-24-332-W	3-F32T8	White	21 1/2" - 45 3/8" - 1 3/4"
74-RFK-24-332-A	3-F32T8	Aluminum	21 1/2" - 45 3/8" - 1 3/4"
74-RFK-24-432-W	4-F32T8	White	21 1/2" - 45 3/8" - 1 3/4"
74-RFK-24-432-A	4-F32T8	Aluminum	21 1/2" - 45 3/8" - 1 3/4"
74-RFK-24-254-W	2-F54T5HO	White	21 1/2" - 45 3/8" - 1 3/4"

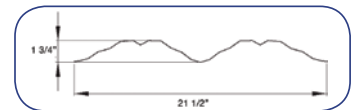


Item #	Reflector	Lamps	W-L-D
74-RFK-24-254-A	2-F54T5HO	Aluminum	21 1/2" - 45 3/8" - 1 3/4"
74-RFK-24-354-W	3-F54T5HO	White	21 1/2" - 45 3/8" - 1 3/4"
74-RFK-24-354-A	3-F54T5HO	Aluminum	21 1/2" - 45 3/8" - 1 3/4"
74-RFK-24-454-W	4-F54T5HO	White	21 1/2" - 45 3/8" - 1 3/4"
74-RFK-24-454-A	4-F54T5HO	Aluminum	21 1/2" - 45 3/8" - 1 3/4"

*Standard Retrofit Kit includes 1-MVN Ballast and fluorescent sockets (lamps not included), see pg. 49 for upgrade options.

*Additional Charge
Dimensions subject to change without notification. Contact factory for verification

RETROFIT KIT – RDI XL SERIES

The RDI-XL, a radial Duriflex diffuser between the sloping acrylic panels provides the look and feel of a deep RDI luminaire available in both T-5 and T-8 configurations customized to fit most standard recessed housing 2X2 and 2X4.

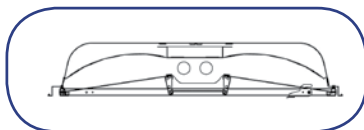


Item #	Dimensions
RDI-XL-RFK-22-117	2x2 T8 (1) Lamp
RDI-XL-RFK-22-217	2x2 T8 (2) Lamp
RDI-XL-RFK-22-124	2x2 T5HO (1) Lamp
RDI-XL-RFK-22-224	2x2 T5HO (2) Lamp
RDI-XL-RFK-24-132	2x4 T8 (1) Lamp
RDI-XL-RFK-24-232	2x4 T8 (2) Lamp
RDI-XL-RFK-24-154	2x4 T5HO (1) Lamp
RDI-XL-RFK-24-254	2x4 T5HO (2) Lamp

*Standard Retrofit Kit includes 1-MVN Ballast and fluorescent sockets (lamps not included), see pg. 49 for upgrade options.

RETROFIT KIT – RDI BFL SERIES

A white aluminum baffle with sloping acrylic side panels maintains the look and feel of a deep RDI luminaire available in both T-5 and T-8.

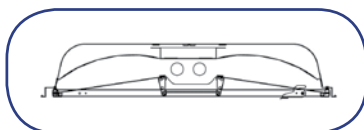

Item #	Dimensions
RDI-BFL-RFK-22-117	2x2 T8 (1) Lamp
RDI-BFL-RFK-22-217	2x2 T8 (2) Lamp
RDI-BFL-RFK-22-124	2x2 T5HO (1) Lamp
RDI-BFL-RFK-22-224	2x2 T5HO (2) Lamp
RDI-BFL-RFK-24-132	2x4 T8 (1) Lamp
RDI-BFL-RFK-24-232	2x4 T8 (2) Lamp
RDI-BFL-RFK-24-154	2x4 T5HO (1) Lamp
RDI-BFL-RFK-24-254	2x4 T5HO (2) Lamp


*Standard Retrofit Kit includes 1-MVN Ballast and fluorescent sockets (lamps not included), see pg. 49 for upgrade options.

RETROFIT KIT – RDI BSK SERIES

This kit provides the look and feel of a deep RDI luminaire. Available in both T-5 and T-8 configurations. Customized to fit most standard recessed housing 2X2 and 2X4.

Item #	Dimensions
RDI-BSK-RFK-22-117	2x2 T8 (1) Lamp
RDI-BSK-RFK-22-217	2x2 T8 (2) Lamp
RDI-BSK-RFK-22-124	2x2 T5HO (1) Lamp
RDI-BSK-RFK-22-224	2x2 T5HO (2) Lamp
RDI-BSK-RFK-24-132	2x4 T8 (1) Lamp
RDI-BSK-RFK-24-232	2x4 T8 (2) Lamp
RDI-BSK-RFK-24-154	2x4 T5HO (1) Lamp
RDI-BSK-RFK-24-254	2x4 T5HO (2) Lamp

*Standard Retrofit Kit includes 1-MVN Ballast and fluorescent sockets (lamps not included), see pg. 49 for upgrade options.

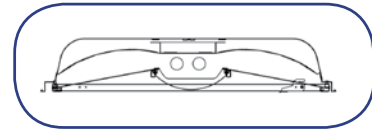


RETROFIT KIT – RDI RXL SERIES

The RDI-RXL, a radial Duriflex diffuser between the sloping acrylic panels provides the look and feel of a deep RDI luminaire available in both T-5 and T-8 configurations customized to fit most standard recessed housing 2X2 and 2X4.

Item #	Dimensions
RDI-RXL-RFK-22-117	2x2 T8 (1) Lamp
RDI-RXL-RFK-22-217	2x2 T8 (2) Lamp
RDI-RXL-RFK-22-124	2x2 T5HO (1) Lamp
RDI-RXL-RFK-22-224	2x2 T5HO (2) Lamp
RDI-RXL-RFK-24-132	2x4 T8 (1) Lamp
RDI-RXL-RFK-24-232	2x4 T8 (2) Lamp
RDI-RXL-RFK-24-154	2x4 T5HO (1) Lamp
RDI-RXL-RFK-24-254	2x4 T5HO (2) Lamp

*Standard Retrofit Kit includes 1-MVN Ballast and fluorescent sockets (lamps not included), see pg. 49 for upgrade options.

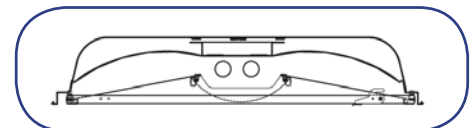

ADDITIONAL INDUCTION HOUSINGS AVAILABLE*

CALL OUR FACTORY FOR MORE INFORMATION



BHi-G



BHi-SC



WPi2



WPi4



BHi



WPi3



GLi6



WPi5



TLi2



ACi

*THESE ARE JUST A SAMPLING OF THE ADDITIONAL HOUSINGS AVAILABLE. FOR A COMPLETE LIST, PLEASE CONTACT OUR FACTORY AT 562.906.2644.

LAMP AND BALLAST UPGRADES

BALLAST

1 Light T8 Ballast	2 Light T8 Ballast		3 Light T8 Ballast	4 Light T8 Ballast	1 Light T5 Ballast	2 Light T5 Ballast	4 Light T5 Ballast
GE-132MAX-L/ULTRA	GE-232-MV-L	GE-232-MVPS-L	GE-332-MV-L	GE-432-MV-L	GE180MVPS-D	GE228-MVPSH-A	GE454MVPS90-E
GE-132MAX-N/ULTRA	GE-232-MV-H	GE-232-MVPS-N	GE-332-MV-H	GE-432-MV-H		GE228-MVPS-A	GE454MVPSN1
GE-159MAX-N/ULTRA	GE-232MAX-L/ULTRA	GE-232-MVPS-H	GE-332MAX-L/ULTRA	GE-432MAX-L/ULTRA		B228PUNV-C061C	
GE-159-MV-N	GE-232MAX-N/ULTRA	GE-259-MAX-N/ULTRA	GE-332MAX-N/ULTRA	GE-432MAX-N/ULTRA		B224PUNV-C061C	
	GE-232MAX-H/ULTRA	GE-259-MV-N	GE-332MAX-H/ULTRA	GE-432MAX-H/ULTRA		B239PUNV-D061C	
	GE-232-120-PS-N	GE-259-120-N	GE-332-120-PS-N	GE-432-120-PS-N		GE254MVPS90-F	
	GE-232-277-PS-N	GE-259-277-N	GE-332-277-PS-N	GE-432-277-PS-N		B254PUNV-D6E1C	
			GE-332-MVPS-L	GE-432-MVPS-L		GE254MVPS-D	
			GE-332-MVPS-N	GE-432-MVPS-N			
			GE-332-MVPS-H	GE-432-MVPS-H			

LAMPS ** indicates lamp color temperature

2' T8 LAMP	3' T8 LAMP	4' T8 LAMP	8' T8 LAMP	2' T5 LAMP	3' T5 LAMP	4' T5 LAMP	5' T5 LAMP
F17T8/SP**/ECO	F25T8/SP**/ECO	F28T8/XL/SPX**/ECO	F96T8/SP**	F14W/T5/8**/ECO	F21W/T5/8**/ECO	F28W/T5/8**/ECO	F35W/T5/85**/ECO
F17T8/SPX**/ECO	F25T8/SPX**/ECO	F32T8/25W/SPX**/ECO	F96T8/SPX**	F14T5/8**/WM/ECO	F21T5/8**/WM/ECO	F28T5/8**/WM/ECO	F35T5/8**/ECO
F17T8/XL/SP**/ECO	F25T8/XL/SP**/ECO	F32T8/SPX**/ECO	F96T8/SP**/ECO	F24W/T5/8**/ECO (HO)	F39W/T5/8**/ECO (HO)	F54W/T5/8**/ECO (HO)	F80W/T5/8**/ECO (HO)
F17T8/XL/SPX**/ECO	F25T8/XL/SPX**/ECO	F32T8/XL/SP**/ECO	F96T8/XL/SP**				
F17T8/XL/SPX**/WM/ECO	F25T8/XL/SPX**/WM/ECO	F32T8/XL/SPX**/ECO	F96T8/XL/SPX**				
		F32T8/XL/SP**/WM/ECO	F96T8/XL/SP**/WM				
		F32T8/XL/SPX**/HL/ECO	F96T8/XL/SP**/WMP				

OPTIONS AND ACCESSORIES

WOOD FINISH CODES



10 UNFINISHED



20 WHITE WASHED



30 STARK WHITE



40 GOLDEN OAK




50 DARK OAK



60 RED OAK




70 PICKLED




80 PAINTED WHITE


END CAP & SCENCE LENS CODES



10 SOLID WHITE



20 WHITE MARBLE



30 IVORY MARBLE



40 PEACH MARBLE



50 ALABASTER

4000, 5000 & 6900 SERIES FINISH OPTIONS



GLOSS
WHITE



TEXTURED
FINISH



TEXTURED
VERDE PATINA



SATIN
BRASS



METALLIC
NICKEL



TEXTURED
BLACK




BLACK



TEXTURED
RUST



TEXTURED
BRONZE



ARCHITECTURAL
BRONZE



STEEL
GRAY

GRIPPERS AND ACCESSORIES




GA-7996



GA-7997



GA-7998



GA-7999



GA-8000



V-HOOK



AC



Cable Yoke

The GA-8000 gripper is designed to work with optional V-hook or a cable yoke can be designed with a maximum end ball diameter of 4mm. Unlike traditional chain hanging, no need to spend time measuring or waste scrap. Cable suspension offers a cleaner look than chain and collects less dust. Adjustment at the fixture level means less time on a ladder or lift.

ORDERS

No minimum order requirement. All items must be ordered by their catalog number. Please specify finish desired when more than one is available.

TERMS

1% 10 Prox from invoice date, net 30 days with prior approved credit. All unpaid accounts after maturity will be charged an additional 1 1/2% interest rate and will be charged back for any prepaid freight charges as well. All returned checks are subject to an additional service charge and subsequent orders will be shipped on a COD basis only. We accept payment in the form of Visa, Mastercard, Discover, Money Order or company check.

CREDIT POLICIES

All requests for an open account are subject to credit approval. Customers must complete a credit application and allow at least one week for processing. To expedite your initial order, please send a check for full amount or pay C.O.D.

FREIGHT

All Shipments are F.O.B. FSC warehouse.

FREIGHT ALLOWED ON ALL ORDERS OF \$1500 OR MORE in the state of California and \$2500 in all other states excluding HI and AK when paid within terms. We reserve the right to select the carrier on all shipments unless special arrangements are made prior to shipment. International orders must be negotiated and arranged with the factory on a case by case basis.

CLAIMS

All claims must be made within ten (10) days of receipt of shipment. All FSC merchandise is inspected prior to shipping. Our liability ceases upon acceptance of merchandise by the carrier. All claims must therefore be filed with the carrier. DO NOT DEDUCT for damaged merchandise when paying invoices, as carrier reimburses the consignee. We will assist in collecting your claim, but the liability for payment of the claim remains with the carrier.

RETURNS

Authorizations must be obtained from FSC prior to returning merchandise. Merchandise must be returned freight prepaid and in original factory cartons. A minimum of 25% re-stocking fee will apply on all returns. If merchandise is returned without proper RETURN GOODS AUTHORIZATION NUMBERS (RGA), then items will be refused or sent back with no credit issued. Prices and terms are subject to change without notice.



12120 East Altamar Place
Santa Fe Springs, California 90670
t. 562.906.2644 • f. 562.906.2649
www.fsclighting.com

