

Kollmorgen Automation Suite

Getting Started



Document Edition: U, December 2021

Valid for KAS Software Revision 3.07

Part Number: 959713



For safe and proper use, follow these instructions. Keep for future use.

Trademarks and Copyrights

Copyrights

Copyright © 2009-2021 Kollmorgen

Information in this document is subject to change without notice. The software package described in this document is furnished under a license agreement. The software package may be used or copied only in accordance with the terms of the license agreement.

This document is the intellectual property of Kollmorgen and contains proprietary and confidential information. The reproduction, modification, translation or disclosure to third parties of this document (in whole or in part) is strictly prohibited without the prior written permission of Kollmorgen.

Trademarks

- KAS and AKD are registered trademarks of [Kollmorgen](#).
- [Kollmorgen](#) is part of the [Altra Industrial Motion](#) Company.
- EnDat is a registered trademark of Dr. Johannes Heidenhain GmbH
- EtherCAT is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH
- Ethernet/IP is a registered trademark of ODVA, Inc.
- Ethernet/IP Communication Stack: copyright (c) 2009, Rockwell Automation
- HIPERFACE is a registered trademark of Max Stegmann GmbH
- PROFINET is a registered trademark of PROFIBUS and PROFINET International (PI)
- SIMATIC is a registered trademark of SIEMENS AG
- Windows is a registered trademark of Microsoft Corporation
- [PLCopen](#) is an independent association providing efficiency in industrial automation.
- Codemeter is a registered trademark of [WIBU-Systems AG](#).
- SyCon® is a registered trademark of [Hilscher GmbH](#).

Kollmorgen Automation Suite is based on the work of:

- [7-zip](#) (distributed under the terms of the LGPL and the BSD 3-clause licenses - [see terms](#))
- The [C++ Mathematical Expression Library](#) (distributed under [the MIT License](#))
- [curl](#) software library
- [JsonCpp](#) software (distributed under the MIT License - [see terms](#))
- [Mongoose](#) software (distributed under the MIT License - [see terms](#))
- [Qt](#) cross-platform SDK (distributed under the terms of the LGPL3; Qt source is available on KDN)
- [Qwt](#) project (distributed under the terms of the [Qwt License](#))
- [U-Boot](#), a universal boot loader is used by the AKD PDMM and PCMM (distributed under the [terms](#) of the GNU General Public License). The U-Boot source files, copyright notice, and readme are available on the distribution disk that is included with the AKD PDMM and PCMM.
- [Zlib](#) software library

All other product and brand names listed in this document may be trademarks or registered trademarks of their respective owners.

Disclaimer

The information in this document (Version U published on 11/30/2021) is believed to be accurate and reliable at the time of its release. Notwithstanding the foregoing, Kollmorgen assumes no responsibility for any damage or loss resulting from the use of this help, and expressly disclaims any liability or damages for loss of data, loss of use, and property damage of any kind, direct, incidental or consequential, in regard to or arising out of the performance or form of the materials presented herein or in any software programs that accompany this document.

All timing diagrams, whether produced by Kollmorgen or included by courtesy of the PLCopen organization, are provided with accuracy on a best-effort basis with no warranty, explicit or implied, by Kollmorgen. The user releases Kollmorgen from any liability arising out of the use of these timing diagrams.

1 Table of Contents

1	Table of Contents	3
2	Introduction	4
2.1	Related Documents	4
2.2	Alerts and Warnings	5
3	System Overview	6
3.1	Software Packages	6
3.2	Hardware Components	7
4	Installing KAS IDE	8
4.1	System Requirements	8
4.2	Download	8
4.3	Installation Procedure	9
4.3.1	User Data	10
4.4	Additional Literature	10
5	Installing KAS Runtime	11
5.1	Updating the Runtime on PDMM & PCMM	11
6	Installing Hardware	13
6.1	HMI - Graphic Operator Interface	15
6.2	Install Controller - PDMM & PCMM	15
6.3	EtherCAT Motion Bus	15
6.4	Remote Input/Output - I/O Terminal	16
6.5	Installing Drives	17
6.6	Installing Motors	17
6.7	Working with SafePLC2 Projects	18
7	Updating Firmware	19
7.1	Check AKD / AKD2G Drive Firmware	19
7.2	Download AKD PDMM Drive Firmware	19
7.3	AKD/AKD2G Firmware Update	20
8	Installing Kollmorgen Visualization Builder	22
8.1	Download	22
8.2	Installation Procedure	22
9	Finalizing Installation	24
9.1	Testing Installation	24
10	Troubleshooting KAS	25

2 Introduction

This guide covers the main following procedures to have your KAS system up and running:

- **Hardware Installation** (Connection and Wiring)
Hardware details, connectors, system diagrams
- **Hardware Configuration**
Basic configuration and settings needed to start the HW components
(HMI + Industrial PC + Fieldbus + I/O)
- **KAS IDE Installation**
KAS software setup

2.1 Related Documents

In addition to this Guide, you may need the following manuals to install other components of KAS, such as drives.

Drives Guide	Description
AKD PDMM User Manual	Describes software installation, setup, and operation for the AKD PDMM drive. Includes basic topics and examples to help guide you in setting up and using the various features in the drive.
AKD PDMM Fault Card	Describes AKD PDMM (including AKD) faults, warnings, error messages, and alarms. Provides cause and remedy instructions to help determine the specifics of the failure and to correct the underlying problem.
AKD Installation Manual	Installation manual for AKD and AKD PDMM drives. Describes the AKD series of digital drives and includes mechanical, electrical, and software installation information needed to safely install AKD.
AKD2G Installation Manual	Describes the AKD2G series of digital drives and includes mechanical, electrical, software and functional safety options.
AKD, AKD2G, S700 (in NA) Accessories Manual	This manual describes the accessories for Kollmorgen digital drive systems and servo drive motors.
AKD EtherCAT Manual	Describes the installation, setup, range of functions, and software protocol for the EtherCAT AKD product series,
AKD2G EtherCAT Manual	AKD2G EtherCAT and CANopen Communications Manual describes the installation, setup, range of functions, and software protocol for the AKD2G product series.
S300 Reference Documentation	Kollmorgen website that gives access to all S300 manuals.
S700 Reference Documentation	Kollmorgen website that gives access to all S700 manuals.

2.2 Alerts and Warnings


When alert symbols are seen in a manual, be alert to the potential for personal injury. Follow the recommended precautions and safe operating practices included with the alert symbols. Safety notices in the manuals provide important information. Read and be familiar with these instructions before attempting to install, operate, or perform maintenance. The purpose of this section is to alert users to possible safety hazards associated with equipments and the precautions that need to be taken to reduce the risk of personal injury and damage to the equipment. Failure to observe these precautions could result in serious bodily injury, damage to the equipment, or operational difficulty.

3 System Overview

Kollmorgen Automation Suite is a complete system solution. This includes a variety of powerful software packages designed to give you complete control over your hardware.

3.1 Software Packages


Software	Description
KAS IDE	Provides you with all the necessary tools for designing, programming, configuring, debugging and maintaining machine applications.
KAS Runtime	The KAS Runtime engine includes a soft PLC and a motion controller.
KVB (optional)	This application is optional and assists in designing an HMI panel.

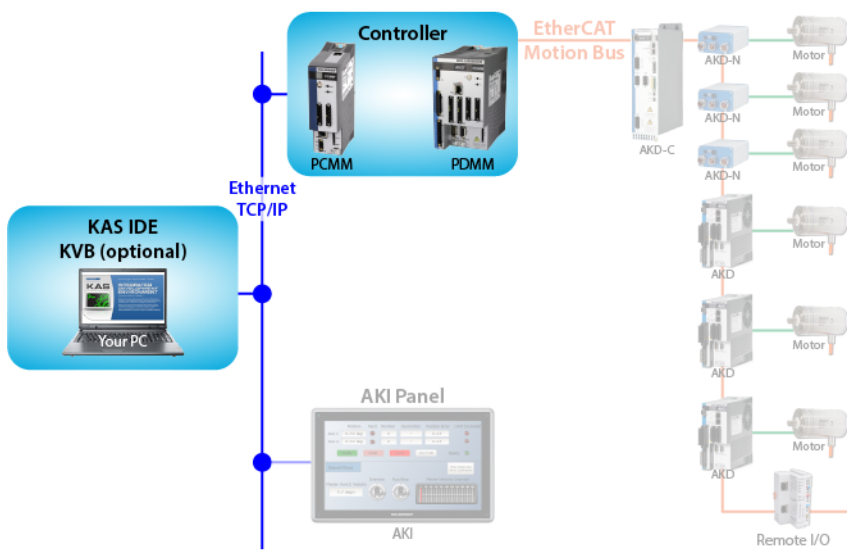

3.2 Hardware Components

The KAS system is comprised of the following hardware components.



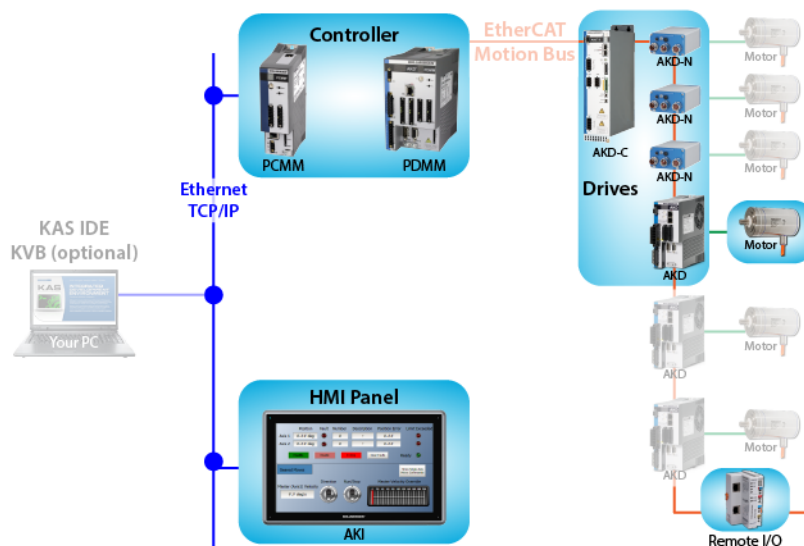

Component	Models	Description
Controller	PCMM	Standalone programmable controller, providing a real-time platform with a PLC engine and motion engine to execute your application program and communicate with all network devices (remote I/O, drives, HMI, other PLCs, etc....).
Controller + Drive	AKD PDMM	Integrated programmable controller and servo drive, providing a real-time platform with a PLC engine and motion engine to execute your application program and communicate with all network devices (remote I/O, drives, HMI, other PLCs, etc....).
Remote I/O	AKT, AKT2G	Digital and analog input and output signals that provide sensor feedback and actuation between your automation system and the physical world.
HMI	AKI, AKI2G	Provides a graphical interface for the operator to manage the machine's operations.
Drive	AKD, AKD2G, AKD-C/N	Servo drives specifically designed with versatility, communications, and the power to expand machine performance.
Motor	AKM, AKM2G	Servo motor is an actuator that allows for precise control of position, velocity, and acceleration by closing the control loop with a feedback device.



4 Installing KAS IDE

4.1 System Requirements

KAS IDE minimum system requirements:

Element	Description
Operating System	Microsoft® Windows® 7 SP1 (32 or 64-bit), Microsoft® Windows® 10 (32 or 64-bit). For optimal performance, please be sure your operating system is fully updated with the latest patches.
Processor type	Intel® Pentium® M or equivalent processor at 1.5 GHz or greater.
Memory	1 GB RAM (for 32-bit) or 2 GB RAM (for 64-bit) or greater (which is recommended for complex applications).
Storage	16 GB (for 32-bit) or 20 GB (for 64-bit) of free space on hard disk.
Display	WXGA+ (1440 x 900) or higher-resolution monitor with 24-bit color. See Note #1 below.
Connectivity	1 Ethernet port, at either 100Mbps/s or 1Gbits/s. See Note #2 below.
Web Browser	A modern web browser is required to access the web server and online help. We recommend Microsoft Edge  , Google Chrome  , Mozilla Firefox  , or Internet Explorer (IE9 or later, see Note #3)  .

NOTE

1. Better results are achieved with OpenGL and 3D cards.
2. A 100Mb network is required in order to allow the IDE to Runtime communication to work in all conditions. The AKD WorkBench AutoTuner and Scope both require 100Mb of bandwidth to function properly.
3. IE9 should be considered a minimum. Later versions of the browser are more compliant with web standards and afford better performance and compatibility.

TIP

See the topic [Connect Remotely](#) for information about the ports used by the KAS IDE which may need to be opened to support connecting from an external network.

4.2 Download

The latest version of the Kollmorgen Automation Suite is available from KDN. Visit www.kollmorgen.com/en-us/developer-network/ to download the latest, or older versions.

NOTE

This is a restricted community to which you must be given access based on having purchased KAS. If you do not have access, please contact support.

4.3 Installation Procedure

How to proceed if you have a CD/DVD

After inserting the installation CD or DVD, a web browser automatically displays the installation start page.

TIP

If the installation start page does not automatically display, double-click on the file **Index.html** file.

To start the installation of Kollmorgen Automation Suite, click the corresponding link and confirm that you want to execute **KAS-Setup.exe**.

Follow the procedure below to proceed with the KAS IDE software installation.

IMPORTANT

Installation of the KAS IDE can require you to change your firewall setting. If you do not have sufficient privileges to configure your firewall, you must stop the relevant Windows Service.

Once KAS has finished downloading, complete the following installation steps:

1. Double-click the **KAS-Setup.exe** file to run the installation Wizard.

NOTE

A Security Warning dialog displays as a result of security certification. Do not be alarmed.

2. Click **Run** to start the installation Wizard.
3. While the setup is loading, wait for the setup splash screen to vanish after being displayed.
4. The following Welcome Wizard displays with the version and build number of the KAS IDE. Click **Next** to continue.
5. Review the License Agreement and click "I Agree" to continue the installation.

NOTE

You must accept the agreement to install Kollmorgen Automation Suite.

6. Select the **Development Environment** installation type from the drop-down menu.

Installation Type	Description
Development Environment	This kind of installation is typically used for creating and developing a new application. When you need to install the KAS IDE and the KAS Runtime Simulator, you can select Development Environment as the type of installation.
Custom	You can manually select the specific KAS components to install.

7. Click **Next** to access the destination folder.
8. Click **Browse** to specify a custom install directory or accept the recommended default location. When finished, click **Install** to continue.

TIP

Kollmorgen strongly recommends accepting the default destination folder under C:\Program Files\Kollmorgen\Kollmorgen Automation Suite\Kollmorgen Automation Suite 3.07.X.X.

9. The software installation begins. Wait until the installation process is complete.
10. You are done; click **Finish**.







TIP

- Adding the **KAS IDE** application as an exception in your firewall settings is recommended to avoid security issues.

4.3.1 User Data

User-generated data such as log files, project sources, field bus configurations, function blocks, etc. are stored in the Windows User directory and are maintained between installations. This applies to files on AKD PDMs, PCMMs, and Simulator files.

4.4 Additional Literature

Document Title	PDF	Description
Release Notes		The KAS version 3.07 Release Notes contain fixed limitations, known limitations, workarounds, and information on all hardware and software components that have been updated, changed or added in this release.
Getting Started		Covers the main steps to get your KAS system up and running. <i>What does it contain?</i> <ul style="list-style-type: none"> • HW Installation (Connection and Wiring): Wiring & hardware details, connectors, system diagrams • HW Configuration: Basic configuration and settings needed to start the HW components (HMI + Industrial PC + Fieldbus + I/O) • SW Installation: KAS software setup
30 Minutes to Motion		Covers the main topics to help you start quickly with KAS IDE. The objective is to familiarize you with the basic principles and the way the program works by creating a simple motion application project. <i>What does it contain?</i> <ul style="list-style-type: none"> • Key Features • Explore the Workspace • Build a motion project <p>Almost every task that you perform in KAS falls under one of the following basic steps (which may not always be completed in the following order):</p> <ol style="list-style-type: none"> 1. Start Projects - Create a project from scratch, or modify an existing project. 2. Add Components - Add elements to build your project necessary to control the motion part of your system. 3. Build Output - Select a device and generate the application that you will deliver to users. 4. Run Output - Make the output accessible to your end-users.
IDE User Manual		Contains the content to help you with KAS IDE, except the topics included in the Reference Manuals.
Reference Manual - PLC Library		Contains Technical References on PLC Programming Languages and Library.
Reference Manual - Motion Library		Contains Technical References on Motion Library for Pipe Network and PLCopen.

5 Installing KAS Runtime

The controller comes with all the necessary software already installed (including KAS Runtime).

NOTE

KAS Runtime is only supported with Kollmorgen controllers.

5.1 Updating the Runtime on PDMM & PCMM

The KAS Runtime is contained in the AKD PDMM and PCMM firmware, and comes pre-installed. Following is the procedure for updating the firmware and runtime using the KAS web server.

The firmware files are IMG files with the following name format:

`KAS-PCMM-M- {model-code}- {software-revision}.img`

`KAS-PDMM-M- {model-code}- {software-revision}.img`

The *model-code* reflects the CPU speed.

Model	CPU Speed	Cores
MCEC	800 MHz	single
M1EC	1.2 GHz	single
M2EC	1.2 GHz	dual

1. Download the latest drive firmware and/or runtime firmware from Kollmorgen.com.
2. Open the controller's web server in your web browser by entering its IP address.
3. Select the **Settings** tabbed-page.
4. In the **Firmware** pane, click the **Choose File** button to select the new firmware image file for the KAS Runtime.

The recommended file is displayed in the **Current Information** section, as seen below.

Firmware Information	
Firmware version	_2.10.0.54368
Recommended File Name	_KAS-PDMM-M-MCEC-{version}.img

5. Click **Upgrade** to start the update procedure.

TIP

If the Upgrade button is disabled, log into the webserver. Click on **Login** at the top of the web page and enter the password.

A message and a throbber are shown across the web page, indicating that maintenance is in progress. The device's 7-segment display will animate chasing lights.

Successful upgrade	<p>A message similar to the following is shown upon a successful firmware upgrade:</p> <p>Upload of firmware KAS-PDMM-M-MCEC-2.10.0.54368.img successful.</p> <p>Please reboot the unit in order to boot on the new firmware, and once reboot is performed, press CTRL+F5 in your web browser to force a page refresh.</p>
---------------------------	--

Incompatible firmware	An error message similar to the following will be displayed if the wrong firmware file was downloaded: The file provided is not compatible with this device. The file name should be... "KAS-PDMM-M-MCEC-{version}.img"
------------------------------	---

6. After the download is complete, click **Reboot**.

A message and a throbber are shown over the web server while the reboot is in progress. The login session will no longer be valid when the reboot is complete. The web server will display a message to indicate the user has been logged out.

NOTE

This step is not necessary if the controller automatically reboots during the upgrade (previous step).

7. Press **CTRL+F5** to force the web browser to refresh the page.

⚠ IMPORTANT

Do not try to refresh the web page until firmware upgrade is done.

6 Installing Hardware

Before your motion application can be up and running, you first need to connect, wire and configure all your hardware components.

The **Getting Started** guide contains procedures for installing and configuring hardware components (HMI, controllers, I/O Terminals, EtherCAT Motion Bus, AKD Drive, and AKM Motor).

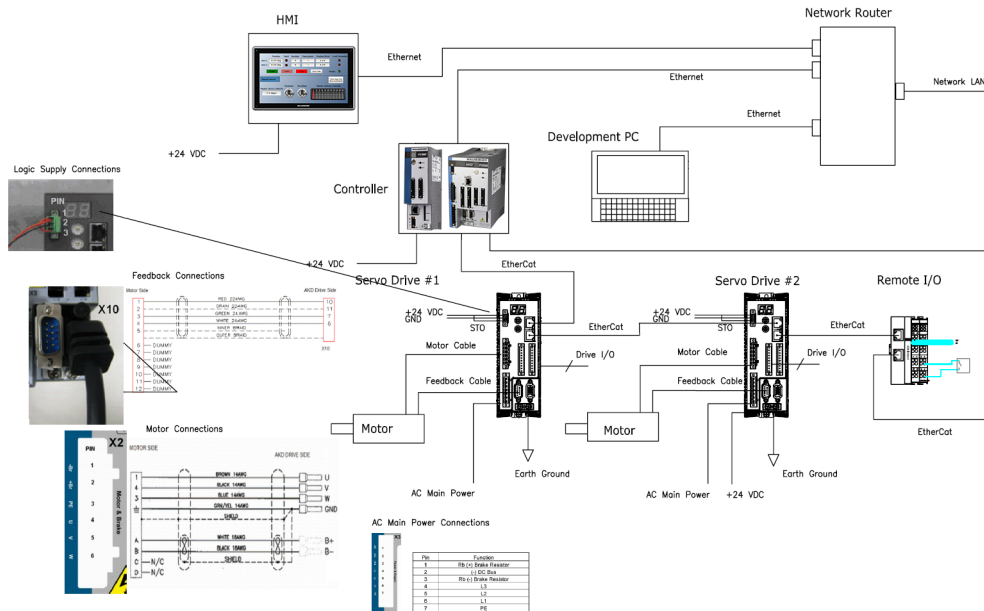




Figure 4-1: Connecting all the Hardware components

NOTE

For extensive information about installing the different hardware components, see the relevant documentation available on:

- Kollmorgen [Website](#)
- KAS IDE online help (after it has been installed)

Links to installation instructions for hardware components can be found in the following table.

Component	Installation
HMI (Human-Machine Interface) 	Install the graphic operator interface. See HMI - Graphic Operator Interface
Controller 	Install the PCMM or AKD/PDMM controller. See Install Controller - PDMM & PCMM


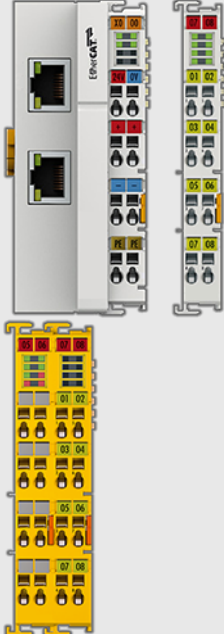



Component	Installation
EtherCAT Motion Bus 	Set up EtherCAT Motion Bus Communication. See AKD™ EtherCAT Communication
I/O Terminal 	Install the remote Input/Output Terminal. See Remote Input/Output - I/O Terminal
Safety 	Working with SafePLC2 Projects
AKD Drive 	Install a AKD or AKD2G Drive. See AKD Installation Manual and also AKD Quick Start. Available from KDN: AKD Downloads
AKM and AKM2G Motor 	Install the AKM or AKM2G Motor. Mechanical and Electrical installation. Available from KDN. AKM Downloads AKM2G Downloads

Table 4-1: Kollmorgen Automation Suite Installation and Configuration

6.1 HMI - Graphic Operator Interface

Please find in the table below the list of each HMI component available:










HMI Part Number	Description	KVB	Manual
AKI2G-CDA-MOD-05T-000	Graphical Display 7" TFT LCD, Touchscreen	v2.20	
AKI2G-CDA-MOD-07T-000	Graphical Display 5" TFT LCD, Touchscreen	v2.20	
AKI2G-CDB-MOD-07T-000	Graphical Display 7" TFT LCD, Touchscreen	v2.20	
AKI2G-CDB-MOD-12T-000	Graphical Display 12" TFT LCD, Touchscreen	v2.20	
AKI-CDC-MOD-12T-000	Graphical Display 12.1" TFT LCD, Touchscreen	v2.0	
AKI-CDC-MOD-15T-000	Graphical Display 15.4" TFT LCD, Touchscreen	v2.0	
AKI-CDC-MOD-21T-000	Graphical Display 21.5" TFT LCD, Touchscreen	v2.0	

Table 4-2: List of KAS HMI

Please see the Kollmorgen website for specifications and Technical Manuals for more information.

6.2 Install Controller - PDMM & PCMM

The AKD PDMM and PCMM installation information may be found in the following locations.

Manual	Description
AKD PDMM Install Guide 	Covers the most important points to install the drive hardware and software. Provides instructions for basic drive setup and connection to a network
PCMM Install Guide 	Covers the most important points of the installation and setup of the controller.

6.3 EtherCAT Motion Bus

One EtherCAT master has to be connected with all the slaves (drives and I/O terminals) of your system. Please find all the details about the installation procedure for the EtherCAT Motion Bus in the following deliverable **AKD™ EtherCAT Communication** listed in the list of [References](#).

6.4 Remote Input/Output - I/O Terminal

Please find in the table below the list of each I/O component available. Please see the AKT2G I/O Manual or the online help for detailed information on setting up I/O.

AKT2G (EtherCAT) Terminals

I/O Terminal Part Number	I/O Terminal Description
AKT2G-AC-FAN-001	Fan cartridge for EtherCAT and Bus Terminals
AKT2G-AN-240-000	2-channel input terminal PT100 (RTD) for resistance sensors, 16 bit, 2-, 3-wire system
AKT2G-AN-400-000	4-channel thermocouple input terminal, preset to type K, with wire breakage detection, 16 bit
AKT2G-AN-430-000	4-channel analog input, parameterisable, -10/0...+10 V, -20/0/+4...+20 mA, 16 bit
AKT2G-AT-410-000	4-channel analog output terminal 0...10 V, 12 bit, 1-wire system
AKT2G-AT-425-000	4-channel analog output terminal -10 V...+10 V, 12 bit, 4 x 2-wire system
AKT2G-BRC-000-000	Brake Chopper Terminal
AKT2G-DN-002-000	Up/down counter 24 V DC, 100 kHz, 32 bit counter depth
AKT2G-DN-008-000	8-channel digital input terminal 24 V DC, filter 3.0 ms, 1-wire system
AKT2G-DNH-008-000	8-channel digital input terminal 24 V DC, filter 10 µs, 1-wire system
AKT2G-DT-008-000	8-channel digital output terminal 24 V DC, 0.5 A, 1-wire system
AKT2G-ECT-000-000	EtherCAT Coupler for E-bus terminals
AKT2G-EM-000-000	Bus end cover for E-bus terminals, cover for power and E-bus contacts, grey
AKT2G-ENC-180-000	1-channel incremental encoder interface, 32 bit
AKT2G-ENC-190-000	Incremental encoder interface with differential input, 16/32 bit
AKT2G-PSF-024-000	Power supply terminal with fuse, 24 V DC
AKT2G-SDI-004-000	4-channel digital input terminal, Safety, 24 V DC
AKT2G-SDO-004-000	4-channel digital output terminal, Safety, 24 V DC, 0.5 A
AKT2G-SM-L15-000	Stepper motor terminal, 24 V DC, 1.5 A, vector control
AKT2G-SM-L50-000	Stepper motor terminal, 50 V DC, 5 A, vector control

Table 4-3: List of KAS I/O Terminals

6.5 Installing Drives

Drives Guide	Description
AKD PDMM User Manual	Describes software installation, setup, and operation for the AKD PDMM drive. Includes basic topics and examples to help guide you in setting up and using the various features in the drive.
AKD PDMM Fault Card	Describes AKD PDMM (including AKD) faults, warnings, error messages, and alarms. Provides cause and remedy instructions to help determine the specifics of the failure and to correct the underlying problem.
AKD Installation Manual	Installation manual for AKD and AKD PDMM drives. Describes the AKD series of digital drives and includes mechanical, electrical, and software installation information needed to safely install AKD.
AKD2G Installation Manual	Describes the AKD2G series of digital drives and includes mechanical, electrical, software and functional safety options.
AKD, AKD2G, S700 (in NA) Accessories Manual	This manual describes the accessories for Kollmorgen digital drive systems and servo drive motors.
AKD EtherCAT Manual	Describes the installation, setup, range of functions, and software protocol for the EtherCAT AKD product series,
AKD2G EtherCAT Manual	AKD2G EtherCAT and CANopen Communications Manual describes the installation, setup, range of functions, and software protocol for the AKD2G product series.
S300 Reference Documentation	Kollmorgen website that gives access to all S300 manuals.
S700 Reference Documentation	Kollmorgen website that gives access to all S700 manuals.


Table 4-4: List of AKD/AKD2G Guides

6.6 Installing Motors

To install AKM or AKM2G Servomotors, refer to the [AKM Instructions Manual](#) or the [AKM2G Installation Manual](#).

6.7 Working with SafePLC2 Projects

A node may be added to the Project tree which connects to a [SafePLC2](#) project. This allows you to synchronize a SafePLC2 project with a KAS project. The KAS IDE automatically generates the PDOs for the connected devices and will establish the Black Channel with the EtherCAT Safety network.

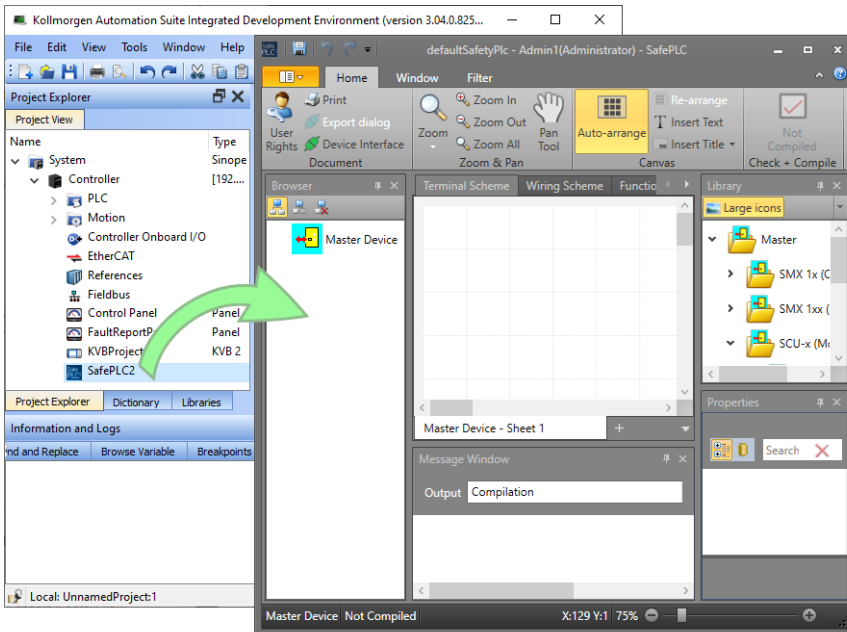

There are two methods for creating the synchronization between KAS Runtime and SafePLC2.

- Direct - this is used when both the KAS IDE and SafePLC2 are installed on the same computer.
- Import - this is used when KAS IDE and SafePLC2 are installed on different computers.

Please see the online help or the AKT2G I/O Manual for detailed directions.

7 Updating Firmware

Check the KAS software release notes to find the AKD PDMM firmware version that matches with your KAS software version. The latest version of the firmware can be downloaded from the [Kollmorgen website](#).

To ensure your installation is correct, you have to:

- Check the current AKD or AKD2G drive firmware.
- Download the official version, if necessary.
- Update the firmware.


7.1 Check AKD / AKD2G Drive Firmware

To check AKD PDMM Firmware with KAS IDE:

1. Create a new project.
2. Set the controller type and IP address.
3. In the Project Explorer, double-click the **EtherCAT** node to open the EtherCAT Devices summary window.
4. In the Devices tab, click the **Scan Devices** button.
5. Choose the **Create...** option to map the physical device to a new device.



NOTE

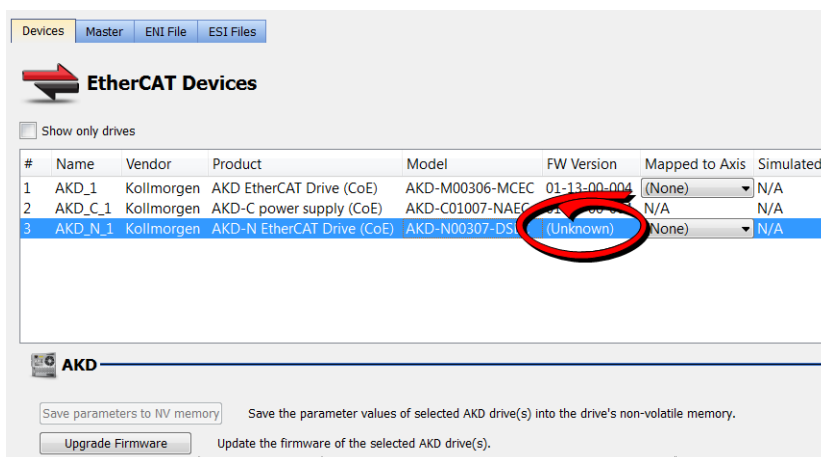If a Kollmorgen drive is showing the firmware version as "Unknown", the drive has valid resident firmware (from which to boot), but does not have valid operational firmware. Please download and install the latest operational firmware and reboot the AKD/AKD2G.



6. If the version is not correct, continue following with the procedure below.
7. Compile the project.
8. Connect to the controller.
9. Download the project to the controller .
10. If the version is not correct, download the new firmware ([click here](#)) and follow with the next procedure.

7.2 Download AKD PDMM Drive Firmware

Component	Title	Download
800MHz AKD PDMM Drive FW	AKD PDMM Servo Drive Firmware (AKD-M-MCEC- [firmware version])	
1.2GHz AKD PDMM Drive FW	AKD PDMM Servo Drive Firmware (AKD-M-M1EC- [firmware version])	

To upgrade AKD PDMM drive Firmware with KAS IDE, continue from the previous procedure as follows:

1. In the toolbar, deactivate the Online Configuration Mode.
2. Select the drives requiring the same firmware version to be updated .

TIP

Please note that the firmware download is limited to 16 drives at a time.

3. Click **Upgrade Firmware** button.

IMPORTANT

Give careful attention to any warning dialog that appears at this point. These warnings usually include important information about preventing damage to the drives.


4. Browse to select the new AKD/AKD2G firmware file.
5. Click **Open** to start the updating procedure.

7.3 AKD/AKD2G Firmware Update

Based on the File Access over EtherCAT (FoE) protocol, the AKD/AKD2G drive Firmware can be downloaded as follows:

1. Scan the devices and make sure all devices are created.
2. Compile the project.
3. Connect to the controller.
4. Download the project to the controller.
5. Open the **EtherCAT Devices** summary form.
6. Select the drives requiring the same firmware version to be updated.
 - Multiple drives of the same type can be selected allowing the same firmware file to be downloaded to the selected drives simultaneously.
 - **AKD-P:** The last four letters of the model number must be the same for simultaneous firmware download.
 - **AKD-N:** The last four characters can be different. However, the firmware file selected to download must support all the selected models. The file `AKD-N-xxEC-*****.i00` supports multiple AKD-N models.
 - **AKD-C:** Devices with the product description "AKD-C String 2" do not support firmware download.

#	Name	Vendor	Product	Model	FW Version	Mapped to Axis	Simulated
1	AKD_1	Kollmorgen	AKD EtherCAT Drive (CoE)	AKD-M00306-MCEC-0000	01-14-00-002	(None)	N/A
2	AKD_C_1	Kollmorgen	AKD-C String 1 / Power supply/IO (CoE)	AKD-C00000-CBEC-E000	(Unknown)	N/A	N/A
3	AKD_N_1	Kollmorgen	AKD-N EtherCAT Drive (CoE)	AKD-N00307-DFEC-E000	01-14-00-002	(None)	N/A
4	AKD_C_2	Kollmorgen	AKD-C String 2	AKD-C00000-CBEC-0000	(Unknown)	N/A	N/A
5	AKD_N_2	Kollmorgen	AKD-N EtherCAT Drive (CoE)	AKD-N00307-DFEC-0000	01-14-00-002	(None)	N/A
6	AKD_N_3	Kollmorgen	AKD-N EtherCAT Drive (CoE)	AKD-N00307-DSEC-0000	01-14-00-002	(None)	N/A

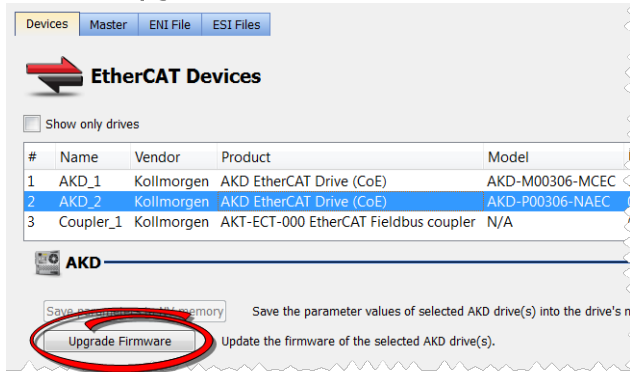7. Click the **Upgrade Firmware** button.**! IMPORTANT**

Give careful attention to any warning dialog that appears at this point. These warnings usually include important information about preventing damage to the drives.

8. Browse to select the new AKD firmware file matching the AKD revision. Refer to the Release Notes for the latest supported firmware.
9. Click **Open** to start the updating procedure.

NOTE

This procedure is not possible when applications are running and when the drive is in Online Configuration Mode.

During the firmware download, the AKD/AKD2G Firmware Update window displays a progress bar and the following messages are displayed:

- Uploading firmware to the drive.
During the download process, the drive LED displays [dL]. Additional codes may appear during the download; see 3.2 Display Codes for a description of codes related to the firmware download.
- Resetting the drive.
- Firmware update is complete.

! CAUTION

While the firmware is downloading to your drive, do not remove the 24V logic power. If you remove the 24V logic power during a firmware download, a severe drive crash can occur. If a crash occurs, the drive will restart in a special mode and prompt you to reload the firmware.

! IMPORTANT

An AKD drive executing the resident firmware is detected as a different device than an AKD or AKD2G drive executing the operational firmware. Be sure to re-scan the network and compile it if a drive's executed firmware has changed since the last scan.

↖ TIP

Power cycling is recommended after completing the update for all drives.

8 Installing Kollmorgen Visualization Builder

Kollmorgen Visualization Builder (KVB) allows you to design HMI running on AKI panels. KVB is an optional feature that is only included in some licenses.

NOTE

Kollmorgen Visualization Builder contains the two following installation packages:

- Kollmorgen Visualization Builder(KVB IDE) for development PC
- Visualizer RT (KVB RT) for AKI panel runtime

8.1 Download

Component	Version
Latest Version of Kollmorgen Visual Builder	v.2.40
Visualizer RT (KVB RT)	v.2.40

8.2 Installation Procedure

The following programs will automatically be installed during the KVB installation.

- Microsoft .NET Compact Framework 3.5
- Microsoft SQL Server Compact 3.5
- Microsoft Visual C++ 2013 - Redistributable Setup


Once Kollmorgen Visualization Builder has finished downloading, complete the following installation steps:

1. Double-click the **Setup.exe** file to run the installation Wizard.

NOTE


If KVB was already installed and you want to update to a new version, then running **NeoSetup.msi** is enough.

2. Select the check box to accept the License agreement and click **Next** to start installing **Kollmorgen Visualization Builder**.
3. Select where you want to install **Kollmorgen Visualization Builder** and the application language, then click **Next**.

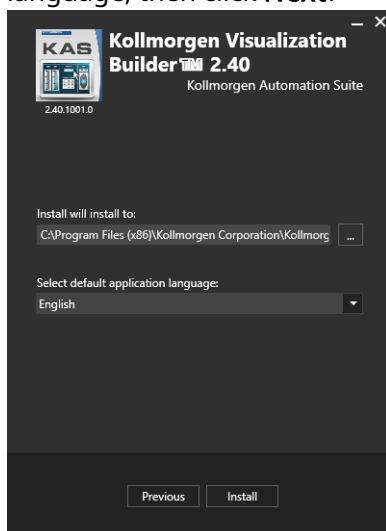

Kollmorgen strongly recommends accepting the default destination folder under C:\Program Files (x86)\Kollmorgen\Kollmorgen Visualization Builder\.

4. Click **Install** to start **Kollmorgen Visualization Builder** installation.
5. Click **Close** or to start usig KVB right away, click **Launch**.

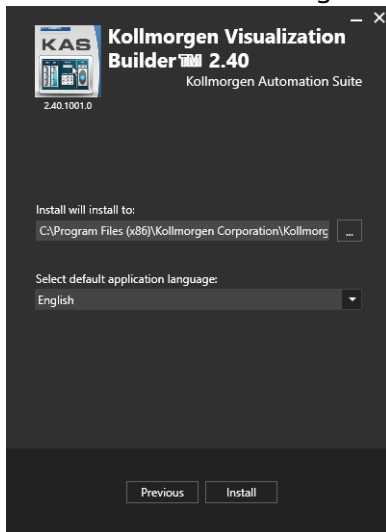

KVB Guide	Description
Kollmorgen Visualization Builder™ Quick Start Guide	Quick Start that covers the most important points to install and use Kollmorgen Visualization Builder, in order to configure HMI Panels and PC operated control applications.
Kollmorgen Visualization Builder™ User Manual	Contains all the content to help you with Kollmorgen Visualization Builder.

9 Finalizing Installation

To complete the KAS installation, you can optionally:

- Test the system
- Create a backup image

9.1 Testing Installation

To conclude your installation, the whole system has to be tested.

A test could be done with the standard Two-Axis Template that corresponds to a simple application (refer to **KAS 30 Minutes to Motion**).

10 Troubleshooting KAS

Faults occur for a variety of reasons, depending on the conditions in your installation. The causes of faults in multi-axis systems can be especially complex.

TIP

You can find more details in:

- the **Troubleshooting** chapter in the online help.
- the Faults and Warnings section of the online help.
- searching KDN (Kollmorgen Developer Network at www.kollmorgen.com/developer-network) for answers, or submit a question.

About KOLLMORGEN

Kollmorgen is a leading provider of motion systems and components for machine builders. Through world-class knowledge in motion, industry-leading quality and deep expertise in linking and integrating standard and custom products, Kollmorgen delivers breakthrough solutions that are unmatched in performance, reliability and ease-of-use, giving machine builders an irrefutable marketplace advantage.



Join the [Kollmorgen Developer Network](#) for product support. Ask the community questions, search the knowledge base for answers, get downloads, and suggest improvements.

North America KOLLMORGEN

201 West Rock Road
Radford, VA 24141, USA

Web: www.kollmorgen.com
Mail: support@kollmorgen.com
Tel.: +1 - 540 - 633 - 3545
Fax: +1 - 540 - 639 - 4162

**Europe
KOLLMORGEN Europe GmbH**
Pempelfurtstr. 1
40880 Ratingen, Germany

Web: www.kollmorgen.com
Mail: technik@kollmorgen.com
Tel.: +49 - 2102 - 9394 - 0
Fax: +49 - 2102 - 9394 - 3155

South America KOLLMORGEN

Avenida João Paulo Ablas, 2970
Jardim da Glória, Cotia - SP
CEP 06711-250, Brazil

Web: www.kollmorgen.com
Mail: contato@kollmorgen.com
Tel.: +55 11 4615-6300

China and SEA KOLLMORGEN

Room 302, Building 5, Lihpao Plaza,
88 Shenbin Road, Minhang District,
Shanghai, China.

Web: www.kollmorgen.cn
Mail: sales.china@kollmorgen.com
Tel.: +86 - 400 668 2802
Fax: +86 - 21 6248 5367