BCR
SERIES
WALL/CEILING MOUNT

	Approvals
Туре	



R

SPECIFICATIONS


 Opal borosilicate glass lens provides long life and soft uniform distribution; Held by cast aluminum frame/door; Gasketed to housing and secured by stainless steel allenhead screws

Cat. #

Job

- Heavy-wall cast aluminum housing and face trims offer rugged mounting and durability; Select from open face to spoke trim for complementary styling; Wall or ceiling mount
- Soft uniform Type V distribution for general accent/security illumination
- Available in 70 and 100 watt metal halide and HPS, PLC26/2PLC26/PLT42 fluorescent or 100 watt max. incandescent; Lamp not supplied unless ordered as an option
- Standard powder paint finishes are dark bronze, black, white and platinum
- Listed to UL1598 for use in wet locations






	A	В
BCR13	13"	9 ³ /4"
	330 mm	248 mm
BCR14-18	13"	10 ³ /8"
	330 mm	264 mm



ORDERING INFORMATION

ORDERING EXAMPLE: BCR13-70HPS-120-DB-LP

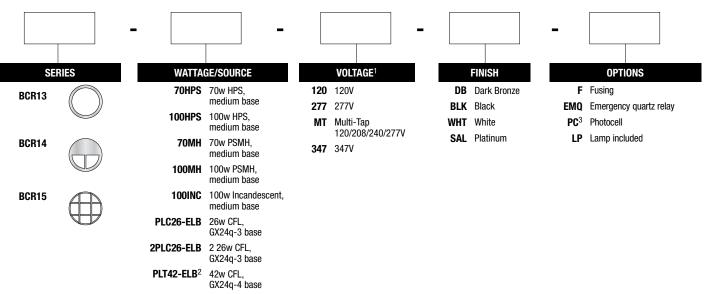

1 50 Hz, 220/240V available (consult factory)

2 Accepts PLT26, PLT32 or PLT42 lamp(s)

3 Specify voltage

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

