




Before You Start:

- Make sure you have a router and high-speed Internet access (not included).
- Connect your DVR to your router using an Ethernet cable (see the Quick Connection Guide for details).
- Upgrade your DVR firmware and client software or mobile app to the latest versions.
- Please note that an upload speed of 1 Mbps is recommended for the best video performance. Up to 3 devices may connect to the system at the same time.



1A iPhone

- Install the free **Lorex ECO Stratus** app from the App Store.
- Tap the **Lorex ECO Stratus** icon to open the app.
- Tap **Device Manager**.
- Tap **+**.
- Configure the following:



- Name:** Enter a name for your DVR of your choice.
- Device ID:** Press the QR code icon (📷) next to Device ID and line up the QR code on the top of the DVR using the camera on your device.
- Client Port:** Enter the **Client Port** (default: **9000**).
- User Name:** Enter the **DVR's User Name** (default: **admin**).
- Password:** Enter the **DVR's Password** (default: **000000**).




EXAMPLE

	Device
1 Name	DVR1
Login Type	Device ID
2 Device ID	ecofb10479
3 Client Port	9000
4 User Name	admin
5 Password	*****
Channels	

- Tap **Save**. You will be prompted to change the DVR password. Tap **OK**.
- Enter a new 6 character password and tap **Done**. This password will be used to connect to your system from now on.
- Tap **Save** again to connect to the DVR. The app opens in Live View and streams video from all connected cameras.

1B iPad

- Install the free **Lorex ECO Stratus HD** app from the App Store.
- Tap the **Lorex ECO Stratus HD** icon to open the app.
- Tap **+**.
- Tap **+**.
- Configure the following:




- Name:** Enter a name for your DVR of your choice.
- Device ID:** Press the QR code icon (📷) next to Device ID and line up the QR code on the top of the DVR using the camera on your device.
- Client Port:** Enter the **Client Port** (default: **9000**).
- User Name:** Enter the **DVR's User Name** (default: **admin**).
- Password:** Enter the **DVR's Password** (default: **000000**).

1 Device Name	DVR1
Login Mode	Device ID
2 Device ID	ecofb10479
3 Client Port	9000
4 User Name	admin
5 Password	*****

- Tap **Save**. You will be prompted to change the DVR password. Tap **OK**.
- Enter a new 6 character password and tap **Done**. This password will be used to connect to your system from now on.
- Tap **Save** again to connect to the DVR. The app opens in Live View and streams video from all connected cameras.

1C Android

- Install the free **Lorex ECO Stratus** app from the Google Play Store.
- Tap the **Lorex ECO Stratus** icon to open the app.
- Tap **Device Manager**.
- Tap **Add**.
- Configure the following:

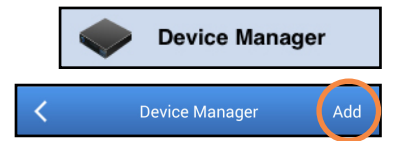


- Name:** Enter a name for your DVR of your choice.
- Device ID:** Press the QR code icon (📷) next to Device ID and line up the QR code on the top of the DVR using the camera on your device.
- Client Port:** Enter the **Client Port** (default: **9000**).
- User Name:** Enter the **DVR's User Name** (default: **admin**).
- Password:** Enter the **DVR's Password** (default: **000000**).



EXAMPLE

	Device
1 Device Name	Lh050
Login Type	Device ID
2 Device ID	ecofb1047
3 Client Port	9000
4 User Name	admin
5 Password	*****
Channels	

- Tap **Save**. You will be prompted to change the DVR password. Tap **Confirm**.
- Enter a new 6 character password and tap **Save**. This password will be used to connect to your system from now on.
- Tap **Save** again to connect to the DVR. The app opens in Live View and streams video from all connected cameras.



LOREX[®] Quick PC/MAC Guide

NOTE: PC/Mac setup is not required to connect on a smartphone or tablet. See reverse for smartphone/tablet setup.



15 Minutes

2 Find your Device ID

The **Device ID** is printed on a label on the side panel of the DVR.



Device ID: xxxxxxxxxxxx



Record your information below:

DEVICE ID: _____

3 PC Users

a Download the **Client Software for PC** from www.lorextechnology.com.

b Once installation is finished, double-click the **Lorex Stratus Client 1 icon** (🖱️) on the desktop. The DVR login appears.

c Enter the following information:

- 1 Select **Device ID**
- 2 Enter the **DVR's Device ID**
- 3 Enter the DVR's **user name** (default: **admin**)
- 4 Enter the DVR's **password** (default: **000000**)
- 5 Enter the **Client Port** (default: **9000**)

d Click **Login**. If this is the first time connecting to your system, you will be prompted to change the password. Enter a new 6 character password and click **OK**.

e Enter the new password in the login screen and click **Login** to connect to the DVR. The Client Software connects to your DVR and streams live video from your cameras.

Congratulations! You can now connect over the Internet to view and playback video on your PC.

OR

Mac Users

a Visit www.lorextechnology.com and download the **Client Software for Mac**.

b Extract the installer file and double-click it to install.

c Open Safari, then click **Safari** → **Quit Safari**. This resets Safari to complete the installation.

d Open the **Lorex Stratus Client 1** (🖱️) from the Applications list.

e Enter the following information:

- 1 Select **Device ID**
- 2 Enter the **DVR's Device ID**
- 3 Enter the DVR's **user name** (default: **admin**)
- 4 Enter the DVR's **password** (default: **000000**)
- 5 Enter the **Client Port** (default: **9000**)

g Click **Login**. If this is the first time connecting to your system, you will be prompted to change the password. Enter a new 6 character password and click **OK**.

h Enter the new password in the login screen and click **Login** to connect to the DVR.

Congratulations! You can now connect over the Internet to view and playback video on your Mac computer.

Quick Reference

Default access information:

- Default user name: **admin**
- Default password: **000000**

See the label on the side panel of your DVR for your Device ID.

Default system ports:

- HTTP Port: **80**
- Client Port: **9000**

If you have forgotten your password, contact Lorex technical support.

Need Help?

Visit www.lorextechnology.com

It's all on the Web

- Product Information
- Specification Sheets
- User Manuals
- Software Upgrades
- Quick Start Guides
- Firmware Upgrades

www.lorextechnology.com

Information in this document is subject to change without notice. As our products are subject to continuous improvement, Lorex Corporation and our subsidiaries reserve the right to modify product design, specifications and prices, without notice and without incurring any obligation. E&OE © 2015 LOREX. All rights reserved.