

Compact and Cost-Optimized Digital Piezo Controller

For SGS, Piezoresistive and Capacitive Sensors, 1 Axis



E-709

- Linearity error to 0.02 %
- Fast 25 Mbit/s serial interface
- Comprehensive I/O functions
- Inexpensive OEM versions available
- Extensive software package

Fast digital servo controller

Benchtop (.xRG) or OEM board (.xR). Voltage range -30 to 130 V.

Interfaces

USB, digital RS-232, fast serial interface with up to 25 MBit/s. Additional high-bandwidth analog control input / sensor input. Analog output, e.g., for external amplifiers.

User software and functions

PIMikroMove, PI General Command Set (GCS). Drivers for NI LabVIEW, shared libraries for Windows and Linux. Compatible with µManager, MetaMorph, MATLAB. Wave generator. Linearization. Data recorder. Autozero. Trigger I/O. Software-configurable parameters.

Fields of application

- Multiphoton microscopy, confocal microscopy
- 3-D imaging
- Screening
- Autofocus systems
- Surface analysis
- Wafer inspection

Specifications

	E-709.SR / E-709.SRG	E-709.PR / E-709.PRG	E-709.CR / E-709.CRG
Sensor type	Strain gauge sensors	Piezoresistive sensors	Capacitive sensors
Function	Digital controller for single-axis piezo nanopositioning systems (.SR: OEM board)	Digital controller for single-axis piezo nanopositioning systems (.PR: OEM board)	Digital controller for single-axis piezo nanopositioning systems (.CR: OEM board)
Axes	1	1	1
Processor	DSP 32-bit floating point, 150 MHz	DSP 32-bit floating point, 150 MHz	DSP 32-bit floating point, 150 MHz
Controller type	P-I, two notch filters, sensor linearization	P-I, two notch filters, sensor linearization	P-I, two notch filters, sensor linearization
Sampling rate, servo control	10 kHz	10 kHz	10 kHz
Sampling rate, sensor	10 kHz	10 kHz	10 kHz

Sensor	E-709.SR / E-709.SRG	E-709.PR / E-709.PRG	E-709.CR / E-709.CRG
Linearization	5th order polynomials	5th order polynomials	5th order polynomials
Sensor bandwidth	5 kHz	5 kHz	5 kHz
Sensor resolution	16 bit	16 bit	16 bit
External synchronization	No	No	No


Amplifier	E-709.SR / E-709.SRG	E-709.PR / E-709.PRG	E-709.CR / E-709.CRG
Output voltage	-30 V to 130 V	-30 V to 130 V	-30 V to 130 V
Peak power (<5 ms)	10 W	10 W	10 W
Average output power (>5 ms)	5 W	5 W	5 W
Peak current (<5 ms)	100 mA	100 mA	100 mA*
Average output current (>5 ms)	50 mA	50 mA	50 mA*
Current limitation	Short-circuit proof	Short-circuit proof	Short-circuit proof
Resolution DAC	17 bit	17 bit	17 bit

Interfaces and operation	E-709.SR / E-709.SRG	E-709.PR / E-709.PRG	E-709.CR / E-709.CRG
Communication	USB, RS-232, SPI	USB, RS-232, SPI	USB, RS-232, SPI
Piezo / sensor connection	Sub-D 9 (f)	Sub-D 9 (f)	Sub-D special connector
I/O	HD Sub-D 26 (f) 1 analog input 0 to 10 V 1 sensor monitor 0 to 10 V 1 digital input (LV TTL, programmable) 1 analog output 5 digital outputs (LV TTL, 3x predefined, 2x programmable)		
Command set	PI General Command Set (GCS)		
User software	PIMikroMove		
Software drivers	NI LabVIEW driver, dynamic libraries for Windows and Linux, MATLAB, MetaMorph, µManager, Andor iQ		
Supported functions	Wave generator, data recorder, autozero, trigger I/O		
Display and indicators	Status LED, overflow LED		


Miscellaneous	E-709.SR / E-709.SRG	E-709.PR / E-709.PRG	E-709.CR / E-709.CRG
Operating temperature range	8 to 50 °C (above 40 °C, power derated)	8 to 50 °C (above 40 °C, power derated)	12 to 50 °C (above 40 °C, power derated)
Dimensions	160 mm × 96 mm × 33 mm	160 mm × 96 mm × 33 mm	160 mm × 96 mm × 33 mm
Mass	260 g / 470 g	260 g / 470 g	260 g / 470 g
Operating voltage	24 V DC	24 V DC	24 V DC
Max. power consumption	24 W	24 W	24 W

* The E-709 is also available for capacitive sensor-equipped positioning systems in a version with higher output current.


Drawings / Images

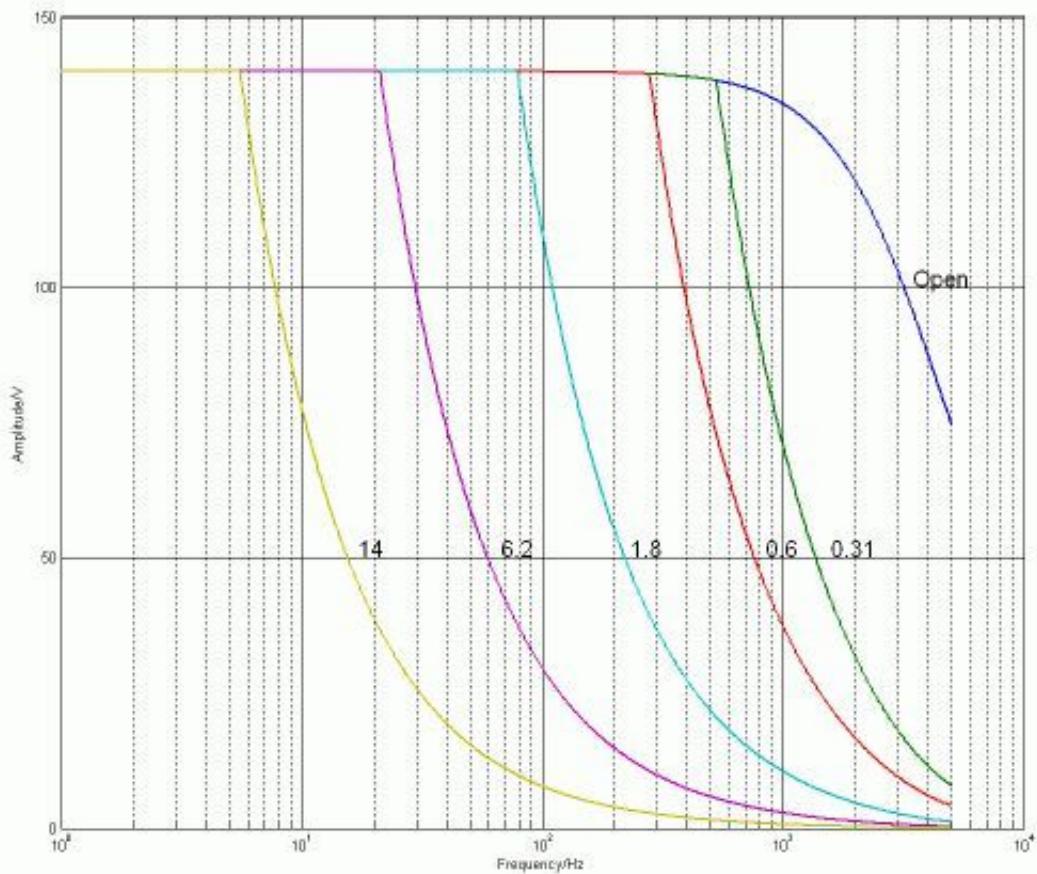

E-709: Operating limits (open loop) with various piezo loads, capacitance values in μF

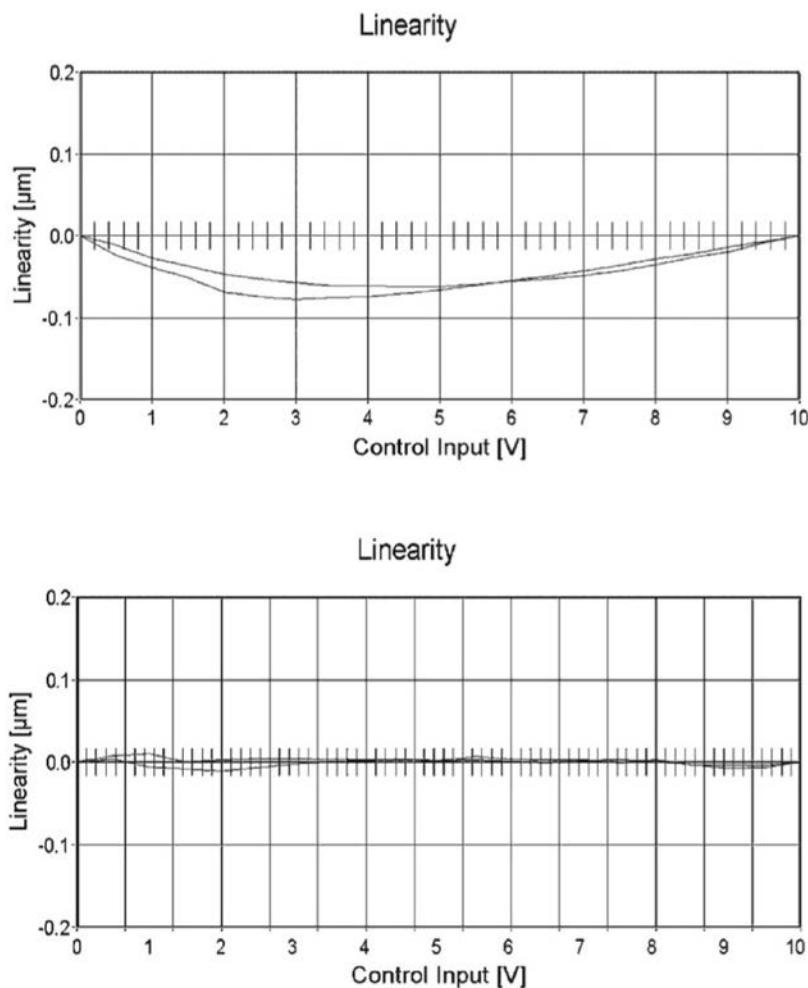

Comparison of the linearity of a strain gauge sensor with analog controller (top) and the E-709 digital controller (bottom), which improves the linearity by up to one order of magnitude

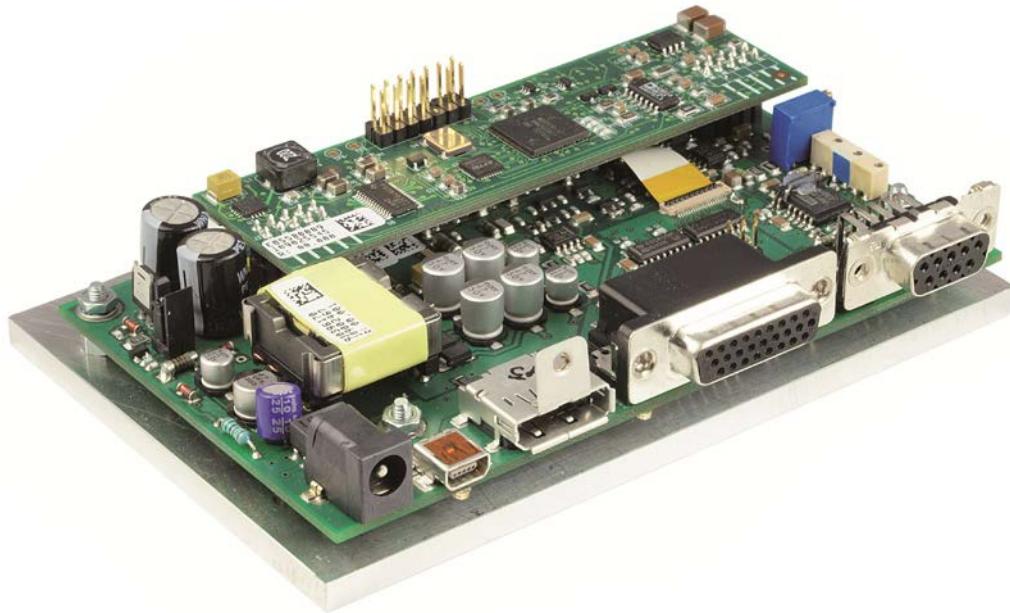

OEM version of the E-709 without housing

Ordering Information

E-709.PRG

Digital piezo controller, 1 axis, -30 to 130 V, piezoresistive sensor, benchtop device

E-709.SRG

Digital piezo controller, 1 axis, -30 to 130 V, strain gauge sensor, benchtop device

E-709.CRG

Digital piezo controller, 1 axis, -30 to 130 V, capacitive sensor, benchtop device

E-709.PR

Digital piezo controller, 1 axis, -30 to 130 V, piezoresistive sensor, OEM module

E-709.SR

Digital piezo controller, 1 axis, -30 to 130 V, strain gauge sensor, OEM module

E-709.CR

Digital piezo controller, 1 axis, -30 to 130 V, capacitive sensor, OEM module