


To access FIELD TEST MODE :

- 1) Press "HELP" button.(from home screen)
- 2) Press and hold "BACK" and "MY CYCLES" buttons for three seconds.

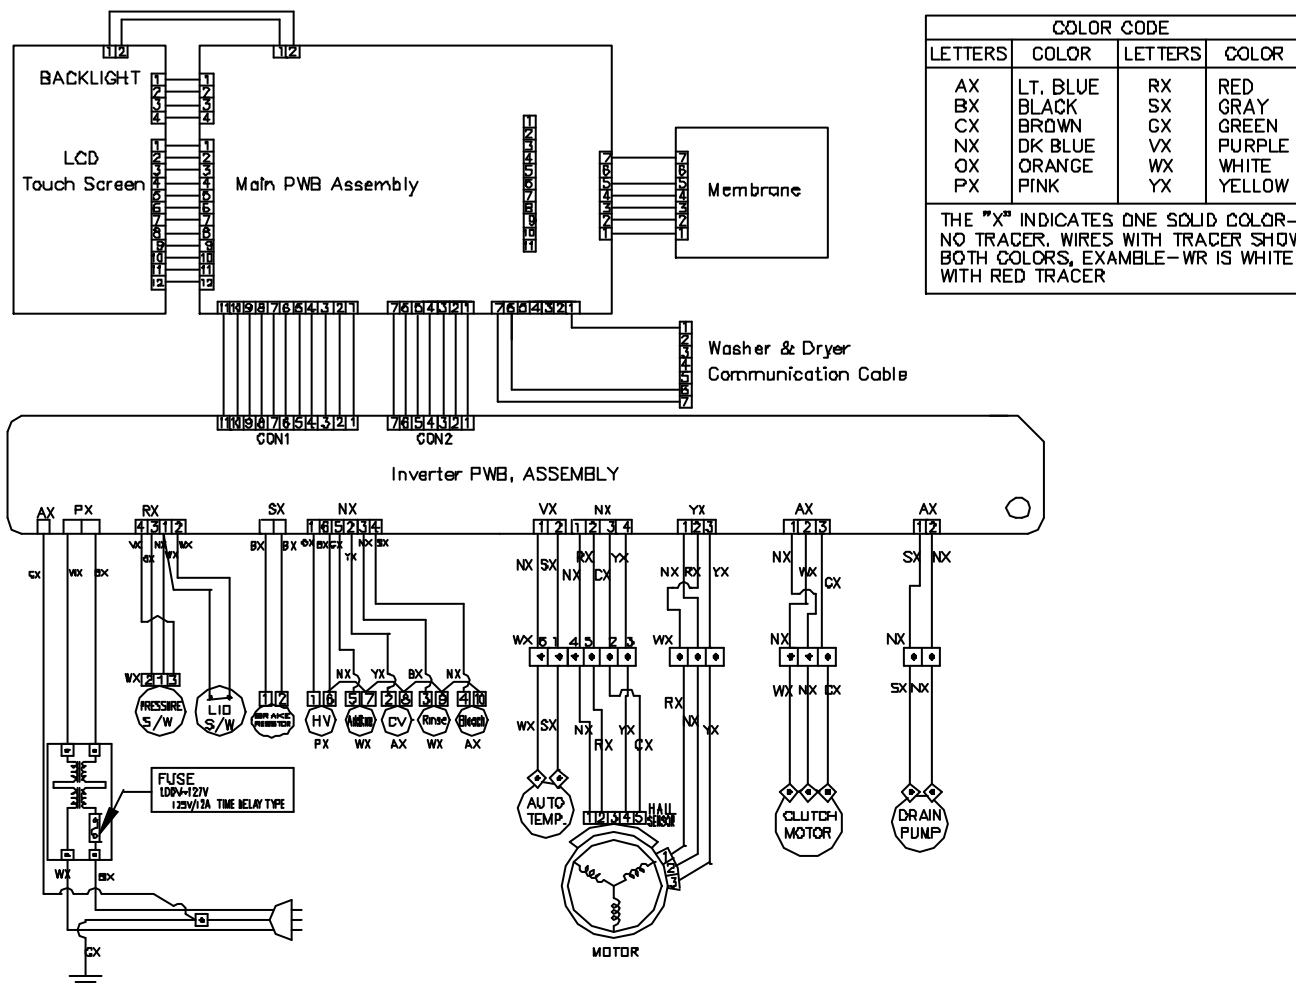

WARNING : TO REDUCE THE RISK OF ELECTRIC SHOCK:

THE POWER MUST BE DISCONNECTED BEFORE SERVICING BY UNPLUGGING THE MACHINE OR DISCONNECTING THE CIRCUIT BREAKER.

THE MACHINE MUST BE ELECTRICALLY GROUNDING THROUGH THE LEAD IN THE 3-PRONG POWER CORD THE CORD MUST BE PLUGGED INTO A APPLIANCE OUTLET THAT HAS BEEN PROPERLY INSTALLED. IF LOCAL CODES REQUIRE AN ADDITIONAL GROUND CONNECTION, USE A 15 GAUGE OR LARGER WIRE TO CONNECT THE WASHER CABINET TO AN ESTABLISHED GROUND. IN ALL CASES, THE GROUNDING METHOD MUST COMPLY WITH ALL LOCAL ELECTRICAL CODES AND ORDINANCES.