

Specifications

Model name	LP-WU6500	
Display system	1-chip DLP®	
Display device	Size of effective display area 0.67" DLP® chip × 1, aspect ratio 16 : 10	
	Number of pixels 2,304,000 pixels (1,920 horizontal × 1,200 vertical)	
Lens	Zoom	Manual (1.65×)
	Focus	Manual
	Lens shift	Manual (V : +63 ~ +75%, H : ±2.5%)
Light source	Laser diode	
Screen size	36.7 - 201.9 inch	
Light output (Brightness)	5,000 lm*1	
Contrast ratio (full white / full black)	30,000 : 1**	
Speaker	5W × 2 (stereo)	
Displayable scanning frequency	Horizontal	15 ~ 91 kHz
	Vertical	24 ~ 85 Hz
Terminals	HDBaseT	RJ-45 jack × 1
	HDMI IN	HDMI connector × 3 *HDMI IN 3 supports MHL input.
	COMPUTER IN	Mini D-sub 15-pin connector × 1
	MONITOR OUT	Mini D-sub 15-pin connector × 1
	VIDEO IN	RCA connector × 1
	3D SYNC OUT	VESA 3-pin connector × 1
	AUDIO IN	3.5mm mini connector × 1, RCA connector (L, R) × 1
	AUDIO OUT	RCA connector (L, R) × 1
	CONTROL IN (RS-232C)	D-sub 9-pin connector × 1
	LAN (RJ45)	RJ-45 connector × 1
	USB POWER	USB type A × 1 (5V / 1.5A output)
SERVICE	USB mini type B × 1	
Operating temperature	0 - 40°C*2	
Power requirements	AC 100 - 240V (50 / 60Hz), 5A	
Power consumption	500W	
Standby mode power consumption	Less than 0.5 W (Low Power Mode On)	
Standard outside dimension (W × H × D)	360mm × 164mm × 442mm	
Weight	Approx. 11.4kg	
Accessories	Remote control with batteries, Power cord, Computer cable, 3D sync cable, User's Manual (Book, CD)	
Optional parts	HAS-L5000 (Bracket for fixing mount)	
	HAS-104S (Slim adapter for fixing mount)	
	HAS-204L (Standard adapter for fixing mount)	
	HAS-304H (Long adapter for fixing mount)	

*1 : Laser Mode is set to Normal. *2 : The brightness of light source may be reduced automatically over 35°C at altitude from 0 to 1,520 m (0 to 5,000 ft), over 25°C at altitude from 1,520 to 3,050 m (5,000 to 10,000 ft). *3 : LAN and RS-232C are inactive in a standby state.

Environment

- ▶ **Compliance with EU Directive RoHS*1**
- ▶ **Power saving mode (Low Power Mode On) engaged during standby**
- ▶ **Laser mode** Laser mode provides power saving.
- ▶ **No use of mercury lamp**

*1 RoHS is the acronym of "Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment".

Design and specifications are subject to change without notice.

- The projected images and comparison photos in this catalog are simulations. • Do not use in places where there is a lot of water, dampness, steam, dust, soot or tobacco smoke. This may result in fire or malfunction. • Optical components (light source, DLP® chip, etc.) and cooling fans have limited service lives. They must be repaired or replaced if they are used for a long period of time.
- During use and immediately after use, do not touch anywhere near the vents as these parts are extremely hot.
- DLP® and the DLP logo are registered trademarks of Texas Instruments. • Crestron® and Crestron RoomView® are registered trademarks of Crestron Electronics, Inc. in the United States and other countries. • DICOM is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information. • MHL, the MHL logo, and Mobile High-Definition Link are trademarks or registered trademarks of MHL, LLC in the United States and other countries. • HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. • HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance. • All other trademarks are the properties of their respective owners.


HITACHI

Hitachi America, Ltd., Digital Media Division
 Hitachi Home Electronics Asia (S) Pte. Ltd.
 Hitachi Sales (Malaysia) Sdn. Bhd.
 Hitachi Sales (Thailand), Ltd.
 Hitachi (Hong Kong), Ltd.
 Hitachi Sales Corp. of Taiwan
 Hitachi Australia Pty Ltd.
 Hitachi Europe Ltd., Digital Media Group Consumer Affairs Department
 Hitachi Consumer Marketing, Inc.


2420 Fenton Street, Suite 200 Chula Vista, CA 91914, U.S.A. and Canada Tel: +1-800-448-2244 www.hitachi-america.us/digitalmedia
 438A Alexandra Road #01-01/02/03, Alexandra Technopark, 119967, Singapore Tel: +65-6536-2520 www.hitachiconsumer.com.sg
 Lot 12, Jalan Kemajuan, Bangi Industrial Estate, 43650 Bandar Baru Bangi, Selangor Darul Ehsan, Malaysia Tel: +60-3-8911-2670 www.hitachiconsumer.com.my
 333, 333/1-8 Moo 13, Bangna-Trad Road km 7, Bangkaew, Bangplee, Samutprakarn 10540, Thailand Tel: +66-2335-5455 www.hitachi-th.com
 18th Floor, Ever Gain Centre, 28 On Muk Street, Shatin, N.T., Hong Kong Tel: +852-2113-8883 www.hitachi-hk.com.hk
 2nd Floor, No.65, Nanking East Road, Section 3, Taipei 104, Taiwan Tel: +886-2-2516-0500 www.hsct.com.tw
 Suite 801, Level 8, 123 Epping Road, North Ryde NSW 2113, Australia Tel: +61-2-9888-4100 www.hitachi.com.au
 Whitebrook Park, Lower Cookham Road, Maidenhead, Berkshire, SL6 8YA, UK Tel: +44-844-481-0297 www.hitachidigitalmedia.com
 http://www.hitachi.co.jp/proj/

October 2017

Dimensions

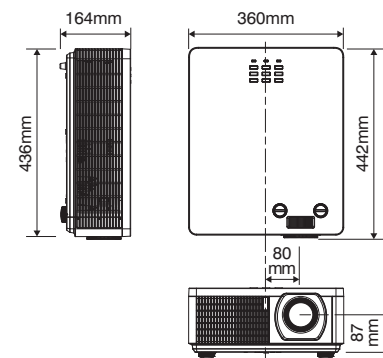

Projection Distance

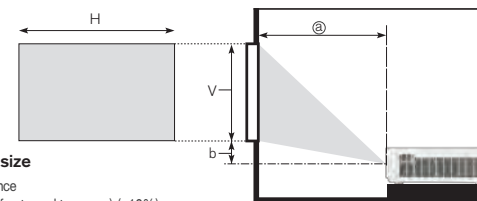

H x V : Screen size

@ : Projection distance (from the projector's front panel to screen) (±10%)
 *This figure is not drawn to scale.

1,920x1,200 (Aspect ratio 16:10)

Screen Type	Screen size		Projection distance @				Screen height : b					
	H		V		Min.		Max.		Min.		Max.	
In.	m	Inch.	m	Inch.	m	Inch.	m	Inch.	m	Inch.	m	Inch.
60	1.3	51	0.8	32	1.5	59	2.4	96	0.11	4	0.20	8
80	1.7	68	1.1	42	2.0	78	3.3	129	0.14	6	0.27	11
100	2.2	85	1.3	53	2.5	98	4.1	161	0.18	7	0.34	13
120	2.6	102	1.6	64	3.0	117	4.9	193	0.21	8	0.40	16
150	3.2	127	2.0	79	3.7	146	6.1	241	0.26	10	0.50	20
200	4.3	170	2.7	106	5.0	195	8.2	322	0.35	14	0.67	26

Terminals



1.HDMI 1 2.HDMI 2 3.HDMI 3 / MHL 4.MONITOR OUT 5.COMPUTER IN 6.VIDEO 7.3D SYNC 8.SERVICE 9.USB POWER 10.RJ45 11.HDBaseT 12.RS-232C 13.AUDIO OUT 14.AUDIO IN 15.AUDIO IN (L/R)

* This projector is a CLASS 1 LASER PRODUCT (IEC/EN 60825-1:2014). (CLASS 3R LASER PRODUCT (IEC/EN 60825-1:2007) for the U.S.A. and Canada)

LASER RADIATION AVOID DIRECT EYE EXPOSURE CLASS 3R LASER PRODUCT Wavelength : 450-460 nm Max. Pulse energy: 0.698 mJ, Pulse duration: 1.34 ms IEC/EN 60825-1:2007	LASERSTRAHLUNG DIREKTE EXPOSITION DER AUGEN VERMEIDEN LASERPRODUKT DER KLASSE 3R Wellenlänge : 450-460 nm Max. Pulsenergie: 0.698 mJ, Pulsdauer: 1.34 ms IEC/EN 60825-1:2007
RAYONNEMENT LASER ÉVITER D'EXPOSER DIRECTEMENT LENS YEUX PRODUIT LASER DE CLASSE 3R Longueur D'onde : 450-460nm Énergie D'impulsion Max. : 0.698 mJ, Durée de L'impulsion : 1.34 ms IEC/EN 60825-1:2007	雷射輻射 避免眼睛受到直接照射 3級雷射產品 波長 : 450-460nm 最大脈衝能量 : 0.698 mJ 脈衝持續時間 : 1.34 ms IEC/EN 60825-1:2007

LASER Projector

HITACHI
 Inspire the Next



Equipped with a long-life laser light source. The projector is capable of long continuous projection.



LP-WU6500



NM-E501 102017

*Projected images are simulations.

With a stable projection performance and high installability, the laser projector is suitable for various purposes.



LP-WU6500

WUXGA 5,000 lm

LASER Light Source

HDMI HDBT MHL





High Reliability and Stability

Long life 20,000 hours*1 Laser light source


Light source combined Blue laser diodes and Phosphor can achieve 5,000 lumens. The projection image is bright, clear and vivid color. Since lamp exchange is unnecessary, maintenance cost is reduced. Furthermore, you do not need to worry about lamp life, and it is fit for digital signage purposes that require long hours of continuous projection. Because the product does not use mercury lamps, it is eco-friendly. With an approximate light source life of 20,000 hours, the LASER projector series is suitable for venues such as museums, restaurants and digital signage.

*1 For laser light source. Not a guaranteed value.

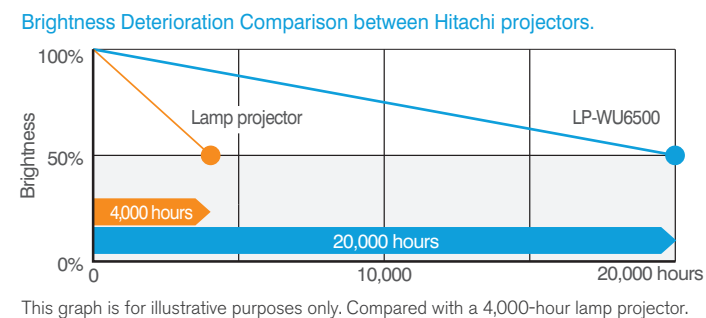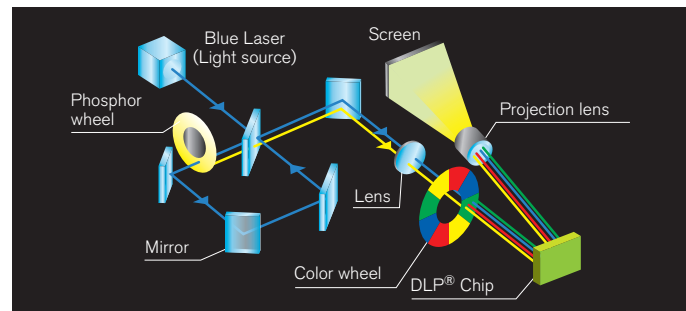

Dust Resistant Optical Engine with Heat Pipe Cooling System


Reduces the invasion of dust and other particles in the air that decreases the brightness when they get attached to the optical parts. Reduces the decrease in brightness due to dust, resulting in a long lasting bright, clear, and vivid colored picture. Eliminates the intake filter and filter maintenance. Achieved efficient cooling by adopting a heat pipe cooling system for the laser module. Contributes to the module's reliability due to its capabilities in reducing thermal stress.

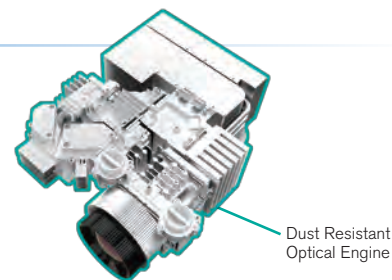

High Image Quality


Wide range of Color Reproduction

The color reproduction range is wide compared to lamp light projectors and projects brilliantly colored images.

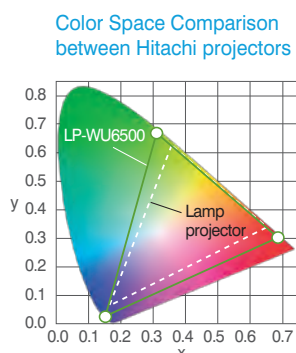

DICOM® Simulation Mode

This mode is suitable for viewing grayscale medical images, such as X-rays, for training and educational purposes.

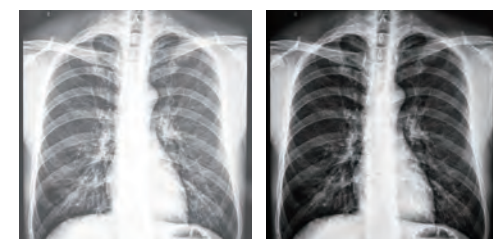

This projector is not a medical device and is not compliant with the DICOM® standard, and neither the projector nor the DICOM® Simulation Mode should be used for medical diagnosis.


*Comparison photos are simulations.

Flexible Installation

360° Projection

This projector provides great installation flexibility as it can be installed at various angle. By rotating the projector 90 degrees, you can project vertically long images (Portrait Projection).*2


*2 The life of optical parts may shorten if the projector is installed at PORTRAIT projection situation.

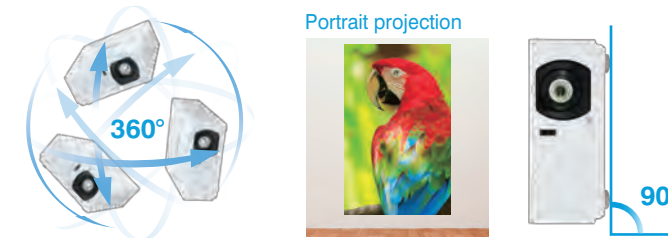

Laser Power Level Control


Power of laser light source is controllable by every 1% step*3. It allows the brightness of projection image fits in the luminance environment and can save the power consumption. This feature helps you to adjust the similar brightness of projectors in such the side-by-side projection.

*3 The adjustment range is 25~ 100% at Custom Light mode.

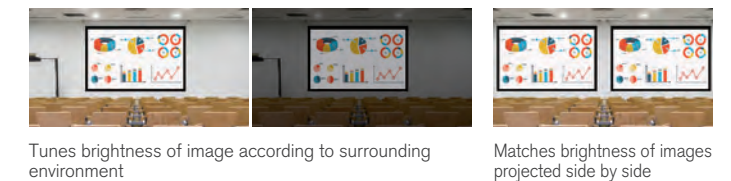


Digital Connectivity

Equipped with HDBaseT™ input, capable of transmitting signals with no image degradation using standard LAN cables (Cat5e or higher, shielded type) of up to approx.100 m. This projector provides 4 digital inputs: HDBaseT, HDMI1/2/3.

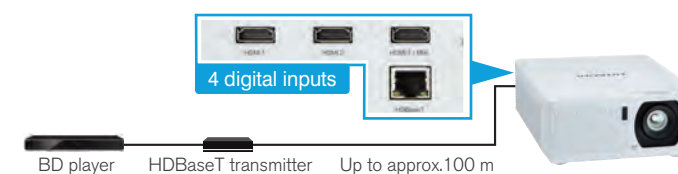

MHL® connectivity

The projector's HDMI3 input terminal supports the MHL (Mobile High-Definition Link). This feature allows you to mirror the screen of your MHL-enabled smartphone / tablet on a projected screen.


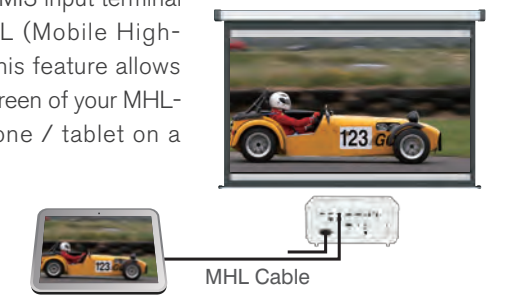


1.65x Zoom Lens, Lens Shift

Featuring a powerful 1.65x manual zoom lens, the projectors allow for a greater range of installation possibilities. Manually shift the lens horizontally and vertically to position the image on the screen without causing keystone distortion.

*The figures are not drawn to scale.

Projection distance for 100" screen

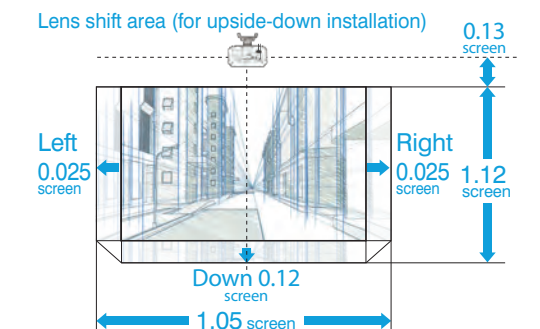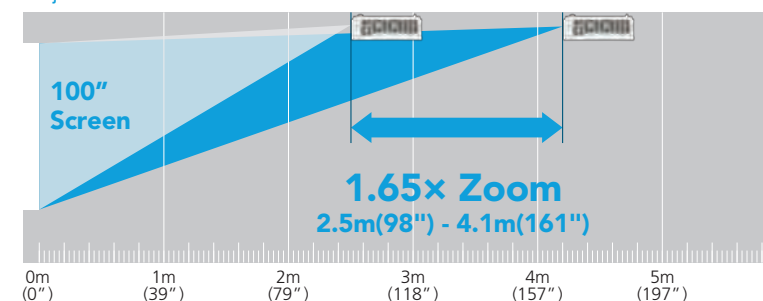

Other Features

- Color management · Remote Control with ID function · Closed Caption · Built-in Speaker · Horizontal / Vertical Keystone Correction
- Digital Zoom · Direct Power On/Off · Sleep Timer · Auto Power Off · Security Lock · Keypad Lock · Web Browser Control

*Projected images are simulations.