

- Die-cast aluminum housing with radius corners, complements "Southwest Series." Die-cast aluminum door with clear, flat tempered glass lens, fully gasketed to housing; Hinged door secured with two captive screws.
- IES Type II, III, IV and V with flat lens for full cut-off classification
- Hydroformed and segmented High Performance Reflectors are field rotatable
- Easy order popular fixture & pole combinations
- Mounts on upswept or straight arms for poles or on wall bracket for uniform project look
- Mogul porcelain socket, pulse-rated with spring-loaded, nickel-plated center contact and reinforced lamp grip screw shell
- 100w - 150w Lag type, HPF ballast, starting rated at -20°F (-40°F HPS)
- 200w - 400w CWA type, HPF ballast, starting rated at -20°F (-40°F for HPS)
- Durable Lektrocote® TGIC thermoset polyester powder coat paint finish assures long life and maintenance-free service
- Listed to UL1598 for use in wet locations
- U.S. Patent No. D556,935
- IDA fixture seal of approval



CAST LUMINAIRES

ORDERING INFORMATION



SERIES	SOURCE/WATTAGE	LAMP ORIENT./DISTR.	LENS	COLOR	OPTIONS
CR1 Cimarron	PULSE START METAL HALIDE P25 250w (ED-28 Mog base) P32 320w (ED-28 Mog base) P40 400w (ED-28 Mog base) HIGH PRESSURE SODIUM S25 250w (ED-18 Mog base) S40 400w (ED-18 Mog base)	H2 Horiz. II - hydroformed H3P Horiz. III - High Performance Series (segmented) H4 Horiz. IV - multi-piece H4P Horiz. IV High Performance Series (segmented) H5P Horiz. V - High Performance Series (segmented)	F Flat	DB Dark Bronze BL Black WH White GR Gray PS Platinum Silver RD Red (premium color) FG Forest Green (premium color) CC Custom Color (consult factory)	WBAD Substitutes decorative upswept arm when WB wall bracket mounting is chosen RPA2 Round pole adapter (2 3/4-3 1/8") RPA3 Round pole adapter (3 1/4-3 3/4") RPA4 Round pole adapter (3 7/8-4 1/2") RPA5 Round pole adapter (5") RPA6 Round pole adapter (6") F(X) Fusing (replace X with voltage: 1-120, 2-208, 3-240, 4-277, 5-480, 6-347) P(X) Photo button (replace X with voltage: 1-120, 2-208, 3-240, 4-277, 6-347) PR(X) Photo cell receptacle (replace X with voltage: 1-120, 2-208, 3-240, 4-277, 5-480, 6-347) QZ Quartz RS with lamp HS Internal house side shield (available for H2, H3 & H4 distributions) VG Polycarbonate vandal guard L Lamp

MOUNTING

- A** Arm mount construction (6" straight rigid arm included & acceptable for 90° configurations)
- AD** Decorative arm mount const. (6" decorative upswept arm incl. & acceptable for 90° configurations)
- WB** Wall bracket const. (includes wall bracket & 6" straight arm unless WBAD option is chosen which substitutes decorative upswept arm)
- O** No arm or wall bracket (only order without arm or wall bracket when they are ordered as an accessory)

VOLTAGE

- Q Quad-Tap® 120/208/240/277V
- V Five-Tap 120/208/240/277/480V (250 & 400w PSMH & HPS only)
- 5 480V
- T Tri-Tap® 120/277/347V
- E 50Hz, 220/240V (250 & 400w PSMH & HPS only)
- O No Ballast
- 1 120V (350 & 400w eHID)
- J 208/240/277V (350 & 400w eHID only)
- O 120/208/240/277V (150 & 240w eHID only)
- F 347V

EASY ORDER FIXTURE AND POLE COMBINATIONS


Catalog Number	Description
CRPC-1-P25-H3-20	20ft 250w PMH, Type III
CRPC-1-P40-H3-20	20ft 400w PMH, Type III
CRPC-1-P40-H3-25	25ft 400w PMH, Type III
CRPC-1-P40-H4-20	20ft 400w PMH, Type IV
CRPC-1-P40-H4-25	25ft 400w PMH, Type IV
Twin Configurations	
CRPC-2-P25-H3-20	20ft 250w PMH, Type III
CRPC-2-P40-H3-20	20ft 400w PMH, Type III
CRPC-2-P40-H3-25	25ft 400w PMH, Type III
CRPC-2-P40-H4-20	20ft 400w PMH, Type IV
CRPC-2-P40-H4-25	25ft 400w PMH, Type IV

All Combos include lamp, anchor bolts, poles and fixtures, color is Dark Bronze

Note: Mounting A and AD acceptable for 90 degree configurations

NOTE: All poles to be drilled with #2 pattern,

SEE PAGE 613 FOR ACCESSORIES

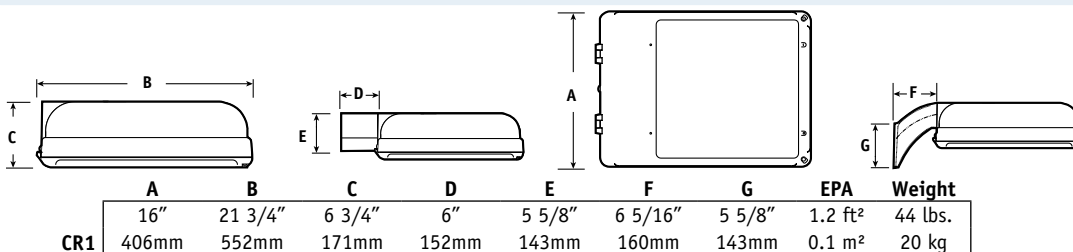

Note: EPA and weight values do not include mounting arm.
See Spaulding EPA Value pgs. 622-623 for more detailed information.