

ACCESSORIES - Order separately


Catalog Number	Description
SCP-REMOTE ²	Remote control for SCP option. Order at least one per project to program and control.
BB-GE0-XX	Back box with 4 - 1/2" threaded conduit holes, specify finish by replacing "XX" with finish selection, eg. Dark Bronze "DB"

² Must order minimum of one remote control to program dimming settings, 0-10V fully adjustable dimming with automatic daylight calibration and different time delay settings, 120V or 277V only



BB-GE0-XX – Mounted to luminaire

BB-GE0-XX

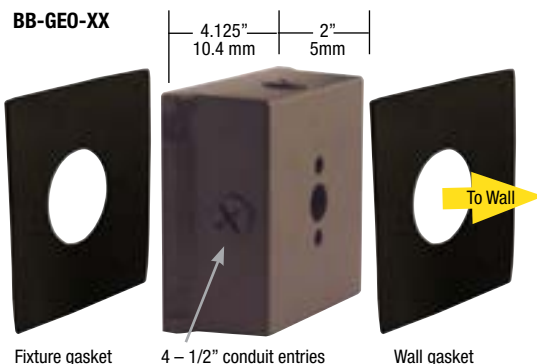

Fixture gasket

4 - 1/2" conduit entries

Wall gasket

PERFORMANCE DATA

# OF LEDS	DRIVE CURRENT	SYSTEM WATTS	DIST. TYPE	5K (5000K nominal, 67 CRI)					4K (4000K nominal, 70 CRI)					3K (3000K nominal, 80 CRI)				
				LUMENS	LPW ¹	B	U	G	LUMENS	LPW ¹	B	U	G	LUMENS	LPW ¹	B	U	G
30	BBU*	-	3	1601	-	-	-	-	1473	-	-	-	-	1201	-	-	-	-
	350mA	34w	2	3996	118	1	0	2	3958	116	1	0	1	3255	96	1	0	1
			3	3919	115	1	0	1	3882	114	1	0	1	3192	94	1	0	1
			4	3904	115	1	0	2	3867	114	1	0	1	3180	94	1	0	1
	530mA	53w	2	5751	109	2	0	2	5732	108	1	0	2	4507	85	1	0	1
			3	5723	108	1	0	2	5705	108	1	0	2	4486	85	1	0	2
			4	5582	105	1	0	2	5564	106	1	0	2	4375	83	1	0	2
	700mA	68w	2	6893	101	2	0	2	6828	100	2	0	2	5615	83	2	0	2
			3	6761	99	2	0	2	6696	98	2	0	2	5507	81	1	0	2
			4	6734	99	1	0	2	6671	98	1	0	2	5486	81	1	0	2

*BBU Emergency mode lumen output, TRP hosing only

ELECTRICAL DATA

# OF LEDS	NUMBER OF DRIVERS	DRIVE CURRENT (mA)	INPUT VOLTAGE (V)	SYSTEM POWER (w)	CURRENT (Amps)
30	1	350mA	120	34	0.29
			277		0.12
		530mA	120	53	0.45
			277		0.18
	2	700mA	120	68	0.57
			277		0.25

LUMINAIRE AMBIENT TEMPERATURE FACTOR (LATF)

AMBIENT TEMPERATURE	LUMEN MULTIPLIER
0° C	1.02
10° C	1.01
20° C	1.00
25° C	1.00
30° C	1.00
40° C	0.99
50° C	0.98

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

PROJECTED LUMEN MAINTENANCE


Ambient Temp.	OPERATING HOURS					L70 (hours)
	0	25,000	50,000	TM-21-11 ¹ 60,000	100,000	
25°C / 77°F	1.00	0.98	0.95	0.94	0.91	345,000
40°C / 104°F	0.99	0.96	0.93	0.91	0.86	251,000

¹ Nichia 219C, 700mA, 85°C Ts, 10,000hrs


Data references the extrapolated performance projections for the TRP base model in 40°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.

PHOTOMETRIC REPORTS


(530mA, 4000K)

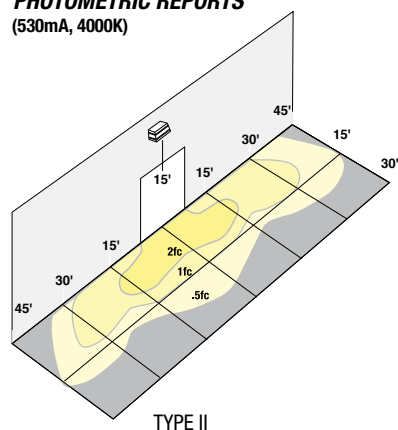

TYPE II

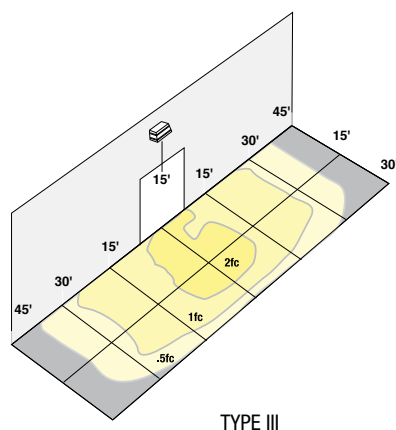

TYPE III

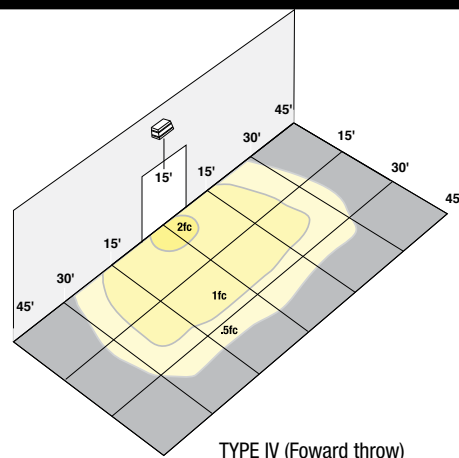

TYPE IV (Forward throw)