

## Ethos™ Design C Single-handle Lavatory High-Efficiency Faucet, 1.5 gpm

### FEATURES


- WaterSense certified low-flow 1.5 gpm faucet
- Lever handle
- Solid brass construction
- Ceramic disk valve cartridge
- Metal pop-up drain assembly included

### COLORS/FINISHES

- #CP Polished Chrome

### CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF 61-9
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant

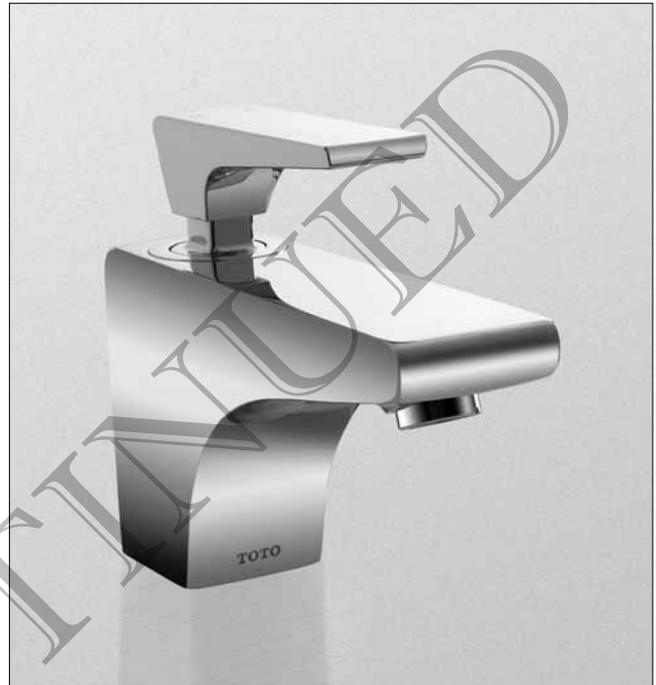

### PRODUCT SPECIFICATION



The single-handle lavatory faucet shall have a maximum flow rate of 1.5 gpm (5.7 lpm). Product shall have a lever handle. Product shall have a solid brass construction. Product shall have a ceramic disk valve cartridge. Product shall include metal pop-up drain assembly. Product shall be TOTO Model TL680SDL# \_\_\_\_.

# TL680SDL

## Ethos™ Design C Single-handle Lavatory High-Efficiency Faucet, 1.5 gpm

### SPECIFICATIONS

- Warranty Lifetime Limited Warranty (Residential Use)  
One Year (Commercial Use)
- Material Brass
- Shipping Weight 6.0 lbs.
- Shipping Dimensions 20-1/2" L x 9-3/4" W x 3-1/2" H
- Maximum Flow Rate 1.5 gpm (5.7 lpm)

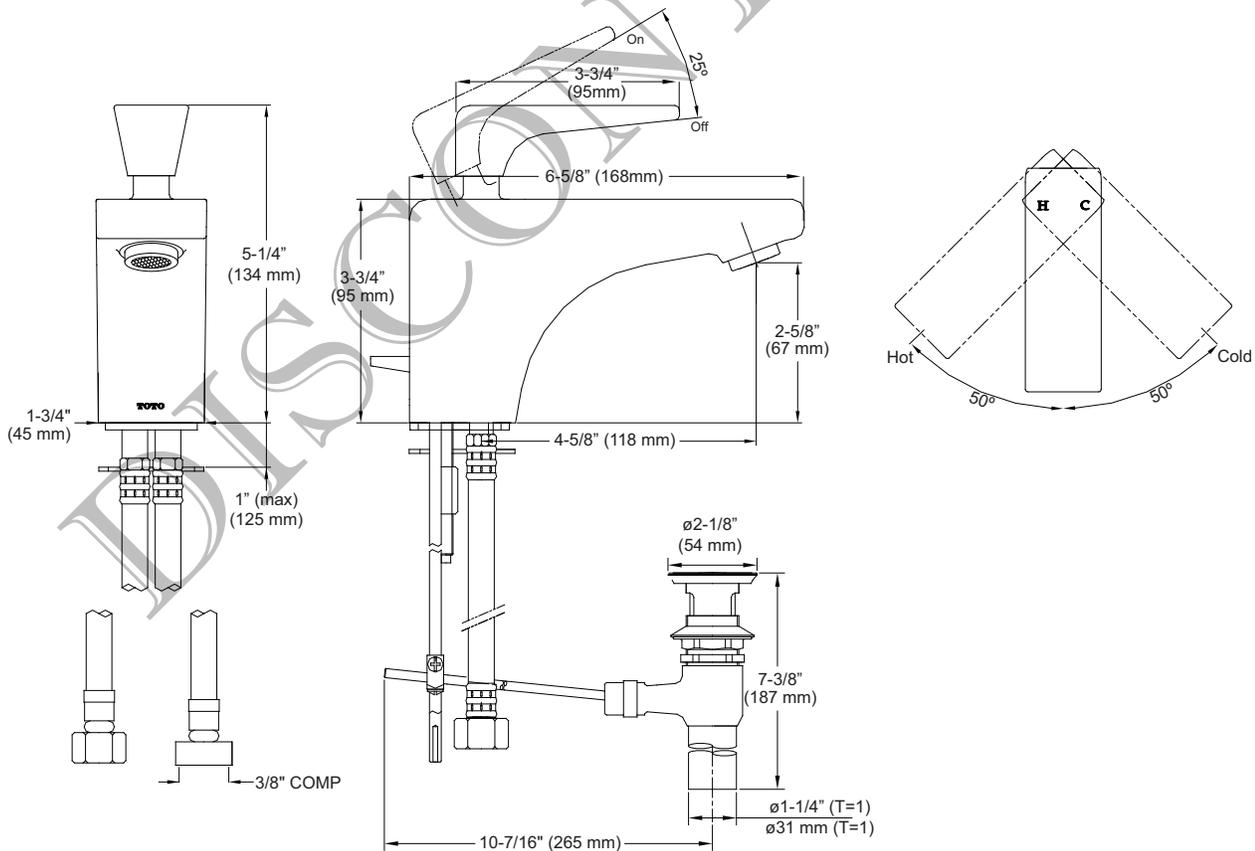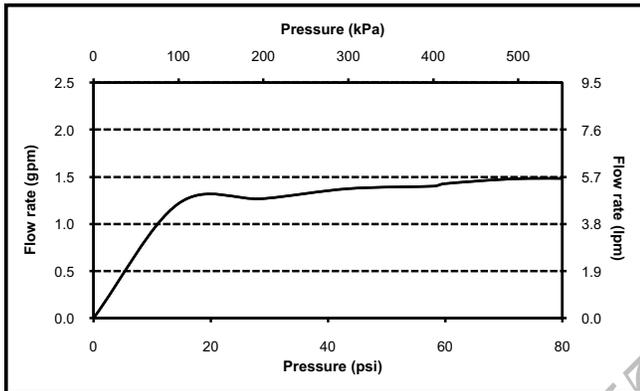

**TOTO**

These dimensions and specifications are subject to change without notice