

**FEATURES**

- Precision optical design produces high efficiency in a high visual comfort architecturally styled direct/indirect distribution
- Custom perforated metal basket is backed by a high transmission lamp obscuring overlay
- Optimized coating process and unique paint formulation provide exceptional reflectivity in a matte finish for a soft visual image and balanced basket and reflector illumination
- Completely recessed, provides a clean ceiling with uniform illumination at mounting heights as low as 8 feet
- Available for use with T8, T5 or T5HO linear fluorescent lamps
- Optional acrylic dust guard pivots to seal lamp compartment against contaminants especially for schools, medical facilities and public spaces
- Companion Louvered (STEL), side basket (STS) and pendant (STP) models available

**PROJECT INFORMATION**

Project Name \_\_\_\_\_

Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Date \_\_\_\_\_

**CONSTRUCTION**

Luminaire housing and end caps are die formed code gauge cold rolled steel. The sturdy reflector is stiffened with linear forms, profiled to a precision curve. Perforated basket with high transmission overlay for improved optical efficiency plus lamp obscuration. Basket and all reflective surfaces are finished after fabrication with unique formula high reflectivity matte white paint for soft, uniform indirect illumination.

Thermoplastic light traps snap into the housing at both ends of the basket to prevent light leaks. Basket hinges down for easy access to center wireway.

**INSTALLATION**

An access plate is furnished with each luminaire for fast wiring access from the plenum. No need to open fixture.

**BALLASTS**

Energy efficient, thermally protected, automatic resetting, Class P, high power factor, sound rated A, magnetic or electronic ballasts. CEE NEMA Premium compliant.

**ELECTRICAL**

Standard class "P", thermally protected, autoresetting HPF ballast, sound rated A. CEE NEMA Premium compliant. All ballast leads extend a minimum of 6" through access location. NEC/CEC-compliant ballast disconnect is standard.

**CEILING COMPATIBILITY**

NEC-compliant T-Bar clips supplied with all grid trim fixtures. See ceiling details on reverse. For type SG ceilings order G trim. Fixture will be regressed 3/8" from the face of the ceiling tee. For hard ceilings order G trim and FK flange accessory. Assemble then support FK accessory at the ceiling plane using tie wires (by others). Contact your Columbia representative for compatibility information for specific ceiling types or for continuous row applications in hard ceilings.

**CERTIFICATION**

All luminaires are built to UL 1598 standards and bear appropriate UL and cUL or CSA labels. Damp location labeling is standard. Emergency-equipped fixtures labeled UL 924.

**ORDERING INFORMATION**

**EXAMPLE STE24-332G-MPO-EU**

<b>STE</b>		<b>24</b>	<b>-</b>	<b>3</b>	<b>-</b>	<b>MPO</b>	<b>-</b>	<b>-</b>	<b>-</b>		
<b>MODEL</b>		<b>NO. OF LAMPS</b>		<b>CEILING TYPE</b>		<b>SHIELDING</b>		<b>VOLTAGE</b>		<b>OPTIONS</b>	
STE Stratus E-Series Recessed Indirect		3 Three		G Grid Lay-in SM Surface Mount		MPO Metal Perf w/Overlay		U 120V-277V 347 347V		GLR Fast Blow Fuse GMF Slow Blow Fuse EL Emergency Battery Pack EL5 Emergency Battery Pack, T5 DG Dust Guard Clear Acrylic NYC NYC Compliant NYCU NYC Compliant, Union Label	
<b>SIZE</b>		<b>LAMP TYPE</b>		<b>BALLAST</b>						<b>ACCESSORIES (ORDER SEPARATELY)</b>	
24 2' x 4'		28 4', T5: 28 Watt 32 4', T8: 32, 30, 28 or 25 Watt 54 4', T5HO: 54 or 51 Watt		E Electronic T8, Instant Start ED Electronic Dimming T8 and T5 (specify series) EP Electronic T5, T5HO, or T8, Programmed Start 3E 3-Lamp Electronic T8, Programmed Start 3EP 3-Lamp Electronic T5, T5HO, or T8 Programmed Start						FK24 2' x 4' Single Flange Kit (Shipped separately)	

### PHOTOMETRIC DATA

Test ITL65805 Test Date 8/30/10

#### LUMINAIRE DATA

Luminaire	STE24-332G-MPO-3EU Stratus, Recessed/Architectural 2 x 4 3-lamp with perforated metal baslet and opal overlay
Ballast	ICN-3P32-SC
Ballast Factor	0.88
Lamp	F28T8
Lumens per Lamp	2750
Watts	71
Shielding Angle	0° = 0 90° = 0
Spacing Criterion	0° = 1.22 90° = 1.30
Luminous Opening in Feet	Length: 3.93 Width: 1.88 Height: 0.00

#### ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt.
0-30	1750	21.2	26.9
0-40	2875	34.8	44.2
0-60	5130	62.2	78.8
0-90	6507	78.9	100.0
0-180	6507	78.9	100.0

#### ENERGY DATA

Total Luminaire Efficiency	78.9%
Luminaire Efficacy Rating (LER)	81
IESNA RP-1-1993 Compliance	Noncompliant
Comparative Yearly Lighting Energy Cost per 1000 Lumens	\$2.96 based on 3000 hrs. and \$0.08 per KWH


#### COEFFICIENTS OF UTILIZATION (%)

RCR	RW	80				70				50				0
		70	50	30	10	70	50	30	10	50	30	10	0	
1	86	82	79	76	84	80	77	74	77	74	72	66		
2	78	71	66	61	76	70	65	61	67	63	59	55		
3	71	63	56	51	69	61	55	50	59	54	50	46		
4	65	55	48	43	63	54	48	43	52	47	42	39		
5	60	49	42	37	58	48	42	37	47	41	36	34		
6	55	44	37	32	53	44	37	32	42	36	32	30		
7	51	40	33	28	50	40	33	28	38	32	28	26		
8	47	37	30	25	46	36	30	25	35	29	25	23		
9	44	34	27	23	43	33	27	23	32	27	23	21		
10	42	31	25	21	41	31	25	21	30	24	20	19		

RCR = Room Cavity Ratio

RC = Effective Ceiling Cavity Reflectance RW = Wall Reflectance


#### INDOOR CANDELA PLOT

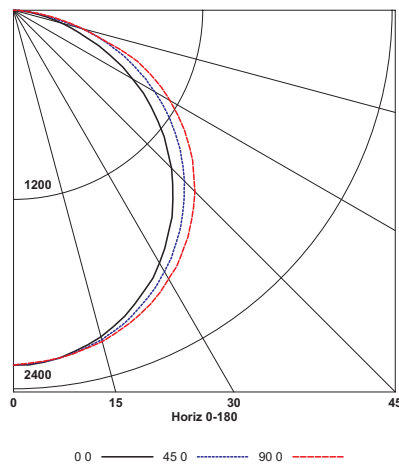

#### AVG. LUMINANCE (Candela/Sq. M.)


Average Luminance Angle	0.0	22.5	45.0	67.5	90.0
0	3275	3275	3275	3275	3275
30	3110	3142	3220	3285	3307
40	2986	3058	3174	3307	3330
45	2917	3000	3158	3309	3350
50	2824	2926	3125	3300	3359
55	2700	2832	3078	3289	3358
60	2538	2719	3010	3255	3339
65	2330	2603	2923	3254	3289
70	2011	2415	2794	3088	3016
75	1790	2184	2550	2561	2561
80	1460	1913	1905	2156	2114
85	919	1170	1438	1504	1504

#### DIMENSIONAL DATA

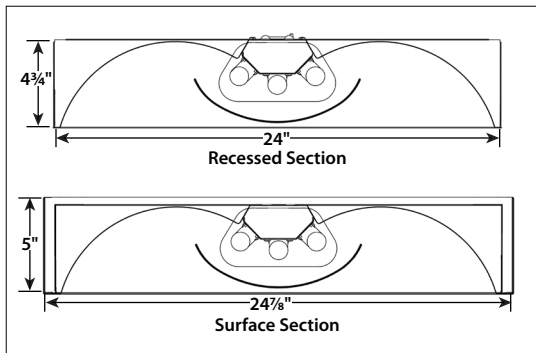


#### Top View


Surface Mount K.O. Dimensions  
**A:** 7/8" K.O.  
**B:** 2" x 3" Access (Cover Removed)  
**C:** 2" x 3" Rectangular Knockout

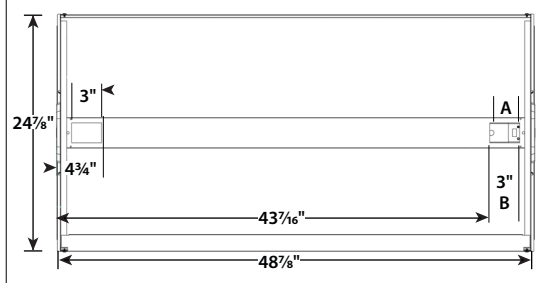


#### CEILING COMPATIBILITY

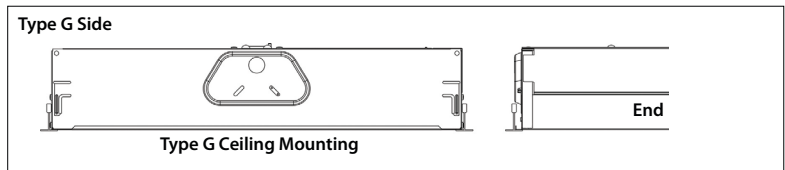

For lay-in installation in exposed grid ceilings. Maximum tee widths of 1" and maximum heights of 1 1/2" allowed.

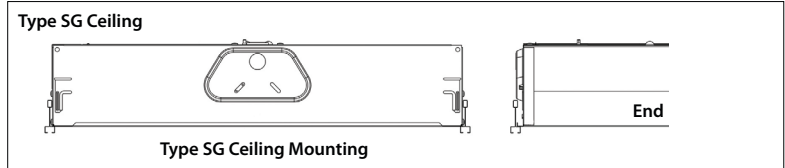

For 3/8" slot grid type ceilings. Luminaire will be regressed 3/8" horizontal surface of the tee. Slot grid tees must be field installed all around the fixture.

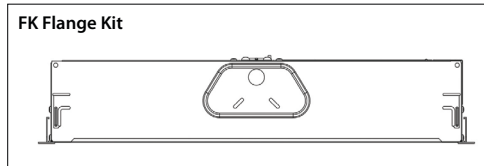

For hard ceiling applications, fixtures must be ordered with a flange kit that wires directly into the concealed ceiling opening for a clean finished appearance. For row configurations contact your local Columbia Representative.

Flange kit cut out dimension for single FK22 only: 24 3/8" x 48 3/8"

**NOTE:** All dimensions are in inches; dimensions and specifications are subject to change without notice. Please consult factory or check sample for verification.