

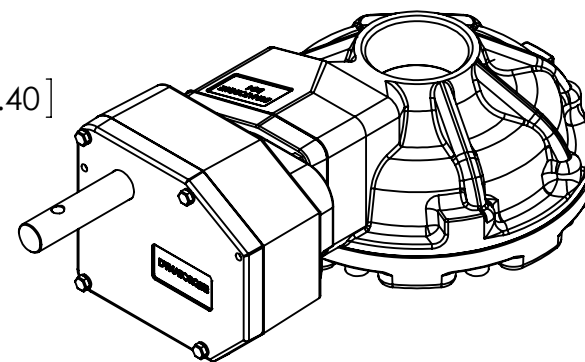
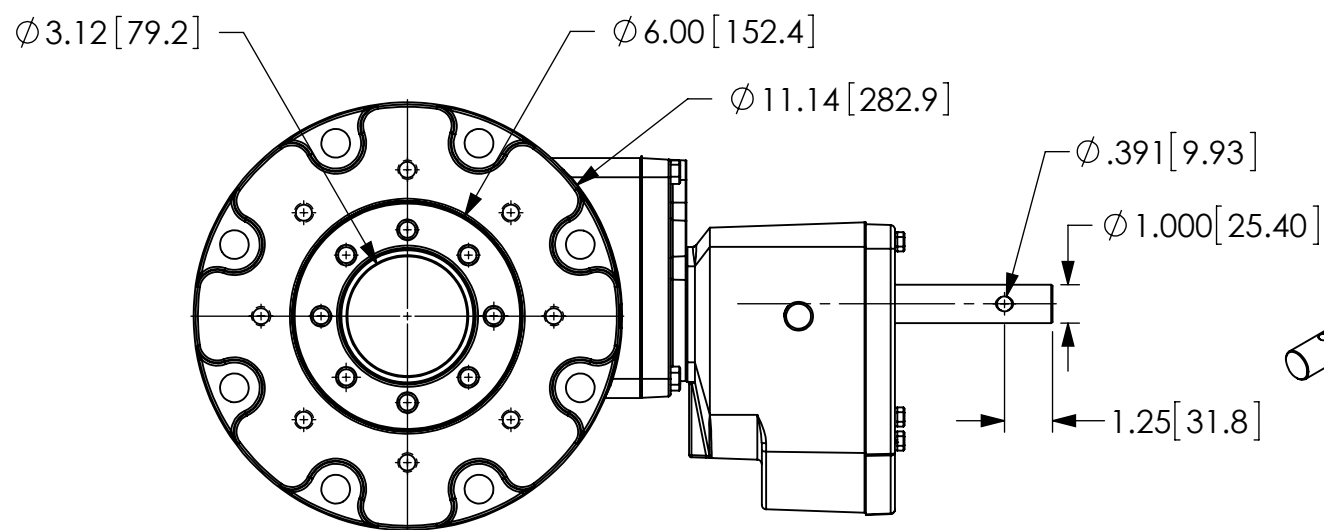
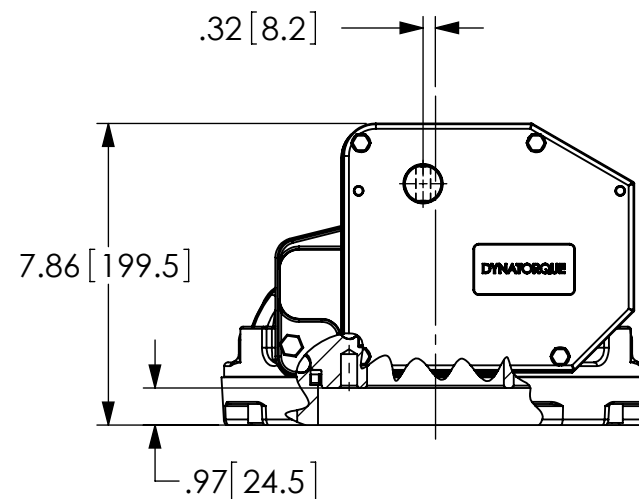


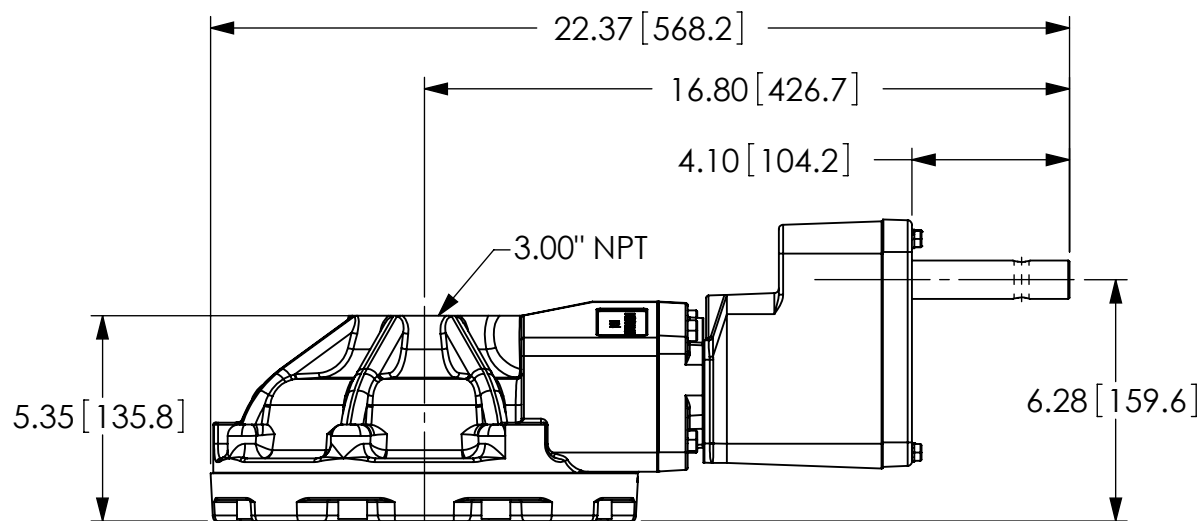



CONSULT FACTORY FOR
SPECIAL CONFIGURATIONS

MOUNTING PATTERN			DRIVE PATTERN	RATIO: 24:1 THRUST: 30,000 LB [133 KN] TORQUE: 1,600 FT-LB [2170 N-M] TEMPERATURE: -20° TO 150°F [-29° TO 66°C] WEIGHT: 119 LBS [54 KGS] GREASED FOR LIFE PLATED STANDARD SHAFT	MANUAL MULTI-TURN ACTUATOR COMMERCIAL GRADE	
STD	MIN	MAX	STD		DYNATORQUE WWW.DYNATORQUE.COM A BRAND OF CAMERON	BG46
Ø 7.625 1/2-13 UNC	Ø 6.875 3/8-16 UNC	Ø 10.180 5/8-11 UNC	Ø 4.500 1/2-13 UNC			

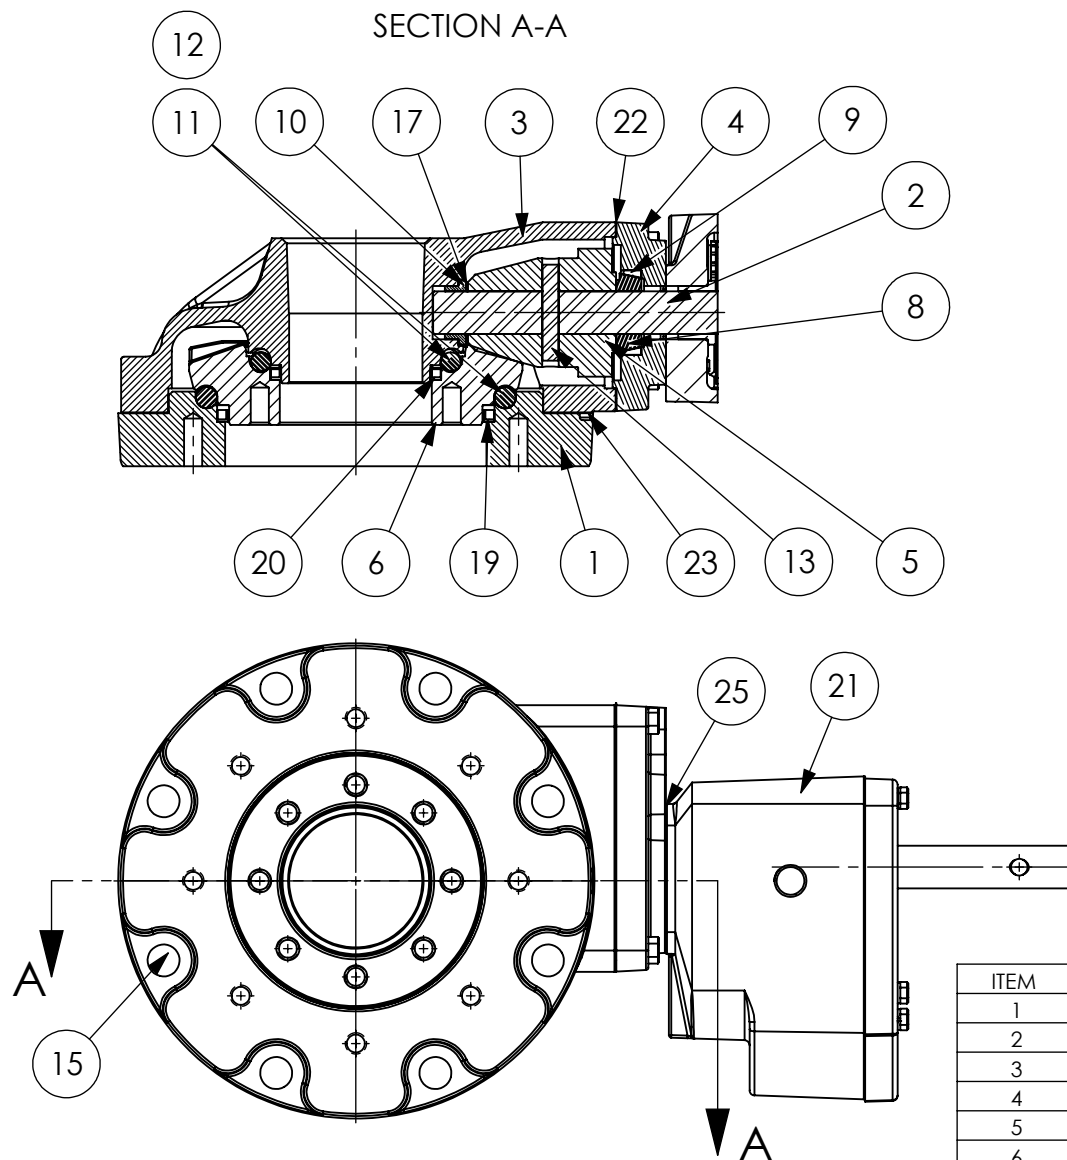

7 UNIT IS PAINTED BLACK ENAMEL.

18 UNIT BEARINGS & GEAR TEETH ARE GREASED.

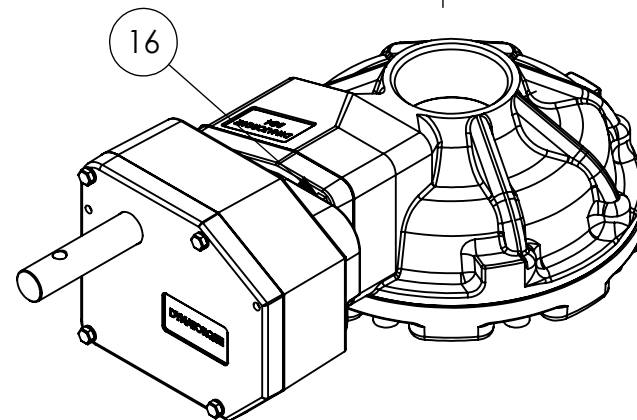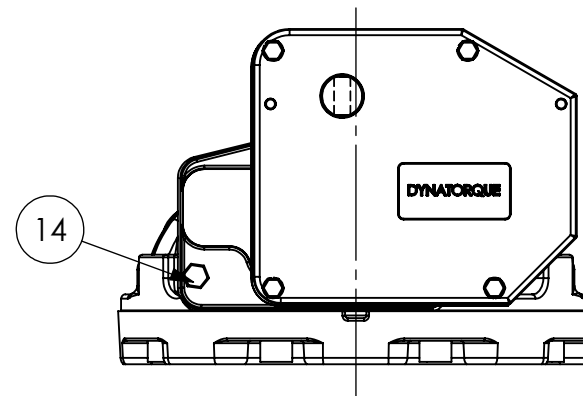

ITEM	QTY.	DESCRIPTION	ITEM	QTY.	DESCRIPTION
1	1	BEARING RET, BG4, STD	15	8	SHCS, 1/2-13 X 1.25
2	1	SHAFT, BG4, SPUR	16	3	HHCS, 3/8-16 X .875
3	1	HOUSING, BG4, MACH	17	1	WASHER, WAVE
4	1	BRG HSG, BG44	18	1	GREASE, COMMERCIAL GRADE
5	1	BEVEL PINION, BG4, MACH	19	1	LIP SEAL, 6.00
6	1	BEVEL GEAR, BG4, MACH	20	1	LIP SEAL, 3.50
7	1	BLACK ENAMEL	21	1	SPUR, 6:1, BG
8	1	ROLLER BEARING, CONE	22	1	GASKET, BRG HSG
9	1	ROLLER BEARING, CUP	23	1	GASKET, BRG RET
10	1	BEARING, FLANGED, 1.0	24	1	LIP SEAL, 1.00
11	36	BALL BEARING, .500 DIA	25	1	RTV SEALANT
12	36	BALL BEARING, .469 DIA	DYNATORQUE WWW.DYNATORQUE.COM A BRAND OF CAMERON		
13	1	GROOVE PIN, .375, 2.25			
14	1	HHCS, 3/8-16 X 1.25 LG			

BG46