
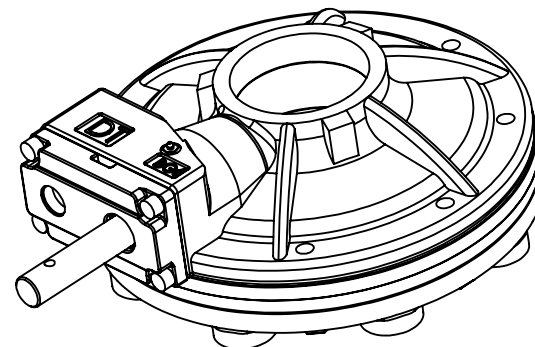
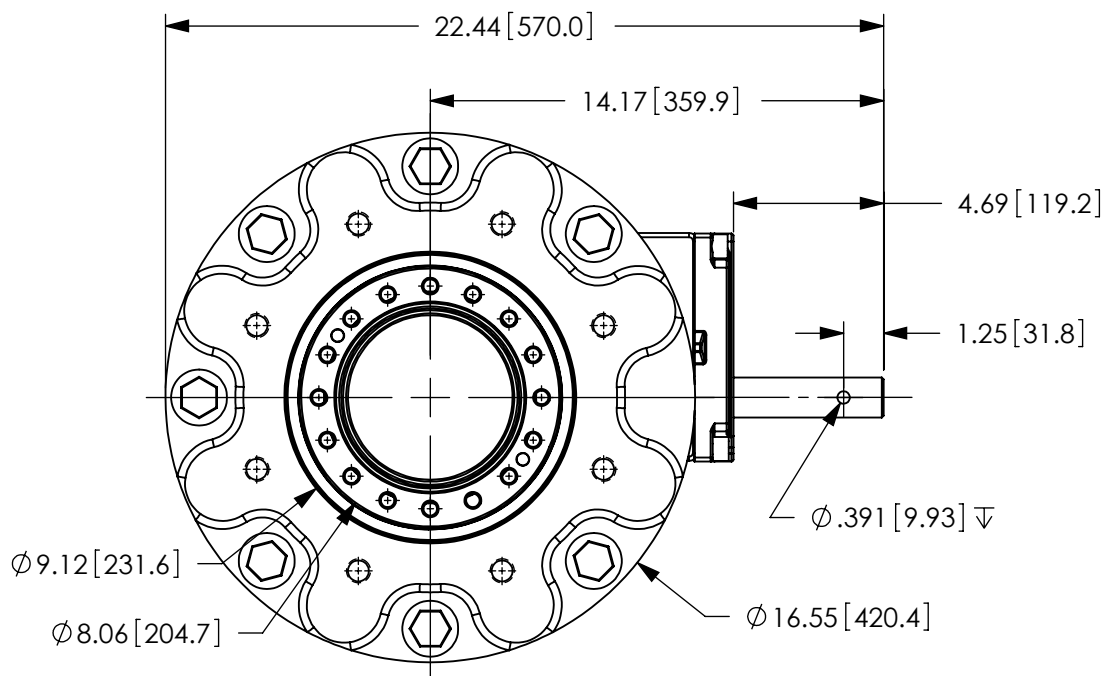
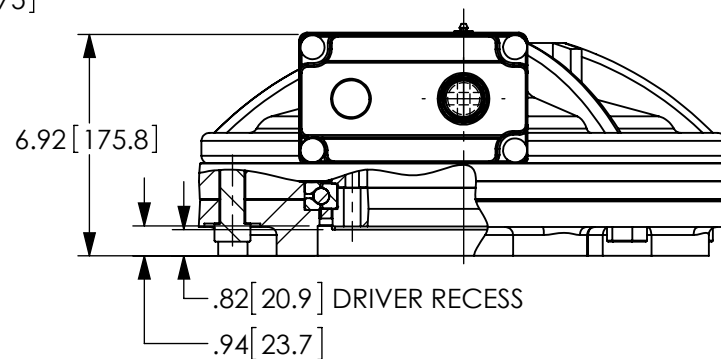


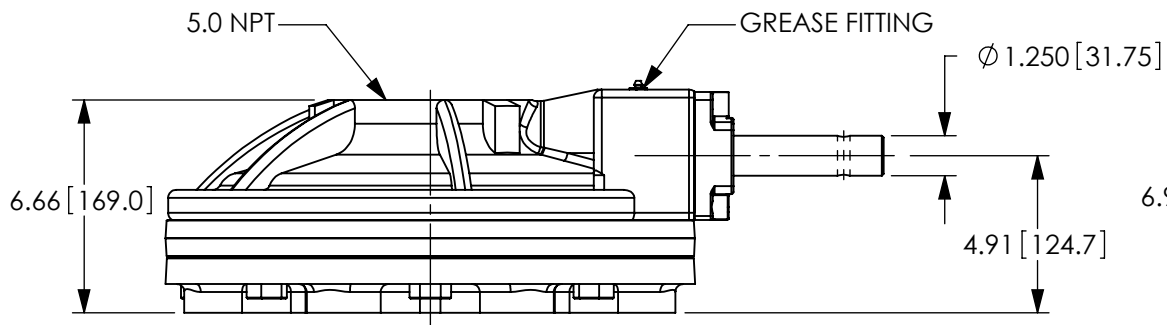

CONSULT FACTORY FOR
SPECIAL CONFIGURATIONS

MOUNTING PATTERN

DRIVE PATTERN

RATIO: 6:1
THRUST: 150,000 LBS
[667 KN]
TORQUE: 3,500 FT-LB
[4750 N-M]
TEMPERATURE: -20° TO 150°F
[-29° TO 66°C]
WEIGHT: 210 LBS [95.5 KGS]
GREASED FOR LIFE

MANUAL MULTI- TURN ACTUATOR COMMERCIAL GRADE




DYNATORQUE

WWW.DYNATORQUE.COM

A BRAND OF CAMERON

BG6

SECTION A-A

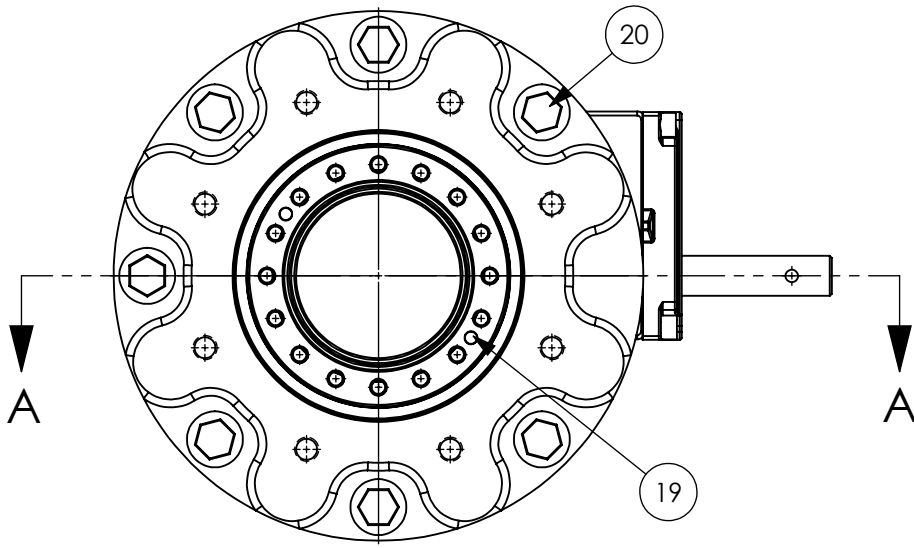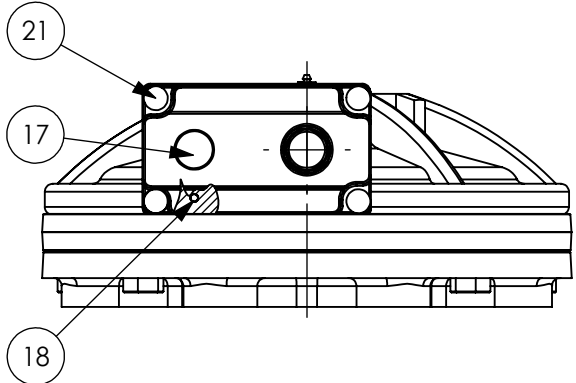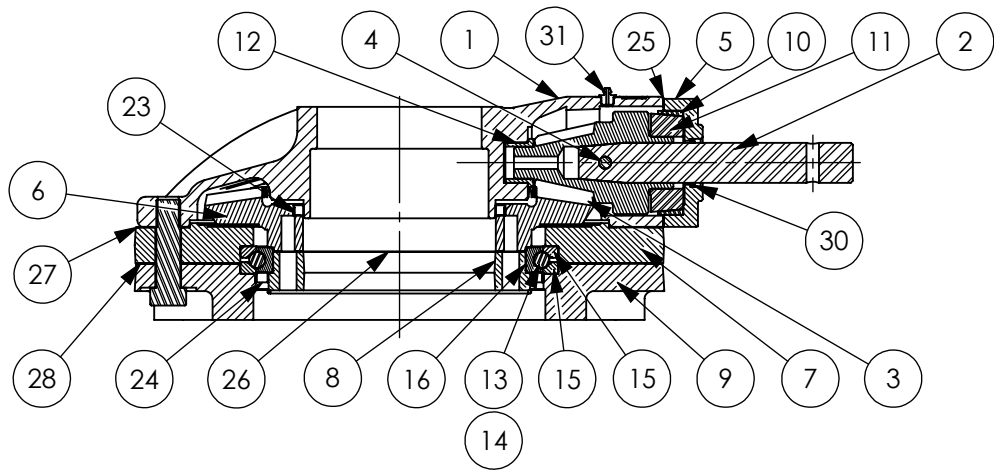

22 UNIT BEARINGS & GEAR TEETH ARE GREASED.

29 UNIT IS PAINTED BLACK ENAMEL.

ITEM.	QTY.	DESCRIPTION	ITEM.	QTY.	DESCRIPTION
1	1	HOUSING,BG6,STD,NPT	18	2	DOWEL PIN,.250,1.00
2	1	INPUT SHAFT, BG6, STD	19	2	SHCS,1/4-20 X 1.25
3	1	BEVEL PINION, BG6, MACH	20	7	HHCS,3/4-10 X 2.750 LG
4	1	GROOVE PIN,.375,2.25	21	4	SHCS,1/2-13 X 1.25
5	1	BEARING HSG, BG6, BLANK	22	1	GREASE,COMMERCIAL GRADE
6	1	BEVEL GEAR, BG6, STD	23	1	LIP SEAL,6.00, 6.625
7	1	UPPER BRG RET, BG6, STD	24	1	LIP SEAL,8.25, 9.00
8	1	INNER BRG RET, BG6, STD	25	1	GASKET, BG6, BRG HSG
9	1	LOWER BEARING RET, BG6, STD	26	1	GASKET, BG6, INNER RET
10	1	ROLLER BRG, CUP	27	1	GAKET, UPPER RET, BG6
11	1	ROLLER BRG, CONE	28	1	GASKET, LOWER RET, BG6
12	1	BEARING,FLANGED,1.25,1.0,.88	29	1	BLACK ENAMEL
13	28	BALL BEARING,.500 DIA	30	1	LIP SEAL,1.25
14	28	BALL BEARING,.469 DIA	31	1	GREASE FITTING,1/8 NPT
15	2	OUTER BRG RACE, BG6	DYNATORQUE WWW.DYNATORQUE.COM A BRAND OF CUMMINS		
16	1	INNER BRG RACE, BG6			
17	1	EXPANSION PLUG,1.250,.50			

BG6