

## TS/AW RF-KeyBoard

### How to use the keyboard:


1. Plug the receiver unit into any USB port.



2. Your operation system will start to setup the receiver unit. There is no software to load. (Win98/Me may show some dialog boxes during setup process. Press "Next" on all dialog boxes and then "finish". During setup process, the O/S may ask you to put Win98 CD into the CD-ROM.)
3. After the setup process finish, the keyboard will work.

### Notice:

1. If the keyboard is not working or interference with another:
  - 1-1. Use a paper clip to press the button. (Prepare to change a new ID). —Pic-1
  - 1-2. Use paper clip to press the receiver unit red button. (Stand by to learn the new ID)—Pic.2

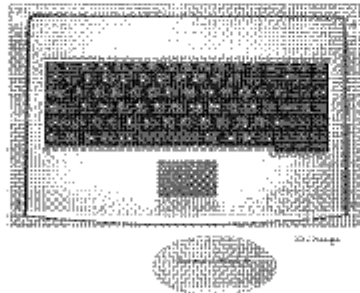

Pic-1



Pic-2

- 1-3. Press any button to operate. (Let receiver learn the new ID).
2. If you **remove the battery** or **the mouse does not work**, repeat the steps 1-1 to 1-3.

### FCC Guideline:

This device complies with part 15 of the FCC Rules.

- (1) This device may not cause harmful interference and
- (2) This device must accept any interference received, including interference that may cause undesired operation

THE MANUFACTURER IS NOT RESPONSIBLE  
FOR ANY RADIO OR TV INTERFERENCE  
CAUSED BY UNAUTHORIZED MODIFICATIONS  
TO THIS EQUIPMENT. SUCH MODIFICATIONS  
COULD VOID THE USER'S AUTHORITY