

Model 0010 Cartridge Circulator

The High Velocity series Taco 0010 Cartridge circulator is designed for quiet, efficient operation in residential or light commercial applications for hydronic heating, chilled water cooling and potable hot water systems. Its unique field-serviceable cartridge contains all moving parts. Replacing the cartridge rebuilds the circulator. With no mechanical seal, the self-lubricating, maintenance free design provides unmatched reliability. Compact and lightweight, with excellent performance characteristics, the 0010 is ideal for installations where space is a premium. Available in Cast Iron, Bronze or Stainless Steel construction.



Submittal Data Information Model 0010 Cartridge Circulator

Submittal Data # 101-033
Supersedes: 09/01/03

Effective: 06/27/07

Features

- Standard high capacity output - Compact design
- Quiet, efficient operation
- Direct drive - Low power consumption
- Unique Replaceable Cartridge design (Field serviceable)
- Self Lubricating
- No mechanical seal
- Unmatched reliability - Maintenance free
- Universal flange to flange dimensions
- Cast Iron, Bronze or Stainless Steel construction

Materials of Construction

Casing (Volute):	Cast Iron, Bronze or 304 Stainless Steel
Stator Housing:	Aluminum
Cartridge:	Stainless Steel
Impeller:	Non-metallic
Shaft:	Ceramic
Bearings:	Carbon
O-Ring & Gaskets:	EPDM

Model Nomenclature

F – Cast Iron, Flanged
BF – Bronze, Flanged
SF – 304 Stainless Steel, Flanged

Variations:

Z – Zoning Circulator
J – Bronze Cartridge with Cast Iron casing

Performance Data

Flow Range: 0 – 32 GPM
Head Range: 0 – 10 Feet
Minimum Fluid Temperature: 40°F (4°C)
Maximum Fluid Temperature: 230°F (110°C)
Maximum Working Pressure: 125 psi
Connection Sizes: 3/4", 1", 1-1/4", 1-1/2" Flanged



FOR INDOOR USE ONLY


Application

The Taco 0010 is designed for a wide range of large residential or light commercial water circulating applications. Typical uses include hydronic heating, radiant heating, primary-secondary loops, indirect water heaters, chilled water cooling, and potable hot water systems. The Bronze or Stainless Steel 0010 is designed for all open-loop, fresh water systems. The unique replaceable cartridge contains all of the moving parts and allows for easy service, instead of replacing the entire circulator. Compact, direct-drive, low power consumption design makes it ideal for high-efficiency jobs.

Pump Dimensions & Weights

Model	Casing	A		B		C		D		F		G		Ship Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
0010-F3	Cast Iron	7-1/4	184	5-5/16	135	3-3/16	81	3-5/16	84	5-3/8	137	6-3/8	162	10	4.5
0010-BF3	Bronze	7-1/4	184	5-5/16	135	3-3/16	81	3-5/16	84	5-3/8	137	6-3/8	162	10	4.5
0010-SF3	St.Steel	7-1/4	184	5-5/16	135	3-3/16	81	3-5/16	84	5-3/8	137	6-3/8	162	9	4


Mounting Positions

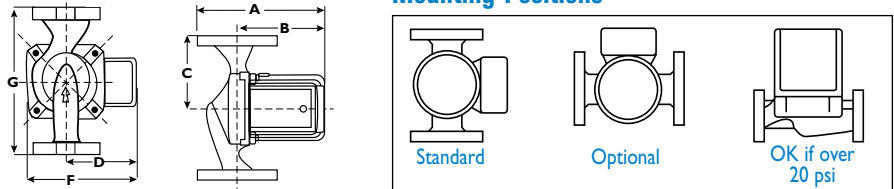

Electrical Data

Model	Volts	Hz	Ph	Amps	RPM	HP
0010-F3	115	60	1	1.10	3250	1/8
0010-BF3/SF3	115	60	1	1.17	3250	1/8
Motor Type	Permanent Split Capacitor Impedance Protected					
Motor Options	220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1					

Flange Orientation



Performance Field - 60Hz

Taco 00[®] CIRCULATORS
FLOW-M3/H

