

**SUBMITTAL****B-131.3E**

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



1 $\frac{1}{2}$ x1 $\frac{1}{2}$ x5 $\frac{1}{4}$ Series 60[®]

Maintenance Free In-Line Mounted Pump

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☐ BRONZE FITTED ☐ ALL BRONZE

FEATURES

☒ MAINTENANCE FREE PUMP
☒ INTERNALLY SELF-FLUSHING MECHANICAL SEAL☒ XLII[®] LUBRICATION SYSTEM☒ THREE YEAR WARRANTY☒ FACTORY TEST

WORKING PRESSURE

☒ 175 psi (12 bar) W.P.


TYPE OF SEAL


☐ BUNA/CARBON-CERAMIC (STANDARD)
(-20 °F TO 225 °F)

TYPE OF SEAL

☐ EPT/TUNGSTEN-CARBIDE
(-20 °F TO 250 °F)

TYPE OF SEAL

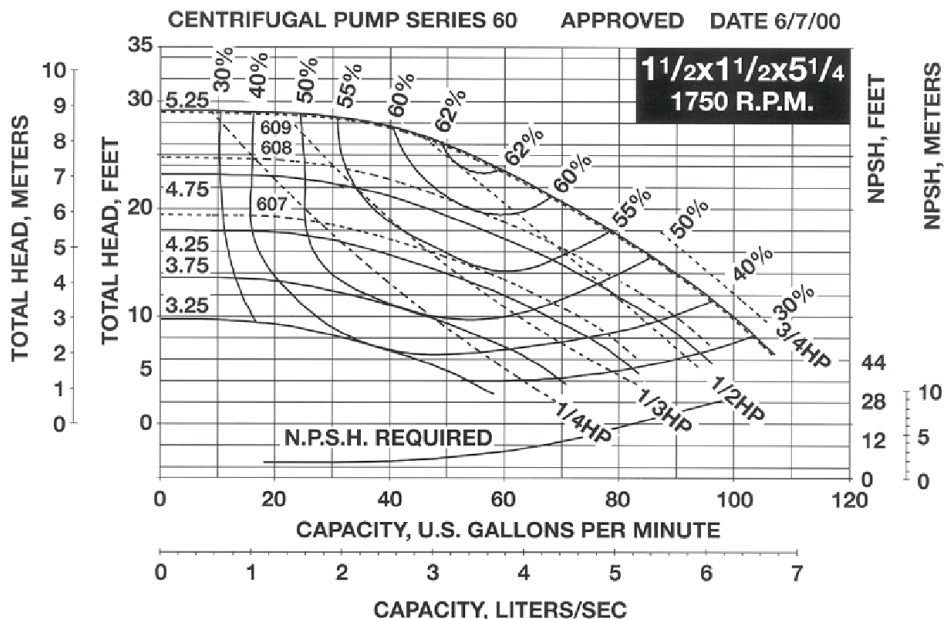☐ VITON/CARBON-CERAMIC
(0 °F TO 225 °F)

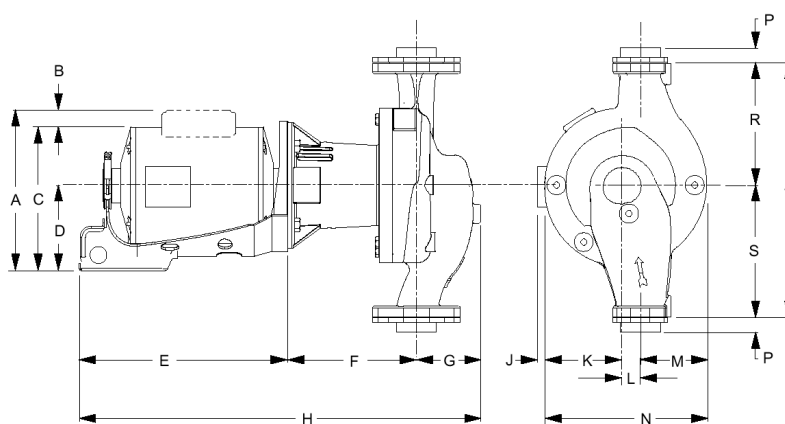

SUCTION AND DISCHARGE SIZE INCHES NPT	PUMP DIMENSIONS IN INCHES (MM)									
	F	G	K	L	M	N	P	R	S	T
1-1/2	6-9/16 (167)	3-5/8 (92)	3-3/4 (95)	1-3/8 (35)	2-3/4 (70)	7-7/8 (200)	3/4 (19)	5 (127)	6-1/2 (165)	11-1/2 (292)

MAXIMUM WORKING PRESSURE 175PSI (12 BAR)

ALL MOTORS 1750 RPM

DIMENSIONS – Inches (mm)

MOTOR HP		MOTOR DIMENSIONS - INCHES (MM)					
HP	PHASE	A	B	C	D	E	H
1/4	1	10-1/8 (257)	2-1/4 (57)	7-7/8 (200)	4-3/8 (111)	10 (254)	20-3/16 (513)
1/4	3	7-7/8 (200)	–	7-7/8 (200)	4-3/8 (111)	10 (254)	20-3/16 (513)
1/3	1	10-1/8 (257)	2-1/4 (57)	7-7/8 (200)	4-3/8 (111)	10 (254)	20-7/16 (519)
1/3	3	7-7/8 (200)	–	7-7/8 (200)	4-3/8 (111)	10 (254)	20-7/16 (519)
1/2	1	10-1/8 (257)	2-1/4 (57)	7-7/8 (200)	4-3/8 (111)	11 (279)	21-7/16 (545)
1/2	3	7-7/8 (200)	–	7-7/8 (200)	4-3/8 (111)	11 (279)	21-7/16 (545)
3/4	1	10-1/8 (257)	2-1/4 (57)	7-7/8 (200)	4-3/8 (111)	11 (279)	21-7/16 (545)
3/4	3	7-7/8 (200)	–	7-7/8 (200)	4-3/8 (111)	11 (279)	21-7/16 (545)

Dimensions are subject to change. Not to be used for construction purposes unless certified.
Includes Companion Flanges.