



Company name: -
 Created by: -
 Phone: -
 Fax: -
 Date: -




Position	Count	Description	Unit price
	-1	Product name: UP 15-10 SU7P/TLC, 1 Comfort valve  Product photo could vary from the actual product Product No.: 00595916 Product Number: 00595916 EAN number: 5700394894807 Technical: Maximum operating pressure: 145 psi Approvals on nameplate: UL, CSA Materials: Pump housing: Stainless steel Impeller: PES Composite (30% glass-filled) Installation: Maximum ambient temperature: 104 °F Ambient max at 176°F liquid: 176 °F Maximum operating pressure: 145 psi Flange standard: USA Threaded Pipe connection: NPT 3/4" Pressure stage: 10 Port-to-port length: 5 1/8 in Liquid: Liquid temperature range: 35.6 .. 150.8 °F Density: 62.4 lb/ft³ Electrical data: Number of poles: 2 Max. power input: 25 W Rated power - P2: 0.04 HP Main frequency: 60 Hz Rated voltage: 1 x 115 V Current in speed 3: 0.23 A Capacitor size - run: 2 µF/400 V Insulation class (IEC 85): F Type of cable plug: NEMA 5-15P	On request




Company name: -
Created by: -
Phone: -
Fax: -
Date: -

Position	Count	Description	Unit price
		Others: Gross weight: 5.51 lb	

Description	Value
Product name:	UP 15-10 SU7P/TLC, 1 Comfort valve
Product Number:	00595916
EAN number:	5700394894807
Technical:	
Speed Number:	1
Max flow:	6.16 US gpm
Head max:	5.25 ft
	3.28 ft
Maximum operating pressure	145 psi
Approvals on nameplate:	UL, CSA
Materials:	
Pump housing:	Stainless steel
Impeller:	PES Composite (30% glass-filled)
Installation:	
Maximum ambient temperature:	104 °F
Ambient max at 176°F liquid	176 °F
Maximum operating pressure	145 psi
Flange standard:	USA Threaded
Pipe connection:	NPT 3/4"
Pressure stage:	10
Port-to-port length:	5 1/8 in
Liquid:	
Liquid temperature range	35.6 .. 150.8 °F
Density:	62.4 lb/ft³
Electrical data:	
Number of poles:	2
Max. power input:	25 W
Rated power - P2:	0.04 HP
Main frequency:	60 Hz
Rated voltage:	1 x 115 V
Current in speed 3	0.23 A
Capacitor size - run	2 µF/400 V
Insulation class (IEC 85):	F
Motor protection:	CONTACT
Thermal protec:	internal
Type of cable plug:	NEMA 5-15P
Controls:	
Pos term box:	9H
Others:	
Gross weight:	5.51 lb

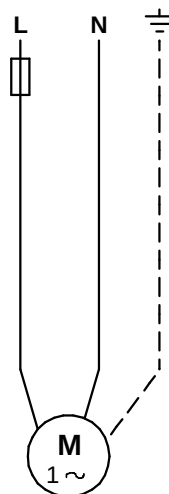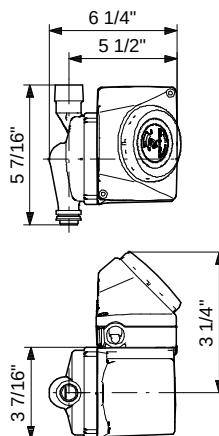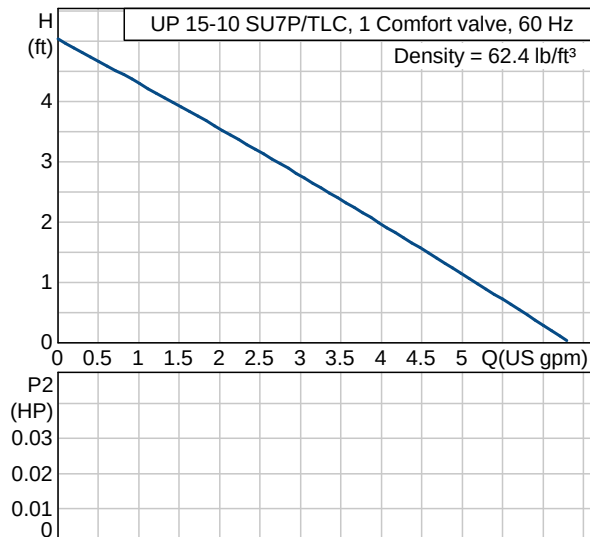

00595916 UP 15-10 SU7P/TLC, 1 Comfort valve 60 Hz

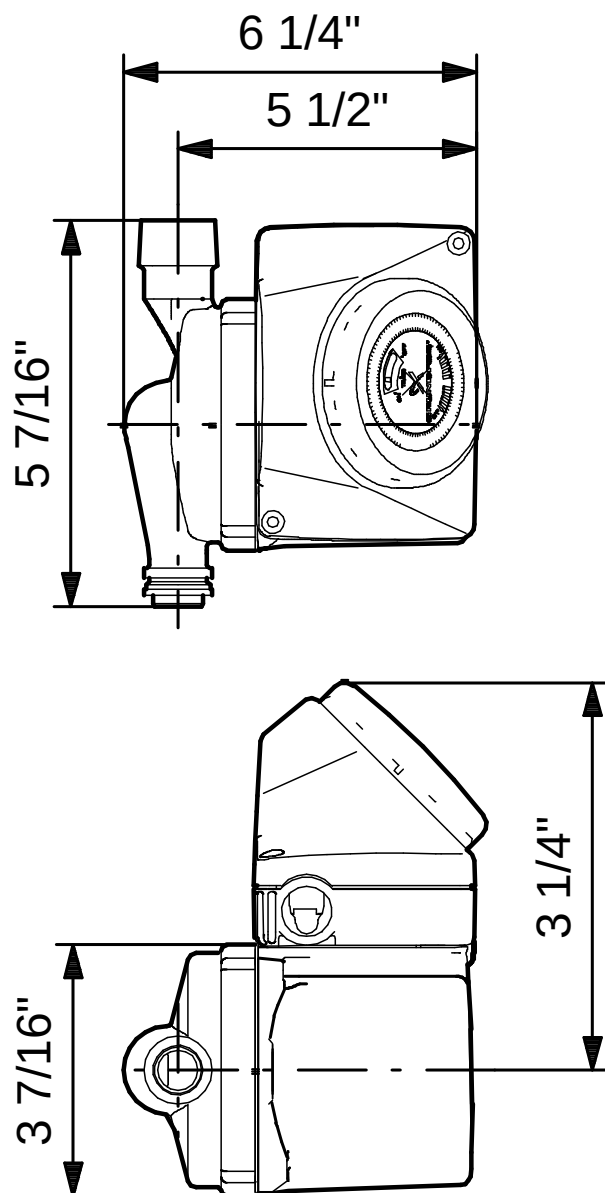

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.