TECHNICAL BROCHURE

BSPBB



FEATURES

Battery powered sump pump runs automatically during a power outage.

Provides a backup to your standard sump pump if it breaks down.

Automatic start-up

Self-charging

Indicator lights on charger

Alarm sounds when pumping and battery won't charge.

SPBB/SPBB2

BATTERY BACKUP SUMP PUMPS



Goulds Water Technology

Wastewater

APPLICATIONS

Designed to provide emergency backup service for primary pump in the event of a power outage. Will also operate if main pump can't keep up with inflow.

SPECIFICATIONS


- 12 volt pump
- Float switch
- 10 amp battery charger
- Check valve
- Pipe fittings
- Battery box is 7.5" W, 14.5" L, 8" D and is sized for Group 24-30 batteries.
- System requires minimum 105 amp deep cycle marine battery, Series 27, (not included).

SPBB PERFORMANCE CHART

Discharge Height	GPH	Battery Life
5'	1380	9 hours
10'	900	9 hours
13'	480	11 hours

SPBB2 PERFORMANCE CHART

Discharge Height	GPH	Battery Life
5'	2250	7 hours
10'	1500	8 hours
13'	1000	9 hours

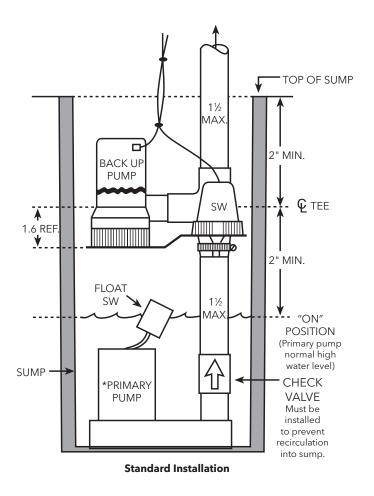

NOTE: *PRIMARY PUMP NOT INCLUDED.



Xylem, Inc. 2881 East Bayard Street Ext., Suite A Seneca Falls, NY 13148 Phone: (866) 325-4210

Fax: (888) 322-5877

www.xyleminc.com/brands/gouldswatertechnology

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license. © 2012 Xylem Inc. BSPBB R1 April 2012