Control Float

Pilot Duty / Intrinsically Safe
125 Volt

BARNES®
Professional Plumbing
www.cranepumps.com

Accessories

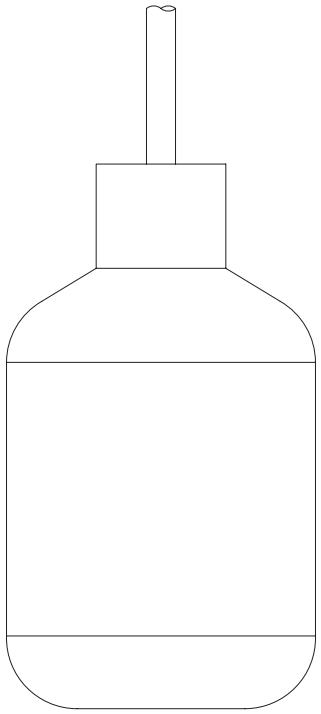

P/N: 124522
125147

Specifications:

CORD.....18/2 SJOW
PLUG.....None
FLOAT.....Polypropylene for use in water & sewage up to 140° (60° C).
WATER DEPTH.....Maximum 30' (9m), 13 PSI
SWITCH:
P/N 124522: .....Snap Action, Normally Open, Pilot Duty
P/N 125147: .....Snap Action, Normally Closed
CLAMP .....Stainless Steel Construction. Range: 1" to 3" Dia.
MOUNTING SADDLE .....ABS/Nylon
SWITCH COMPONENT ELECTRICAL RATINGS:
125 VAC: .....Maximum Electrical Load: 0.1 Amps
Minimum Electrical Load: 0.160 Milliamps
30 VDC:.....Maximum Electrical Load: 0.1 Amps
Minimum Electrical Load: 0.160 Milliamps
ELECTRICAL CONFIGURATION:
P/N 124522: .....Normally Open
P/N 125147: .....Normally Closed
COLOR.....Black
PACKING .....Pack Float Assembly, Clamp, Saddle & Instruction Sheet in Individual Carton.

inches
(mm)

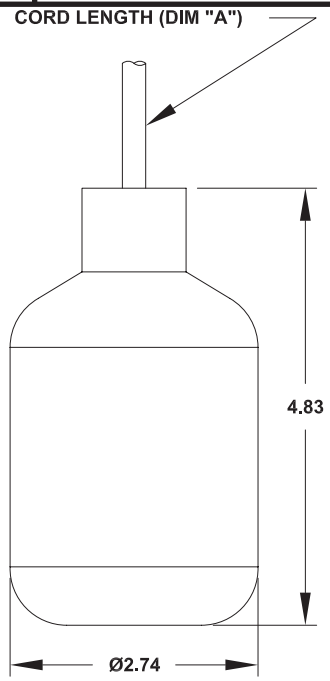

CRANE®
A Crane Co. Company

PUMPS & SYSTEMS

USA: (937) 778-8947 • Canada: (905) 457-6223 • International: (937) 615-3598