Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



SECTION: 2.20.015FM2850
1115
Supersedes
1015


Zoeller Family of Water Solutions

TECHNICAL DATA SHEET **AQUA-MATE SERIES**

Model 212 Sewage/Effluent or Dewatering Pump Builder Series

PRODUCT SPECIFICATIONS

		1				
MOTOR	Horse Power	1/2				
	Voltage	115				
	Phase	1 Ph				
	Hertz	60 Hz				
2	RPM	3400				
2	Туре	Permanent split capacitor				
	Insulation	Class B				
	Amps	6.6				
	Operation	Automatic				
	Auto On/Off Points	11 1/2" (29 cm) / 5 1/4" (13 cm)				
	Discharge Size	2" NPT				
	Solids Handling	2" (50 mm) spherical solids				
₽	Cord Length	10' (3 m) standard				
PUMP	Cord Type	UL listed 3-prong plug				
I	Max. Head	19.5' (5.9 m)				
	Max. Flow Rate	82 GPM (310 LPM)				
	Max. Operating Temp.	104° F (40° C)				
	Cooling	Oil filled				
	Motor Protection	Auto reset thermal overload (1 Ph)				
	Motor Housing	Cast iron				
	Pump Housing	Engineered plastic				
	Base	Engineered plastic				
MATERIALS	Upper Bearing	Ball bearing				
	Lower Bearing	Ball bearing				
	Mechanical Seals	Carbon and ceramic				
	ImpellerType	Non-clogging vortex				
	Impeller	Engineered plastic				
	Hardware	Stainless steel				
	Motor Shaft	SUS420J2 stainless steel				
	Gasket	NBR				

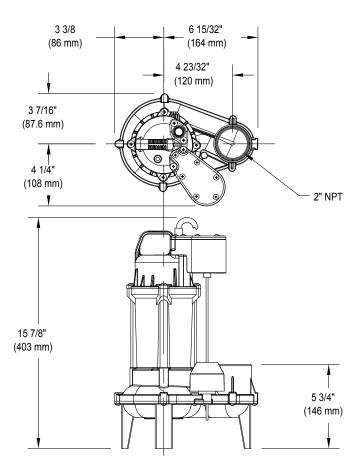

SK3054

NOTE: The sizing of effluent systems normally requires variable level float(s) controls and properly sized basins to achieve required pumping cycles or dosing timers with nonautomatic pumps.

NOTE: See model comparison chart for specific details.






TOTAL DYNAMIC HEAD FLOW PER MINUTE

МО	DEL	212			
Feet	Meters	Gal.	Liters		
5	1.5	82	310		
10	3.0	53	201		
15	4.6	32	121		
Shut-of	f Head:	19.5 ft. (5.9m)			

NOTE: recommended for 2" pipe only

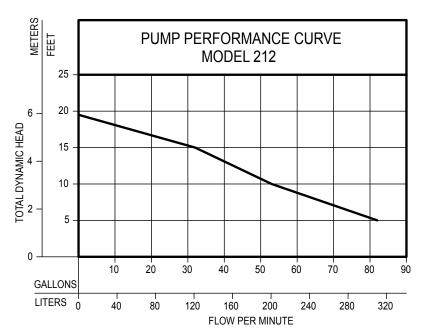

153444

Model	MODEL COMPARISON								
	Seal	Mode	Volts	Ph	Amps	HP	Hz	Lbs.	Kg
M212	Single	Auto	115	1	6.6	1/2	60	16.8	7.6

SELECTION GUIDE

- 1. Integral float-operated mechanical switch, no external control required.
- 2. See FM1663 for a residential alternator system.

AUTION All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).