



FILL-RITE®

IN-LINE DIGITAL TURBINE METER

**+/-1% ACCURACY
FACTORY & FIELD CALIBRATIONS
GLOBAL CERTIFICATIONS**

 **Tuthill**
PUMP YOUR HEART INTO IT

PROUDLY
 **Made in
USA™**



Why choose Fill-Rite?


Accurate to 1%, this turbine meter sets the standard for accuracy, ease of use and safety. It has factory presets for 20 fluids and UL/ATEX listing on the entire meter, not just the electronics as competing brands have. Replaceable AA batteries keep your meter running and downtime to a minimum. A rubber boot helps protect the meter and electronics from impact damage. For a robust meter you can depend on, choose Fill-Rite, the most trusted name in pumps and meters.

- Install it where you need it, even at the end of the hose.
- Measure gallons, liters, quarts, pints, and ounces with one meter.
- A priority on safety with intrinsically safe electronics and near global regulatory approvals provide peace-of-mind.



Aluminum

COMMON COMPATIBLE FUELS:
Gasoline, Diesel, Jet Fuel, Heptane,
Kerosene, Mineral Spirits

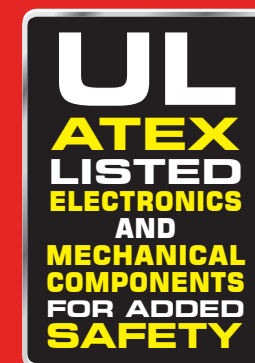

	TT10AN*	TT10AB
Flow Rate (GPM/LPM)	2-35 / 8-132	2-35 / 8-132
Operating Pressure	50 psi	50 psi
Inlet/Outlet	1" NPT	1" BSPP
Meter Accuracy	+/- 1.00%	+/- 1.00%
Units of Measure	Ounces, pints, quarts, liters, or gallons	
Wetted Materials	Aluminum, Acetal, SS, Gold	
Operating Temp (°F/°C)	-40°F-176°F / -40°C-60°C	
Power Source	2 AA Batteries	2 AA Batteries
Certifications	UL/cUL, CE, ATEX, IECEx	

*Includes 1" to 3/4" reducer bushings



Nickel Plated

COMMON COMPATIBLE FUELS:
E85, B100 Bio-Diesel, Gasoline,
Diesel, Non-Potable Water, Jet Fuel,
Lavatory water, Mineral Spirits



2 YEAR WARRANTY
ON ALL MODELS

	TT10ANC	TT10ABC
Flow Rate (GPM/LPM)	2-35 / 8-132	2-35 / 8-132
Operating Pressure	50 psi	50 psi
Inlet/Outlet	1" NPT	1" BSPP
Meter Accuracy	+/- 1.00%	+/- 1.00%
Units of Measure	Ounces, pints, quarts, liters, or gallons	
Wetted Materials	Nickel-Plated Aluminum, Acetal, SS, Gold	
Operating Temp (°F/°C)	-40°F-176°F / -40°C-60°C	
Power Source	2 AA Batteries	2 AA Batteries
Certifications	UL/cUL, CE, ATEX, IECEx	

Polymer

COMMON COMPATIBLE FUELS:
DEF/Ad Blue, Anti-Freeze,
De-icing Fluid, Non-Potable Water,
and Other Chemicals



INSTALL IT WHERE YOU NEED IT
EVEN AT THE END OF THE HOSE

	TT10PN	TT10PB
Flow Rate (GPM/LPM)	2-35 / 8-132	2-35 / 8-132
Operating Pressure	50 psi	50 psi
Inlet/Outlet	1" NPT	1" BSPP
Meter Accuracy	+/- 1.00%	+/- 1.00%
Units of Measure	Ounces, pints, quarts, liters, or gallons	
Wetted Materials	PP, UHMWPE, SS, Gold	
Operating Temp (°F/°C)	-15°F-176°F / -26°C-60°C	
Power Source	2 AA Batteries	2 AA Batteries
Certifications	UL/cUL, CE, ATEX, IECEx	



IN-LINE DIGITAL TURBINE METER

+/-1% ACCURACY
FACTORY & FIELD CALIBRATIONS
GLOBAL CERTIFICATIONS

FILL-RITE®

PROUDLY
Made in
USA

Turbine-12 16-Rev.1