

Features


Model 5802-2 UPC: 696471058024
(EPA/49-State)

- **Generac's OHVI® Engine** incorporates full pressure lubrication with spin-on automotive style oil filter for longer engine life.
- **Covered Outlets** provide protection from the environment and rugged working conditions.
- **Low-Oil Pressure Shutdown** automatically safeguards engine from damage.
- **PowerBar™** monitors power usage.
- **Hour meter** with maintenance resets tracks usage.
- **Heavy-duty, never flat wheels** for reliable portability.
- **Illuminated control panel** for improved visibility.
- **Full-wrap, heavy-duty frame tubing** for durability and strength.
- **User-friendly design** has conveniently placed engine controls for simple operation and easy start-up.



AC Rated Output Running Watts 10000
AC Maximum Output Starting Watts 12500

49-State Control Panel

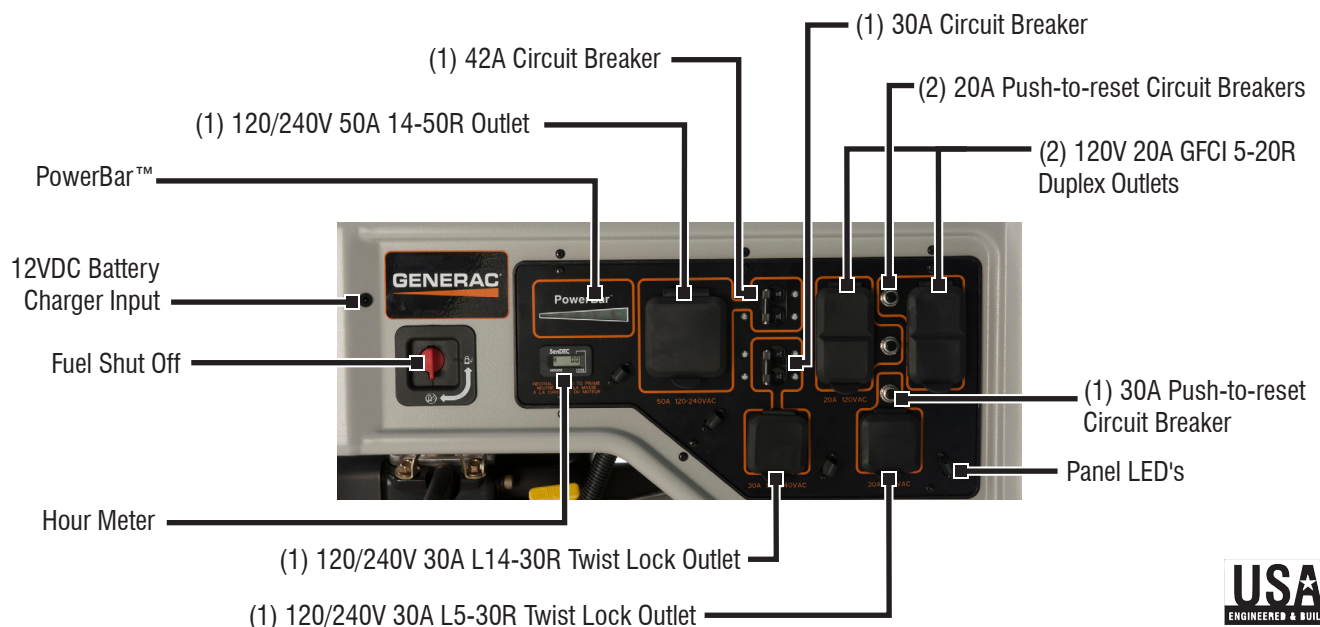

XG10000E

Specifications

Product Series	XG10000E
Model (Configuration)	5802-2 (EPA/49-State)
AC Rated Output Running Watts	10000
AC Maximum Output Starting Watts	12500
Rated AC Voltage	120/240 VAC
Rated AC Frequency	60 Hz
Rated 120/240 VAC Amperage	83.3/41.7
Engine Displacement	530cc
Engine Type	OHVI
Engine RPM	3600
Recommended Oil	10W-30 / SAE 30
Lubrication Method	Oil Pump
Choke Location	On Engine
Fuel Shut Off	On Control Panel
Starting Method	Electric
Battery	Yes
Battery Type	12VDC
Battery Wall Charger Adapter	Included
Low Oil Shutdown	Low Pressure
Neutral Bonded to Ground	Yes

Start Switch Type	On/Off/Start
Switch Location	On Engine
Fuel Gauge	Built-in Tank
Fuel Tank Capacity Gal (Ltrs)	10 (38)
Run Time at 50% (Hours)	10
Handle Style	Folding Interlocked
Wheel Type	10" Semi-Solid Wheels
Maintenance Kit	Included
Warranty- Residential	2 Year
Warranty- Commercial	1 Year

Dimensions and Weights

Length in (mm)	30 (762)
Width in (mm)	29.5 (749)
Height in (mm)	31 (787)
Extended Length in (mm)	50 (1270)
Carton Length in (mm)	34 (864)
Carton Width in (mm)	25.5 (641)
Carton Height in (mm)	33 (838)
Unit Weight lbs (kg)	300 (136)
Shipping Weight lbs (kg)	324 (147)

