




Series  
**NSX**

**NONENVIRONMENTAL SIZE 8 QUADRAX PIN CONTACT  
FOR JSFY02 QUADRAX CABLE**

Issue:  
**JULY 21, 2005**

Page  
**1/1**

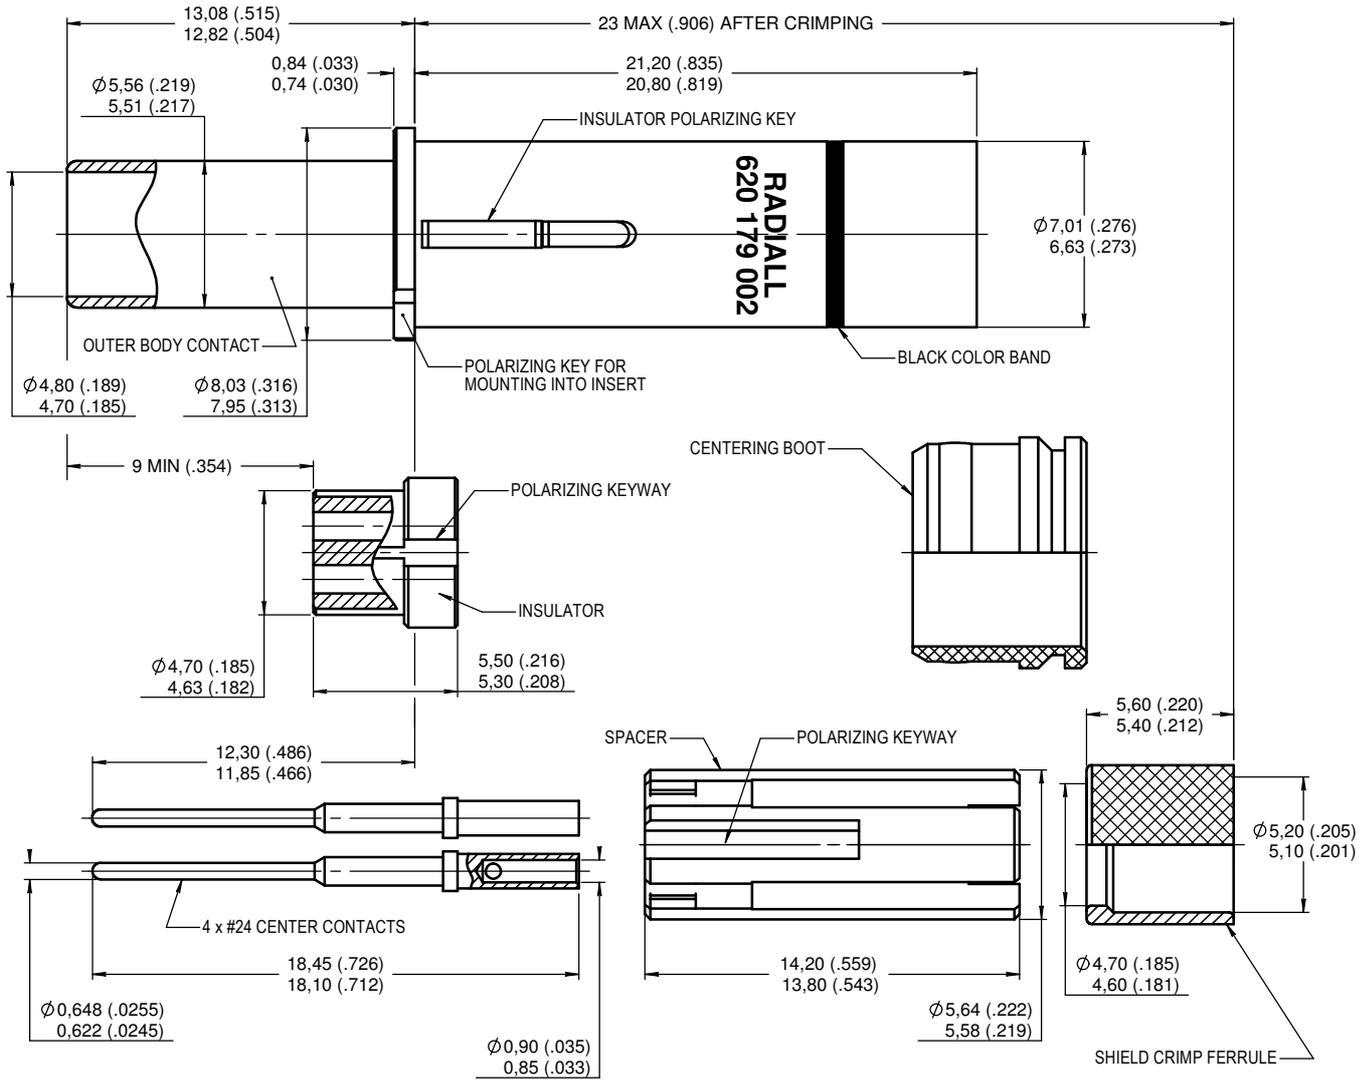

**MATERIAL:**

- OUTER, CENTER CONTACTS AND FERRULE: COPPER ALLOY
- INSULATOR AND CENTERING BOOT: PTFE PER ASTM-D-1710 OR EQUIVALENT PER MIL-R-25988 OR ZZ-R-765
- SPACER : THERMOPLASTIC PER ASTM D 5205

**FINISH:**


- ALL METAL PARTS:  
PLATING .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II  
GRADE C OR D CLASS 1 OVER NICKEL PER QQ-N-290

**EXTRACTION TOOL:**

- M81969/28.03 (RADIALL: 282 549 001) OR M81969/14-06

WIRING INSTRUCTIONS: SEE RP57186

**ENGAGING FACE**

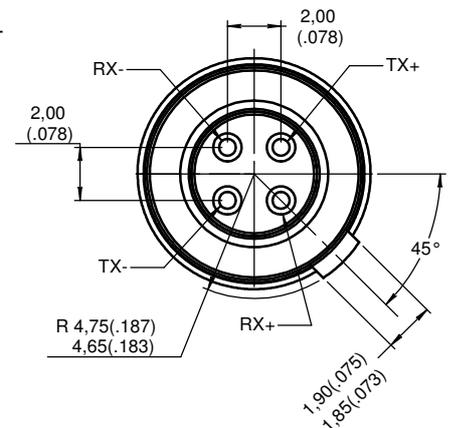

**DIMENSIONS : mm (inch) -**



This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112\_9311

<b>CREATION</b>				
<b>PEN: M030400075B</b>				
<b>NOM: MACARI</b>	<b>JULY 21, 05</b>	<b>Error corrected for spacer's material</b>	<b>LEGENDRE</b>	<b>LAHOREAU</b>
<b>DATE: 26 APRIL 04</b>	<b>10 JUNE 04</b>	<b>NONENVIRONMENTAL WAS ENVIRONMENTAL</b>	<b>MACARI</b>	<b>MONDOT</b>
<b>APPR.: MONDOT</b>	<b>MAY 3, 04</b>	<b>COPPER ALLOY WAS BRASS PER QQ-B-626</b>	<b>LEGENDRE</b>	<b>MACARI</b>
	<b>Issue</b>	<b>Revisions</b>	<b>Name</b>	<b>Approved</b>

**620179002EN**