




# TRE-SBMD

40 Channel AM Mobile CB Radio  
With USB/ SD / MP3 Player

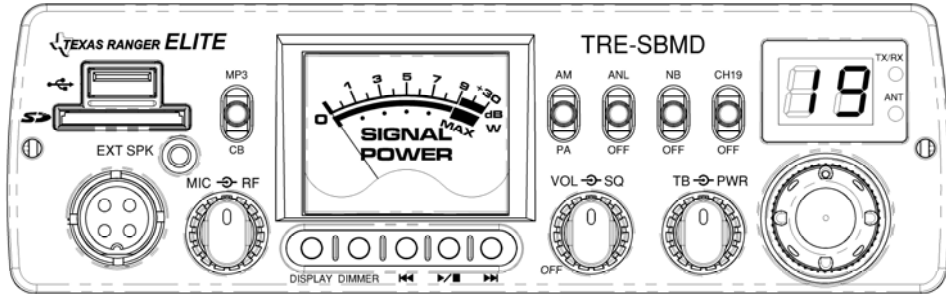

## USER'S MANUAL

## CONTENTS

	PAGE
<b>Specifications</b> .....	2
<b>Installation</b> .....	3
Location .....	3
Mounting The Radio .....	3
Ignition Noise Interference .....	4
Antenna .....	4
Tuning The Antenna for Optimum SWR .....	5
External Speaker .....	6
Public Address .....	6
<b>Operation</b> .....	7
Front Panel .....	7
Rear Panel .....	10
Frequency Chart .....	11
Procedure to Receive And Transmit .....	12
Alternate Microphone And Installation .....	13
Maintenance And Adjustment .....	16
A Few Rules That Should Be Obeyed .....	17
How Your CB Can Serve You .....	17

## SPECIFICATIONS

---

### GENERAL

Model	TRE-SBMD
Channels	40
Frequency Range	26.965 ~ 27.405 MHz
Emission	AM
Frequency Control	Phase-Lock-loop (PLL) Synthesizer
Frequency Stability	0.001%
Temperature Range	-30°C to +50°C
Antenna Impedance	50 Ohms
Antenna Connectors	Standard SO-239 type
Input Voltage	13.8V DC
USB/SD Card Capacity	USB 1GB/SD Card 2GB
Size	7- 7/16" (W) x 8" (D) x 2- 5/16" (H)
Weight	4.2 lbs.

### TRANSMITTER

RF Power Output	4W
Spurious Emission	-60 dB
Audio Distortion	10%
Frequency Response	300 to 2500 Hz
Microphone	Dynamic

### RECEIVER

Sensitivity for 10 dB (S+N)/N	< 1.0 uV
Squelch Sensitivity	< 0.5 uV
Image Rejection	More than 65 dB
AGC Figure of Merit	100 mV for 10dB Change in Audio Output
Audio Power Output	3W @ 10% Distortion
Audio Response	300 to 2500 Hz
Audio Input	2V @ 10K ohms
AUX output	2V @ 200 ohms

(SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)

## INSTALLATION

---

### LOCATION

Plan the location of the transceiver and microphone bracket before starting the installation. Select a location that is convenient for operation and does not interfere with the driver or passengers in the automobiles, the transceiver is usually mounted the dash panel with the microphone bracket beside it.

### MOUNTING THE RADIO

The transceiver is supplied with a universal mounting bracket. When mounting the bracket and radio to your car, make sure it is mechanically strong. Also provide a good electrical connection to the chassis of the vehicle. Proceed as follows to mount the transceiver:

1. After you have determined the most convenient location in your vehicle, hold the transceiver with mounting bracket in the exact location desired. If nothing will interfere with mounting it in the desired position remove the mounting bolts. Before drilling the holes, make sure nothing will interfere with the installation of the mounting bolts.
2. Connect the antenna cable plug to the standard receptacle on the rear panel. Most transceiver antennas are terminated with a type PL-259 plug and mate with the receptacle.
3. Connect the red DC power input wire (with the fuse) to +13.8V DC. This wire extends from the rear panel. In automobile installation, +13.8V DC is usually obtained from the accessory contact on the ignition switch. This prevent the set being left on accidentally when the driver leaves the car and also permits operating the unit without the engine running. Locate the accessory contact on most ignition switches by tracing the power wire from the AM broadcast receiver in the car.
4. Connect the black lead to -13.8V DC. This is usually the chassis of the car. Any convenient location with good electrical contact (remove paint) may be used.
5. Mount the microphone bracket on the right side of the transceiver, using two screws supplied. When mounting in an automobile, place the bracket under the dash so that microphone is readily accessible.

**IGNITION NOISE INTERFERENCE**

Use of a mobile receiver at low signal levels is normally limited by the presence of electrical noise. The primary source of noise in automobile installation is from the generator and ignition system in the vehicle. Under most operating conditions, when signal level is adequate, the background noise does not present a serious problem. Also, when extremely low level signals are being received, the transceiver may be operated with vehicles engine turned off. The unit requires very little current and therefore will not significantly discharge the vehicle battery.

Even though the transceiver has ANL and NB controls, in some installation ignition interference may be high enough to make good communications impossible. The electrical noise may come from several sources. Many possibilities exist, as variations between vehicles require different solutions to reduce the noise.

**ANTENNA**

A vertically polarized, quarter-wavelength whip antenna provides the most reliable operation and greatest range. Shorter, loaded-type whip antennas are more attractive, compact and adequate for applications where the maximum possible distance is not required. Also, loaded whips do not present the problems of high wind resistant imposed by a full quarter-wavelength whip.

Mobile whip antennas utilize the metal body of the vehicle as a ground plane. When mounted at a corner of the vehicle they are slightly directional, in the direction of the body of the vehicle. For all practical purpose, however, the radiation pattern is nondirectional. The slight directional characteristic will be observed only at extreme distances. A standard antenna connector (type SO-239) is provided on the transceiver for easy connection to a standard PL-259 cable termination.

If the transceiver is not mounted on a metal surface, it is necessary to run a separate ground wire from the unit to good metal electrical ground in the vehicle. When installed in a boat, the transceiver will not operate at maximum efficiency without a ground plate, unless the vessel has a steel hull.

Before installing the transceiver in a boat, consult your dealer for information regarding an adequate grounding system and prevention of electrolysis between fittings in the hull and water.

**TUNING THE ANTENNA FOR OPTIMUM S.W.R.**

Since there are such a wide variety of base and mobile antennas, this section will strictly concern itself to the various types of mobile adjustable antennas.

Because the antenna length is directly related to the channel frequency, it must be tuned to resonate optimally on all channels of the transceiver. Channel 1 requires a longer antenna than Channel 40 because it is lower in its frequency of operation.

Due to the various methods of adjusting antennas for proper S.W.R. we have chosen what we think is the optimum method:

**A. Antenna with adjustment screws (set screws).**

1. Starts with the antenna extended and tighten the set screw lightly enough so that the antenna can be lightly tapped with your finger for easy adjustment.
2. Set your transceiver to Channel 20. Press the PTT (push-to-talk) switch, and tap the antenna (making it shorter). The S.W.R meter will show a lower reading each time the antenna is tapped. By continuing to shorten the antenna, you will notice the S.W.R reading will reach a low point and then start rising again. This means that you have passed the optimum point for Channel 20.

Extend the antenna a short distance and again follow the procedure above. When the lowest point has been reached, switch to Channel 1 and then to Channel 40 and compare S.W.R readings. They should be almost equal.

**NOTE**  
*The proper setting is achieved when the SWR is 1.5 or below, and when it has similar reading for channels 1 and 40.*

**B. Antennas which must be cut to proper length**

1. Follow the same procedure as above but adjust the length by cutting in 1/8" increments until a good match is obtained.
2. *Be very careful not to cut too much at one time, as once it is cut, it can no longer be lengthened. .*
3. The whip is easily cut by filing a notch all the way around and breaking the piece off with pliers.

## INSTALLATION

4. If you're having difficulties in adjusting your antenna, check the following:
  - a. All doors must be closed when adjusting the antenna.
  - b. Make sure the base of the antenna is grounded.
  - c. Check your coaxial cable routing (it may be pinched when routed into the car).
  - d. Try a different location in your car (keeping in mind the radiation pattern you wish.)
  - e. Is the antenna perfectly vertical?
  - f. Try a different location in your neighborhood. Stay away from large metal objects when adjusting (metal telephone polls or light post, fences, etc.)

### NOTE

*The transceiver will operate into an SWR of 2 to 1 indefinitely and sustain an SWR of 2:1 for a maximum of 5 minutes at rated operating conditions.*


## EXTERNAL SPEAKER

The external speaker jack (EXT SP.) on the rear panel is used for remote receiver monitoring. The external speaker should have 8 ohms impedance and be able to handle at least 4 watts. When the external speaker is plugged in, the internal speaker is disconnected.

## PUBLIC ADDRESS

To use the transceiver as a public address system, connect an external 8 ohms speaker (4 watts minimum) to the PA. SP. jack located on the rear panel. Direct the speaker away from the microphone to prevent acoustic feedback. Physical separation or isolation of the microphone and speaker is important when operating the PA at high output levels.

## OPERATION FRONT PANEL

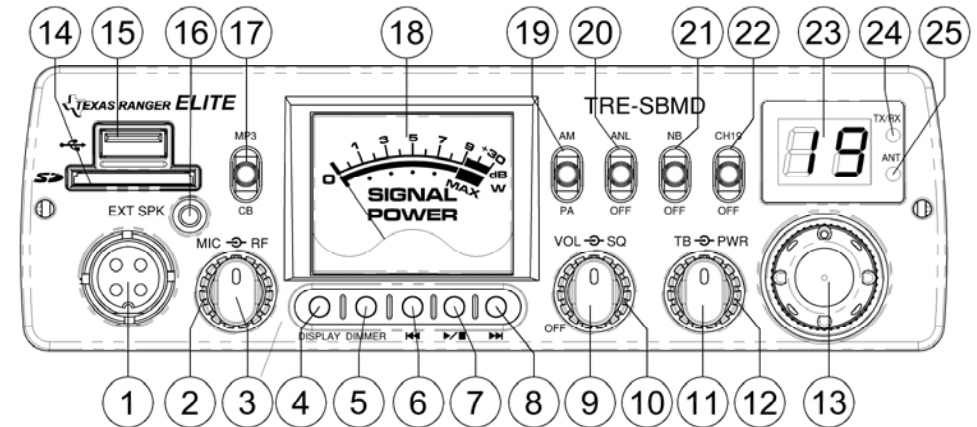

1. **MICROPHONE JACK:** Used to connect microphone for voice source.
2. **RF GAIN CONTROL:** This control is used to reduce the gain of the RF amplifier under strong signal conditions.
3. **MIC GAIN CONTROL:** Adjusts the microphone gain in transmit and PA modes. It controls the gain to the extent that full talk power is available several inches away from the microphone. In the Public Address (PA) mode, this control functions as the volume control.
4. **DISPLAY SELECT:** This is used in conjunction with the Meter Mode to select the different types of meter to be used as a display.
5. **DIMMER CONTROL:** This Push Switch controls the level of brightness for the display lamp and channel display.
6. **REVERSE** ◀◀: This Push Switch has dual function; it is used to scroll back songs from the Music List or to select previous track. In addition, this switch is used to scroll back pictures from the USB stick or SD card.

## OPERATION

---

7. **PLAY/STOP SWITCH ▶/■:** This Push Switch controls the play and stop function for the MP3 Player.
8. **NEXT/FORWARD SWITCH ▶▶|:** This Push Switch has dual function; it is used for selecting or to skip to the next track from the Music List. In addition, this switch is used to scroll forward pictures from the USB stick or SD card.
9. **ON/OFF VOLUME CONTROL:** This knob controls the volume and power to the radio. To turn radio on, rotate the knob clockwise. Turning the knob further will increase the volume of the receiver.
10. **SQUELCH CONTROL:** This switch is used to eliminate background noise being heard through the receiver, which can be disturbing when no transmission is being heard through the received. To use this feature, turn the switch fully counterclockwise and then turn clockwise slowly until the background noise is just eliminated. Further clockwise rotation will increase the threshold level, which a signal must overcome in order to be heard. Only strong signal will be heard at a maximum clockwise setting.
11. **TALKBACK CONTROL:** Adjust this knob for desired volume of Talkback. This is used to monitor your own voice. This feature can be used to compare TX audio from different microphones.
12. **RF POWER CONTROL:** This control allows the user to adjust RF power output.
13. **CHANNEL SELECTOR:** This control is used to select a desired transmit and receive channel.
14. **SD Card Port:** Accepts 4GB SD card for music or photo source.

**NOTE: Do not use a USB stick with more than 4GB capacity or an SD card with more than 4GB capacity as it will cause the display & the MP3 player to malfunction.**

15. **USB Port:** Accepts 4GB USB stick for music or photo source.


## OPERATION

---

16. **EXT. SPK (STEREO):** This jack accepts a 4 to 8 ohm, 5 watt external speaker. When the external speaker is connected to this jack, the rear speaker is disabled. This jack is only for MP3 music output.
17. **MP3/CB SWITCH:** This switch allows you to select one of the following operating modes; MP3 Player or CB. In the "MP3" position, you can play the music stored in the USB stick or SD card. In the "RADIO" position, the CB is activated.
18. **FRONT PANEL METER:** The Front Panel Meter allows the user to monitor signal strength and RF output power.
19. **AM/PA SWITCH:** This switch allows you to select one of the following operating modes: AM/PA. In the "AM" position, the CB radio is activated. In the PA position, the radio acts as public address amplifier. Your voice will come out from the speaker that is plugged into the PA. SP. jack on the rear panel. The transceiver will not operate when you are in the PA mode.
20. **ANL/OFF SWITCH:** In the ANL position, the Automatic Noise Limiter (ANL) in the audio circuits is activated.
21. **NB/OFF SWITCH:** In the NB position, the Noise Blanker (NB) is activated. The NB is very effective in eliminating repetitive impulse noise such as ignition interference.
22. **CH19/NORMAL SWITCH:** Channel 19 switch is used for instant access to information channel 19.
23. **CHANNEL DISPLAY:** The channel display indicates the current selected channel.
24. **TX/RX LED:** The Red LED indicates the unit is in the transmit mode. The Blue LED indicates the unit is in the receive mode.
25. **ANT LED:** This LED lights red when your SWR is higher than about 3:1. This is not an exact indicator of 3:1 SWR, but it is an indication that you should check your antenna and its components.

OPERATION

REAR PANEL

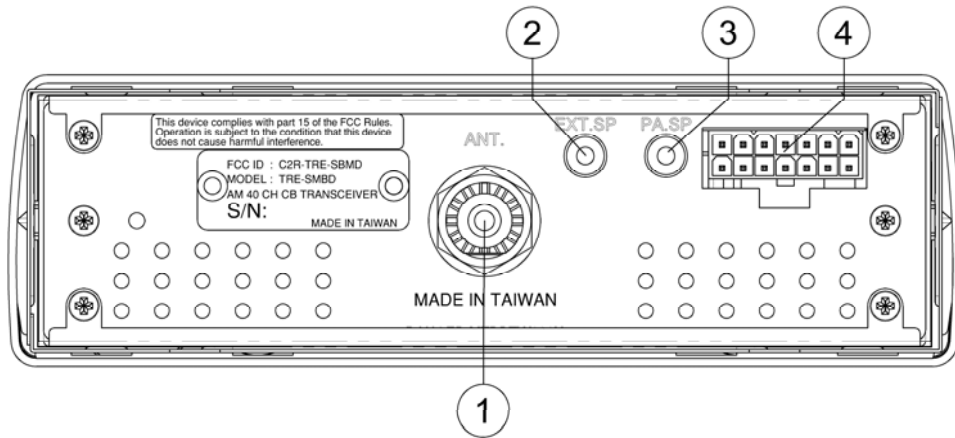

1. **ANTENNA:** This jack accepts 50 ohms coaxial cable with a PL-259 type plug.
2. **EXT. SP:** This jack accepts a 4 to 8 ohm, 5 watt external speaker. When the external speaker is connected to this jack, the built-in speaker is disabled. This jack is only for CB radio output
3. **PA SP:** This jack is for PA operation. Before operating, you must first connect a PA speaker (8 Ohms, 4W) to this jack.
4. **DC POWER & 2 EXT SP:** This jack accepts a 13.8V DC power cable with built-in fuse. The power cord provided with the radio has a black and red wire. The black goes to negative and red goes to positive. This jack also accepts two 4 to 8 ohm, 5 watt externals speakers. The external speakers are only for MP3 music output.

OPERATION

FREQUENCY CHART

Channel	Channel Frequency	Channel	Channel Frequency
1	26.965 MHz	21	27.215 MHz
2	26.975 MHz	22	27.225 MHz
3	26.985 MHz	23	27.255 MHz
4	27.005 MHz	24	27.235 MHz
5	27.015 MHz	25	27.245 MHz
6	27.025 MHz	26	27.265 MHz
7	27.035 MHz	27	27.275 MHz
8	27.055 MHz	28	27.285 MHz
9	27.065 MHz	29	27.295 MHz
10	27.075 MHz	30	27.305 MHz
11	27.085 MHz	31	27.315 MHz
12	27.105 MHz	32	27.325 MHz
13	27.115 MHz	33	27.335 MHz
14	27.125 MHz	34	27.345 MHz
15	27.135 MHz	35	27.355 MHz
16	27.155 MHz	36	27.365 MHz
17	27.165 MHz	37	27.375 MHz
18	27.175 MHz	38	27.385 MHz
19	27.185 MHz	39	27.395 MHz
20	27.205 MHz	40	27.405 MHz

## OPERATION

### PROCEDURE TO RECEIVE AND TRANSMIT

#### A. MICROPHONE

The receiver and transmitter are controlled by the push-to-talk switch on the microphone. Press the PTT switch, transmitter will be activated, release switch to receive. When transmitting, hold the microphone two inches from the mouth and speak clearly in a normal voice. This transceiver comes complete with a low impedance dynamic microphone.

#### B. PROCEDURE TO RECEIVE

1. Ensure that power source, microphone and antenna are connected to the proper connectors before going to the next step.
2. Turn **VOL** knob clockwise to apply power to the radio.
3. Set the **VOL** for a comfortable listening level.
4. Set the **MODE** switch to the desired mode.
5. Listen to the background noise from the speaker. Turn the **SQ** knob slowly clockwise until the noise just disappears. The **SQ** is now properly adjusted. The receiver will remain quiet until a signal is actually received. Do not advance the control too far or some of weaker signals will not be heard.
6. Set the **CHANNEL** selector switch to the desired channel.
7. Set the **RF GAIN** control fully clockwise for maximum RF gain.

#### C. PROCEDURE TO TRANSMIT

1. Select the desired channel of transmission
2. Set the **MIC GAIN** control fully clockwise.
3. If the channel is clear, depress the push-to-talk switch on the microphone and speak in a normal voice.

## OPERATION


### ALTERNATE MICROPHONES AND INSTALLATION

For best results, the user should select a low-impedance dynamic type microphone or a transistorized microphone. Transistorized type microphones have low output impedance characteristics. The microphones must be provided with a four-lead cable. The audio conductor and its shielded lead comprise two of the leads. The third lead is for transmit control and fourth is for receiving control.

The microphone should provide the functions shown in schematic below.

#### 4 WIRE MIC CABLE

<u>Pin Number</u>	<u>Mic Cable Lead</u>
1	Audio Shield
2	Audio Lead
3	Transmit Control
4	Receive Control

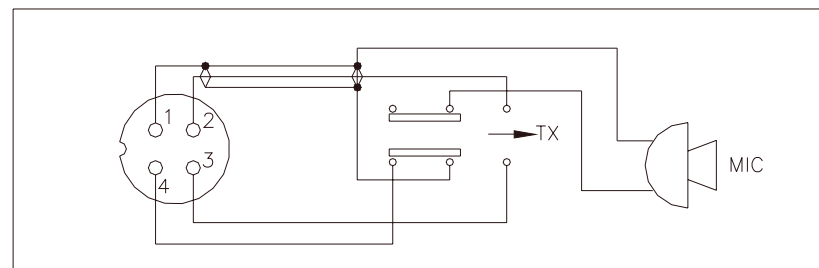


**Fig. 1** Your transceiver microphone schematic.

If the microphone to be used is provided with pre-cut leads, they must be revised as follows.

1. Cut leads so that they extend 7/16" beyond the plastic insulating jacket of the microphone cable.
2. All leads should be cut to the same length. Strip the ends of each wire 1/8" and tin the exposed wire.

## OPERATION

Before beginning the actual wiring, read carefully the circuit and wiring information provided with the microphone you select. Use the minimum heat required in soldering the connections. Keep the exposed wire lengths to a minimum to avoid shorting when the microphone plug is reassembled.

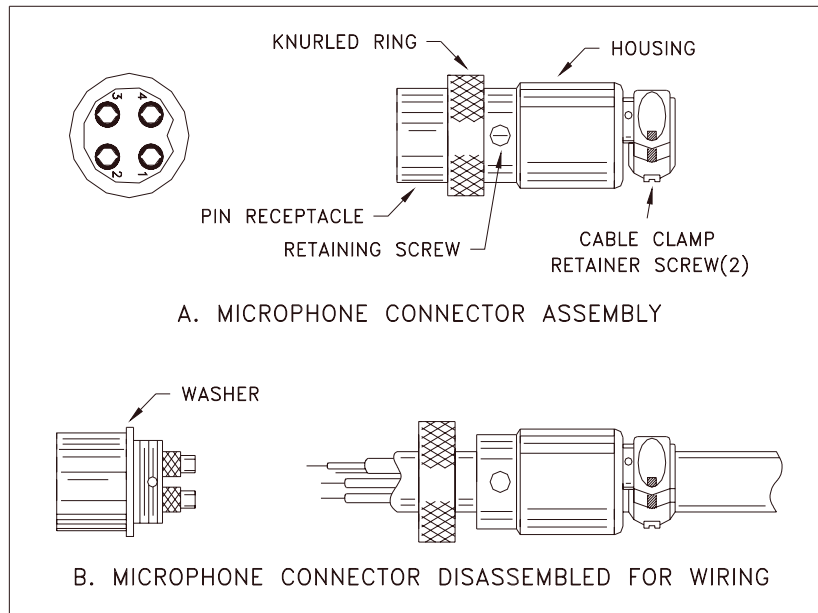


**Fig. 2** Microphone plug wiring

To wire the microphone cable to the plug provided, proceed as follows:

1. Remove the retaining screw.
2. Unscrew the housing from the pin receptacle body.
3. Loosen the two cable clamp retainer screws.
4. Feed the microphone cable through the housing, knurled ring and washer as shown Figure 2.

## OPERATION

5. The wires must now be soldered to the pins as indicated in the above wiring tables. If a vise or clamping tool is available it should be used to hold the pin receptacle body during the soldering operation, so that both hands are free to perform the soldering. If a vise or clamping tool is not available, the pin receptacle body can be held in a stationary position by inserting it into the microphone jack on the front panel. The numbers of the microphone plug are shown in Fig. 3, as viewed from the back of the plug. Before soldering the wire to the pins, pre-tin the wire receptacle of each pin of the plug.

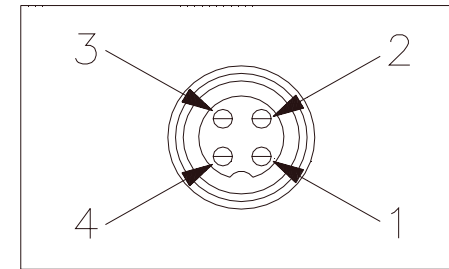

**Fig. 3** Microphone plug pin numbers viewed from rear of pin receptacle.

6. Be sure that the housing and the knurled ring of Figure 2 are pushed back onto the microphone cable before starting to solder. If the washer is not captive to the pin receptacle body, make sure that it is placed on the threaded portion of the pin receptacle body before soldering.
7. If the microphone jack is used to hold the pin receptacle during soldering operation, best results are obtained when the connections to pin 1 and 3 are made first and then the connections to pins 2 and 4. Use a minimum amount of soldering and be careful to prevent excessive solder accumulation on pins, which could cause a short between the pin and the microphone plug housing.
8. When all soldering connections to the pins of the microphone are completed, push the knurled ring and the housing forward and screw the housing onto the threaded portion of the pin receptacle body. Note the location of the screw clearance hole in the plug housing with respect to the threaded hole in the pin receptacle body. When the housing is completely threaded into the pin receptacle body, a final fraction of a turn either clockwise or counterclockwise may be required to align the screw hole with the threaded hole in the pin receptacle body. When these are aligned, the retaining screw is then screwed into place to secure the housing to the pin receptacle body.



## OPERATION

---

9. The two cable clamp retainer screws should now be tightened to secure the housing to the microphone cord. If the cutting directions have been carefully followed, the cable clamp should secure to the insulation jacket of the microphone cable.
10. Upon completion of the microphone plug wiring, connect and secure the microphone plug in the transceiver.

## MAINTENANCE AND ADJUSTMENT

This transceiver is specifically designed for the environment encountered in base installations. The use of all solid state circuitry and its light weight result in high reliability. Should a failure occur, however, replace parts only with identical parts. Do not substitute.

### NOTE

If the performance described in the OPERATION and MAINTENANCE AND ADJUSTMENT sections is not obtained, review the operating instructions to insure that proper procedures were followed.

### FCC WARNING

All transmitter adjustments other than those provided on front panel by the manufacturer must be made by or under the supervision of the holder of an FCC – issued general radiotelephone operator's license.

## OPERATION

---

### A FEW RULES THAT SHOULD BE OBEYED

1. You are not allowed to carry on a conversation with another station for more than five minutes at a time without taking a one-minute break, to give others a chance to use the channel.
2. You are not allowed to blast others off the air by over-powering them with illegally amplified transmitter power, or illegally high antennas.
3. You can't use the transceiver to promote illegal activities.
4. You are not allowed to use profanity.
5. You may not play music in your transceiver.
6. You may not use your transceiver to sell merchandised or professional service.

### HOW YOUR CB CAN SERVE YOU

1. Warn of traffic tie-ups ahead.
2. Provide weather and road information.
3. Provide fast help in event of emergency or breakdown.
4. Suggest good spots to eat and sleep.
5. Make long trips more interesting, and help keep you awake.
6. Provide direct contact with your office or home.
7. Make friends as you travel.
8. Provide "local information" to find your destination.
9. Help law enforcement officers by reporting drunk and reckless drivers.

