



The new degree of comfort.™



Residential Gas
Professional Classic Direct Vent
Water Heaters for Manufactured Housing

Professional Classic™ Direct Vent gas water heaters from Rheem are certified for Manufactured Housing (HUD) and modular construction

Efficiency

- .58 - .61 EF

Performance

- FHR: 67-gallons for 50-gallon model, 60 gallons for 40-gallon model and 51 gallons for 30-gallon model
- Recovery rate is 32.3 gallons at a 90 degree rise for 50-gallon model, 30.3 gallons for 30 and 40-gallon models

Flexibility

- Field convertible controls for natural gas or LP operation included
- No external door is required
- Provides maximum design freedom since it can be placed anywhere within the home
- Hot water outlet located at top
- Cold water inlet at side for fast, economical hook-up



Adjustable Roof Jack Vent

Design allows adjustment to roof pitches of up to 5/12". Four roof jacks available to accommodate roof thickness of 12" up to 95".

Direct Combustion Air Inlet

Air is drawn directly into combustion chamber through air inlet fixed to base; 1/2" screen for rodent protection.

Roof Jacks

12" Non-Adjustable & Air Inlet	AP12032E
15-32" Adjustable & Air Inlet	AP12032B
30-60" Adjustable & Air Inlet	AP12032C
48-95" Adjustable & Air Inlet	AP12032D

Air Inlets

6" Non-Adjustable	AP12019B
11-22" Adjustable	AP12017B

Extension Pipe Kit

Roof Jack Extension Pipe Kit	AP12021
------------------------------	---------

Roof jack and air inlet must be ordered separately with 30, 40 and 50-gallon direct vent models and must be in accordance with instructions furnished with the heater. No other roof jack or air inlet assemblies are approved for installation with this heater. Clamps and secure strapping are packed in water heater carton.

Longer Life

- Rheem exclusive R-Tech (resistored) anode rod provides long-lasting tank protection

Plus...

- Piezo ignition – easy light pilot
- Enhanced flow brass drain valve
- Factory installed temperature and pressure relief valve – side location
- Low lead compliant
- EverKleen™ patented system fights sediment build-up

Warranty

- 6-Year limited tank and parts warranty*

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



**Professional Classic
Direct Vent for
Manufactured Housing**
30, 40 and 50-Gallon Capacities
Up to 32,000 Btu/h
Natural and LP Gas



See dimensions chart on back.



INTEGRATED HOME COMFORT



The new degree of comfort.™




Residential Gas
Professional Classic Direct Vent
Water Heaters for Manufactured Housing

Professional Classic™ Direct Vent for Manufactured Housing Specifications

DESCRIPTION			FEATURES			ROUGHING IN DIMENSIONS (SHOWN IN INCHES)									ENERGY INFO.	
T Y P E	GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H NAT./LP	RECOVERY IN G.P.H. 90° RISE NAT./LP	FIRST HOUR DEL. G.P.H. NAT./LP	HT. TO VENT A	TANK HT. B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	ROOF JACK VENT SIZE F	HT. TO SIDE T&P VALVE G	WATER CONN. SIZE H	SHIP. WT. (LBS)	ENERGY FACTOR NAT./LP	
Tall	30	PROG30-30N RH61 MH DV	30	30.3	51	57	57	17-3/4	14-1/2	3	5	51-1/2	20	110	0.61	
Tall	40	PROG40-30N RH59 MH DV	30	30.3	60	57-1/2	57-1/2	19-3/4	14-1/2	3	5	51-1/2	20	125	0.59	
Tall	50	PROG50-32N RH58 MH DV	32	32.3	67	57	57	21-3/4	14-1/2	3	5	51-1/2	20	150	0.58	

Energy Factor based on D.O.E. (Department of Energy) test procedures.

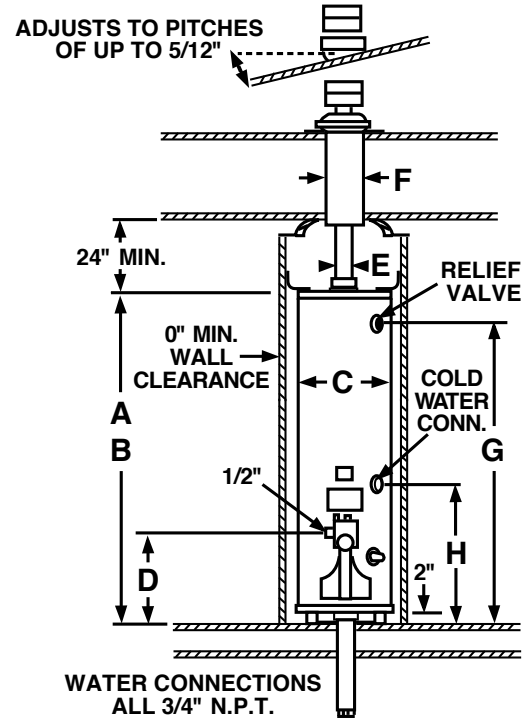

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com



INTEGRATED HOME COMFORT