



The new degree of comfort.™



Residential Gas
Professional Classic
Heavy Duty Water Heaters

Professional Classic™ Heavy Duty gas water heaters exceed ANSI standards for flammable vapor ignition resistance

Efficiency


- .53 - .57 EF

Performance

- FHR: Up to 141 gallons for natural gas, up to 109 gallons for LP gas
- Recovery: Up to 75.8 gallons for natural gas, up to 67.7 gallons for LP gas at a 90 degree rise

Guardian System™ & Sensor

- Exclusive air/fuel shut-off device
- Maintenance free – no filter to clean
- Disables the heater in the presence of flammable vapor accumulation



Combustion Shut-off System



Flame Arrestor Plate

Self-Cleaning

- 60-gallon models only
- EverKleen™ patented system fights sediment build-up
- Reduces fuel costs
- Fights sediment build-up

Easy to Light

- Piezo Ignitor – no matches required

Low Emissions

- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements

Longer Life

- Rheem exclusive R-Tech (resistored) anode rod provides long-lasting tank protection

High Altitude Compliant

- All models are certified for applications up to 7,700 feet above sea level

Plus...

- Enhanced-flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant
- Side water connections for space heating applications for 75-gallon models
- Standard replacement parts


Warranty

- 6-Year limited tank and parts warranty*

*See Residential Warranty Certificate for complete information



Professional Classic Heavy Duty
60 and 75-Gallon Capacities
Up to 75,100 Btu/h
Natural and LP Gas

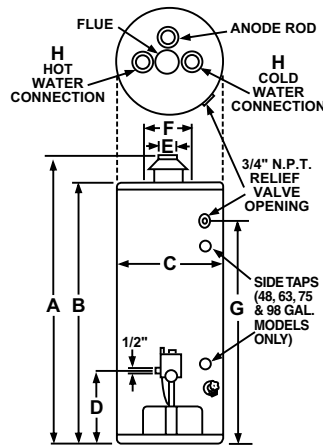

DESCRIPTION			FEATURES						ROUGHING IN DIMENSIONS (SHOWN IN INCHES)								ENERGY INFO.	
TYPE	GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H		RECOVERY IN G.P.H. 90° RISE		FIRST HOUR DEL. G.P.H.		HT. TO VENT A	TANK HT. B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	WATER CONN. CNTR. F	HT. TO SIDE T&P VALVE G	WATER CONN. SIZE H	SHIP. WT. (LBS)	ENERGY FACTOR NAT.
			NAT.	LP	NAT.	LP	NAT.	LP										
Tall	60	PROG60S-50N CN56	50	50	50.5	50.5	107	107	62	58	23	13-1/4	4	8	48-1/2	3/4	180	0.56
Tall	60	PROG60S-50N CN57†	50	50	50.5	50.5	107	107	62	58	22-1/4	13-1/4	4	8	48-1/2	3/4	180	0.57
Tall	75	PROG75S-75N CN53	75.1	65	75.8	67.7	141	109	64	60	26-1/4	14-3/4	4	11	53-1/4	1	320	0.53

Specify LP gas when ordering. Add gas input and "P" to model number. Example: PROG60S-50P CN56

† Complies with BC construction requirements.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT