



The new degree of comfort.™




Residential Electric
Professional *Classic Plus* Water Heaters

Professional *Classic Plus*™ electric water heaters are engineered for longer life – resistored heating elements and premium grade anode rod

Efficiency

- Standby watts loss 56 - 97
- Isolated tank design reduces conductive heat loss
- Resistored Lifeguard™ stainless steel upper and lower elements to prolong anode rod and tank life



Performance

- FHR: 42 - 88 gallons, based on gallon capacity
- Recovery rate is 21 gallons at a 90 degree Fahrenheit rise**

Longer Life

- Rheem exclusive R-Tech (resistored) anode rod provides long-lasting tank protection

Features

- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature

Plus...

- EverKleen™ self cleaning device fights harmful sediment build-up with a high-velocity spiraling water stream – helps operating efficiency by saving energy, money and improving tank life



- Enhanced-flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant

Warranty

- 8-Year limited tank and parts warranty*
- With ProtectionPlus™ the 8-year limited tank warranty becomes 10-year
- ProtectionPlus - order part number SP20081 (6 pack only)

*See Residential Warranty Certificate for complete information



Professional *Classic Plus*

40 and 60 Imperial Gallon Capacities
240 Volt AC/Single Phase
Double Element Models
Electric



See dimensions chart on back.



INTEGRATED HOME COMFORT



The new degree of comfort.™



Professional **Classic Plus**™ Specifications


DESCRIPTION					FEATURES				ROUGHING IN DIMENSIONS									
MODEL NUMBER	STORAGE CAP.			ELEM. QTY.	STANDARD ELEMENTS				HEIGHT		DIAMETER		HT. TO DRAIN VALVE		ESTIMATED SHIP. WEIGHT		STANDBY WATTS LOSS	
	U.S. GALS.	IMP. GALS.	LITRES		208 VOLT WATT.	AMPS.	240 VOLT WATT.	AMPS.	IN.	MM	IN.	MM	IN.	MM	LBS.	KG		
TOP INLET																		
PRO+E40 M2 CN69	45	39	178	2	2250	10.8	3000	12.5	46	1168	21-3/4	552	3-1/2	89	117	53	69	
PRO+E40 M2 CN61†	45	39	178	2	2250	10.8	3000	12.5	49	1245	22.25	565.15	3.5	89	130	59	61	
PRO+E40 M2 CN61†	45	39	178	2	2850	10.8	3800	12.5	49	1245	22.25	565.15	3.5	89	130	59	61	
PRO+E40 M2 CN56	45	39	178	2	2250	10.8	3000	12.5	46	1168	24-1/4	616	3-1/2	89	134	61	56	
PRO+E60 T2 CN90	72	63	285	2	3380	16.3	4500	18.8	59	1499	23	584	3-1/2	89	177	80	90	
PRO+E60 T2 CN77	72	63	285	2	3380	16.3	4500	18.8	59	1499	24-1/2	622	3-1/2	89	188	85	77	
BOTTOM INLET																		
PRO+E40 M2 CN70†	45	39	178	2	2250	10.8	3000	12.5	46	1168	21-3/4	552	3-1/2	89	117	53	70	
PRO+E40 M2 CN70†	45	39	178	2	3380	16.3	4500	18.8	46	1168	21-3/4	552	3-1/2	89	117	53	70	
PRO+E60 T2 CN97†	72	63	285	2	3380	16.3	4500	18.8	59	1499	23	584	3-1/2	89	177	80	97	

• Heaters furnished with standard 240 volt AC, single phase non-simultaneous wiring, and 4500 watt upper and lower heating elements.

† Complies with BC construction requirements. BC 40 imperial gallon top inlet models will have side T&P.

**Recovery = wattage / (2.42 x temp. rise °F)
 Example: $\frac{4500W}{2.42 \times 90^{\circ}} = 21 \text{ GPH}$

**Recovery calculations used are based on 4500 watt elements used in non-simultaneous operation.

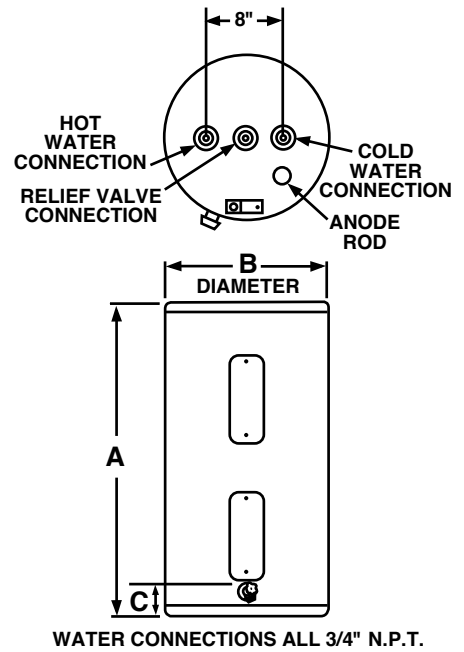

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT